



VA

U.S. Department
of Veterans Affairs

Specifications

St. Cloud VA Health Care System

4801 Veterans Drive

St. Cloud, Minnesota 56303

**CONSTRUCT PACT CLINIC
BUILDING 4 | FIRST FLOOR**

VA Contract No. 36C263-19-D-0022

Task Order No. 36C26319N1141

Station Project No. 656-400

Bancroft-AE Project No. 18-116

Issue for (100%) CD

Volume 1
Divisions 00-12

October 28th, 2022

I hereby certify that this plan, specification, or report was prepared by me or under my direct supervision and that I am a duly Licensed Professional Engineer under the laws of the State of Minnesota.

Print Name: Michael J Wilbur

Signature:

Date 10/28/2022 License # 48456

Seal applies to Div 3 and 5

I hereby certify that this plan, specification, or report was prepared by me or under my direct supervision and that I am a duly Licensed Architect under the laws of the State of Minnesota.

Print Name: DENNIS J MIKA

Signature:

Date 10-28-22 License # 56382

BANCROFT ARCHITECTS + ENGINEERS
700 Nicholas Blvd. Suite 300 | Elk Grove Village, IL 60007
847.952.9362 | www.bancroft-ae.com

William Dold

Name



Signature

AD2355


Asbestos Project Designer Accreditation Number



m ASBESTOS
DEPARTMENT OF HEALTH PROJECT
DESIGNER

Certified by:
State of Minnesota
Department of Health
Expires: 10/29/2021

William J Dold
11426 Norway St NW
Coon Rapids, MN 55433




Director, Env. Health Div.

No. AD2355

Issued: 11/24/2020

Branden Voigt

Name



Signature

AD10892

Asbestos Project Designer Accreditation Number



**ASBESTOS
PROJECT
DESIGNER**

Certified by:
State of Minnesota
Department of Health

Expires: 10/27/2022

Branden D Voigt
15784 Okapi St NW
Ramsey, MN 55303



Director, Env. Health Div.

No. AD10892

Issued: 11/09/2021

Collin Nelson


Name



Signature

LD720

Lead Project Designer Accreditation Number


Director, Env. Health Div.

 **LEAD**
DEPARTMENT OF HEALTH **Project Designer**

Licensed by:
State of Minnesota
Department of Health
License No. **LD720**
Expires **10/20/2021**

Collin T Nelson
6720 Quantico Ln N
Maple Grove, MN 55311

DIVISION 00
SPECIAL SECTIONS

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
 St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

10-01-19

DEPARTMENT OF VETERANS AFFAIRS
VHA MASTER SPECIFICATIONS

TABLE OF CONTENTS
Section 00 01 10

SECTION NO.	DIVISION AND SECTION TITLES	DATE
	DIVISION 00 - SPECIAL SECTIONS	
00 01 00	Table of Contents	10-19
00 01 15	List of Drawing Sheets	07-15
	DIVISION 01 - GENERAL REQUIREMENTS	
01 00 00	General Requirements	12-23
01 32 16.15	Project Schedules (Small Projects - Design/Bid/Build)	11-21
01 33 23	Shop Drawings, Product Data, and Samples	06-21
01 35 26	Safety Requirements	11-21
01 42 19	Reference Standards	11-20
01 45 00	Quality Control	02-21
01 45 29	Testing Laboratory Services	11-18
01 45 35	Special Inspections	06-21
01 57 19	Temporary Environmental Controls	01-11
01 58 16	Temporary Interior Signage	07-15
01 74 19	Construction Waste Management	09-13
01 81 13	Sustainable Construction Requirements	10-17
01 91 00	General Commissioning Requirements	04-22
	DIVISION 02 - EXISTING CONDITIONS	
02 41 00	Demolition	08-17
02 42 00	Cutting, Removal, Demolition, Restoration and Patching	12-11
02 82 11	Traditional Asbestos Abatement	04-19
02 82 13.13	Glovebag Asbestos Abatement	09-15
02 82 13.19	Asbestos Floor Tile and Mastic Abatement	09-15
02 83 33.13	Lead-Based Paint Removal and Disposal	08-16
	DIVISION 03 - CONCRETE	
03 30 00	Cast-in-Place Concrete	07-19
	DIVISION 04 - MASONRY	
04 01 00	Maintenance of Masonry	02-16
04 05 13	Masonry Mortaring	10-17
04 05 16	Masonry Grouting	02-16
04 20 00	Unit Masonry	08-17

Contract No. 36C26319D0022
 Station Project No. 656-400
 Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

10-01-19

SECTION NO.	DIVISION AND SECTION TITLES	DATE
	DIVISION 05 - METALS	
05 12 00	Structural Steel Framing	11-18
05 50 00	Metal Fabrications	08-18
	DIVISION 06 - WOOD, PLASTICS AND COMPOSITES	
06 10 00	Rough Carpentry	10-17
06 20 00	Finish Carpentry	08-16
	DIVISION 07 - THERMAL AND MOISTURE PROTECTION	
07 01 50.19	Preparation for Re-roofing	01-21
07 11 13	Bituminous Damp proofing	02-16
07 21 13	Thermal Insulation	10-17
07 22 00	Roof and Deck Insulation	02-16
07 53 23	Ethylene-Propylene-Diene-Monomer Roofing	02-16
07 60 00	Flashing and Sheet Metal	07-14
07 71 00	Roof Specialties	01-21
07 72 00	Roof Accessories	10-15
07 84 00	Firestopping	02-16
07 92 00	Joint Sealants	10-17
07 95 13	Expansion Joint Cover Assemblies	02-16
	DIVISION 08 - OPENINGS	
08 11 13	Hollow Metal Doors and Frames	08-16
08 14 00	Interior Wood Doors	02-16
08 31 13	Access Doors and Frames	02-16
08 71 00	Door Hardware	01-20
08 71 13	Automatic Door Operators	02-16
08 80 00	Glazing	10-15
	DIVISION 09 - FINISHES	
09 05 16	Subsurface Preparation for Floor Finishes	02-15
09 22 16	Non-Structural Metal Framing	06-18
09 29 00	Gypsum Board	06-18
09 30 13	Ceramic/Porcelain Tiling	09-15
09 51 00	Acoustical Ceilings	12-18
09 65 13	Resilient Base and Accessories	02-16
09 65 19	Resilient Tile Flooring	05-18
09 68 00	Carpeting	10-15
09 91 00	Painting	01-16
	DIVISION 10 - SPECIALTIES	

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

00 01 10-2

10/28/2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

10-01-19

SECTION NO.	DIVISION AND SECTION TITLES	DATE
10 14 00	Signage	10-15
10 21 23	Cubicle Curtain Tracks	05-15
10 26 00	Wall and Door Protection	10-15
10 28 00	Toilet, Bath, and Laundry Accessories	02-16
10 44 13	Fire Extinguisher Cabinets	08-18
	DIVISION 11 - EQUIPMENT	
11 73 00	Ceiling Mounted Patient Lift System	01-17
	DIVISION 12 - FURNISHINGS	
12 32 00	Manufactured Wood Casework	09-15
12 36 61.16	Solid Surface Countertops	12-15
	DIVISION 13 - SPECIAL CONSTRUCTION (NOT USED)	
	DIVISION 14 - CONVEYING EQUIPEMENT (NOT USED)	
	DIVISION 21- FIRE SUPPRESSION	
21 08 00	Commissioning of Fire Suppression System	11-16
21 13 13	Wet-Pipe Sprinkler Systems	06-15
	DIVISION 22 - PLUMBING	
22 05 11	Common Work Results for Plumbing	07-16
22 05 12	General Motor Requirements for Plumbing Equipment	09-15
22 05 19	Meters and Gages for Plumbing Piping	09-15
22 05 23	General-Duty Valves for Plumbing Piping	09-15
22 07 11	Plumbing Insulation	09-19
22 11 00	Facility Water Distribution	11-19
22 11 23	Domestic Water Pumps	09-15
22 13 00	Facility Sanitary and Vent Piping	09-15
22 14 00	Facility Storm Drainage	09-15
22 15 00	General Service Compressed-Air Systems	09-15
22 40 00	Plumbing Fixtures	09-15
	DIVISION 23 - HEATING, VENTILATING, AND AIR CONDITIONING (HVAC)	
23 05 11	Common Work Results for HVAC	08-17
23 05 12	General Motor Requirements for HVAC and Steam Generation Equipment	02-20
23 05 41	Noise and Vibration Control for HVAC Piping and Equipment	02-20
23 05 93	Testing, Adjusting, and Balancing for HVAC	02-20

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

00 01 10-3

10/28/2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

10-01-19

SECTION NO.	DIVISION AND SECTION TITLES	DATE
23 07 11	HVAC and Boiler Plant Insulation	02-20
23 08 00	Commissioning of HVAC Systems	02-20
23 09 23	Direct-Digital Control System for HVAC	09-11
23 21 13	Hydronic Piping	02-20
23 21 23	Hydronic Pumps	02-20
23 22 13	Steam and Condensate Heating Piping	02-20
23 22 23	Steam Condensate Pumps	08-17
23 23 00	Refrigerant Piping	02-15
23 25 00	HVAC Water Treatment	02-20
23 31 00	HVAC Ducts and Casings	02-20
23 34 00	HVAC Fans	02-20
23 36 00	Air Terminal Units	02-20
23 37 00	Air Outlets and Inlets	02-20
23 40 00	HVAC Air Cleaning Devices	02-12
23 72 00	Air-to-Air Energy Recovery Equipment	05-11
23 73 00	Indoor Central-Station Air-Handling Units	04-11
23 81 23	Computer-Room Air-Conditioners	04-11
23 82 00	Convection Heating and Cooling Units	04-11
23 82 16	Air Coils	04-11
	DIVISION 25 - INTEGRATED AUTOMATION (NOT USED)	
	DIVISION 26 - ELECTRICAL	
26 05 11	Requirements for Electrical Installations	01-16
26 05 19	Low-Voltage Electrical Power Conductors and Cables	01-17
26 05 26	Grounding and Bonding for Electrical Systems	01-17
26 05 33	Raceway and Boxes for Electrical Systems	01-18
26 05 73	Overcurrent Protective Device Coordination Study	01-18
26 08 00	Commissioning of Electrical Systems	11-16
26 09 23	Lighting Controls	01-18
26 24 16	Panelboards	01-18
26 27 26	Wiring Devices	01-18
26 29 11	Motor Controllers	01-18
26 29 21	Enclosed Switches and Circuit Breakers	01-17
26 51 00	Interior Lighting	01-18
	DIVISION 27 - COMMUNICATIONS	
27 05 11	Requirements for Communications Installations	09-19
27 05 26	Grounding and Bonding for Communications Systems	06-15
27 05 33	Raceways and Boxes for Communications Systems	10-18
27 10 00	Control, Communications and Signal Wiring	06-15
27 11 00	Communications Equipment Room Fittings	06-15
27 15 00	Communications Structured Cabling	01-16
27 52 23	Nurse Call and Code Blue Systems	10-18

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

10-01-19

SECTION NO.	DIVISION AND SECTION TITLES	DATE
	DIVISION 28 - ELECTRONIC SAFETY AND SECURITY	
28 05 00	Common Work Results for Electronic Safety and Security	04-18
28 05 13	Conductors and Cables for Electronic Safety and Security	10-18
28 05 26	Grounding and Bonding for Electronic Safety and Security	09-11
28 05 28.33	Conduits and Backboxes for Electronic Safety and Security	09-11
28 13 00	Physical Access Control System	10-11
28 31 00	Fire Detection and Alarm	10-11
	DIVISION 31 - EARTHWORK	
31 20 00	Earthwork	07-16
	DIVISION 32 - EXTERIOR IMPROVEMENTS	
32 05 23	Cement and Concrete for Exterior Improvements	08-16
32 12 16	Asphalt Paving	09-15
32 17 23	Pavement Markings	08-16
32 31 13	Chain Link Fences and Gates	06-18
32 90 00	Planting	07-16
	DIVISION 33 - UTILITIES (NOT USED)	
	DIVISION 34 - TRANSPORTATION (NOT USED)	
	DIVISION 48 - ELECTRICAL POWER GENERATION (NOT USED)	

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

00 01 10-5

10/28/2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

07-01-15

SECTION 00 01 15
LIST OF DRAWING SHEETS

The drawings listed below accompanying this specification form a part of the contract.

<u>Drawing No.</u>	<u>Title</u>
GENERAL	
G001	GENERAL - TITLE SHEET
G002	GENERAL - DRAWING INDEX
G003	GENERAL - CODE AND BUILDING INFORMATION
G004	GENERAL - CODE AND BUILDING INFORMATION
GI001	GENERAL - CONTRACTOR AND BASIS OF DESIGN NOTES
GI002	GENERAL - PROTECTION PROTOCOL AND MISC NOTES
GI003	GENERAL - DEMOLITION NOTES
GI100	GENERAL - LIFE SAFETY PLAN - BASEMENT
GI101	GENERAL - LIFE SAFETY PLAN - FIRST FLOOR
GI400	GENERAL - INFECTION CONTROL NOTES
GI401	GENERAL - INFECTION CONTROL DETAILS
GI410	GENERAL - INFECTION CONTROL PLAN - BASEMENT
GI411	GENERAL - INFECTION CONTROL PLAN - FIRST FLOOR
GC101	GENERAL - STAGING PLAN - SITE
HAZARDOUS MATERIALS	
HA001	HAZARDOUS MATERIALS PLAN - ASBESTOS / LEAD - BASEMENT
HA002	HAZARDOUS MATERIALS PLAN - ASBESTOS / LEAD - FIRST FLOOR
STRUCTURAL	
S010	STRUCTURAL - GENERAL NOTES
S020	STRUCTURAL - SCHEDULES
S021	STRUCTURAL - SCHEDULES
SB100	STRUCTURAL - PLAN - FOUNDATION
SF101	STRUCTURAL - PLAN - FIRST FLOOR FRAMING
SF102	STRUCTURAL - PLAN - ROOF FRAMING (FUTURE SECOND FLOOR)
S200	STRUCTURAL - BUILDING ELEVATIONS
S201	STRUCTURAL - BUILDING SECTIONS AND DETAILS
S202	STRUCTURAL - BUILDING SECTIONS AND DETAILS
S203	STRUCTURAL - BUILDING SECTIONS AND DETAILS
ARCHITECTURAL	
A001	ARCHITECTURAL - ABBREVIATIONS AND SYMBOLS
AD100	ARCHITECTURAL - DEMOLITION COORD AND KEY NOTES

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

00 01 15-1

10/28/2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

07-01-15

AD101 ARCHITECTURAL - DEMOLITION PLAN - BASEMENT
AD102 ARCHITECTURAL - DEMOLITION PLAN - BASEMENT CLNG
AD103 ARCHITECTURAL - DEMOLITION PLAN - FIRST FLOOR
AD104 ARCHITECTURAL - DEMOLITION PLAN - FIRST FLOOR CLNG
A010 ARCHITECTURAL - COMPOSITE PLAN - BASEMENT
A011 ARCHITECTURAL - COMPOSITE PLAN - FIRST FLOOR
A012 ARCHITECTURAL - COMP PLAN - SECOND FLOOR - LOWER ROOF
A013 ARCHITECTURAL - GENERAL CEILING PLAN - FIRST FLOOR
A100 ARCHITECTURAL - PLAN - BASEMENT
A101.1 ARCHITECTURAL - PLAN - FIRST FLOOR - ZONE 1
A101.2 ARCHITECTURAL - PLAN - FIRST FLOOR - ZONE 2
A131.1 ARCHITECTURAL - CEILING PLAN - FIRST FLOOR - ZONE 1
A131.2 ARCHITECTURAL - CEILING PLAN - FIRST FLOOR - ZONE 2
A301 ARCHITECTURAL - BUILDING SECTIONS
A310 ARCHITECTURAL - WALL SECTIONS
A311 ARCHITECTURAL - WALL SECTIONS
A312 ARCHITECTURAL - WALL SECTIONS
A313 ARCHITECTURAL - WALL SECTIONS
A401 ARCHITECTURAL - ROOM ELEVATIONS
A402 ARCHITECTURAL - ROOM ELEVATIONS
A403 ARCHITECTURAL - ROOM ELEVATIONS
A404 ARCHITECTURAL - ROOM ELEVATIONS
A405 ARCHITECTURAL - ROOM AND MILLWORK ELEVATIONS
A411 ARCHITECTURAL - ENLARGED PLANS - TOILET ROOMS
A501 ARCHITECTURAL - PARTITION SCHEDULE
A502 ARCHITECTURAL - DETAILS
A503 ARCHITECTURAL - DETAILS
A504 ARCHITECTURAL - DETAILS
A505 ARCHITECTURAL - DETAILS - ROOF
A506 ARCHITECTURAL - DETAILS - ROOF
A507 ARCHITECTURAL - DETAILS - EXPANSION JOINTS
A508 ARCHITECTURAL - DETAILS
A521 ARCHITECTURAL - PLAN AND DETAILS - PATIENT LIFT
A550 ARCHITECTURAL - DETAILS - MILLWORK
A601 ARCHITECTURAL - DOOR AND FRAME SCHEDULE
A602 ARCHITECTURAL - DETAILS - DOOR AND FRAME; WINDOW

INTERIORS

I600 INTERIORS - ROOM FINISH SCHEDULE

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

00 01 15-2

10/28/2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

07-01-15

I601 INTERIORS - ROOM FINISH LEGEND
I620 INTERIORS - SIGNAGE TYPES AND MOUNTING HEIGHTS
I621 INTERIORS - SIGNAGE SCHEDULE
IF100 INTERIORS - FINISH PLAN - BASEMENT
IF101.1 INTERIORS - FINISH PLAN - FIRST FLOOR - ZONE 1
IF101.2 INTERIORS - FINISH PLAN - FIRST FLOOR - ZONE 2
IG100 INTERIORS - SIGNAGE PLAN - BASEMENT
IG101.1 INTERIORS - SIGNAGE PLAN - FIRST FLOOR - ZONE 1
IG101.2 INTERIORS - SIGNAGE PLAN - FIRST FLOOR - ZONE 2

EQUIPMENT

IQ100 EQUIPMENT - SEPS EQUIPMENT AND ACCESSORY SCHEDULE
IQ101 EQUIPMENT - GENERAL PLAN - FIRST FLOOR
IQ101.1 EQUIPMENT - PLAN - FIRST FLOOR - ZONE 1
IQ101.2 EQUIPMENT - PLAN - FIRST FLOOR - ZONE 2
IQ200 EQUIPMENT - TYPICAL ROOM LAYOUTS - REFERENCE ONLY

FIRE PROTECTION

F000 FIRE PROTECTION - COVER SHEET
FD100 FIRE PROTECTION - DEMOLITION PLAN - BASEMENT
FD101 FIRE PROTECTION - DEMOLITION PLAN - FIRST FLOOR
F100 FIRE PROTECTION - PLAN - BASEMENT
F101 FIRE PROTECTION - PLAN - FIRST FLOOR

PLUMBING

P000 PLUMBING - COVER SHEET
PDU100 PLUMBING - DEMOLITION PLAN - BASEMENT UNDERFLOOR
PD100 PLUMBING - DEMOLITION PLAN - BASEMENT
PD101 PLUMBING - DEMOLITION PLAN - FIRST FLOOR
PD102 PLUMBING - DEMOLITION PLAN - LOWER ROOF
PU100 PLUMBING - PLAN - BASEMENT UNDERFLOOR
P100 PLUMBING - PLAN - BASEMENT
P101 PLUMBING - PLAN - FIRST FLOOR
P102 PLUMBING - PLAN - LOWER ROOF
P300 PLUMBING - DETAILS
P400 PLUMBING - WASTE RISER DIAGRAM
P401 PLUMBING - WASTE AND VENT RISER DIAGRAM
P500 PLUMBING - SCHEDULES AND MATERIAL LIST

MECHANICAL

M000 MECHANICAL - COVER SHEET

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

07-01-15

MHD100 MECHANICAL - VENTILATION - DEMOLITION PLAN - BASEMENT
MHD101 MECHANICAL - VENTILATION - DEMOLITION PLAN - FIRST FLOOR
MHD102 MECHANICAL - VENTILATION - DEMOLITION PLAN - LOWER ROOF
MH100 MECHANICAL - VENTILATION - PLAN - BASEMENT
MH101 MECHANICAL - VENTILATION - PLAN - FIRST FLOOR
MH102 MECHANICAL - VENTILATION - PLAN - LOWER ROOF
MH200 MECHANICAL - VENTILATION - ENLARGED PLANS
MH201 MECHANICAL - SPACE AIRFLOW AND PRESSURE PLAN
MH300 MECHANICAL - VENTILATION - SECTIONS
MH400 MECHANICAL - VENTILATION - DETAILS
MH500 MECHANICAL - VENTILATION - SCHEDULES
MI100 MECHANICAL - CONTROL SEQUENCES - AHU-01
MI101 MECHANICAL - CONTROL SEQUENCES - AHU-01 (CONTINUED)
MI102 MECHANICAL - CONTROL SEQUENCES
MPD100 MECHANICAL - PIPING - DEMOLITION PLAN - BASEMENT
MPD101 MECHANICAL - PIPING - DEMOLITION PLAN - FIRST FLOOR
MP100 MECHANICAL - PIPING - PLAN - BASEMENT
MP101 MECHANICAL - PIPING - PLAN - FIRST FLOOR
MP200 MECHANICAL - PIPING - ENLARGED PLANS
MP300 MECHANICAL - PIPING - SECTIONS
MP400 MECHANICAL - PIPING - DETAILS
MP401 MECHANICAL - PIPING - FLOW DIAGRAMS
MP402 MECHANICAL - PIPING - FLOW DIAGRAMS
MP403 MECHANICAL - PIPING - FLOW DIAGRAMS
MP500 MECHANICAL - PIPING - SCHEDULES

ELECTRICAL

E000 ELECTRICAL - COVER SHEET
ED100 ELECTRICAL - DEMOLITION PLAN - BASEMENT
EDL101 ELECTRICAL - LIGHTING - DEMOLITION PLAN - FIRST FLOOR
EDP101 ELECTRICAL - POWER - DEMOLITION PLAN - FIRST FLOOR
EL100 ELECTRICAL - LIGHTING - PLAN - BASEMENT
EL101 ELECTRICAL - LIGHTING - PLAN - FIRST FLOOR
EP100 ELECTRICAL - POWER & SYSTEMS - PLAN - BASEMENT
EP101 ELECTRICAL - POWER - PLAN - FIRST FLOOR
EP102 ELECTRICAL - POWER - PLAN - LOWER ROOF
ES400 ELECTRICAL - FIRE ALARM RISER DIAGRAM
E200 ELECTRICAL - ENLARGED PLANS
E300 ELECTRICAL - DETAILS

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

00 01 15-4

10/28/2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

07-01-15

E400 ELECTRICAL - ONE-LINE DIAGRAMS
E401 ELECTRICAL - ONE-LINE DIAGRAMS
E500 ELECTRICAL - SCHEDULES

TECHNOLOGY

T000 TECHNOLOGY - COVER SHEET
TD101 TECHNOLOGY - DEMOLITION PLAN - FIRST FLOOR
T100 TECHNOLOGY - PLAN - BASEMENT
T101 TECHNOLOGY - PLAN - FIRST FLOOR
T200 TECHNOLOGY - ENLARGED PLANS
T300 TECHNOLOGY - DETAILS
T400 TECHNOLOGY - RISER DIAGRAMS
T500 TECHNOLOGY - SCHEDULES

- - - END - - -

DIVISION 01
GENERAL REQUIREMENTS

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

12-13-23

SECTION 01 00 00
GENERAL REQUIREMENTS

GENERAL

1.1 SAFETY REQUIREMENTS

- A. Refer to section 01 35 26, SAFETY REQUIREMENTS for safety and infection control requirements. Throughout the campus there is existing hazardous material (lead paint, asbestos, etc); not all areas are shown on the drawings. Contractor shall maintain awareness, have safety plans, PPE and comply with OSHA, EPA and other related regulations when working near assemblies.
- B. In addition to the requirements of the safety section, the contractor shall submit Safety Data Sheets per OSHA, for all products, chemicals, etc to be used on site within 21 calendar days of contract award. Any changes to the material, products, chemicals planned for use during the project shall be submitted and approved 21 calendar days prior to bringing the material onsite.

1.2 GENERAL INTENTION

- A. Contractor shall furnish all labor, materials, tools and equipment required to completely prepare site for building operations, including demolition and removal of existing structures and furnish labor, equipment and materials to perform work for the Construct PACT Clinic Building 4 First Floor project, as required by drawings and specifications.

The subject project will construct a new Patient Aligned Care Team (PACT) clinic on the first floor of building 4. Work includes general construction not all inclusive to: abatement, demolition, removal or relocation of existing structures, relocation of existing utilities, alterations, grading, drainage, site utilities, curbs, walks, pavement, stormwater management systems, architectural, structural, mechanical and electrical work.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

12-13-23

Adjacent corridor of Building 4, basement of Building 4, adjacent first floor of Building 4, second floor of Building 4, all spaces of Building 5 and all spaces of Building 1 will remain occupied by the VA throughout the construction phasing. Work affecting occupied areas may need to be accomplished outside of normal working hours if noise, dust and other hazards cannot be satisfactorily mitigated. Coordination with other construction projects may be required during construction phasing. All contract work is required to be completed prior to acceptance of the work.

1. Demolition: Contractor to demolition current kitchen coolers, equipment and infrastructure on the first floor as required to complete the infill of the courtyard and the first-floor remodel. Remainder of the first-floor space involved in this scope, outside of the vacated kitchen space is office and general circulation space.
2. Contractor shall remove from the VA site and dispose of all equipment and materials not scheduled to be reused.
3. New construction consists of, but is not limited to:
 - A. Excavation of courtyard.
 - B. Provide a basement infill space which will house MEP support.
 - C. Structurally join new infill to the parent building.
 - D. Provide renovated spaces for exam rooms, intake rooms, nursing areas and other common spaces for patient / provider interaction.
 - E. Connect to or install necessary utilities to serve the remodeled and infilled spaces.
4. PHASING, OFF-HOURS WORK, OR MAJOR SHUTDOWNS: Adjacent corridor of Building 4, basement of Building 4, adjacent first floor of Building 4, second floor of Building 4, all spaces of Building 5 and all spaces of Building 1 will be occupied during construction phasing. The VA expects that the normal operation of Building 4 (and other adjacent buildings) shall not be adversely affected by construction activities for the subject project. The majority of construction work to be performed off hours. Utility outages required to facilitate construction phasing shall be authorized by the COR and

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

12-13-23

scheduled according to the requirements of the Specifications. Performing on-site work outside normal working hours will require approval from the Contracting Officer and the COR. Requests shall be submitted via email at least 72 hours prior to the requested date and at no additional cost to the Government. Approvals are subject to the availability of on-site staff.

5. The contract duration shall include all work, inspections and punch list corrections. Beneficial occupancy and final acceptance shall be achieved within the contract duration. Progress payments do not indicate acceptance. The process of formal acceptance shall be used in this contract. The process of conditional acceptance and/or use without acceptance may be used in this contract as coordinated with the COR.
6. Contract working hours are 8:00 am to 4:30 pm Monday through Friday, excluding Federal Holidays.

7. Tentative Schedule:

Contract award*	D
Pre-construction conference	D+20 calendar days
Badging Process	D+90 calendar days
Notice to Proceed	D+95 calendar days
Construction start	D+100 calendar days
Construction completion	D+669 calendar days

8. Schedule Objectives: The anticipated substantial completion of this project is 574 calendar days after "Notice to Proceed" (NTP).

B. Visits to the site by Bidders may be made only by appointment with the Contracting Officer.

C. Offices of Bancroft Architects + Engineers, as Architect-Engineers, will render certain technical services during construction. Such services shall be considered as advisory to the Government and shall not be construed as expressing or implying a contractual act of the

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

12-13-23

Government without affirmations by Contracting Officer or his duly authorized representative.

- D. Before placement and installation of work subject to tests by testing laboratory retained by the Contractor. The Contractor shall notify the COR not less than two work days in advance of the tests/inspection.
- E. All employees of general contractor and subcontractors shall comply with VA security management program and obtain permission of the VA police, be identified by project and employer, and restricted from unauthorized access.
- F. Prior to commencing work, the general contractor shall provide proof that the project supervisor assigned to the project is an OSHA 30 certified "competent person" (CP) (29 CFR 1926.20(b)(2)). The CP will maintain a presence at the work site whenever the employees of the general contractor or subcontractors are present.
- G. Training:
 - 1. The Contractor's project supervisor is required to attend GEMS and Safety training provided by VA St. Cloud. Training must be attended prior to being designated as a job supervisor on any VA St. Cloud construction project.
 - 2. All employees of general contractor and subcontractors shall have, at a minimum, the 10-hour OSHA certified Construction Safety course and other relevant competency training, as determined by VA CP with input from the Infection Control Risk Assessment (ICRA) team.
 - 3. Submit training records of all such employees for approval before the start of work.
 - 4. Notice to proceed will be issued not less than 2 weeks after receipt of bonds; time extensions will not be granted because of the need for training.

H. Identification Badge:

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

12-13-23

All contractor employees working on this project will be required to obtain and wear while on VA property, a VA picture identification badge. The badge will only be issued to those employees having the appropriate OSHA Construction Safety Cards. All completed badge request forms, proof of OSHA training and any other required certificates shall be submitted electronically 90 calendar days in advance of working on site. Contractors will then be issued a badge free of charge by the VA. A separate site visit prior to performing work by each contractor employee shall be expected to obtain a badge. Contractors shall not perform work without a VA issued badge. All ID badges must be returned upon contract completion. There will be a \$200 charge for each PIV/Flash ID badge not returned at the end of the contract. There will be a \$25 charge for "facility" badges and "contractor" or consultant badges. Reference security procedures for additional information. Payments to invoices will be withheld for badging noncompliance.

Contractor and subcontractor employees that will work on VA property shall submit the following information to the Contracting Officer's Representative (COR) when requesting a badge:

First, middle and last name (Legal name, as shown on picture ID)

Date of Birth (DOB)

Social Security Number (SSN)

Height

Eye Color

Hair Color

Name of Firm or Company

Place of Birth: Town/State

VA Contract Number

VA Project Name

Name of COR

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

12-13-23

I. Project Acceptance (Substantial Completion):

1. The acceptance of a project for substantial completion is to include the following:

- a. The completion of all items to meet the criteria of the contract drawings and specifications to the satisfaction of the Contracting Officer (CO). Items for correction may be considered to be punch list items, as determined by the CO, if the COR finds them to be minor in correction. Value for the corrections will be held by the VA, as determined by the CO, until all corrections are completed to the satisfaction of the CO.
- b. The VA will not accept a project, or phase of a project as determined by contract documents, as substantially complete until a complete passing test and balance report of the HVAC system has been submitted and accepted as complete and passing by the CO. It is recommended that the HVAC system be completed with sufficient time to make corrections to submit a passing report. A time extension to the contract will not be considered for corrections to the HVAC system that are determined by the CO to be installation or design errors if within the contract.
- c. Occupancy and/or use of contractor provided/installed items does not require acceptance by the government. Contractor is to coordinate with the COR and the Contracting Officer when this condition exists.
- d. In addition to the above items, the following conditions included in the contract shall be satisfied prior to requesting a final inspection to consider a substantial completion date.

1. All items completed within Division 1.

- a. Occupied flushing of the building or similar commissioning activities identified prior to request of the final inspection may be considered punch list items subject to the discretion of the COR and Contracting Officer.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

12-13-23

2. All items completed within Division 2 thru 8.
 3. All items completed within Division 9.
 - a. No more than 1 patch and paint repair within 100 linear feet of wall shall be accepted as a punch list condition per project/phase. Unfinished painting conditions shall not be accepted as punch list items (i.e. cuts, blemishes, flashing etc).
 - b. No more than 1 flooring repair per 200 square feet shall be accepted as a punch list condition. Flooring repair is defined as gaps between tiles, grout damage, grout stains, grout gaps, broken tiles/flooring, scratches in tile/grout/flooring, gaps between wall base and flooring, incomplete transitions, poor adhesion, discoloration, etc.
 - c. No more than 1 ceiling repair per 200 square feet shall be accepted as a punch list condition.
 4. All contractor furnished and/or contractor installed items completed within Division 10 and 11.
 5. All items completed within Division 12 thru 22.
 6. All items completed within Division 23.
 - a. Occupied flushing of the building or similar commissioning activities identified prior to request of the final inspection may be considered punch list items subject to the discretion of the COR and Contracting Officer.
 7. All items completed within Division 25 thru 48.
- E. General contractor to have dedicated site superintendent that is assigned to this project only. Contractor to include project management, site supervision and related expenses for the entire period of performance.

1.3 STATEMENT OF BID ITEM(S)

A. ITEM I- BASE BID: Work includes construction of the Building 4 -
Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

12-13-23

First Floor PACT Clinic, which includes, but is not limited to, the following.

1. Remodel of a portion of the First Floor of Building 4 and construction of a building infill in the open courtyard area of the building to provide for a Patient-Aligned Care Team (PACT) Clinic with support infrastructure.
2. Construction of a Basement Level mechanical room as a building infill in the open courtyard area of Building 4, along with a remodel of a portion of the basement to provide for mechanical room means of egress.
3. The structure of the building infill is designed for a future floor addition at the Building 4 Second Floor level.

1.4 SPECIFICATIONS AND DRAWINGS FOR CONTRACTOR

- A. AFTER AWARD OF CONTRACT, Contractor is to provide his/her own drawings and specifications as downloaded from WWW.FBO.gov
- B. The Contractor has the Duty of Coordination. By executing the contract the contractor agrees the contract package has been reviewed (prior to bid) to ensure that each trade included all work required to construct functional systems.
- C. There is no requirement that the construction documents be completely accurate. Minor clarifications and coordination of details are not changes due to defective specifications.
- D. Omissions from the drawings or specifications or the misdescription of details of work which are manifestly necessary to carry out the intent of the drawings and specifications, or which are customarily performed, shall not relieve the contractor from performing such omitted or

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

12-13-23

misdescribed details of the work, but they shall be performed as if fully and correctly set forth and described in the drawings and specifications. The contractor shall furnish and install complete and functional systems.

1.5 CONSTRUCTION SECURITY REQUIREMENTS

A. Security Plan: A. Security Plan:

1. The security plan defines both physical and administrative security procedures that will remain effective for the entire duration of the project.
2. The General Contractor is responsible for assuring that all sub-contractors working on the project and their employees also comply with these regulations.

B. Security Procedures:

1. General Contractor's employees shall not enter the project site without appropriate badge. They may also be subject to inspection of their personal effects when entering or leaving the project site.
2. All contractor and subcontractor employees working on this project are subject to a background investigation. VA has the right to refuse to badge any employee that does not pass the background investigation. It is expected that the contractor will have the employee scheduled for the issuance of a badge well in advance of starting work. Due to the badge process, the employee will not be able come to the VA, receive badge, and conduct work on same day. There will be a **\$200** fine for badges issued and not returned upon completion of project.
3. Before starting work the General Contractor shall give 21 calendar days notice to the COR so that security arrangements can be provided

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

12-13-23

for the employees. This notice is separate from any notices required for utility shutdown described later in this section.

4. For working outside the "regular hours" as defined in the contract, the General Contractor shall give 21 calendar days notice to the Contracting Officer and the COR so that arrangements can be made. This notice is separate from any notices required for utility shutdown described later in this section.
5. No photography of VA premises is allowed without written permission of the Contracting Officer.
6. VA reserves the right to close down or shut down the project site and order General Contractor's employees off the premises in the event of a national emergency. The General Contractor may return to the site only with the written approval of the Contracting Officer.
7. The prime contractor shall secure the entire construction operation (interior and exterior, staging, work area(s), etc) to prevent unauthorized access and to maintain appropriate (1 or 2 hour fire rating) fire separation between construction activities and VA space.
8. It is the contractor's responsibility to furnish and install temporary walls/ceiling, chain link 8' fences, doors, gates, hardware for doors and/or gates as needed for their activities. Not all temporary provisions are illustrated on the construction documents.
9. The contractor shall include 100 square feet of sheetrock assembly patching to patch existing walls used as construction barriers to a 1 hour fire barrier rating in each project phase.
- 10 The contractor shall include 1,000 linear feet of red in color, fire caulk patching to existing walls used as construction barriers in each project phase.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

12-13-23

11. The contractor shall include UL listed fire barrier assemblies for temporary fire barrier protection thru construction barriers and other permanent fire barriers.
12. Prior to installing temporary walls, the contractor and the COR shall inspect the existing conditions to determine if existing penetrations exist in existing fire barriers. The contractor shall ensure all fire barriers around the construction site are compliant prior to commencing with other non-fire barrier related construction activities.
13. Temporary construction walls/ceilings shall be constructed of noncombustible material (metal framing with gypsum sheathing), per a UL rated 1hr fire rated assembly minimum (match existing rating if more than 1 hr), sound insulated with mineral wool batts and to a level 2 finish on the public side of the wall/ceiling.
14. If the temporary construction wall/ceiling will remain in place for more than 5 calendar days, it shall be painted to cover, the color of the adjacent wall.
15. Wood shall not be used in the temporary wall/ceiling assemblies.
16. Corner guards or similar protective furnishing shall be at the contractor's discretion.
17. It is the contractor's responsibility to repair/maintain the temporary assemblies due to wear and tear caused by operations of the VA, contractor shall include costs for upkeep of the temporary barriers. Not all temporary wall/ceiling locations are illustrated on the plans.
18. The contractor shall include material and labor as needed to separate VA occupied space and the construction activity. Temporary walls/ceilings shall be assembled in a manner to control dust per ICRA and remain compliant with below fire-resistant poly duration limitations.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

12-13-23

Temporary construction doors (interior and exterior) shall be an UL rated assembly with a minimum rating to be installed into a 1 hr fire rated wall or match increased rating of wall.

19. Not all construction ingress and egress doors are illustrated on the plans. The contractor shall include material and labor for temporary doors and hardware to separate VA occupied space and the construction site. Repairing existing doors with wood filler due to temporary door hardware is not allowed. If the contractor alters an existing door for use as a temporary construction door, it shall be replaced with a new like and kind door assembly.
20. Temporary wall/ceilings shall be assembled in a manner to control dust per referenced ICRA and remain compliant with below fire-resistant duration limitations.
 - a. Temporary construction doors (interior and exterior) shall be a UL listed assembly with a minimum rating to be install into a 1-hour fire rated wall.
 - b. Not all construction ingress and egress doors are illustrated on the plans.
 - c. The contractor shall include material and labor for temporary doors and hardware to separate VA occupied space and the construction activities.
 - d. Repairing existing doors with wood filler due to temporary door hardware shall not be allowed.
 - e. If the contractor alters an existing door for use as a temporary construction door, that door shall be replaced with a new like and kind door assembly.
 - f. Fire resistant poly products per NFPA 241 shall only be used as dust control. It shall be used for up to (one) eight-hour work shift in a single location.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

12-13-23

21. Contractor shall comply with VHA St. Cloud influenza policy (VHA Directive 1192.01 and VHA Directive 1013). Contractor shall direct all subcontractors working on site to also comply with VHA St. Cloud influenza policy. To comply with this policy, all contractors must complete a Health Care Personnel Influenza Vaccination Form during the influenza season which is generally from December 1 through March 31; however, it can vary from one season or geographic location to another. For security reasons, these forms are to be submitted directly to the St. Cloud VA Infection Prevention Nurse, whom will document and track influenza vaccination status. Starting at the end of December until the end of March, Contractor shall provide monthly a list of all contractors working on site. This list will be provided to the St. Cloud VA Infection Prevention Nurse whom can check against their documentation to confirm forms have been received for all contractors working on site during the influenza season. A copy of Directive 1192.01 and Directive 1013 and Health Care Personnel Influenza Vaccination Forms are available upon request.

C. Key Control:

1. Door hardware installed in construction doors is to be self-closing and storage function lock, able to receive a BEST 7 pin core and only operable with a key. The VA will install the construction core and issue keys to the contractor's personnel. All construction fences are to be locked with a VA lock in series so VA engineering and police personnel have emergency access at all times. Construction fences are to be kept locked at all times to prevent access by patients and VA unauthorized staff. Contractor is to provide means of egress from the site that keeps the site secure from the exterior. Keys to necessary construction areas can be checked out with the approval of the COR. The contractor is to give a minimum of 15 calendar days' notice for security approval for areas that need to be entered for construction purposes.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

12-13-23

2. The General Contractor shall turn over all permanent lock cylinders to the VA locksmith for permanent installation. See Section 08 71 00, DOOR HARDWARE and coordinate.
3. VA construction core keys will be issued to the contractor as deemed necessary by the COR. All keys must be returned when no longer needed or upon completion of the contract. There will be a \$25 charge for each key not returned at the end of the contract. Should VA security be compromised as a result of failure to return a key(s), there will be an additional charge to the contractor of \$25 for each door re-cored. There will be a \$75 charge for any VA padlocks not returned by the contractor.

D. Document Control:

1. Before starting any work, the General Contractor/Subcontractors shall submit an electronic security memorandum describing the approach to following goals and maintaining confidentiality of "sensitive information".
2. The General Contractor is responsible for safekeeping of all drawings, project manual and other project information. This information shall be shared only with those with a specific need to accomplish the project.
3. Certain documents, sketches, videos or photographs and drawings may be marked "Law Enforcement Sensitive" or "Sensitive Unclassified". Secure such information in separate containers and limit the access to only those who will need it for the project. Return the information to the Contracting Officer upon request.
4. These security documents shall not be removed or transmitted from the project site without the written approval of Contracting Officer.
5. All paper waste or electronic media such as CD's and diskettes shall be shredded and destroyed in a manner acceptable to the VA.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

12-13-23

6. Notify Contracting Officer and Site Security Officer immediately when there is a loss or compromise of "sensitive information".
7. All electronic information shall be stored in specified location following VA standards and procedures using an Engineering Document Management Software (EDMS).
 - a. Security, access and maintenance of all project drawings, both scanned and electronic shall be performed and tracked through the EDMS system.
 - b. "Sensitive information" including drawings and other documents may be attached to e-mail provided all VA encryption procedures are followed.

E. Motor Vehicle Restrictions

1. Vehicle authorization request shall be required for any vehicle entering the site and such request shall be submitted seven calendar days before the date and time of access. Contractor shall maintain a list of vehicles of all employees (general contractor and subcontractors) working on their site. List shall include employee name, vehicle make, model, color and license plate number.
2. Ten parking permits shall be issued for General Contractor and subcontractor for parking in the east contractor lot. This lot is gravel, with minimum maintenance. No overnight parking of contractor vehicles allowed in this lot. No equipment and/or materials are allowed in this lot.

1.6 OPERATIONS AND STORAGE AREAS (FAR 52.236-10)

- A. The Contractor shall confine all operations (including storage of materials) on Government premises to areas authorized or approved by the Contracting Officer. The Contractor shall hold and save the Government, its officers and agents, free and harmless from liability of any nature occasioned by the Contractor's performance.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

12-13-23

- B. Temporary buildings (e.g., storage sheds, shops, offices) and utilities may be erected by the Contractor only with the approval of the Contracting Officer and shall be built with labor and materials furnished by the Contractor without expense to the Government. The temporary buildings and utilities shall remain the property of the Contractor and shall be removed by the Contractor at its expense upon completion of the work. With the written consent of the Contracting Officer, the buildings and utilities may be abandoned and need not be removed.
- C. The Contractor shall, under regulations prescribed by the Contracting Officer, use only established roadways, or use temporary roadways constructed by the Contractor when and as authorized by the Contracting Officer. When materials are transported in prosecuting the work, vehicles shall not be loaded beyond the loading capacity recommended by the manufacturer of the vehicle or prescribed by any Federal, State, or local law or regulation. When it is necessary to cross curbs or sidewalks, the Contractor shall protect them from damage. This includes crossing curbs and other features when temporary roads and pedestrian walkways are used. The Contractor shall repair or pay for the repair of any damaged curbs, sidewalks, or roads.
- D. Working space and space available for storing materials shall be as shown on the drawings.
- E. Workmen are subject to rules of Health Care System applicable to their conduct.
- F. Execute work in such a manner as to interfere as little as possible with work being done by others. Keep roads clear of construction materials, debris, standing construction equipment and vehicles at all times.
- G. Execute work so as to interfere as little as possible with the normal functioning of the Health Care System as a whole, including operations

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

12-13-23

of utility services, fire protection systems and any existing equipment, and with work being done by others. The Contractor shall notify the COR prior to the use of equipment and tools that transmit vibrations and noises that can be either felt or heard outside the work site (core drilling, chipping hammer, jack hammer etc.). COR approval to use such equipment and tools shall be obtained in advance, not less than 14 calendar days prior to the use of such tools, in order to allow advance coordination with health care staff. Contractor to include pricing in the offer for executing this work off hours, before 8:00 am and/or after 4:30 pm or as indicated in the construction documents. This applies to all VA occupied space and any occupied space adjacent to construction activities where noise above 80 decibel or vibration can be felt or heard.

1. Do not store materials and equipment in other than assigned areas.
2. Contractor shall coordinate and utilize just in time material and equipment delivery system. Long term storage of material is not allowed. Storage of common construction material beyond 7 calendar days is not allowed. Schedule delivery of materials and equipment to construction working areas in quantities sufficient for not more than 5 workdays as the staging/storage areas as indicated on the plans allow. Provide unobstructed access to Health Care System areas required to remain in operation.
3. Contractor shall provide unobstructed access to VA Health Care System area required to remain in operation.

H. Utilities Services: Where necessary to cut existing pipes, electrical wires, conduits, cables, etc., of utility services, or of fire protection systems or communications systems (except telephone), they shall be cut and capped at suitable places where shown; or, in absence of such indication, where directed by the COR. All such actions shall be coordinated with the COR or Utility Company involved.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

12-13-23

1. Whenever it is required that a connection fee be paid to a public utility provider for a new permanent service to the construction project, for such items as water, sewer, electricity, gas or steam, payment of such fee shall be the responsibility of the Government and not the Contractor.

I. Phasing:

The Health Care System must maintain its operation 24 hours a day 7 days a week. Therefore, any interruption in service must be scheduled 21 calendar days in advance and coordinated with the COR to ensure that no lapses in operation occur. It is the CONTRACTOR'S responsibility to develop a work plan and schedule detailing, at a minimum, the procedures to be employed, the equipment and materials to be used, the interim life safety measure to be used during the work, and a schedule defining the duration of the work with milestone subtasks.

To ensure such executions, Contractor shall furnish the COR with a schedule of approximate phasing dates on which the Contractor intends to accomplish work in each specific area of site, building or portion thereof. In addition, Contractor shall notify the COR 21 calendar days in advance of the proposed date of starting work in each specific area of site, building or portion thereof. All phasing dates shall be arranged to ensure accomplishment of this work in successive phases as detailed in the Construction Drawings for phasing. Unless noted otherwise, 21 calendar days between each phase is required for VA activations and move relocations. The contractor shall include this coordination time in their schedule.

J. Building No. 4 will be occupied during performance of work; but immediate areas of alterations will be vacated.

1. Continuous and uninterrupted operations of Building No. 4 are critical to the activities of the St. Cloud VA Health Care System. Upon

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

12-13-23

award of the contract and prior to starting onsite activities the contractor shall meet with the VA/COR to develop an understanding of Building No. 4 operations and develop a plan for performing work in proximity to ongoing operations without impeding them. The plan, to be approved by the VA/COR, is to include, but not be limited to:

2. Means and methods of protecting existing building components and equipment during demolition and construction.
3. Schedule of power interruptions to equipment and utilities.
4. Provision for temporary power as required during the installation of new equipment.
5. Electrical outages that will require a steam outage will be scheduled between the months of May and August. Outages during April and September will be considered by the VA/COR based on weather conditions and campus heat load.
6. Other work as described in the contract documents.
7. Contractor shall take all measures and provide all material necessary for protecting existing equipment and property in affected areas of construction against dust and debris, so that equipment and affected areas to be used in the VA Health Care System operations will not be hindered. Contractor shall permit access to Department of Veterans Affairs personnel and patients through other construction areas which serve as routes of access to such affected areas and equipment. These routes whether access or egress shall be isolated from the construction area by temporary partitions and have walking surfaces, lighting etc. to facilitate patient and staff access. Coordinate alteration work in areas occupied by Department of Veterans Affairs so that Health Care System operations will continue during the construction period.

- K. Construction Fence: Before construction operations begin, Contractor shall provide a chain link construction fence, 2.1m (seven

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

12-13-23

feet) minimum height, around the construction area(s) indicated on the drawings or as required confining all construction activities and staged materials, equipment etc. All fences designed and intended to run parallel to sidewalks and roadways shall be at least 5' away from the edge/shoulder of sidewalks and/or roadways. Provide vehicle and "man gate" (s) for access with necessary hardware, including hasps and padlocks. The "man gate"(s) shall have panic hardware installed on the gate to allow emergency egress from the construction staging area(s) and construction work zone(s) to the public way. Contractor must provide hardware on gate to provide exit ability of contractor's staff and not allow access to unauthorized persons at the facility. An exterior grade metal door and frame (with appropriate hardware per ingress & egress requirements) professionally and securely installed into the fence assembly can be an alternative to "man gate (s)". VA engineering staff must have the ability to access this gate at any time. Fasten fence fabric to terminal posts with tension bands and to line posts and top and bottom rails with tie wires spaced at maximum 375mm (15 inches). Bottom of fences shall extend to 25mm (one inch) above grade. Access to the contractors' staging area and/or work site shall remain secure at all times. Secure is defined as locked to prevent unauthorized entrance to the construction site or during times of entrance or delivery, a construction representative shall be within 10 yards of the gate, monitoring the gate to prevent unauthorized access. Removal of construction fence shall be coordinated in advance with the COR.

- L. When a building or part of a building and/or construction site is turned over to Contractor, Contractor shall accept entire responsibility including upkeep and maintenance therefore:
 - 1. Contractor shall maintain a minimum temperature of 4 degrees C (40 degrees F) at all times, except as otherwise specified.
 - 2. Contractor shall maintain in code compliant operating condition and provide any temporary material and equipment for existing fire

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

12-13-23

protection and alarm equipment until the final systems are operational. During renovation the contractor shall alter the existing and/or install a temporary fire sprinkler system, compliant with NFPA to be used until the final system is operational. In connection with fire alarm equipment, Contractor shall make arrangements for pre-inspection of site with VA's Fire Protection System Representative whichever will be required to respond to an alarm from Contractor's employee or watchman.

M. Utilities Services: Maintain existing utility services for Health Care System at all times. Not all details will be shown on the construction plan. Contractor shall request any additional information prior to bid if needed, contractor shall field verify electrical, HVAC, water, sewer and life systems in project area to provide material and equipment to maintain existing utilities for construction, life safety and operations of adjacent/impacted patients and/or staff. Provide temporary facilities, labor, materials, equipment, connections, and utilities to assure uninterrupted services. Where necessary to cut existing water, steam, gases, sewer or air pipes, or conduits, wires, cables, etc. of utility services or of fire protection systems and communications systems (including telephone), they shall be cut and capped at suitable places where shown; or, in absence of such indication, the Contractor shall coordinate in advance with the COR and receive COR approval to proceed prior to any such cuts or caps. The Contractor shall coordinate with the COR and the Utility Company when applicable. Utility pathways no longer used shall be removed back to the common source (main, branch, panel, junction box, etc).

1. No utility service such as water, gas, steam, sewers or electricity, or fire protection systems and communications systems may be interrupted without 21 calendar day notice and prior approval of the COR. No "HOT TAPPING" of any utility service other than storm or sanitary utilities is allowed unless under extreme circumstances. If these circumstances are determined appropriate and approved by the

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

12-13-23

- Chief Engineer, all work must follow Facilities Management Memorandum 23 "Hot Tapping Procedures". All services under work shall be isolated and all energy released before work begins. Electrical work shall be accomplished with all affected circuits or equipment de-energized. When an electrical outage cannot be accomplished, work on any energized circuits or equipment shall not commence without a detailed work plan, the Health Care System Director's prior knowledge and written approval. Refer to specification Sections 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS, 27 05 11 REQUIREMENTS FOR COMMUNICATIONS INSTALLATIONS and 28 05 11, REQUIREMENTS FOR ELECTRONIC SAFETY AND SECURITY INSTALLATIONS for additional requirements.
2. Contractor shall submit a request to interrupt any such services to the COR, in writing, 21 calendar days in advance of proposed interruption. Request shall state reason, date, exact time of, and approximate duration of such interruption. The contractor will identify the detailed work activity plan related including a contingency plan with this request. The request shall be submitted to the COR via the RFI process.
 3. Contractor will be advised (in writing) of approval of request, or of which other date and/or time such interruption will cause least inconvenience to operations of Health Care System. Interruption time approved by Health Care System may occur at other than Contractor's normal working hours.
 4. Major interruptions (any utility systems affecting operations of the Health Care System, i.e. power, water, steam, heating, cooling etc outside of the immediate construction work site) of any system must be requested, in writing, at least 21 calendar days prior to the desired time and shall be performed as directed by the COR.
 5. In case of a contract construction emergency, service will be interrupted on approval of the COR. Such approval will be confirmed in writing as soon as practical.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

12-13-23

6. Whenever it is required that a connection fee be paid to a public utility provider for new permanent service to the construction project, for such items as water, sewer, electricity, gas or steam, payment of such fee shall be the responsibility of the Government and not the Contractor.
- N. Abandoned Lines: All service lines such as wires, cables, conduits, ducts, pipes and the like (including hangers and all supports) shall be removed back to the common source (panels, main lines, branch lines, etc).
- O. To minimize interference of construction activities with flow of Health Care System traffic, comply with the following:
1. Keep roads, walks and entrances to grounds/parking/occupied areas of buildings clear of construction materials, debris and standing construction equipment and vehicles. Wherever excavation for new utility lines cross existing roads, at least one lane must be open to traffic at all times with approval.
 2. The Contractor shall submit proposed methods and scheduling of required cutting, altering and removal of existing roads, walks and entrances to the COR not less than 15 calendar days in advance of any such work. Plans for such work must be approved in advance by the COR.
- P. Coordinate the work for this contract with other construction operations and notify the COR in advance of scheduling of traffic and the use of roadways, as specified in Article, USE OF ROADWAYS.

1.7 ALTERATIONS

- A. Survey: Before any work is started, the Contractor shall make a thorough survey with the COR of areas of buildings in which alterations occur and areas which are anticipated routes of access, and furnish a report, signed by both, to the Contracting Officer. This report shall list by rooms and spaces:

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

12-13-23

1. Existing condition and types of resilient flooring, doors, windows, walls and other surfaces not required to be altered throughout affected areas of buildings.
 2. Existence and conditions of items such as plumbing fixtures and accessories, electrical fixtures, equipment, venetian blinds, shades, etc., required by drawings to be either reused or relocated, or both.
 3. Shall note any discrepancies between drawings and existing conditions at site.
 4. Shall designate areas for working space, materials storage and routes of access to areas within buildings where alterations occur and which have been agreed upon by Contractor and the COR.
- B. Any items required by drawings to be either reused or relocated or both, found during this survey to be nonexistent, or in opinion of the COR, to be in such condition that their use is impossible or impractical, shall be furnished and/or replaced by Contractor with new items in accordance with specifications which will be furnished by Government. Provided the contract work is changed by reason of this subparagraph B, the contract will be modified accordingly, under provisions of clause entitled "DIFFERING SITE CONDITIONS" (FAR 52.236-2) and "CHANGES" (FAR 52.243-4 and VAAR 852.236-88).
- C. Re-Survey: Thirty days before expected partial or final inspection date, the Contractor and the COR together shall make a thorough re-survey of the areas of buildings involved. They shall furnish a report on conditions then existing, of resilient flooring, doors, windows, walls and other surfaces as compared with conditions of same as noted in first condition survey report:
1. Re-survey report shall also list any damage caused by Contractor to such flooring and other surfaces, despite protection measures; and, will form basis for determining extent of repair work required of

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

12-13-23

Contractor to restore damage caused by Contractor's workmen in executing work of this contract.

D. Protection: Provide the following protective measures:

1. Wherever existing roof surfaces are disturbed they shall be protected against water infiltration. In case of leaks, they shall be repaired immediately upon discovery.
2. Temporary protection against damage for portions of existing structures and grounds where work is to be done, materials handled and equipment moved and/or relocated.
3. Protection of interior of existing structures at all times, from damage, dust and weather inclemency. Wherever work is performed, floor surfaces that are to remain in place shall be adequately protected prior to starting work, and this protection shall be maintained intact until all work in the area is completed.

1.8 DISPOSAL AND RETENTION

A. Materials and equipment accruing from work removed and from demolition of buildings or structures, or parts thereof, shall be disposed of as follows:

1. Reserved items which are to remain property of the Government are identified by attached tags as items to be stored. Items that remain property of the Government shall be removed or dislodged from present locations in such a manner as to prevent damage which would be detrimental to re-installation and reuse. Store such items where directed by the COR.
2. Items not reserved shall become property of the Contractor and be removed by Contractor from Health Care System.
3. Items of portable equipment and furnishings located in rooms and spaces in which work is to be done under this contract shall remain the property of the Government. When rooms and spaces are vacated by the Department of Veterans Affairs during the alteration period,

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

12-13-23

such items which are NOT required by drawings and specifications to be either relocated or reused will be removed by the Government in advance of work to avoid interfering with Contractor's operation.

4. PCB Transformers and Capacitors : The Contractor shall be responsible for disposal of the Polychlorinated Biphenyl (PCB) transformers and capacitors. The transformers and capacitors shall be taken out of service and handled in accordance with the procedures of the Environmental Protection Agency (EPA) and the Department of Transportation (DOT) as outlined in Code of Federal Regulation (CFR), Titled 40 and 49 respectively. The EPA's Toxic Substance Control Act (TSCA) Compliance Program Policy Nos. 6-PCB-6 and 6-PCB-7 also apply. Upon removal of PCB transformers and capacitors for disposal, the "originator" copy of the Uniform Hazardous Waste Manifest (EPA Form 8700-22), along with the Uniform Hazardous Waste Manifest Continuation Sheet (EPA Form 8700-22A) shall be returned to the Contracting Officer who will annotate the contract file and transmit the Manifest to the Health Care System's Chief.

- a. Copies of the following listed CFR titles may be obtained from the Government Printing Office:

40 CFR 261.....Identification and Listing of Hazardous Waste

40 CFR 262.....Standards Applicable to Generators of Hazardous Waste

40 CFR 263.....Standards Applicable to Transporters of Hazardous Waste

40 CFR 761.....PCB Manufacturing, Processing, Distribution in Commerce, and use Prohibitions

49 CFR 172.....Hazardous Material tables and Hazardous Material Communications Regulations

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

12-13-23

49 CFR 173.....Shippers - General Requirements for Shipments
and Packaging

49 CRR 173.....Subpart A General

49 CFR 173.....Subpart B Preparation of Hazardous Material for
Transportation

49 CFR 173.....Subpart J Other Regulated Material; Definitions
and Preparation

TSCA.....Compliance Program Policy Nos. 6-PCB-6 and 6-
PCB-7

1.9 PROTECTION OF EXISTING VEGETATION, STRUCTURES, EQUIPMENT, UTILITIES, AND IMPROVEMENTS

A. The Contractor shall preserve and protect all surfaces including but not limited to asphalt, sidewalks, curbs, structures, equipment, and vegetation (such as trees, shrubs, and grass) on or adjacent to the work site, which are not to be removed and which do not unreasonably interfere with the work required under this contract. The Contractor shall only remove trees when specifically authorized to do so, and shall avoid damaging vegetation that will remain in place. If any limbs or branches of trees are broken during contract performance, or by the careless operation of equipment, or by workmen, the Contractor shall trim those limbs or branches with a clean cut and paint the cut with a tree-pruning compound. Any grass that is damaged during construction will have the pre-existing grade restored, be sodded and maintained until the sod is firmly rooted as determined by the COR. Sod will be watered by contractor and may not exceed 4 inches while the contractor is responsible for the sod. Any trees/shrubs not identified for demolition shall remain. The contractor shall protect the existing trees/shrubs from damage by enclosing the dripline area with plastic fence. No material, vehicles and/or equipment shall be stored within this protected area. Tree trimming is not allowed as the trees are considered "historic". Contractors shall make all reasonable efforts to

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

12-13-23

use other methods to not conflict with trees (i.e. shorter/smaller equipment).

- B. The Contractor shall protect from damage all existing improvements and utilities at or near the work site and on adjacent property of a third party, the locations of which are made known to or should be known by the Contractor. The Contractor shall repair any damage to those facilities, including those that are the property of a third party, resulting from failure to comply with the requirements of this contract or failure to exercise reasonable care in performing the work. If the Contractor fails or refuses to repair the damage promptly, the Contracting Officer may have the necessary work performed and charge the cost to the Contractor.

(FAR 52.236-9)

- C. Refer to Section 01 57 19, TEMPORARY ENVIRONMENTAL CONTROLS, for additional requirements on protecting vegetation, soils and the environment. Refer to Articles, "Alterations", "Restoration", and "Operations and Storage Areas" for additional instructions concerning repair of damage to structures and site improvements. At a minimum, the contractor is to comply with all EPA regulations for protection from storm water pollution that would be caused by construction and implement all required safeties to maintain compliance. Also, all wash downs for concrete trucks is to be conducted off site. No containment areas are allowed on site.

- D. Refer to FAR clause 52.236-7, "Permits and Responsibilities," which is included in General Conditions. A National Pollutant Discharge Elimination System (NPDES) and/or Storm Water pollution Prevention Plan (SWPPP) permit is required for this project. The Contractor is considered an "operator" under the permit and has extensive responsibility for compliance with permit requirements. VA will provide the permit application upon request available at the (appropriate

Health Care System) office. The Contractor and affected subcontractors
Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

12-13-23

shall furnish all information and certifications that are required to comply with the permit process and permit requirements. Many of the permit requirements will be satisfied by completing construction as shown and specified. Some requirements involve the Contractor's method of operations and operations planning and the Contractor is responsible for employing best management practices. The affected activities often include, but are not limited to the following:

- Designating areas for equipment maintenance and repair;
- Providing waste receptacles at convenient locations and provide regular collection of wastes;
- Locating equipment wash down areas on site, and provide appropriate control of wash-waters; concrete truck wash down is not allowed on site.
- Providing protected storage areas for chemicals, paints, solvents, fertilizers, and other potentially toxic materials; and
- Providing adequately maintained sanitary facilities.

E. Contractor shall maintain grounds in and around their construction site including all staging, storage and parking areas assigned to this contract (referred to as construction area). Contractor shall remove debris promptly within construction areas. Contractor shall mow and weed whip the construction areas and weed whip on the public side of their construction fences. Mowing and whipping shall occur on regular basis at all times throughout the active contract to prevent vegetation from exceeding 4" in height. Weed control shall be maintained throughout the construction contract period with a plan approved by the COR to return construction site to the preexisting condition unless stated otherwise.

Contractor shall make all reasonable attempts to prevent tracking or other type of unintentional debris transferring of material. Should

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

12-13-23

this occur, the contractor shall complete clean up the affected areas within 2 hours of the discovery.

Inlet protection bags shall be clear of debris after each rain event. Any erosion control blankets or spikes used shall be biodegradable.

Contractor shall not use a "restricted use" herbicide.

1.10 RESTORATION

- A. Remove, cut, alter, replace, patch and repair existing work as necessary to install new work. Except as shown in the drawings or specified, do not cut, alter or remove any structural work, and do not disturb any ducts, plumbing, steam, gas, or electric work without prior written approval of the CO. Existing work to be altered or extended and that is found to be defective in any way, shall be reported to the COR before it is disturbed. Materials and workmanship used in restoring work, shall conform in type and quality to that of original existing construction, except as otherwise shown or specified.
- B. Upon completion of contract, deliver work complete and undamaged. Existing work (walls, ceilings, partitions, floors, mechanical and electrical work, lawns, paving, roads, walks, etc.) disturbed or removed as a result of performing required new work, shall be patched, repaired, reinstalled, or replaced with new work, and refinished and left in as good condition as existed before commencing work.
- C. At Contractor's own expense, Contractor shall immediately restore to service and repair any damage caused by Contractor's workmen to existing piping and conduits, wires, cables, etc., of utility services or of fire protection systems and communications systems (including telephone) which are not scheduled for discontinuance or abandonment.
- D. Expense of repairs to such utilities and systems not shown on drawings or locations of which are unknown will be covered by adjustment to contract time and price in accordance with clause entitled "CHANGES" (FAR 52.243-4 and VAAR 852.236-88) and "DIFFERING SITE CONDITIONS" (FAR 52.236-2).

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

12-13-23

1.11 PHYSICAL DATA - SOIL CONDITIONS (NOT USED)

1.12 PROFESSIONAL SURVEYING SERVICES (NOT USED)

1.13 LAYOUT OF WORK (NOT USED)

1.14 AS-BUILT DRAWINGS

- A. The contractor shall maintain two full size sets of as-built drawings which will be kept current during construction of the project, to include all contract changes, modifications and clarifications (Field coordination, Request For Information, Architectural Supplemental Info, PR's etc). These drawings shall be maintained and protected in a professional manner. All information shall be legible to a reasonable person.
- B. All variations shall be shown in the same general detail as used in the contract drawings. To insure compliance, as-built drawings shall be made available for COR review, as often as requested.
- C. Contractor shall deliver two approved completed sets of as-built drawings in the electronic version (scanned PDF) to the COR within 15 calendar days after each completed phase and after the acceptance of the project by the COR.
- D. Paragraphs A, B, & C shall also apply to all shop drawings.

1.15 USE OF ROADWAYS

- A. For hauling, use only established public roads and roads on Health Care System property and, when authorized by the COR, such temporary roads which are necessary in the performance of contract work. Temporary roads shall be constructed and restoration performed by the Contractor at Contractor's expense. When necessary to cross curbing, sidewalks, or similar construction, they must be protected by well-constructed bridges.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

12-13-23

1.17 TEMPORARY USE OF MECHANICAL AND ELECTRICAL EQUIPMENT

- A. Use of new installed mechanical and electrical equipment to provide heat, ventilation, plumbing, light and power will be permitted subject to written approval and compliance with the following provisions:
1. Permission to use each unit or system must be given by the Contracting Officer in writing. Any such equipment shall be installed and maintained in accordance with the written agreement and following provisions
 2. Electrical installations used by the equipment shall be completed in accordance with the drawings and specifications to prevent damage to the equipment and the electrical systems, i.e. transformers, relays, circuit breakers, fuses, conductors, motor controllers and their overload elements shall be properly sized, coordinated and adjusted. Installation of temporary electrical equipment or devices shall be in accordance with NFPA 70, National Electrical Code, (2017 Edition), Article 590, *Temporary Installations*. Voltage supplied to each item of equipment shall be verified to be correct. Motors shall not be overloaded. The electrical equipment shall be thoroughly cleaned before using it and again immediately before final inspection including vacuum cleaning and wiping clean interior and exterior surfaces.
 3. Units shall be properly lubricated, balanced, and aligned. Vibrations must be reduced to contract specifications or, in the absence of contracting specifications, to at or below manufacturer's specifications for typical installations.
 4. Automatic temperature control systems for preheat coils shall function properly and all safety controls shall function to prevent coil freeze-up damage.
 5. The air filtering system utilized shall be that which is designed for the system when complete, and all filter elements shall be

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

12-13-23

replaced at completion of construction and prior to testing and balancing of system.

6. All components of heat production and distribution system, metering equipment, condensate returns, and other auxiliary facilities used in temporary service shall be cleaned prior to use; maintained to prevent corrosion internally and externally during use; and cleaned, maintained and inspected prior to acceptance by the Government.

B. Prior to final inspection, the equipment or parts used which show wear and tear beyond normal, shall be replaced with identical replacements, at no additional cost to the Government.

C. This paragraph shall not reduce the requirements of the mechanical and electrical specifications sections.

D. Any damage to the equipment or excessive wear due to prolonged use will be repaired replaced by the contractor at the contractor's expense.

1.18 TEMPORARY USE OF EXISTING ELEVATORS

A. Contractor will not be allowed the use of existing elevators. Outside doors and interior stairs shall be used by the general contractor for transporting materials and equipment.

1.19 TEMPORARY USE OF NEW ELEVATORS (NOT USED)

1.20 TEMPORARY TOILETS

A. Provide where directed, (for use of all Contractor's workmen) ample temporary sanitary toilet accommodations with suitable sewer and water connections; or, when approved by the COR , provide suitable dry closets where directed. Keep such places clean and free from flies, and all connections and appliances connected therewith are to be removed prior to completion of contract, and premises left perfectly clean.

1.21 AVAILABILITY AND USE OF UTILITY SERVICES

A. The Government shall make all reasonably required amounts of utilities available to the Contractor from existing outlets and supplies, as

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

12-13-23

specified in the contract. The Contractor shall carefully conserve all utilities furnished.

- B. The Contractor, at Contractor's expense and in a workmanlike manner, in compliance with code and as satisfactory to the Contracting Officer, shall install and maintain all necessary temporary connections and distribution lines. Before final acceptance of the work by the Government, the Contractor shall remove all the temporary connections, distribution lines, meters, and associated paraphernalia and repair restore the infrastructure as required.
- C. Contractor shall furnish and install temporary utility meters at Contractor's expense and furnish the Health Care System a monthly record of the Contractor's usage of all furnished utilities including but not limited to electricity, water and steam.
- D. Heat: Furnish temporary heat necessary to prevent injury to work and materials through dampness and cold. Use of open flame devices including but not limited to 'salamander' is not permitted on St Cloud VA property. Use only indirect heat exchanger heaters. Maintain minimum temperatures as specified for various materials:
 - 1. Obtain heat by connecting to Health Care System heating distribution system.
 - a. Steam is available at no cost to Contractor. Building must be dried in (weather tight), perimeter completely insulated per design and deemed not wasteful (by Chief Engineer) of VA utilities prior to heating with steam.
 - b. Electric Resistance heat is not allowed.
 - 2. If the contractor elects not to connect to the nearest available steam supply, gas/fuel heaters will be allowed with a submitted plan that is approved by the COR and facility Safety Officer.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

12-13-23

- a. Gas/fuel heaters must be an indirect heat unit with a heat exchanger. The unit must utilize a fresh air intake and exhaust outdoors.
 - b. All gas/fuel is to be supplied by the contractor at contractor's expense.
- E. Electricity (for Construction and Testing): Furnish all temporary electric services.
1. Obtain electricity by connecting to the Health Care System electrical distribution system. The Contractor shall meter and pay for electricity required for electric cranes and hoisting devices, electrical welding devices and any electrical heating devices providing temporary heat. Electricity for all other uses is available at no cost to the Contractor.
- F. Water (for Construction and Testing): Furnish temporary water service.
1. Obtain water by connecting to the Health Care System water distribution system. Provide reduced pressure backflow preventer at each connection as per code. Water is available at no cost to the Contractor.
 2. Maintain connections, pipe, fittings and fixtures and conserve water-use so none is wasted. Failure to stop leakage or other wastes may be cause for revocation (at Contracting Officer's discretion) of use of water from Health Care System's system.
 3. Water from the potable water system may not be used for irrigation. Irrigation water is available on campus near the Sauk River pump from Monday through Friday, June through the end of September between the hours of 1pm to 4pm. Contractor shall arrange for transportation of water, and source of water outside of those times.
 4. **Contractor Water Activities** - any action in which water is used on a construction site that creates an aerosolized risk (landscape watering, compaction watering, moisture content adjustments, dust

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

12-13-23

mitigation, cleaning, surface preparation, dewatering pumps etc) shall be conducted off-hours when patients are not traversing the grounds to prevent risk of legionella impacts. Contractors shall not utilize a method of watering that aerosolizes to create a legionella risk to adjacent patients. The contractors watering activities shall be completed under supervision of an employee of the prime contractor.

- G. Fuel: Natural and LP gas and burner fuel oil required for boiler cleaning, normal initial boiler-burner setup and adjusting, and for performing the specified boiler tests will be furnished by the Government. Fuel required for prolonged boiler-burner setup, adjustments, or modifications due to improper design or operation of boiler, burner, or control devices shall be furnished and paid by the Contractor at Contractor's expense.

1.22 NEW TELEPHONE EQUIPMENT (NOT USED)

1.23 TESTS

- A. As per specification section 23 05 93 the contractor shall provide a written testing and commissioning plan complete with component level, equipment level, sub-system level and system level breakdowns. The plan will provide a schedule and a written sequence of what will be tested, how and what the expected outcome will be. This document will be submitted for approval prior to commencing work. The contractor shall document the results of the approved plan and submit for approval with the as built documentation.
- B. Pre-test mechanical and electrical equipment and systems and make corrections required for proper operation of such systems before requesting final tests. Final test will not be conducted unless pre-tested.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

12-13-23

- C. Conduct final tests required in various sections of specifications in presence of an authorized representative of the Contracting Officer. Contractor shall furnish all labor, materials, equipment, instruments, and forms, to conduct and record such tests.
- D. Mechanical and electrical systems shall be balanced, controlled and coordinated. A system is defined as the entire system which must be coordinated to work together during normal operation to produce results for which the system is designed. For example, air conditioning supply air is only one part of entire system which provides comfort conditions for a building. Other related components are return air, exhaust air, steam, chilled water, refrigerant, hot water, controls and electricity, etc. Another example of a system which involves several components of different disciplines is a boiler installation. Efficient and acceptable boiler operation depends upon the coordination and proper operation of fuel, combustion air, controls, steam, feedwater, condensate and other related components.
- E. All related components as defined above shall be functioning when any system component is tested. Tests shall be completed within a reasonable period of time during which operating and environmental conditions remain reasonably constant and are typical of the design conditions.
- F. Individual test result of any component, where required, will only be accepted when submitted with the test results of related components and of the entire system.

1.24 INSTRUCTIONS

- A. Contractor will be provided an electronic copy of the VA equipment log spreadsheet. During the initial start-up, the contractor shall submit the populated spreadsheet to include the following information for each piece of equipment:
 - o Equipment installed
 - o Manufacturer of equipment
 - o Model # of equipment

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

12-13-23

- o Serial # of equipment
- o Location of equipment
- o Market value of equipment
- o Purchase date of equipment
- o Manufacturer warranty end date of equipment

Contractor shall also furnish Maintenance and Operating manuals (hard copies and electronic), completed start-up check lists and verbal instructions when the equipment is activated and as required by the various sections of the specifications and as hereinafter specified.

B. Manuals: Maintenance and operating manuals and one compact disc (four hard copies and one electronic copy each) for each separate piece of equipment shall be delivered to the COR coincidental with the delivery of the equipment to the job site. Manuals shall be complete, detailed guides for the maintenance and operation of equipment. They shall include complete information necessary for starting, adjusting, maintaining in continuous operation for long periods of time and dismantling and reassembling of the complete units and sub-assembly components. Manuals shall include an index covering all component parts clearly cross-referenced to diagrams and illustrations. Illustrations shall include "exploded" views showing and identifying each separate item. Emphasis shall be placed on the use of special tools and instruments. The function of each piece of equipment, component, accessory and control shall be clearly and thoroughly explained. All necessary precautions for the operation of the equipment and the reason for each precaution shall be clearly set forth. Manuals must reference the exact model, style and size of the piece of equipment and system being furnished. Manuals referencing equipment similar to but of a different model, style, and size than that furnished will not be accepted.

C. Instructions: Contractor shall provide qualified, factory-trained manufacturers' representatives to give detailed training to assigned Department of Veterans Affairs personnel in the operation and complete maintenance for each piece of equipment. All such training will be at the job site. These requirements are more specifically detailed in the

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

12-13-23

various technical sections. Training for different items of equipment that are component parts of a complete system, shall be given in an integrated, progressive manner. All instructors for every piece of component equipment in a system shall be available until training for all items included in the system have been completed. This is to assure proper instruction in the operation of inter-related systems. The Contractor shall coordinate and schedule all training in advance with the COR. Training shall be considered concluded only when the COR is satisfied in regard to complete and thorough coverage. The contractor shall submit a course outline with associated material to the COR for review and approval prior to scheduling training to ensure the subject matter covers the expectations of the VA and the contractual requirements. The Department of Veterans Affairs reserves the right to request the removal of, and substitution for, any instructor who, in the opinion of the COR, does not demonstrate sufficient qualifications.

1.25 GOVERNMENT-FURNISHED PROPERTY (NOT USED)

1.26 RELOCATED EQUIPMENT AND ITEMS (NOT USED)

1.27 STORAGE SPACE FOR DEPARTMENT OF VETERANS AFFAIRS EQUIPMENT (NOT USED)

1.28 CONSTRUCTION SIGN (NOT USED)

1.29 SAFETY SIGN

- A. Provide a Safety Sign where directed by the COR. Face of sign shall be 19 mm (3/4 inch) thick exterior grade plywood. Provide two 100 mm by 100 mm (four by four inch) posts extending full height of sign and 900 mm (three feet) into ground. Set bottom of sign level at 1200 mm (four feet) above ground.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

12-13-23

- B. Paint all surfaces of Safety Sign and posts with one prime coat and two coats of white gloss paint. Letters and design shall be painted with gloss paint of colors noted.
- C. Maintain sign and remove it when directed by the COR.
- D. Standard Detail Drawing Number SD10000-02 (Found on VA TIL) of safety sign showing required legend and other characteristics of sign is shown on the drawings.
- E. Post the number of accident free days on a daily basis.

1.30 PHOTOGRAPHIC DOCUMENTATION

- A. During the construction period through completion, provide photographic documentation of construction progress and at selected milestones including electronic indexing, navigation, storage and remote access to the documentation, as per these specifications. A minimum of 75 photos per month (for Minor) are to be delivered monthly on 2 CD's to the COR. The commercial photographer or the subcontractor used for this work shall meet the following qualifications:

- 1. Demonstrable minimum experience of three (3) years in operation providing documentation and advanced indexing/navigation systems including a representative portfolio of construction projects of similar type, size, duration and complexity as the Project.
- 2. Demonstrable ability to service projects throughout North America, which shall be demonstrated by a representative portfolio of active projects of similar type, size, duration and complexity as the Project.

- B. Photographic documentation elements:

- 1. Each digital image shall be taken with a professional grade camera with minimum size of 6 megapixels (MP) capable of producing 200x250mm (8 x 10 inch) prints with a minimum of 2272 x 1704 pixels

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

12-13-23

and 400x500mm (16 x 20 inch) prints with a minimum 2592 x 1944 pixels.

2. Indexing and navigation system shall utilize actual AUTOCAD construction drawings, making such drawings interactive on an on-line interface. For all documentation referenced herein, indexing and navigation must be organized by both time (date-stamped) and location throughout the project.
3. Documentation shall combine indexing and navigation system with inspection-grade digital photography designed to capture actual conditions throughout construction and at critical milestones. Documentation shall be accessible on-line through use of an internet connection. Documentation shall allow for secure multiple-user access, simultaneously, on-line.
4. Before construction, the building pad, adjacent streets, roadways, parkways, driveways, curbs, sidewalks, landscaping, adjacent utilities and adjacent structures surrounding the building pad and site shall be documented. Overlapping photographic techniques shall be used to insure maximum coverage. Indexing and navigation accomplished through interactive architectural drawings. If site work or pad preparation is extensive, this documentation may be required immediately before construction and at several pre-determined intervals before building work commences.
5. Construction progress for all trades shall be tracked at pre-determined intervals, but not less than once every thirty (30) calendar days ("Progressions"). Progression documentation shall track both the exterior and interior construction of the building. Exterior Progressions shall track 360 degrees around the site and each building. Interior Progressions shall track interior improvements beginning prior to demolition commencing and continuing until Project completion.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

12-13-23

6. As-built condition of pre-foundation utilities and site utilities shall be documented prior to pouring footers, placing concrete and/or backfilling. This process shall include all underground and in-slab utilities within the building(s) envelope(s) and utility runs in the immediate vicinity of the building(s) envelope(s). This may also include utilities enclosed in slab-on-deck in multi-story buildings. Overlapping photographic techniques shall be used to insure maximum coverage. Indexing and navigation accomplished through interactive site utility plans.
7. As-built conditions of mechanical, electrical, plumbing and all other systems shall be documented post-inspection and pre-insulation, sheet rock or dry wall installation. This process shall include all finished systems located in the walls and ceilings of all buildings at the Project. Overlapping photographic techniques shall be used to insure maximum coverage. Indexing and navigation accomplished through interactive architectural drawings.
8. As-built conditions of exterior skin and elevations shall be documented with an increased concentration of digital photographs as directed by the COR in order to capture pre-determined focal points, such as waterproofing, window flashing, radiused steel work, architectural or Exterior Insulation and Finish Systems (EIFS) detailing. Overlapping photographic techniques shall be used to insure maximum coverage. Indexing and navigation accomplished through interactive elevations or elevation details.
9. As-built finished conditions of the interior of each building including floors, ceilings and walls shall be documented at certificate of occupancy or equivalent, or just prior to occupancy, or both, as directed by the COR. Overlapping photographic techniques shall be used to insure maximum coverage. Indexing and navigation accomplished through interactive architectural drawings.
10. Miscellaneous events that occur during any Contractor site visit, or events captured by the Department of Veterans Affairs independently,

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

12-13-23

shall be dated, labeled and inserted into a Section in the navigation structure entitled "Slideshows," allowing this information to be stored in the same "place" as the formal scope.

11. Customizable project-specific digital photographic documentation of other details or milestones. Indexing and navigation accomplished through interactive architectural plans.
12. Monthly (29 max) exterior progressions (360 degrees around the project) and slideshows (all elevations and building envelope). The slideshows allow for the inclusion of Department of Veterans Affairs pictures, aerial photographs, and timely images which do not fit into any regular monthly photograph.
13. Weekly (21 Max) Site Progressions - Photographic documentation capturing the project at different stages of construction. These progressions shall capture underground utilities, excavation, grading, backfill, landscaping and road construction throughout the duration of the project.
14. Regular (8 max) interior progressions of all walls of the entire project to begin at time of substantial framed or as directed by the COR through to completion.
15. Detailed Exact-Built of all Slabs for all project slab pours just prior to placing concrete or as directed by the COR.
16. Detailed Interior exact built overlapping photos of the entire building to include documentation of all mechanical, electrical and plumbing systems in every wall and ceiling, to be conducted after rough-ins are complete, just prior to insulation and or drywall, or as directed by the COR.
17. Finished detailed Interior exact built overlapping photos of all walls, ceilings, and floors to be scheduled by the COR prior to occupancy.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

12-13-23

18. In event a greater or lesser number of images than specified above are required by the COR, adjustment in contract price will be made in accordance with clause entitled "CHANGES" (FAR 52.243-4 and VAAR 852.236-88).
- C. Images shall be taken by a commercial photographer and must show distinctly, at as large a scale as possible, all parts of work embraced in the picture.
- D. Coordination of photo shoots is accomplished through the COR. Contractor shall also attend construction team meetings as necessary. Contractor's operations team shall provide regular updates regarding the status of the documentation, including photo shoots concluded, the availability of new Progressions or Exact-Builts viewable on-line and anticipated future shoot dates.
- E. Contractor shall provide all on-line domain/web hosting, security measures, and redundant server back-up of the documentation.
- F. Contractor shall provide technical support related to using the system or service.
- G. Upon completion of the project, final copies of the documentation (the "Permanent Record") with the indexing and navigation system embedded (and active) shall be provided in an electronic media format, typically a DVD or external hard-drive. Permanent Record shall have Building Information Modeling (BIM) interface capabilities. On-line access terminates upon delivery of the Permanent Record.

1.31 FINAL ELEVATION DIGITAL IMAGES (NOT USED)

1.32 HISTORIC PRESERVATION

Where the Contractor or any of the Contractor's employees, prior to, or during the construction work, are advised of or discover any possible archeological, historical and/or cultural resources, the Contractor shall immediately notify the COR verbally, and then with a written follow up. The Contractor shall cease work at the point of discovery in

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

12-13-23

order to protect the find from damage, pending direction from the Contracting Officer as to how to proceed.

1.33 REBATE DOCUMENTATION

- A. As the VA is involved in rebate programs for installed materials and equipment, the contractor is to provide information to the COR including invoices, information sheets, etc. as required for the government to successfully receive rebates.

1.34 SITE INSPECTIONS

- A. The Government reserves the right to inspect the project site during contractor performance. Inspections shall conform to FAR 52.246-12 and herein described.
- B. Inspections shall be conducted randomly on a daily basis by the assigned COR and/or other Facilities Management (FM) staff members. Once per week project sites may be inspected by Facilities Management team. Work shall continue during these inspections as usual, as these are routine compliance inspections.
- C. Throughout the duration of the project the contractor shall schedule critical milestone inspections and obtain approval from the Contracting Officer and COR in order to proceed with the work.
 - 1. At minimum the Contractor shall schedule inspections for any underground, in floor, in wall, above ceiling, concrete, concrete reinforcement, partial final and final inspection work. If any work is covered without inspection, it is the Contractor's responsibility to uncover the work at the Contractors expense for inspection. These is inspections are for the benefit of the Government. It is the contractors responsibility (regardless of an inspection and/or results of an inspection) to comply with the terms of the contract.
 - a. Above ceiling inspections are treated as final inspections for items above the ceiling. All items shall be installed into the ceiling with exception of the acoustical tile or finished surface

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

12-13-23

(sheetrock etc.). Ceiling tile or finished surface required for items to be mounted to (such as speakers) are allowed to be installed prior to inspection. One M&O clearance pre-inspection with appropriate contractor coordination drawings is allowed prior to above ceiling inspection

2. Contractor shall request inspection date 21 calendar days prior to the proposed inspection date. The Government will make all reasonable attempts to schedule inspection within 7 calendar days of the proposed inspection date. However, an alternate date may be scheduled by the COR. This shall not constitute a delay to the schedule, if within a reasonable time period.
3. Written inspection reports will be furnished to the contractor by the Government. In the event there are discrepancies that effect follow on tasks, the Contractor shall not proceed with work without written approval from the Contracting Officer. This inspection log is generic; the specific project may require additional or less inspections depending upon the construction, site location and impacts. Coordinate with COR and Contracting Officer throughout the project for more information. Contracting Officers have the final authority on all punch lists. If the COR chooses to send an informal punch list to the contractor, that punch list is for reference only. If the COR chooses to send this information they have at least 7 calendar days to format and submit to the contractor.
4. Inspections by VA and or A/E personnel do not release the contractor from following the contract documents. The contractor shall have all work completed and ready for the requested inspection. The VA reserves the right to deny an inspection due to incomplete, unacceptable work. The contractor cannot claim delays for failure to prepare for requested inspection. All inspection requests must be submitted 21 calendar days prior to the requested date. Reasonable attempts will be made to accommodate the Contractor's request.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

12-13-23

5. Should VA personnel identify items that do not meet or exceed the requirements for maintenance and safety clearances it is the contractor's responsibility to remove and reinstall the item(s) at no additional cost to the Government.
6. At the start of any Contractor requested inspection, the Contractor shall submit to the COR 3 copies of the Contractor's inspection records. The Contractor shall develop, maintain and document an inspection system acceptable to the Government to ensure that all work performed under the contract conforms to the contract requirements. The Contractor shall maintain complete inspection records documenting deficiencies and corrective actions. The Superintendent shall sign off on each deficiency listed upon completion.

1.35 Project/Phase Occupancy

- A.** Prior to VA occupancy of any portion of the project the contractor shall provide all training (maintenance of equipment, operation of equipment, lockout/tag out training of equipment), operation manuals, maintenance manuals, safety manuals (including lockout/tag out and permit required confine space forms completed by contractors on the VA format used during construction), as built documents, the VA inspection packet and inspection records kept by the contractors which demonstrate contract compliance. The contractor will not be granted a time extension and will not be allowed to proceed due to not providing proper documents for the VA to occupy the space.

1.36 Contracting Officer Representative Coordination

- A** Contracting Officer Representative (COR) will be onsite while the contract is active. CORs will be available at all times for emergencies. Contractors are to coordinate with the CORs schedule for inspections, coordination, etc. It is the responsibility of the contractor to submit Requests For Information (RFI) within a reasonable time frame. Typical RFI processing duration is 15 - 20 calendar days

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

12-13-23

per RFI, subject to complexity. Contractor has a duty to coordinate upcoming work and seek clarifications in a timely manner to prevent contract delays and diligently pursue the contract. Contractor shall provide submittals for COR's and/or A/E's review within a reasonable time frame. Typical submittal review process duration is 25 calendar days per submittal, subject to complexity of the submittal.

- A. For working outside the "regular hours" as defined in the contract, the General Contractor shall give 21 calendar days' notice to the Contracting Officer and the COR so that arrangements can be made. This notice is separate from any notices required for utility shutdown described in other sections.

1.37 Required Permits

The contractor shall request and coordinate information to obtain the following permits:

- A. Storm Water Pollution Prevention Plan
- B. Infectious Control Risk Assessment
- C. Hot Work
- D. Lock Out/Tag Out
- E. Energized Work
 - o Including removing electrical panel covers
- F. Demolition Permit
 - o Will be approved after NFPA 241, ICRA, security, other temporary safety/security measures including approved GEMS measures are installed by the contractor per contract.

1.38 GC Supervision

The contractor shall request and coordinate information to comply with supervision requirements

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

12-13-23

- A. The GC shall employ a superintendent either via contract or via direct employee.
- B. Each superintendent shall be assigned to only 1 contract/project for the duration of the period of performance of the contract.
- C. Each superintendent shall have construction management experience in a healthcare setting.
- D. Each superintendent shall have ICRA, SWPPP and OSHA 30 certification.
- E. Each superintendent shall assume responsibility of the construction site under this contract and the safety of those whom enter it.

1.39 Locates

- A. The GC shall contract/employ a locate crew for locating public and private utilities on VA grounds. Any locate paint, flags or other locate markers on the VA grounds, not contained in an approved construction fence after 14 calendar days is consider abandoned. VA will remove locate markers to maintain grounds. It will be the contractor's responsibility to relocate the utilities if needed. Damage to existing utilities is subject to repair by the contractor.

- - - E N D - - -

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

11-01-21

SECTION 01 32 16.15
PROJECT SCHEDULES
(SMALL PROJECTS - DESIGN/BID/BUILD)

PART 1- GENERAL

1.1 DESCRIPTION:

- A. The Contractor shall develop a Critical Path Method (CPM) plan and schedule demonstrating fulfillment of the contract requirements (Project Schedule) and shall keep the Project Schedule up to date in accordance with the requirements of this section and shall utilize the plan for scheduling, coordinating, and monitoring work under this contract (including all activities of subcontractors, equipment vendors and suppliers). Conventional Critical Path Method (CPM) technique shall be utilized to satisfy both time and cost applications.

1.2 CONTRACTOR'S REPRESENTATIVE:

- A. The Contractor shall designate an authorized representative responsible for the Project Schedule including preparation, review and progress reporting with and to the Contracting Officer's Representative (COR).
- B. The Contractor's representative shall have direct project control and complete authority to act on behalf of the Contractor in fulfilling the requirements of this specification section.
- C. The Contractor's representative shall have the option of developing the project schedule within their organization or to engage the services of an outside consultant. If an outside scheduling consultant is utilized, Section 1.3 of this specification will apply.

1.3 CONTRACTOR'S CONSULTANT:

- A. The Contractor shall submit a qualification proposal to the COTR, within 10 days of bid acceptance. The qualification proposal shall include:
1. The name and address of the proposed consultant.
 2. Information to show that the proposed consultant has the qualifications to meet the requirements specified in the preceding paragraph.
 3. A representative sample of prior construction projects, which the proposed consultant has performed complete project scheduling

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

11-01-21

services. These representative samples shall be of similar size and scope.

- B. The Contracting Officer has the right to approve or disapprove the proposed consultant and will notify the Contractor of the VA decision within seven calendar days from receipt of the qualification proposal. In case of disapproval, the Contractor shall resubmit another consultant within 10 calendar days for renewed consideration. The Contractor shall have their scheduling consultant approved prior to submitting any schedule for approval.

1.4 COMPUTER PRODUCED SCHEDULES

- A. The contractor shall provide monthly, to the Department of Veterans Affairs (VA), all computer-produced time/cost schedules and reports generated from monthly project updates. This monthly computer service will include: three copies of up to five different reports (inclusive of all pages) available within the user defined reports of the scheduling software approved by the Contracting Officer; a hard copy listing of all project schedule changes, and associated data, made at the update and an electronic file of this data; and the resulting monthly updated schedule in PDM format. These must be submitted with and substantively support the contractor's monthly payment request and the signed look ahead report. The COTR shall identify the five different report formats that the contractor shall provide.
- B. The contractor shall be responsible for the correctness and timeliness of the computer-produced reports. The Contractor shall also be responsible for the accurate and timely submittal of the updated project schedule and all CPM data necessary to produce the computer reports and payment request that is specified.
- C. The VA will report errors in computer-produced reports to the Contractor's representative within ten calendar days from receipt of reports. The Contractor shall reprocess the computer-produced reports and associated diskette(s), when requested by the Contracting Officer's representative, to correct errors which affect the payment and schedule for the project.

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

11-01-21

1.5 THE COMPLETE PROJECT SCHEDULE SUBMITTAL

A. Within 45 calendar days after receipt of Notice to Proceed, the Contractor shall submit for the Contracting Officer's review: three blue line copies of the interim schedule on sheets of paper 765 x 1070 mm (30 x 42 inches) and an electronic file in the previously approved CPM schedule program. The submittal shall also include three copies of a computer-produced activity/event ID schedule showing project duration; phase completion dates; and other data, including event cost. Each activity/event on the computer-produced schedule shall contain as a minimum, but not limited to, activity/event ID, activity/event description, duration, budget amount, early start date, early finish date, late start date, late finish date and total float. Work activity/event relationships shall be restricted to finish-to-start or start-to-start without lead or lag constraints. Activity/event date constraints, not required by the contract, will not be accepted unless submitted to and approved by the Contracting Officer. The contractor shall make a separate written detailed request to the Contracting Officer identifying these date constraints and secure the Contracting Officer's written approval before incorporating them into the network diagram. The Contracting Officer's separate approval of the Project Schedule shall not excuse the contractor of this requirement. Logic events (non-work) will be permitted where necessary to reflect proper logic among work events but must have zero duration. The complete working schedule shall reflect the Contractor's approach to scheduling the complete project. **The final Project Schedule in its original form shall contain no contract changes or delays which may have been incurred during the final network diagram development period and shall reflect the entire contract duration as defined in the bid documents.** These changes/delays shall be entered at the first update after the final Project Schedule has been approved. The Contractor should provide their requests for time and supporting time extension analysis for contract time as a result of contract changes/delays, after this update, and in accordance with Article, ADJUSTMENT OF CONTRACT COMPLETION.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

01 32 16.15 - 3

10/28/2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

11-01-21

- B. Within 30 calendar days after receipt of the complete project interim Project Schedule and the complete final Project Schedule, the Contracting Officer or his representative, will do one or both of the following:
1. Notify the Contractor concerning his actions, opinions, and objections.
 2. A meeting with the Contractor at or near the job site for joint review, correction or adjustment of the proposed plan will be scheduled if required. Within 14 calendar days after the joint review, the Contractor shall revise and shall submit three blue line copies of the revised Project Schedule, three copies of the revised computer-produced activity/event ID schedule and a revised electronic file as specified by the Contracting Officer. The revised submission will be reviewed by the Contracting Officer and, if found to be as previously agreed upon, will be approved.
- C. The approved baseline schedule and the computer-produced schedule(s) generated there from shall constitute the approved baseline schedule until subsequently revised in accordance with the requirements of this section.
- D. The Complete Project Schedule shall contain all work activities/events required to complete the project, including temporary infection control measures and power interruptions to equipment and utilities.1.6 WORK

ACTIVITY/EVENT COST DATA

- A. The Contractor shall cost load all work activities/events except procurement activities. The cumulative amount of all cost loaded work activities/events (including alternates) shall equal the total contract price. Prorate overhead, profit and general conditions on all work activities/events for the entire project length. The contractor shall generate from this information cash flow curves indicating graphically the total percentage of work activity/event dollar value scheduled to be in place on early finish, late finish. These cash flow curves will be used by the Contracting Officer to assist him in determining approval or disapproval of the cost loading. Negative work activity/event cost data will not be acceptable, except on VA issued contract changes.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

11-01-21

- B. The Contractor shall cost load work activities/events for guarantee period services, test, balance and adjust various systems in accordance with the provisions in Article, FAR 52.232 - 5 (PAYMENT UNDER FIXED-PRICE CONSTRUCTION CONTRACTS) and VAAR 852.232 - 83 (PAYMENT UNDER FIXED-PRICE CONSTRUCTION CONTRACTS).
- C. In accordance with FAR 52.236 - 1 (PERFORMANCE OF WORK BY THE CONTRACTOR) and VAAR 852.236 - 72 (PERFORMANCE OF WORK BY THE CONTRACTOR), the Contractor shall submit, simultaneously with the cost per work activity/event of the construction schedule required by this Section, a responsibility code for all activities/events of the project for which the Contractor's forces will perform the work.
- D. The Contractor shall cost load work activities/events for all BID ITEMS including ASBESTOS ABATEMENT. The sum of each BID ITEM work shall equal the value of the bid item in the Contractors' bid.

1.7 PROJECT SCHEDULE REQUIREMENTS

- A. Show on the project schedule the sequence of work activities/events required for complete performance of all items of work. The Contractor Shall:
 - 1. Show activities/events as:
 - a. Contractor's time required for submittal of shop drawings, templates, fabrication, delivery and similar pre-construction work.
 - b. Contracting Officer's and Architect-Engineer's review and approval of shop drawings, equipment schedules, samples, template, or similar items.
 - c. Interruption of VA Facilities utilities, delivery of Government furnished equipment, and rough-in drawings, project phasing and any other specification requirements.
 - d. Test, balance and adjust various systems and pieces of equipment, maintenance and operation manuals, instructions and preventive maintenance tasks.
 - e. VA inspection and acceptance activity/event with a minimum duration of five workdays at the end of each phase and immediately preceding any VA move activity/event required by the contract phasing for that phase.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

11-01-21

2. Show not only the activities/events for actual construction work for each trade category of the project, but also trade relationships to indicate the movement of trades from one area, floor, or building, to another area, floor, or building, for at least five trades who are performing major work under this contract.
 3. Break up the work into activities/events of a duration no longer than twenty workdays each or one reporting period, except as to non-construction activities/events (i.e., procurement of materials, delivery of equipment, concrete and asphalt curing) and any other activities/events for which the COTR may approve the showing of a longer duration. The duration for VA approval of any required submittal, shop drawing, or other submittals will not be less than twenty workdays.
 4. Describe work activities/events clearly, so the work is readily identifiable for assessment of completion. Activities/events labeled "start," "continue," or "completion," are not specific and will not be allowed. Lead and lag time activities will not be acceptable.
 5. The schedule shall be generally numbered in such a way to reflect either discipline, phase or location of the work.
- B. The Contractor shall submit the following supporting data in addition to the project schedule:
1. The appropriate project calendar including working days and holidays.
 2. The planned number of shifts per day.
 3. The number of hours per shift.
- Failure of the Contractor to include this data shall delay the review of the submittal until the Contracting Officer is in receipt of the missing data.
- C. To the extent that the Project Schedule or any revised Project Schedule shows anything not jointly agreed upon, it shall not be deemed to have been approved by the COTR. Failure to include any element of work required for the performance of this contract shall not excuse the Contractor from completing all work required within any applicable completion date of each phase regardless of the COTR's approval of the Project Schedule.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

01 32 16.15 - 6

10/28/2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

11-01-21

- D. Compact Disk Requirements and CPM Activity/Event Record Specifications:
Submit to the VA an electronic file(s) containing one file of the data required to produce a schedule, reflecting all the activities/events of the complete project schedule being submitted.

1.8 PAYMENT TO THE CONTRACTOR:

- A. Monthly, the contractor shall submit an application and certificate for payment using the AIA application and certificate for payment documents G702 & G703 reflecting updated schedule activities and cost data in accordance with the provisions of the following Article, PAYMENT AND PROGRESS REPORTING, as the basis upon which progress payments will be made pursuant to Article, FAR 52.232 - 5 (PAYMENT UNDER FIXED-PRICE CONSTRUCTION CONTRACTS) and VAAR 852.232 - 83 (PAYMENT UNDER FIXED-PRICED CONSTRUCTION CONTRACTS). The Contractor shall be entitled to a monthly progress payment upon approval of estimates as determined from the currently approved updated project schedule. Monthly payment requests shall include: a listing of all agreed upon project schedule changes and associated data; and an electronic file (s) of the resulting monthly updated schedule.
- B. Approval of the Contractor's monthly Application for Payment shall be contingent, among other factors, on the submittal of a satisfactory monthly update of the project schedule.

1.9 PAYMENT AND PROGRESS REPORTING

- A. Monthly schedule update meetings will be held on dates mutually agreed to by the COTR and the Contractor. Contractor and their CPM consultant (if applicable) shall attend all monthly schedule update meetings. The Contractor shall accurately update the Project Schedule and all other data required and provide this information to the COTR three workdays in advance of the schedule update meeting. Job progress will be reviewed to verify:
1. Actual start and/or finish dates for updated/completed activities/events.
 2. Remaining duration for each activity/event started, or scheduled to start, but not completed.
 3. Logic, time and cost data for change orders, and supplemental agreements that are to be incorporated into the Project Schedule.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

11-01-21

4. Changes in activity/event sequence and/or duration which have been made, pursuant to the provisions of following Article, ADJUSTMENT OF CONTRACT COMPLETION.
 5. Completion percentage for all completed and partially completed activities/events.
 6. Logic and duration revisions required by this section of the specifications.
 7. Activity/event duration and percent complete shall be updated independently.
- B. After completion of the joint review, the contractor shall generate an updated computer-produced calendar-dated schedule and supply the Contracting Officer's representative with reports in accordance with the Article, COMPUTER PRODUCED SCHEDULES, specified.
- C. After completing the monthly schedule update, the contractor's representative or scheduling consultant shall rerun all current period contract change(s) against the prior approved monthly project schedule. The analysis shall only include original workday durations and schedule logic agreed upon by the contractor and COR for the contract change(s). When there is a disagreement on logic and/or durations, the Contractor shall use the schedule logic and/or durations provided and approved by the COR. After each rerun update, the resulting electronic project schedule data file shall be appropriately identified and submitted to the VA in accordance to the requirements listed in articles 1.4 and 1.7. This electronic submission is separate from the regular monthly project schedule update requirements and shall be submitted to the COR within fourteen (14) calendar days of completing the regular schedule update. **Before inserting the contract changes durations, care must be taken to ensure that only the original durations will be used for the analysis, not the reported durations after progress. In addition, once the final network diagram is approved, the contractor must recreate all manual progress payment updates on this approved network diagram and associated reruns for contract changes in each of these update periods as outlined above for regular update periods. This will require detailed record keeping for each of the manual progress payment updates.**

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

11-01-21

- D. Following approval of the CPM schedule, the VA, the General Contractor, its approved CPM Consultant, RE office representatives, and all subcontractors needed, as determined by the SRE, shall meet to discuss the monthly updated schedule. The main emphasis shall be to address work activities to avoid slippage of project schedule and to identify any necessary actions required to maintain project schedule during the reporting period. The Government representatives and the Contractor should conclude the meeting with a clear understanding of those work and administrative actions necessary to maintain project schedule status during the reporting period. This schedule coordination meeting will occur after each monthly project schedule update meeting utilizing the resulting schedule reports from that schedule update. If the project is behind schedule, discussions should include ways to prevent further slippage as well as ways to improve the project schedule status, when appropriate.

1.10 RESPONSIBILITY FOR COMPLETION

- A. If it becomes apparent from the current revised monthly progress schedule that phasing or contract completion dates will not be met, the Contractor shall execute some or all of the following remedial actions:
1. Increase construction manpower in such quantities and crafts as necessary to eliminate the backlog of work.
 2. Increase the number of working hours per shift, shifts per working day, working days per week, the amount of construction equipment, or any combination of the foregoing to eliminate the backlog of work.
 3. Reschedule the work in conformance with the specification requirements.
- B. Prior to proceeding with any of the above actions, the Contractor shall notify and obtain approval from the COTR for the proposed schedule changes. If such actions are approved, the representative schedule revisions shall be incorporated by the Contractor into the Project Schedule before the next update, at no additional cost to the Government.

1.11 CHANGES TO THE SCHEDULE

- A. Within 30 calendar days after VA acceptance and approval of any updated project schedule, the Contractor shall submit a revised electronic file

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

11-01-21

(s) and a list of any activity/event changes including predecessors and successors for any of the following reasons:

1. Delay in completion of any activity/event or group of activities/events, which may be involved with contract changes, strikes, unusual weather, and other delays will not relieve the Contractor from the requirements specified unless the conditions are shown on the CPM as the direct cause for delaying the project beyond the acceptable limits.
 2. Delays in submittals, or deliveries, or work stoppage are encountered which make rescheduling of the work necessary.
 3. The schedule does not represent the actual prosecution and progress of the project.
 4. When there is, or has been, a substantial revision to the activity/event costs regardless of the cause for these revisions.
- B. CPM revisions made under this paragraph which affect the previously approved computer-produced schedules for Government furnished equipment, vacating of areas by the VA Facility, contract phase(s) and sub phase(s), utilities furnished by the Government to the Contractor, or any other previously contracted item, shall be furnished in writing to the Contracting Officer for approval.
- C. Contracting Officer's approval for the revised project schedule and all relevant data is contingent upon compliance with all other paragraphs of this section and any other previous agreements by the Contracting Officer or the VA representative.
- D. The cost of revisions to the project schedule resulting from contract changes will be included in the proposal for changes in work as specified in FAR 52.243 - 4 (Changes) and will be based on the complexity of the revision or contract change, man hours expended in analyzing the change, and the total cost of the change.
- E. The cost of revisions to the Project Schedule not resulting from contract changes is the responsibility of the Contractor.

1.12 ADJUSTMENT OF CONTRACT COMPLETION

- A. The contract completion time will be adjusted only for causes specified in this contract. Request for an extension of the contract completion date by the Contractor shall be supported with a justification, CPM

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

01 32 16.15 - 10

10/28/2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

11-01-21

data and supporting evidence as the COTR may deem necessary for determination as to whether or not the Contractor is entitled to an extension of time under the provisions of the contract. Submission of proof based on revised activity/event logic, durations (in workdays) and costs is obligatory to any approvals. The schedule must clearly display that the Contractor has used, in full, all the float time available for the work involved in this request. The Contracting Officer's determination as to the total number of days of contract extension will be based upon the current computer-produced calendar-dated schedule for the time period in question and all other relevant information.

- B. Actual delays in activities/events which, according to the computer- produced calendar-dated schedule, do not affect the extended and predicted contract completion dates shown by the critical path in the network, will not be the basis for a change to the contract completion date. The Contracting Officer will within a reasonable time after receipt of such justification and supporting evidence, review the facts and advise the Contractor in writing of the Contracting Officer's decision.
- C. The Contractor shall submit each request for a change in the contract completion date to the Contracting Officer in accordance with the provisions specified under FAR 52.243 - 4 (Changes). The Contractor shall include, as a part of each change order proposal, a sketch showing all CPM logic revisions, duration (in workdays) changes, and cost changes, for work in question and its relationship to other activities on the approved network diagram.
- D. All delays due to non-work activities/events such as RFI's, WEATHER, STRIKES, and similar non-work activities/events shall be analyzed on a month-by-month basis.

- - - E N D - - -

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

06-21

SECTION 01 33 23
SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES

PART 1 - GENERAL

1.1 DESCRIPTION

- A. This specification defines the general requirements and procedures for submittals. A submittal is information submitted for VA review to establish compliance with the contract documents.
- B. Detailed submittal requirements are found in the technical sections of the contract specifications. The Contracting Officer may request submittals in addition to those specified when deemed necessary to adequately describe the work covered in the respective technical specifications at no additional cost to the government.
- C. VA approval of a submittal does not relieve the Contractor of the responsibility for any error which may exist. The Contractor is responsible for fully complying with all contract requirements and the satisfactory construction of all work, including the need to check, confirm, and coordinate the work of all subcontractors for the project. Non-compliant material incorporated in the work will be removed and replaced at the Contractor's expense.

1.2 DEFINITIONS

- A. Preconstruction Submittals: Submittals which are required prior to issuing contract notice to proceed or starting construction. For example, Certificates of insurance; Surety bonds; Site-specific safety plan; Construction progress schedule; Schedule of values; Submittal register; List of proposed subcontractors.
- B. Shop Drawings: Drawings, diagrams, and schedules specifically prepared to illustrate some portion of the work. Drawings prepared by or for the Contractor to show how multiple systems and interdisciplinary work will be integrated and coordinated.
- C. Product Data: Catalog cuts, illustrations, schedules, diagrams, performance charts, instructions, and brochures, which describe and illustrate size, physical appearance, and other characteristics of materials, systems, or equipment for some portion of the work. Samples of warranty language when the contract requires extended product warranties.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

06-21

- D. Samples: Physical examples of materials, equipment, or workmanship that illustrate functional and aesthetic characteristics of a material or product and establish standards by which the work can be judged. Color samples from the manufacturer's standard line (or custom color samples if specified) to be used in selecting or approving colors for the project. Field samples and mock-ups constructed to establish standards by which the ensuing work can be judged.
- E. Design Data: Calculations, mix designs, analyses, or other data pertaining to a part of work.
- F. Test Reports: Report which includes findings of a test required to be performed by the Contractor on an actual portion of the work. Report which includes finding of a test made at the job site or on sample taken from the job site, on portion of work during or after installation.
- G. Certificates: Document required of Contractor, or of a manufacturer, supplier, installer, or subcontractor through Contractor. The purpose is to document procedures, acceptability of methods, or personnel qualifications for a portion of the work.
- H. Manufacturer's Instructions: Pre-printed material describing installation of a product, system, or material, including special notices and MSDS concerning impedances, hazards, and safety precautions.
- I. Manufacturer's Field Reports: Documentation of the testing and verification actions taken by manufacturer's representative at the job site on a portion of the work, during or after installation, to confirm compliance with manufacturer's standards or instructions. The documentation must indicate whether the material, product, or system has passed or failed the test.
- J. Operation and Maintenance Data: Manufacturer data that is required to operate, maintain, troubleshoot, and repair equipment, including manufacturer's help, parts list, and product line documentation. This data shall be incorporated in an operations and maintenance manual.
- K. Closeout Submittals: Documentation necessary to properly close out a construction contract. For example, Record Drawings and as-built drawings. Also, submittal requirements necessary to properly close out a phase of construction on a multi-phase contract.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

06-21

1.3 SUBMITTAL REGISTER

- A. The submittal register will list items of equipment and materials for which submittals are required by the specifications. This list may not be all inclusive and additional submittals may be required by the specifications. The Contractor is not relieved from supplying submittals required by the contract documents, but which have been omitted from the submittal register.
- B. The submittal register will serve as a scheduling document for submittals and will be used to control submittal actions throughout the contract period.
- C. The VA will provide the initial submittal register in electronic format. Thereafter, the Contractor shall track all submittals by maintaining a complete list, including completion of all data columns, including dates on which submittals are received and returned by the VA.
- D. The Contractor shall update the submittal register as submittal actions occur and maintain the submittal register at the project site until final acceptance of all work by Contracting Officer.
- E. The Contractor shall submit formal monthly updates to the submittal register in electronic format. Each monthly update shall document actual submission and approval dates for each submittal.

1.4 SUBMITTAL SCHEDULING

- A. Submittals are to be scheduled, submitted, reviewed, and approved prior to the acquisition of the material or equipment.
- B. Coordinate scheduling, sequencing, preparing, and processing of submittals with performance of work so that work will not be delayed by submittal processing. Allow time for potential resubmittal.
- C. No delay costs or time extensions will be allowed for time lost in late submittals or resubmittals.
- D. All submittals are required to be approved prior to the start of the specified work activity.

1.5 SUBMITTAL PREPARATION

- A. Each submittal is to be complete and in sufficient detail to allow ready determination of compliance with contract requirements.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

06-21

- B. Collect required data for each specific material, product, unit of work, or system into a single submittal. Prominently mark choices, options, and portions applicable to the submittal. Partial submittals will not be accepted for expedition of construction effort. Submittal will be returned without review if incomplete.
- C. If available product data is incomplete, provide Contractor-prepared documentation to supplement product data and satisfy submittal requirements.
- D. All irrelevant or unnecessary data shall be removed from the submittal to facilitate accuracy and timely processing. Submittals that contain the excessive amount of irrelevant or unnecessary data will be returned with review.
- E. Provide a transmittal form for each submittal with the following information:
 - 1. Project title, location and number.
 - 2. Construction contract number.
 - 3. Date of the drawings and revisions.
 - 4. Name, address, and telephone number of subcontractor, supplier, manufacturer, and any other subcontractor associated with the submittal.
 - 5. List paragraph number of the specification section and sheet number of the contract drawings by which the submittal is required.
 - 6. When a resubmission, add alphabetic suffix on submittal description. For example, submittal 18 would become 18A, to indicate resubmission.
 - 7. Product identification and location in project.
- F. The Contractor is responsible for reviewing and certifying that all submittals are in compliance with contract requirements before submitting for VA review. Proposed deviations from the contract requirements are to be clearly identified. All deviations submitted must include a side by side comparison of item being proposed against item specified. Failure to point out deviations will result in the VA requiring removal and replacement of such work at the Contractor's expense.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

06-21

G. Stamp, sign, and date each submittal transmittal form indicating action taken.

H. Stamp used by the Contractor on the submittal transmittal form to certify that the submittal meets contract requirements is to be similar to the following:

CONTRACTOR
(Firm Name)
_____ Approved
_____ Approved with corrections as noted on submittal data and/or attached sheets(s)
SIGNATURE: _____
TITLE: _____
DATE: _____

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

06-21

1.6 SUBMITTAL FORMAT AND TRANSMISSION

- A. Provide submittals in electronic format, with the exception of material samples. Use PDF as the electronic format, unless otherwise specified or directed by the Contracting Officer.
- B. Compile the electronic submittal file as a single, complete document. Name the electronic submittal file specifically according to its contents.
- C. Electronic files must be of sufficient quality that all information is legible. Generate PDF files from original documents so that the text included in the PDF file is both searchable and can be copied. If documents are scanned, Optical Character Resolution (OCR) routines are required.
- D. E-mail electronic submittal documents smaller than 5MB in size to e-mail addresses as directed by the Contracting Officer.
- E. Provide electronic documents over 5MB through an electronic FTP file sharing system. Confirm that the electronic FTP file sharing system can be accessed from the VA computer network. The Contractor is responsible for setting up, providing, and maintaining the electronic FTP file sharing system for the construction contract period of performance.
- F. Provide hard copies of submittals when requested by the Contracting Officer. Up to 3 additional hard copies of any submittal may be requested at the discretion of the Contracting Officer, at no additional cost to the VA.

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

06-21

1.7 SAMPLES

- A. Submit two sets of physical samples showing range of variation, for each required item.
- B. Where samples are specified for selection of color, finish, pattern, or texture, submit the full set of available choices for the material or product specified.
- C. When color, texture, or pattern is specified by naming a particular manufacturer and style, include one sample of that manufacturer and style, for comparison.
- D. Before submitting samples, the Contractor is to ensure that the materials or equipment will be available in quantities required in the project. No change or substitution will be permitted after a sample has been approved.
- E. The VA reserves the right to disapprove any material or equipment which previously has proven unsatisfactory in service.
- F. Physical samples supplied maybe requested back for use in the project after reviewed and approved.

1.8 OPERATION AND MAINTENANCE DATA

- A. Submit data specified for a given item within 30 calendar days after the item is delivered to the contract site.
- B. In the event the Contractor fails to deliver O&M Data within the time limits specified, the Contracting Officer may withhold from progress payments 50 percent of the price of the item with which such O&M Data are applicable.

1.9 TEST REPORTS

SRE may require specific test after work has been installed or completed which could require contractor to repair test area at no additional cost to contract.

1.10 VA REVIEW OF SUBMITTALS AND RFIS

- A. The VA will review all submittals for compliance with the technical requirements of the contract documents. The Architect-Engineer for this project will assist the VA in reviewing all submittals and determining contractual compliance. Review will be only for conformance with the applicable codes, standards and contract requirements.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

06-21

- B. Period of review for submittals begins when the VA COR receives submittal from the Contractor.
- C. Period of review for each resubmittal is the same as for initial submittal.
- D. VA review period is 21 working days for submittals.
- E. VA review period is 21 working days for RFIs.
- F. The VA will return submittals to the Contractor with the following notations:
 - 1. "Approved": authorizes the Contractor to proceed with the work covered.
 - 2. "Approved as noted": authorizes the Contractor to proceed with the work covered provided the Contractor incorporates the noted comments and makes the noted corrections.
 - 3. "Disapproved, revise and resubmit": indicates noncompliance with the contract requirements or that submittal is incomplete. Resubmit with appropriate changes and corrections. No work shall proceed for this item until resubmittal is approved.
 - 4. "Not reviewed": indicates submittal does not have evidence of being reviewed and approved by Contractor or is not complete. A submittal marked "not reviewed" will be returned with an explanation of the reason it is not reviewed. Resubmit submittals after taking appropriate action.

1.11 APPROVED SUBMITTALS

- A. The VA approval of submittals is not to be construed as a complete check, and indicates only that the general method of construction, materials, detailing, and other information are satisfactory.
- B. VA approval of a submittal does not relieve the Contractor of the responsibility for any error which may exist. The Contractor is responsible for fully complying with all contract requirements and the satisfactory construction of all work, including the need to check, confirm, and coordinate the work of all subcontractors for the project. Non-compliant material incorporated in the work will be removed and replaced at the Contractor's expense.

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

06-21

- C. After submittals have been approved, no resubmittal for the purpose of substituting materials or equipment will be considered unless accompanied by an explanation of why a substitution is necessary.
- D. Retain a copy of all approved submittals at project site, including approved samples.

1.12 WITHHOLDING OF PAYMENT

Payment for materials incorporated in the work will not be made if required approvals have not been obtained.

- - - E N D - - -

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

11-01-21

SECTION 01 35 26
SAFETY REQUIREMENTS

TABLE OF CONTENTS

1.1	APPLICABLE PUBLICATIONS	3
1.2	DEFINITIONS	5
1.3	REGULATORY REQUIREMENTS	7
1.4	ACCIDENT PREVENTION PLAN (APP)	8
1.5	ACTIVITY HAZARD ANALYSES (AHAs)	14
1.6	PRECONSTRUCTION CONFERENCE	16
1.7	"SITE SAFETY AND HEALTH OFFICER" (SSHO) and "COMPETENT PERSON" (CP) 17	
1.8	TRAINING	19
1.9	INSPECTIONS	20
1.10	ACCIDENTS, OSHA 300 LOGS, AND MAN-HOURS	21
1.11	PERSONAL PROTECTIVE EQUIPMENT (PPE)	23
1.12	INFECTION CONTROL	24
1.13	TUBERCULOSIS SCREENING	35
1.14	FIRE SAFETY	36
1.15	ELECTRICAL	40
1.16	FALL PROTECTION	42
1.17	SCAFFOLDS AND OTHER WORK PLATFORMS	43
1.18	EXCAVATION AND TRENCHES	44
1.19	CRANES	47
1.20	CONTROL OF HAZARDOUS ENERGY (LOCKOUT/TAGOUT)	48
1.21	CONFINED SPACE ENTRY	48
1.22	WELDING AND CUTTING	48
1.23	LADDERS	49
1.24	FLOOR & WALL OPENINGS	50

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

11-01-21

SECTION 01 35 26
SAFETY REQUIREMENTS

1.1 APPLICABLE PUBLICATIONS:

A. Latest publications listed below form part of this Article to extent referenced. Publications are referenced in text by basic designations only.

B. American Society of Safety Engineers (ASSE):

A10.1-2011.....Pre-Project & Pre-Task Safety and Health
Planning

A10.34-2012.....Protection of the Public on or Adjacent to
Construction Sites

A10.38-2013.....Basic Elements of an Employer's Program to
Provide a Safe and Healthful Work Environment
American National Standard Construction and
Demolition Operations

C. American Society for Testing and Materials (ASTM):

E84-2013.....Surface Burning Characteristics of Building
Materials

D. The Facilities Guidelines Institute (FGI):

FGI Guidelines-2010Guidelines for Design and Construction of
Healthcare Facilities

E. National Fire Protection Association (NFPA):

10-2018.....Standard for Portable Fire Extinguishers

30-2018.....Flammable and Combustible Liquids Code

51B-2019.....Standard for Fire Prevention During Welding,
Cutting and Other Hot Work

70-2020.....National Electrical Code

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

11-01-21

70B-2019.....Recommended Practice for Electrical Equipment
Maintenance

70E-2018Standard for Electrical Safety in the Workplace

99-2018.....Health Care Facilities Code

241-2019.....Standard for Safeguarding Construction,
Alteration, and Demolition Operations

F. The Joint Commission (TJC)

TJC ManualComprehensive Accreditation and Certification
Manual

G. U.S. Nuclear Regulatory Commission

10 CFR 20Standards for Protection Against Radiation

H. U.S. Occupational Safety and Health Administration (OSHA):

29 CFR 1910Safety and Health Regulations for General
Industry

29 CFR 1926Safety and Health Regulations for Construction
Industry

I. VHA Directive 2005-007

1.2 DEFINITIONS:

A. Critical Lift. A lift with the hoisted load exceeding 75% of the crane's maximum capacity; lifts made out of the view of the operator (blind picks); lifts involving two or more cranes; personnel being hoisted; and special hazards such as lifts over occupied facilities, loads lifted close to powerlines, and lifts in high winds or where other adverse environmental conditions exist; and any lift which the crane operator believes is critical.

B. OSHA "Competent Person" (CP). One who is capable of identifying existing and predictable hazards in the surroundings and working conditions which are unsanitary, hazardous or dangerous to employees, and who has the

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

11-01-21

authorization to take prompt corrective measures to eliminate them (see 29 CFR 1926.32(f)).

- C. "Qualified Person" means one who, by possession of a recognized degree, certificate, or professional standing, or who by extensive knowledge, training and experience, has successfully demonstrated his ability to solve or resolve problems relating to the subject matter, the work, or the project.
- D. High Visibility Accident. Any mishap which may generate publicity or high visibility.
- E. Accident/Incident Criticality Categories:
1. No impact - near miss incidents that should be investigated but are not required to be reported to the VA;
 2. Minor incident/impact - incidents that require first aid or result in minor equipment damage (less than \$5000). These incidents must be investigated but are not required to be reported to the VA;
 3. Moderate incident/impact - Any work-related injury or illness that results in:
 - a. Days away from work (any time lost after day of injury/illness onset);
 - b. Restricted work;
 - c. Transfer to another job;
 - d. Medical treatment beyond first aid;
 - e. Loss of consciousness;
 4. A significant injury or illness diagnosed by a physician or other licensed health care professional, even if it did not result in (1) through (5) above or,
 5. Any incident that leads to major equipment damage (greater than \$5000).

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

11-01-21

F. These incidents must be investigated and are required to be reported to the VA;

- 1 Major incident/impact - Any mishap that leads to fatalities, hospitalizations, amputations, and losses of an eye as a result of contractors' activities. Or any incident which leads to major property damage (greater than \$20,000) and/or may generate publicity or high visibility. These incidents must be investigated and are required to be reported to the VA as soon as practical, but not later than 2 hours after the incident.

G. Medical Treatment. Treatment administered by a physician or by registered professional personnel under the standing orders of a physician. Medical treatment does not include first aid treatment even through provided by a physician or registered personnel.

1.3 REGULATORY REQUIREMENTS:

A. In addition to the detailed requirements included in the provisions of this contract, comply with 29 CFR 1926, comply with 29 CFR 1910 as incorporated by reference within 29 CFR 1926, comply with ASSE A10.34, and all applicable [federal, state, and local] laws, ordinances, criteria, rules and regulations. Submit matters of interpretation of standards for resolution before starting work. Where the requirements of this specification, applicable laws, criteria, ordinances, regulations, and referenced documents vary, the most stringent requirements govern except with specific approval and acceptance by the Contracting Officer's Representative (COR).

1.4 ACCIDENT PREVENTION PLAN (APP):

A. The APP (aka Construction Safety & Health Plan) shall interface with the Contractor's overall safety and health program. Include any portions of the Contractor's overall safety and health program referenced in the APP in the applicable APP element and ensure it is site-specific. The Government considers the Prime Contractor to be the "controlling authority" for all worksite safety and health of each subcontractor(s). Contractors are responsible for informing their

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

11-01-21

subcontractors of the safety provisions under the terms of the contract and the penalties for noncompliance, coordinating the work to prevent one craft from interfering with or creating hazardous working conditions for other crafts, and inspecting subcontractor operations to ensure that accident prevention responsibilities are being carried out.

B. The APP shall be prepared as follows:

1. Written in English by a qualified person who is employed by the Prime Contractor articulating the specific work and hazards pertaining to the contract (model language can be found in ASSE A10.33). Specifically articulating the safety requirements found within these VA contract safety specifications.
2. Address both the Prime Contractors and the subcontractors work operations.
3. State measures to be taken to control hazards associated with materials, services, or equipment provided by suppliers.
4. Address all the elements/sub-elements and in order as follows:
 - a. **SIGNATURE SHEET.** Title, signature, and phone number of the following:
 - 1) Plan preparer (Qualified Person such as corporate safety staff person or contracted Certified Safety Professional with construction safety experience);
 - 2) Plan approver (company/corporate officers authorized to obligate the company);
 - 3) Plan concurrence (e.g., Chief of Operations, Corporate Chief of Safety, Corporate Industrial Hygienist, project manager or superintendent, project safety professional). Provide concurrence of other applicable corporate and project personnel (Contractor).

b. **BACKGROUND INFORMATION.** List the following:

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

11-01-21

- 1) Contractor;
 - 2) Contract number;
 - 3) Project name;
 - 4) Brief project description, description of work to be performed, and location; phases of work anticipated (these will require an AHA).
- c. **STATEMENT OF SAFETY AND HEALTH POLICY.** Provide a copy of current corporate/company Safety and Health Policy Statement, detailing commitment to providing a safe and healthful workplace for all employees. The Contractor's written safety program goals, objectives, and accident experience goals for this contract should be provided.
- d. **RESPONSIBILITIES AND LINES OF AUTHORITIES.** Provide the following:
- 1) A statement of the employer's ultimate responsibility for the implementation of his SOH program;
 - 2) Identification and accountability of personnel responsible for safety at both corporate and project level. Contracts specifically requiring safety or industrial hygiene personnel shall include a copy of their resumes.
 - 3) The names of Competent and/or Qualified Person(s) and proof of competency/qualification to meet specific OSHA Competent/Qualified Person(s) requirements must be attached.;
 - 4) Requirements that no work shall be performed unless a designated competent person is present on the job site;
 - 5) Requirements for pre-task Activity Hazard Analysis (AHAs);
 - 6) Lines of authority;
 - 7) Policies and procedures regarding noncompliance with safety requirements (to include disciplinary actions for violation of safety requirements) should be identified.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

11-01-21

e. SUBCONTRACTORS AND SUPPLIERS. If applicable, provide procedures for coordinating SOH activities with other employers on the job site:

- 1) Identification of subcontractors and suppliers (if known);
- 2) Safety responsibilities of subcontractors and suppliers.

f. TRAINING.

- 1) Site-specific SOH orientation training at the time of initial hire or assignment to the project for every employee before working on the project site is required.
- 2) Mandatory training and certifications that are applicable to this project (e.g., explosive actuated tools, crane operator, rigger, crane signal person, fall protection, electrical lockout/NFPA 70E, machine/equipment lockout, confined space, etc...) and any requirements for periodic retraining/recertification are required.
- 3) Procedures for ongoing safety and health training for supervisors and employees shall be established to address changes in site hazards/conditions.
- 4) OSHA 10-hour training is required for all workers on site and the OSHA 30-hour training is required for Trade Competent Persons (CPs)

g. SAFETY AND HEALTH INSPECTIONS.

- 1) Specific assignment of responsibilities for a minimum daily job site safety and health inspection during periods of work activity: Who will conduct (e.g., "Site Safety and Health CP"), proof of inspector's training/qualifications, when inspections will be conducted, procedures for documentation, deficiency tracking system, and follow-up procedures.
- 2) Any external inspections/certifications that may be required (e.g., contracted CSP or CSHT)

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

11-01-21

h. ACCIDENT/INCIDENT INVESTIGATION & REPORTING. The Contractor shall conduct mishap investigations of all Moderate and Major as well as all High Visibility Incidents. The APP shall include accident/incident investigation procedure and identify person(s) responsible to provide the following to the Contracting Officer's Representative:

- 1) Exposure data (man-hours worked);
- 2) Accident investigation reports;
- 3) Project site injury and illness logs.

i. PLANS (PROGRAMS, PROCEDURES) REQUIRED. Based on a risk assessment of contracted activities and on mandatory OSHA compliance programs, the Contractor shall address all applicable occupational, patient, and public safety risks in site-specific compliance and accident prevention plans. These Plans shall include but are not be limited to procedures for addressing the risks associates with the following:

- 1) Emergency response;
- 2) Contingency for severe weather;
- 3) Fire Prevention;
- 4) Medical Support;
- 5) Posting of emergency telephone numbers;
- 6) Prevention of alcohol and drug abuse;
- 7) Site sanitation (housekeeping, drinking water, toilets);
- 8) Night operations and lighting;
- 9) Hazard communication program;
- 10) Welding/Cutting "Hot" work;
- 11) Electrical Safe Work Practices (Electrical LOTO/NFPA 70E);

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

11-01-21

- 12) General Electrical Safety;
- 13) Hazardous energy control (Machine LOTO);
- 14) Site-Specific Fall Protection & Prevention;
- 15) Excavation/trenching;
- 16) Asbestos abatement;
- 17) Lead abatement;
- 18) Crane Critical lift;
- 19) Respiratory protection;
- 20) Health hazard control program;
- 21) Radiation Safety Program;
- 22) Abrasive blasting;
- 23) Heat/Cold Stress Monitoring;
- 24) Crystalline Silica Monitoring (Assessment);
- 25) Demolition plan (to include engineering survey);
- 26) Formwork and shoring erection and removal;
- 27) PreCast Concrete;
- 28) Public (Mandatory compliance with ANSI/ASSE A10.34-2012).

C. Submit the APP to the or Contracting Officer's Representative for review for compliance with contract requirements in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA AND SAMPLES (15) fifteen calendar days prior to the date of the preconstruction conference for acceptance. Work cannot proceed without an accepted APP.

D. Once accepted by the Contracting Officer's Representative, the APP and attachments will be enforced as part of the contract. Disregarding the provisions of this contract or the accepted APP will be cause for stopping of work, at the discretion of the Contracting Officer in

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

01 35 26 -10

10/28/2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

11-01-21

accordance with FAR Clause 52.236-13, *Accident Prevention*, until the matter has been rectified.

- E. Once work begins, changes to the accepted APP shall be made with the knowledge and concurrence of the Contracting Officer Representative. Should any severe hazard exposure, i.e., imminent danger, become evident, stop work in the area, secure the area, and develop a plan to remove the exposure and control the hazard. Notify the Contracting Officer within 24 hours of discovery. Eliminate/remove the hazard. In the interim, take all necessary action to restore and maintain safe working conditions in order to safeguard onsite personnel, visitors, the public and the environment.

1.5 ACTIVITY HAZARD ANALYSES (AHAS) :

- A. AHAs are also known as Job Hazard Analyses, Job Safety Analyses, and Activity Safety Analyses. Before beginning each work activity involving a type of work presenting hazards not experienced in previous project operations or where a new work crew or sub-contractor is to perform the work, the Contractor(s) performing that work activity shall prepare an AHA (Example electronic AHA forms can be found on the US Army Corps of Engineers web site)
- B. AHAs shall define the activities being performed and identify the work sequences, the specific anticipated hazards, site conditions, equipment, materials, and the control measures to be implemented to eliminate or reduce each hazard to an acceptable level of risk.
- C. Work shall not begin until the AHA for the work activity has been accepted by the Contracting Officer's Representative and discussed with all engaged in the activity, including the contractor, subcontractor(s), and Government on-site representatives at preparatory and initial control phase meetings.
 - 1. The names of the Competent/Qualified Person(s) required for a particular activity (for example, excavations, scaffolding, fall protection, other activities as specified by OSHA and/or other State and Local agencies) shall be identified and included in the AHA.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

11-01-21

Certification of their competency/qualification shall be submitted to the Government Designated Authority (GDA) for acceptance prior to the start of that work activity.

2. The AHA shall be reviewed and modified as necessary to address changing site conditions, operations, or change of competent/qualified person(s).
 - a. If more than one Competent/Qualified Person is used on the AHA activity, a list of names shall be submitted as an attachment to the AHA. Those listed must be Competent/Qualified for the type of work involved in the AHA and familiar with current site safety issues.
 - b. If a new Competent/Qualified Person (not on the original list) is added, the list shall be updated (an administrative action not requiring an updated AHA). The new person shall acknowledge in writing that he or she has reviewed the AHA and is familiar with current site safety issues.
3. Submit AHAs to the Contracting Officer's Representative for review for compliance with contract requirements in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA AND SAMPLES for review at least (15) fifteen calendar days prior to the start of each phase. Subsequent AHAs as shall be formatted as amendments to the APP. The analysis should be used during daily inspections to ensure the implementation and effectiveness of the activity's safety and health controls.
4. The AHA list will be reviewed periodically (at least monthly) at the Contractor supervisory safety meeting and updated as necessary when procedures, scheduling, or hazards change.
5. Develop the activity hazard analyses using the project schedule as the basis for the activities performed. All activities listed on the project schedule will require an AHA. The AHAs will be developed by the contractor, supplier, or subcontractor and provided to the prime

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

01 35 26 -12

10/28/2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

11-01-21

contractor for review and approval and then submitted to the Contracting Officer's Representative.

1.6 PRECONSTRUCTION CONFERENCE:

- A. Contractor representatives who have a responsibility or significant role in implementation of the accident prevention program, as required by 29 CFR 1926.20(b)(1), on the project shall attend the preconstruction conference to gain a mutual understanding of its implementation. This includes the project superintendent, subcontractor superintendents, and any other assigned safety and health professionals.
- B. Discuss the details of the submitted APP to include incorporated plans, programs, procedures and a listing of anticipated AHAs that will be developed and implemented during the performance of the contract. This list of proposed AHAs will be reviewed at the conference and an agreement will be reached between the Contractor and the Contracting Officer's representative as to which phases will require an analysis. In addition, establish a schedule for the preparation, submittal, review, and acceptance of AHAs to preclude project delays.
- C. Deficiencies in the submitted APP will be brought to the attention of the Contractor within (14) fourteen days of submittal, and the Contractor shall revise the plan to correct deficiencies and re-submit it for acceptance. Do not begin work until there is an accepted APP.

1.7 "SITE SAFETY AND HEALTH OFFICER" (SSHO) AND "COMPETENT PERSON" (CP):

- A. The Prime Contractor shall designate a minimum of one SSHO at each project site that will be identified as the SSHO to administer the Contractor's safety program and government-accepted Accident Prevention Plan. Each subcontractor shall designate a minimum of one CP in compliance with 29 CFR 1926.20 (b)(2) that will be identified as a CP to administer their individual safety programs.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

11-01-21

- B. Further, all specialized Competent Persons for the work crews will be supplied by the respective contractor as required by 29 CFR 1926 (i.e. Asbestos, Electrical, Cranes, & Derricks, Demolition, Fall Protection, Fire Safety/Life Safety, Ladder, Rigging, Scaffolds, and Trenches/Excavations).
- C. These Competent Persons can have collateral duties as the subcontractor's superintendent and/or work crew lead persons as well as fill more than one specialized CP role (i.e. Asbestos, Electrical, Cranes, & Derricks, Demolition, Fall Protection, Fire Safety/Life Safety, Ladder, Rigging, Scaffolds, and Trenches/Excavations).
- D. The SSHO or an equally qualified Designated Representative/alternate will maintain a presence on the site during construction operations in accordance with FAR Clause 52.236-6: *Superintendence by the Contractor*. CPs will maintain presence during their construction activities in accordance with above mentioned clause. A listing of the designated SSHO and all known CPs shall be submitted prior to the start of work as part of the APP with the training documentation and/or AHA as listed in Section 1.8 below.
- E. The repeated presence of uncontrolled hazards during a contractor's work operations will result in the designated CP as being deemed incompetent and result in the required removal of the employee in accordance with FAR Clause 52.236-5: Material and Workmanship, Paragraph (c).

1.8 TRAINING:

- A. The designated Prime Contractor SSHO must meet the requirements of all applicable OSHA standards and be capable (through training, experience, and qualifications) of ensuring that the requirements of 29 CFR 1926.16 and other appropriate Federal, State and local requirements are met for the project. As a minimum the SSHO must have completed the OSHA 30-hour Construction Safety class and have five (5) years of construction industry safety experience or three (3) years if he/she possesses a Certified Safety Professional (CSP) or certified Construction Safety

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

11-01-21

and Health Technician (CSHT) certification or have a safety and health degree from an accredited university or college.

- B. All designated CPs shall have completed the OSHA 30-hour Construction Safety course within the past 5 years.
- C. In addition to the OSHA 30 Hour Construction Safety Course, all CPs with high hazard work operations such as operations involving asbestos, electrical, cranes, demolition, work at heights/fall protection, fire safety/life safety, ladder, rigging, scaffolds, and trenches/excavations shall have a specialized formal course in the hazard recognition & control associated with those high hazard work operations. Documented "repeat" deficiencies in the execution of safety requirements will require retaking the requisite formal course.
- D. All other construction workers shall have the OSHA 10-hour Construction Safety Outreach course and any necessary safety training to be able to identify hazards within their work environment.
- E. Submit training records associated with the above training requirements to the or Contracting Officer's Representative for review for compliance with contract requirements in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA AND SAMPLES (15) fifteen calendar days prior to the date of the preconstruction conference for acceptance.
- F. Prior to any worker for the contractor or subcontractors beginning work, they shall undergo a safety briefing provided by the SSHO or his/her designated representative. As a minimum, this briefing shall include information on the site-specific hazards, construction limits, VAMC safety guidelines, means of egress, break areas, work hours, locations of restrooms, use of VAMC equipment, emergency procedures, accident reporting, etc. Documentation shall be provided to the Contracting Officer Representative that individuals have undergone contractor's safety briefing.
- G. Ongoing safety training will be accomplished in the form of weekly documented safety meeting.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

11-01-21

1.9 INSPECTIONS:

- A. The SSHO shall conduct frequent and regular safety inspections (daily) of the site and each of the subcontractors CPs shall conduct frequent and regular safety inspections (daily) of their work operations as required by 29 CFR 1926.20(b)(2). Each week, the SSHO shall conduct a formal documented inspection of the entire construction areas with the subcontractors' "Trade Safety and Health CPs" present in their work areas. Coordinate with, and report findings and corrective actions weekly to Contracting Officer's Representative.

- B. A Certified Safety Professional (CSP) with specialized knowledge in construction safety or a certified Construction Safety and Health Technician (CSHT) shall randomly conduct a monthly site safety inspection. The CSP or CSHT can be a corporate safety professional or independently contracted. The CSP or CSHT will provide their certificate number on the required report for verification as necessary.
 - 1. Results of the inspection will be documented with tracking of the identified hazards to abatement.
 - 2. The Contracting Officer's Representative will be notified immediately prior to start of the inspection and invited to accompany the inspection.
 - 3. Identified hazard and controls will be discussed to come to a mutual understanding to ensure abatement and prevent future reoccurrence.
 - 4. A report of the inspection findings with status of abatement will be provided to the Contracting Officer's Representative within one week of the onsite inspection.

1.10 ACCIDENTS, OSHA 300 LOGS, AND MAN-HOURS:

- A. The prime contractor shall establish and maintain an accident reporting, recordkeeping, and analysis system to track and analyze all injuries and illnesses, high visibility incidents, and accidental property damage (both government and contractor) that occur on site.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

11-01-21

Notify the Contracting Officer's Representative as soon as practical, but no more than four hours after any accident meeting the definition of a Moderate or Major incidents, High Visibility Incidents, , or any weight handling and hoisting equipment accident. Within notification include contractor name; contract title; type of contract; name of activity, installation or location where accident occurred; date and time of accident; names of personnel injured; extent of property damage, if any; extent of injury, if known, and brief description of accident (to include type of construction equipment used, PPE used, etc.). Preserve the conditions and evidence on the accident site until the Contracting Officer's Representative determines whether a government investigation will be conducted.

- B. Conduct an accident investigation for all Minor, Moderate and Major incidents as defined in paragraph DEFINITIONS, and property damage accidents resulting in at least \$20,000 in damages, to establish the root cause(s) of the accident. Complete the VA Form 2162 (or equivalent), and provide the report to the Contracting Officer's Representative within (5) five calendar days of the accident. The Contracting Officer's Representative will provide copies of any required or special forms.
- C. A summation of all man-hours worked by the contractor and associated sub-contractors for each month will be reported to the Contracting Officer's Representative.
- D. A summation of all Minor, Moderate, and Major incidents experienced on site by the contractor and associated sub-contractors for each month will be provided to the Contracting Officer's Representative monthly. The contractor and associated sub-contractors' OSHA 300 logs will be made available to the Contracting Officer's Representative as requested.

1.11 PERSONAL PROTECTIVE EQUIPMENT (PPE) :

- A. PPE is governed in all areas by the nature of the work the employee is performing. For example, specific PPE required for performing work on

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

11-01-21

electrical equipment is identified in NFPA 70E, Standard for Electrical Safety in the Workplace.

B. Mandatory PPE includes:

1. Hard Hats - unless written authorization is given by the Contracting Officer's Representative in circumstances of work operations that have limited potential for falling object hazards such as during finishing work or minor remodeling. With authorization to relax the requirement of hard hats, if a worker becomes exposed to an overhead falling object hazard, then hard hats would be required in accordance with the OSHA regulations.
2. Safety glasses - unless written authorization is given by the Contracting Officer's Representative in circumstances of no eye hazards, appropriate safety glasses meeting the ANSI Z.87.1 standard must be worn by each person on site.
3. Appropriate Safety Shoes - based on the hazards present, safety shoes meeting the requirements of ASTM F2413-11 shall be worn by each person on site unless written authorization is given by the Contracting Officer's Representative in circumstances of no foot hazards.
4. Hearing protection - Use personal hearing protection at all times in designated noise hazardous areas or when performing noise hazardous tasks.

1.12 INFECTION CONTROL

- A. Infection Control is critical in all medical center facilities. Interior construction activities causing disturbance of existing dust, or creating new dust, must be conducted within ventilation-controlled areas that minimize the flow of airborne particles into patient areas. Exterior construction activities causing disturbance of soil or creates dust in some other manner must be controlled.
- B. An AHA associated with infection control will be performed by VA personnel in accordance with FGI Guidelines (i.e., Infection Control

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

11-01-21

Risk Assessment (ICRA)). The ICRA procedure found on the American Society for Healthcare Engineering (ASHE) website will be utilized. Risk classifications of Class III or higher will require a permit before beginning any construction work. Infection Control permits will be issued by the Contracting Officer's Representative. The Infection Control Permits will be posted outside the appropriate construction area. More than one permit may be issued for a construction project if the work is located in separate areas requiring separate classes. The primary project scope area for this project is: **Class V**. The required infection control precautions are as follows:

1. Class I requirements (NOT USED)
2. Class II requirements (NOT USED)
3. Class III requirements (NOT USED)
4. Class IV requirements (NOT USED)
5. Class V requirements: (Use the requirements below or as identified on the drawings - whichever is the strictest.)
 - a. During Construction Work:
 - 1) Obtain permit from the Contracting Officer's Representative or Government Designated Authority.
 - 2) Isolate HVAC system in area where work is being done to prevent contamination of duct system.
 - 3) Complete all critical barriers i.e., sheetrock, plywood, plastic, to seal area from non-work area or implement control cube method (cart with plastic covering and sealed connection to work site with HEPA vacuum for vacuuming prior to exit) before construction begins. Install construction barriers and ceiling protection carefully, outside of normal work hours.
 - 4) Maintain negative air pressure, 0.01 inches of water gauge, within work site utilizing HEPA equipped air filtration units and continuously monitored with a digital display, recording

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

11-01-21

and alarm instrument, which must be calibrated on installation, maintained with periodic calibration and monitored by the contractor.5) Seal holes, pipes, conduits, and punctures.

- 6) Construct anteroom and require all personnel to pass through this room so they can be vacuumed using a HEPA vacuum cleaner before leaving work site or they can wear cloth or paper coveralls that are removed each time they leave work site.
- 7) All personnel entering work site are required to wear shoe covers. Shoe covers must be changed each time the worker exits the work area.

b. Upon Completion:

- 1) Do not remove barriers from work area until completed project is inspected by the Contracting Officer's Representative or Government Designated Authority with thorough cleaning by the VA Environmental Services Dept.
- 2) Remove construction barriers and ceiling protection carefully to minimize spreading of dirt and debris associated with construction, outside of normal work hours.
- 3) Contain construction waste before transport in tightly covered containers.
- 4) Cover transport receptacles or carts. Tape covering unless solid lid.
- 5) Vacuum work area with HEPA filtered vacuums.
- 6) Wet mop area with cleaner/disinfectant.
- 7) Upon completion, restore HVAC system where work was performed.
- 8) Return permit to the Contracting Officer's Representative or Government Designated Authority.

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

11-01-21

C. Barriers shall be erected as required based upon classification (Class III & IV requires barriers) and shall be constructed as follows:

1. Class III and IV - closed door with masking tape applied over the frame and door is acceptable for projects that can be contained in a single room.
2. Construction, demolition or reconstruction not capable of containment within a single room must have the following barriers erected and made presentable on hospital occupied side:
 - a. Class III & IV (where dust control is the only hazard, and an agreement is reached with the Resident Engineer and Medical Center) - Airtight plastic barrier that extends from the floor to ceiling. Seams must be sealed with duct tape to prevent dust and debris from escaping
 - b. Class III & IV - Drywall barrier erected with joints covered or sealed to prevent dust and debris from escaping.
 - c. Class III & IV - Seal all penetrations in existing barrier airtight
 - d. Class III & IV - Barriers at penetration of ceiling envelopes, chases and ceiling spaces to stop movement air and debris
 - e. Class IV only - Anteroom or double entrance openings that allow workers to remove protective clothing or vacuum off existing clothing
 - f. Class III & IV - At elevators shafts or stairways within the field of construction, overlapping flap minimum of two feet wide of polyethylene enclosures for personnel access.

D. Products and Materials:

1. Sheet Plastic: Fire retardant polystyrene, 6-mil thickness meeting local fire codes

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

01 35 26 -21

10/28/2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

11-01-21

2. Barrier Doors: Self Closing One-hour fire-rated solid core wood in steel frame, painted.
 3. Dust proof one-hour fire-rated drywall
 4. High Efficiency Particulate Air-Equipped filtration machine rated at 95% capture of 0.3 microns including pollen, mold spores and dust particles. HEPA filters should have ASHRAE 85 or other prefilter to extend the useful life of the HEPA. Provide both primary and secondary filtrations units. Maintenance of equipment and replacement of the HEPA filters and other filters will be in accordance with manufacturer's instructions.
 5. Exhaust Hoses: Heavy duty, flexible steel reinforced; Ventilation Blower Hose
 6. Adhesive Walk-off Mats: Provide minimum size mats of 24 inches x 36 inches
 7. Disinfectant: Hospital-approved disinfectant or equivalent product
 8. Portable Ceiling Access Module
- E. Before any construction on site begins, all contractor personnel involved in the construction or renovation activity shall be educated and trained in infection prevention measures established by the medical center.
- F. A dust control program will be established and maintained as part of the contractor's infection preventive measures in accordance with the FGI Guidelines for Design and Construction of Healthcare Facilities. Prior to start of work, prepare a plan detailing project-specific dust protection measures with associated product data, including periodic status reports, and submit to the Contracting Officer's Representative for review for compliance with contract requirements in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA AND SAMPLES.
- G. Medical center Infection Control personnel will monitor for airborne disease (e.g., aspergillosis) during construction. A baseline of

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

01 35 26 -22

10/28/2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

11-01-21

conditions will be established by the medical center prior to the start of work and periodically during the construction stage to determine impact of construction activities on indoor air quality with safe thresholds established.

- H. In general, the following preventive measures shall be adopted during construction to keep down dust and prevent mold.
1. Contractor shall verify that construction exhaust to exterior is not reintroduced to the medical center through intake vents or building openings. HEPA filtration is required where the exhaust dust may reenter the medical center.
 2. Exhaust hoses shall be exhausted so that dust is not reintroduced to the medical center.
 3. Adhesive Walk-off/Carpet Walk-off Mats shall be used at all interior transitions from the construction area to occupied medical center area. These mats shall be changed as often as required to maintain clean work areas directly outside construction area at all times.
 4. Vacuum and wet mop all transition areas from construction to the occupied medical center at the end of each workday. Vacuum shall utilize HEPA filtration. Maintain surrounding area frequently. Remove debris as it is created. Transport these outside the construction area in containers with tightly fitting lids.
 5. The contractor shall not haul debris through patient-care areas without prior approval of the Resident Engineer and the Medical Center. When, approved, debris shall be hauled in enclosed dust proof containers or wrapped in plastic and sealed with duct tape. No sharp objects should be allowed to cut through the plastic. Wipe down the exterior of the containers with a damp rag to remove dust. All equipment, tools, material, etc. transported through occupied areas shall be made free from dust and moisture by vacuuming and wipe down.

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

11-01-21

6. There shall be no standing water during construction. This includes water in equipment drip pans and open containers within the construction areas. All accidental spills must be cleaned up and dried within 12 hours. Remove and dispose of porous materials that remain damp for more than 72 hours.
7. At completion, remove construction barriers and ceiling protection carefully, outside of normal work hours. Vacuum and clean all surfaces free of dust after the removal.

I. Final Cleanup:

1. Upon completion of project, or as work progresses, remove all construction debris from above ceiling, vertical shafts and utility chases that have been part of the construction.
2. Perform HEPA vacuum cleaning of all surfaces in the construction area. This includes walls, ceilings, cabinets, furniture (built-in or free standing), partitions, flooring, etc.
3. All new air ducts shall be cleaned prior to final inspection.

J. Exterior Construction

1. Contractor shall verify that dust will not be introduced into the medical center through intake vents or building openings. HEPA filtration on intake vents is required where dust may be introduced.
2. Dust created from disturbance of soil such as from vehicle movement will be wetted with use of a water truck as necessary
3. All cutting, drilling, grinding, sanding, or disturbance of materials shall be accomplished with tools equipped with either local exhaust ventilation (i.e., vacuum systems) or wet suppression controls.

1.13 TUBERCULOSIS SCREENING

- A. Contractor shall provide written certification that all contract employees assigned to the work site have had a pre-placement tuberculin screening within 90 days prior to assignment to the worksite and been

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

11-01-21

found have negative TB screening reactions. Contractors shall be required to show documentation of negative TB screening reactions for any additional workers who are added after the 90-day requirement before they will be allowed to work on the work site. NOTE: This can be the Center for Disease Control (CDC) and Prevention and two-step skin testing or a Food and Drug Administration (FDA)-approved blood test.

1. Contract employees manifesting positive screening reactions to the tuberculin shall be examined according to current CDC guidelines prior to working on VHA property.
2. Subsequently, if the employee is found without evidence of active (infectious) pulmonary TB, a statement documenting examination by a physician shall be on file with the employer (construction contractor), noting that the employee with a positive tuberculin screening test is without evidence of active (infectious) pulmonary TB.
3. If the employee is found with evidence of active (infectious) pulmonary TB, the employee shall require treatment with a subsequent statement to the fact on file with the employer before being allowed to return to work on VHA property.

1.14 FIRE SAFETY

- A. Fire Safety Plan: Establish and maintain a site-specific fire protection program in accordance with 29 CFR 1926. Prior to start of work, prepare a plan detailing project-specific fire safety measures, including periodic status reports, and submit to Contracting Officer's Representative for review for compliance with contract requirements in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA AND SAMPLES. This plan may be an element of the Accident Prevention Plan.
- B. Site and Building Access: Maintain free and unobstructed access to facility emergency services and for fire, police and other emergency response forces in accordance with NFPA 241.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

01 35 26 -25

10/28/2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

11-01-21

- C. Separate temporary facilities, such as trailers, storage sheds, and dumpsters, from existing buildings and new construction by distances in accordance with NFPA 241. For small facilities with less than 6 m (20 feet) exposing overall length, separate by 3m (10 feet).
- D. Temporary Construction Partitions:
1. Install and maintain temporary construction partitions to provide smoke-tight separations between construction areas and adjoining areas. Construct partitions of gypsum board or treated plywood (flame spread rating of 25 or less in accordance with ASTM E84) on both sides of fire-retardant treated wood or metal steel studs. Extend the partitions through suspended ceilings to floor slab deck or roof. Seal joints and penetrations. At door openings, install Class C, $\frac{3}{4}$ hour fire/smoke rated doors with self-closing devices.
 2. Install one-hour fire-rated temporary construction partitions as shown on drawings to maintain integrity of existing exit stair enclosures, exit passageways, fire-rated enclosures of hazardous areas, horizontal exits, smoke barriers, vertical shafts and openings enclosures.
 3. Close openings in smoke barriers and fire-rated construction to maintain fire ratings. Seal penetrations with listed through-penetration firestop materials in accordance with Section 07 84 00, FIRESTOPPING.
- E. Temporary Heating and Electrical: Install, use and maintain installations in accordance with 29 CFR 1926, NFPA 241 and NFPA 70.
- F. Means of Egress: Do not block exiting for occupied buildings, including paths from exits to roads. Minimize disruptions and coordinate with the Contracting Officer's Representative.
- G. Egress Routes for Construction Workers: Maintain free and unobstructed egress. Inspect daily. Report findings and corrective actions weekly to the Contracting Officer's Representative.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

01 35 26 -26

10/28/2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

11-01-21

- H. Fire Extinguishers: Provide and maintain extinguishers in construction areas and temporary storage areas in accordance with 29 CFR 1926, NFPA 241 and NFPA 10.
- I. Flammable and Combustible Liquids: Store, dispense and use liquids in accordance with 29 CFR 1926, NFPA 241 and NFPA 30.
- L. Existing Fire Protection: Do not impair automatic sprinklers, smoke and heat detection, and fire alarm systems, except for portions immediately under construction, and temporarily for connections. Provide fire watch for impairments more than 4 hours in a 24-hour period. Request interruptions in accordance with Article, OPERATIONS AND STORAGE AREAS, and coordinate with the Contracting Officer's Representative. All existing or temporary fire protection systems (fire alarms, sprinklers) located in construction areas shall be tested as coordinated with the medical center. Parameters for the testing and results of any tests performed shall be recorded by the medical center and copies provided to the Resident Engineer.
- M. Smoke Detectors: Prevent accidental operation. Remove temporary covers at end of work operations each day. Coordinate with the Contracting Officer's Representative.
- 'N. Hot Work: Perform and safeguard hot work operations in accordance with NFPA 241 and NFPA 51B. Coordinate with the Contracting Officer's Representative at least 48 hours in advance. Designate contractor's responsible project-site fire prevention program manager to permit hot work.
- O. Fire Hazard Prevention and Safety Inspections: Inspect entire construction areas weekly. Coordinate with, and report findings and corrective actions weekly to the Contracting Officer's Representative.
- P. Smoking: Smoking is prohibited in and adjacent to construction areas inside existing buildings and additions under construction. In separate and detached buildings under construction, smoking is prohibited except in designated smoking rest areas.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

01 35 26 -27

10/28/2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

11-01-21

- Q. Dispose of waste and debris in accordance with NFPA 241. Remove from buildings daily.
- R. If required, submit documentation to the Contracting Officer's Representative that personnel have been trained in the fire safety aspects of working in areas with impaired structural or compartmentalization features.

1.15 ELECTRICAL

- A. All electrical work shall comply with NFPA 70 (NEC), NFPA 70B, NFPA 70E, 29 CFR Part 1910 Subpart J - General Environmental Controls, 29 CFR Part 1910 Subpart S - Electrical, and 29 CFR 1926 Subpart K in addition to other references required by contract.
- B. All qualified persons performing electrical work under this contract shall be licensed journeyman or master electricians. All apprentice electricians performing under this contract shall be deemed unqualified persons unless they are working under the immediate supervision of a licensed electrician or master electrician.
- C. All electrical work will be accomplished de-energized and in the Electrically Safe Work Condition (refer to NFPA 70E for Work Involving Electrical Hazards, including Exemptions to Work Permit). Any Contractor, subcontractor or temporary worker who fails to fully comply with this requirement is subject to immediate termination in accordance with FAR clause 52.236-5(c). Only in rare circumstance where achieving an electrically safe work condition prior to beginning work would increase or cause additional hazards, or is infeasible due to equipment design or operational limitations is energized work permitted. The Contracting Officer's Representative or Government Designated Authority with approval of the Medical Center Director will make the determination if the circumstances would meet the exception outlined above. An AHA and permit specific to energized work activities will be developed, reviewed, and accepted by the VA prior to the start of that activity.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

11-01-21

1. Development of a Hazardous Electrical Energy Control Procedure is required prior to de-energization. A single Simple Lockout/Tagout Procedure for multiple work operations can only be used for work involving qualified person(s) de-energizing one set of conductors or circuit part source. Task specific Complex Lockout/Tagout Procedures are required at all other times.
 2. Verification of the absence of voltage after de-energization and lockout/tagout is considered "energized electrical work" (live work) under NFPA 70E, and shall only be performed by qualified persons wearing appropriate shock protective (voltage rated) gloves and arc rate personal protective clothing and equipment, using Underwriters Laboratories (UL) tested and appropriately rated contact electrical testing instruments or equipment appropriate for the environment in which they will be used.
 3. Personal Protective Equipment (PPE) and electrical testing instruments will be readily available for inspection by the Contracting Officer's Representative or Government Designated Authority.
- D. Before beginning any electrical work, an Activity Hazard Analysis (AHA) will be conducted to include Shock Hazard and Arc Flash Hazard analyses (NFPA Tables can be used only as a last alternative and it is strongly suggested a full Arc Flash Hazard Analyses be conducted). Work shall not begin until the AHA for the work activity and permit for energized work has been reviewed and accepted by the Contracting Officer's Representative and discussed with all engaged in the activity, including the Contractor, subcontractor(s), and Government on-site representatives at preparatory and initial control phase meetings.
- E. Ground-fault circuit interrupters. GFCI protection shall be provided where an employee is operating or using cord- and plug-connected tools related to construction activity supplied by 125-volt, 15-, 20-, or 30-ampere circuits. Where employees operate or use equipment supplied by greater than 125-volt, 15-, 20-, or 30- ampere circuits, GFCI

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

01 35 26 -29

10/28/2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

11-01-21

protection or an assured equipment grounding conductor program shall be implemented in accordance with NFPA 70E - 2015, Chapter 1, Article 110.4(C) (2).

1.16 FALL PROTECTION

- A. The fall protection (FP) threshold height requirement is 6 ft (1.8 m) for ALL WORK, unless specified differently or the OSHA 29 CFR 1926 requirements are more stringent, to include steel erection activities, systems-engineered activities (prefabricated) metal buildings, residential (wood) construction and scaffolding work.
 - 1. The use of a Safety Monitoring System (SMS) as a fall protection method is prohibited.
 - 2. The use of Controlled Access Zone (CAZ) as a fall protection method is prohibited.
 - 3. A Warning Line System (WLS) may ONLY be used on floors or flat or low-sloped roofs (between 0 - 18.4 degrees or 4:12 slope) and shall be erected around all sides of the work area (See 29 CFR 1926.502(f) for construction of WLS requirements). Working within the WLS does not require FP. No worker shall be allowed in the area between the roof or floor edge and the WLS without FP. FP is required when working outside the WLS.
 - 4. Fall protection while using a ladder will be governed by the OSHA requirements.

1.17 SCAFFOLDS AND OTHER WORK PLATFORMS

- A. All scaffolds and other work platforms construction activities shall comply with 29 CFR 1926 Subpart L.
- B. The fall protection (FP) threshold height requirement is 6 ft (1.8 m) as stated in Section 1.16.
- C. The following hierarchy and prohibitions shall be followed in selecting appropriate work platforms.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

11-01-21

1. Scaffolds, platforms, or temporary floors shall be provided for all work except that can be performed safely from the ground or similar footing.
 2. Ladders less than 20 feet may be used as work platforms only when use of small hand tools or handling of light material is involved.
 3. Ladder jacks, lean-to, and prop-scaffolds are prohibited.
 4. Emergency descent devices shall not be used as working platforms.
- D. Contractors shall use a scaffold tagging system in which all scaffolds are tagged by the Competent Person. Tags shall be color-coded: green indicates the scaffold has been inspected and is safe to use; red indicates the scaffold is unsafe to use. Tags shall be readily visible, made of materials that will withstand the environment in which they are used, be legible and shall include:
1. The Competent Person's name and signature;
 2. Dates of initial and last inspections.
- E. Mast Climbing work platforms: When access ladders, including masts designed as ladders, exceed 20 ft (6 m) in height, positive fall protection shall be used.

1.18 EXCAVATION AND TRENCHES

- A. All excavation and trenching work shall comply with 29 CFR 1926 Subpart P. Excavations less than 5 feet in depth require evaluation by the contractor's "Competent Person" (CP) for determination of the necessity of an excavation protective system where kneeling, laying in, or stooping within the excavation is required.
- B. All excavations and trenches 24 inches in depth or greater shall require a written trenching and excavation permit (NOTE - some States and other local jurisdictions require separate state/jurisdiction-issued excavation permits). The permit shall have two sections, one section will be completed prior to digging or drilling and the other will be completed prior to personnel entering the excavations greater

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

11-01-21

than 5 feet in depth. Each section of the permit shall be provided to the Contracting's Office Representative and/or Facility Safety Officer and/or other Government Designated Authority prior to proceeding with digging or drilling and prior to proceeding with entering the excavation. After completion of the work and prior to opening a new section of an excavation, the permit shall be closed out and provided to the Contracting Officer's Representative and/or Facility Safety Officer and/or other Government Designated Authority. The permit shall be maintained onsite, and the first section of the permit shall include the following:

1. Estimated start time & stop time
 2. Specific location and nature of the work.
 3. Indication of the contractor's "Competent Person" (CP) in excavation safety with qualifications and signature. Formal course in excavation safety is required by the contractor's CP.
 4. Indication of whether soil or concrete removal to an offsite location is necessary.
 5. Indication of whether soil samples are required to determined soil contamination.
 6. Indication of coordination with local authority (i.e., "One Call") or contractor's effort to determine utility location with search and survey equipment.
 7. Indication of review of site drawings for proximity of utilities to digging/drilling.
- C. The second section of the permit for excavations greater than five feet in depth shall include the following:
1. Determination of OSHA classification of soil. Soil samples will be from freshly dug soil with samples taken from different soil type layers as necessary and placed at a safe distance from the excavation by the excavating equipment. A pocket penetrometer will

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

11-01-21

- be utilized in determination of the unconfined compression strength of the soil for comparison against OSHA table (Less than 0.5 Tons/FT² - Type C, 0.5 Tons/FT² to 1.5 Tons/FT² - Type B, greater than 1.5 Tons/FT² - Type A without condition to reduce to Type B).
2. Indication of selected protective system (sloping/benching, shoring, shielding). When soil classification is identified as "Type A" or "Solid Rock", only shoring or shielding or Professional Engineer designed systems can be used for protection. A Sloping/Benching system may only be used when classifying the soil as Type B or Type C. Refer to Appendix B of 29 CFR 1926, Subpart P for further information on protective systems designs.
 3. Indication of the spoil pile being stored at least 2 feet from the edge of the excavation and safe access being provided within 25 feet of the workers.
 4. Indication of assessment for a potential toxic, explosive, or oxygen deficient atmosphere where oxygen deficiency (atmospheres containing less than 19.5 percent oxygen) or a hazardous atmosphere exists or could reasonably be expected to exist. Internal combustion engine equipment is not allowed in an excavation without providing force air ventilation to lower the concentration to below OSHA PELs, providing sufficient oxygen levels, and atmospheric testing as necessary to ensure safe levels are maintained.
- D As required by OSHA 29 CFR 1926.651(b)(1), the estimated location of utility installations, such as sewer, telephone, fuel, electric, water lines, or any other underground installations that reasonably may be expected to be encountered during excavation work, shall be determined prior to opening an excavation.
1. The planned dig site will be outlined/marked in white prior to locating the utilities.

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

11-01-21

2. Used of the American Public Works Association Uniform Color Code is required for the marking of the proposed excavation and located utilities.
 3. 811 will be called four calendar days before digging on all local or State lands and public Right-of Ways.
 4. Digging will not commence until all known utilities are marked.
 5. Utility markings will be maintained
- E. Excavations will be hand dug or excavated by other similar safe and acceptable means as excavation operations approach within 3 to 5 feet of identified underground utilities. Exploratory bar or other detection equipment will be utilized as necessary to further identify the location of underground utilities.
- F. Excavations greater than 20 feet in depth require a Professional Engineer designed excavation protective system.

1.19 CRANES

- A. All crane work shall comply with 29 CFR 1926 Subpart CC.
- B. Prior to operating a crane, the operator must be licensed, qualified or certified to operate the crane. Thus, all the provisions contained with Subpart CC are effective and there is no "Phase In" date.
- C. A detailed lift plan for all lifts shall be submitted to the Contracting Officer's Representative and/or Facility Safety Officer and/or other Government Designated Authority 14 days prior to the scheduled lift complete with route for truck carrying load, crane load analysis, siting of crane and path of swing and all other elements of a critical lift plan where the lift meets the definition of a critical lift. Critical lifts require a more comprehensive lift plan to minimize the potential of crane failure and/or catastrophic loss. The plan must be reviewed and accepted by the General Contractor before being submitted to the VA for review. The lift will not be allowed to proceed without prior acceptance of this document.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

11-01-21

- D. Crane operators shall not carry loads
 - 1. over the general public or VAMC personnel
 - 2. over any occupied building unless
 - a. the top two floors are vacated
 - b. or overhead protection with a design live load of 300 psf is provided

1.20 CONTROL OF HAZARDOUS ENERGY (LOCKOUT/TAGOUT)

- A. All installation, maintenance, and servicing of equipment or machinery shall comply with 29 CFR 1910.147 except for specifically referenced operations in 29 CFR 1926 such as concrete & masonry equipment [1926.702(j)], heavy machinery & equipment [1926.600(a)(3)(i)], and process safety management of highly hazardous chemicals (1926.64). Control of hazardous electrical energy during the installation, maintenance, or servicing of electrical equipment shall comply with Section 1.15 to include NFPA 70E and other VA specific requirements discussed in the section.

1.21 CONFINED SPACE ENTRY

- A. All confined space entry shall comply with 29 CFR 1926, Subpart AA except for specifically referenced operations in 29 CFR 1926 such as excavations/trenches [1926.651(g)].
- B. A site-specific Confined Space Entry Plan (including permitting process) shall be developed and submitted to the Contracting Officer's Representative.

1.22 WELDING AND CUTTING

As specified in section 1.14, Hot Work: Perform and safeguard hot work operations in accordance with NFPA 241 and NFPA 51B. Coordinate with Contracting Officer's Representative at least 48 hours in advance. Designate contractor's responsible project-site fire prevention program manager to permit hot work.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

11-01-21

1.23 LADDERS

- A. All Ladder use shall comply with 29 CFR 1926 Subpart X.
- B. All portable ladders shall be of sufficient length and shall be placed so that workers will not stretch or assume a hazardous position.
- C. Manufacturer safety labels shall be in place on ladders
- D. Step Ladders shall not be used in the closed position
- E. Top steps or cap of step ladders shall not be used as a step
- F. Portable ladders, used as temporary access, shall extend at least 3 ft (0.9 m) above the upper landing surface.
 - 1. When a 3 ft (0.9-m) extension is not possible, a grasping device (such as a grab rail) shall be provided to assist workers in mounting and dismounting the ladder.
 - 2. In no case shall the length of the ladder be such that ladder deflection under a load would, by itself, cause the ladder to slip from its support.
- G. Ladders shall be inspected for visible defects on a daily basis and after any occurrence that could affect their safe use. Broken or damaged ladders shall be immediately tagged "DO NOT USE," or with similar wording, and withdrawn from service until restored to a condition meeting their original design.

1.24 FLOOR & WALL OPENINGS

- A. All floor and wall openings shall comply with 29 CFR 1926 Subpart M.
- B. Floor and roof holes/openings are any that measure over 2 in (51 mm) in any direction of a walking/working surface which persons may trip or fall into or where objects may fall to the level below. Skylights located in floors or roofs are considered floor or roof hole/openings.
- C. All floor, roof openings or hole into which a person can accidentally walk or fall through shall be guarded either by a railing system with toe boards along all exposed sides or a load-bearing cover. When the

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

11-01-21

cover is not in place, the opening or hole shall be protected by a removable guardrail system or shall be attended when the guarding system has been removed, or other fall protection system.

1. Covers shall be capable of supporting, without failure, at least twice the weight of the worker, equipment and material combined.
2. Covers shall be secured when installed, clearly marked with the word "HOLE", "COVER" or "Danger, Roof Opening-Do Not Remove" or color-coded or equivalent methods (e.g., red or orange "X"). Workers must be made aware of the meaning for color coding and equivalent methods.
3. Roofing material, such as roofing membrane, insulation or felts, covering or partly covering openings or holes, shall be immediately cut out. No hole or opening shall be left unattended unless covered.

- - - E N D - - -

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

11-01-20

SECTION 01 42 19
REFERENCE STANDARDS

PART 1 - GENERAL

1.1 DESCRIPTION

This section specifies the availability and source of references and standards specified in the project manual under paragraphs APPLICABLE PUBLICATIONS and/or shown on the drawings.

1.2 AVAILABILITY OF SPECIFICATIONS LISTED IN THE GSA INDEX OF FEDERAL SPECIFICATIONS, STANDARDS AND COMMERCIAL ITEM DESCRIPTIONS FPMR PART 101-29 (FAR 52.211-1) (AUG 1998)

- A. The GSA Index of Federal Specifications, Standards and Commercial Item Descriptions, FPMR Part 101-29 and copies of specifications, standards, and commercial item descriptions cited in the solicitation may be obtained for a fee by submitting a request to - GSA Federal Supply Service, Specifications Section, Suite 8100, 470 East L'Enfant Plaza, SW, Washington, DC 20407, Telephone (202) 619-8925, Facsimile (202) 619-8978.
- B. If the General Services Administration, Department of Agriculture, or Department of Veterans Affairs issued this solicitation, a single copy of specifications, standards, and commercial item descriptions cited in this solicitation may be obtained free of charge by submitting a request to the addressee in paragraph (a) of this provision. Additional copies will be issued for a fee.

1.3 AVAILABILITY FOR EXAMINATION OF SPECIFICATIONS NOT LISTED IN THE GSA INDEX OF FEDERAL SPECIFICATIONS, STANDARDS AND COMMERCIAL ITEM DESCRIPTIONS (FAR 52.211-4) (JUN 1988)

The specifications and standards cited in this solicitation can be examined at the following location:

DEPARTMENT OF VETERANS AFFAIRS
Office of Construction & Facilities Management
Facilities Quality Service (00CFM1A)
425 Eye Street N.W, (sixth floor)
Washington, DC 20001

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

11-01-20

Telephone Numbers: (202) 632-5249 or (202) 632-5178

Between 9:00 AM - 3:00 PM

1.4 AVAILABILITY OF SPECIFICATIONS NOT LISTED IN THE GSA INDEX OF FEDERAL SPECIFICATIONS, STANDARDS AND COMMERCIAL ITEM DESCRIPTIONS (FAR 52.211-3) (JUN 1988)

The specifications cited in this solicitation may be obtained from the associations or organizations listed below.

- AA Aluminum Association Inc.
<http://www.aluminum.org>
- AABC Associated Air Balance Council
<https://www.aabc.com>
- AAMA American Architectural Manufacturer's Association
<http://www.aamanet.org>
- AASHTO American Association of State Highway and Transportation
Officials
<http://www.aashto.org>
- AATCC American Association of Textile Chemists and Colorists
<http://www.aatcc.org>
- ACGIH American Conference of Governmental Industrial Hygienists
<http://www.acgih.org>
- ACI American Concrete Institute
<http://www.aci-int.net>
- ACPA American Concrete Pipe Association
<http://www.concrete-pipe.org>
- ACPPA American Concrete Pressure Pipe Association
<http://www.acppa.org>
- ADC Air Diffusion Council
<http://flexibleduct.org>

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

11-01-20

AGA American Gas Association
<http://www.aga.org>

AGC Associated General Contractors of America
<http://www.agc.org>

AGMA American Gear Manufacturers Association, Inc.
<http://www.agma.org>

AH American Hort
<https://www.americanhort.org>

AHAM Association of Home Appliance Manufacturers
<http://www.aham.org>

AIA American Institute of Architects
<http://www.aia.org>

AISC American Institute of Steel Construction
<http://www.aisc.org>

AISI American Iron and Steel Institute
<http://www.steel.org>

AITC American Institute of Timber Construction
<https://aitc-glulam.org>

AMCA Air Movement and Control Association, Inc.
<http://www.amca.org>

ANSI American National Standards Institute, Inc.
<http://www.ansi.org>

APA The Engineered Wood Association
<http://www.apawood.org>

ARI Air-Conditioning and Refrigeration Institute
<http://www.ari.org>

ARPM Association for Rubber Product Manufacturers

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

11-01-20

<https://arpm.com>

ASABE American Society of Agricultural and Biological Engineers

<https://www.asabe.org>

ASCE American Society of Civil Engineers

<http://www.asce.org>

ASHRAE American Society of Heating, Refrigerating, and
Air-Conditioning Engineers

<http://www.ashrae.org>

ASME American Society of Mechanical Engineers

<http://www.asme.org>

ASSE American Society of Sanitary Engineering International

<http://www.asse-plumbing.org>

ASTM American Society for Testing and Materials International

<http://www.astm.org>

AWI Architectural Woodwork Institute

<https://www.awinet.org>

AWS American Welding Society

<https://www.aws.org>

AWWA American Water Works Association

<https://www.awwa.org>

BHMA Builders Hardware Manufacturers Association

<https://www.buildershardware.com>

BIA The Brick Industry Association

<http://www.gobrick.com>

CAGI Compressed Air and Gas Institute

<https://www.cagi.org>

CGA Compressed Gas Association, Inc.

<https://www.cganet.com>

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

11-01-20

CI The Chlorine Institute, Inc.
<https://www.chlorineinstitute.org>

CISCA Ceilings and Interior Systems Construction Association
<https://www.cisca.org>

CISPI Cast Iron Soil Pipe Institute
<https://www.cispi.org>

CLFMI Chain Link Fence Manufacturers Institute
<https://www.chainlinkinfo.org>

CPA Composite Panel Association
<https://www.compositepanel.org>

CPMB Concrete Plant Manufacturers Bureau
<https://www.cpm.org>

CRA California Redwood Association
<http://www.calredwood.org>

CRSI Concrete Reinforcing Steel Institute
<https://www.crsi.org>

CTI Cooling Technology Institute
<https://www.cti.org>

DHA Decorative Hardwoods Association
<https://www.decorativehardwoods.org>

DHI Door and Hardware Institute
<https://www.dhi.org>

EGSA Electrical Generating Systems Association
<http://www.egsa.org>

EEI Edison Electric Institute
<https://www.eei.org>

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

11-01-20

EPA United States Environmental Protection Agency
<https://www.epa.gov>

ETL ETL Testing Services
<http://www.intertek.com>

FAA Federal Aviation Administration
<https://www.faa.gov>

FCC Federal Communications Commission
<https://www.fcc.gov>

FPS Forest Products Society
<http://www.forestprod.org>

GANA Glass Association of North America
<http://www.glasswebsite.com>

FM Factory Mutual Global Insurance
<https://www.fmglobal.com>

GA Gypsum Association
<https://gypsum.org>

GSA General Services Administration
<https://www.gsa.gov>

HI Hydraulic Institute
<http://www.pumps.org>

ICC International Code Council
<https://shop.iccsafe.org>

ICEA Insulated Cable Engineers Association
<https://www.icea.net>

ICAC Institute of Clean Air Companies
<http://www.icac.com>

IEEE Institute of Electrical and Electronics Engineers
<https://www.ieee.org/>

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

11-01-20

IGMA Insulating Glass Manufacturers Alliance
<https://www.igmaonline.org>

IMSA International Municipal Signal Association
<http://www.imsasafety.org>

MBMA Metal Building Manufacturers Association
<https://www.mbma.com>

MSS Manufacturers Standardization Society of the Valve and Fittings Industry
<http://msshq.org>

NAAMM National Association of Architectural Metal Manufacturers
<https://www.naamm.org>

PHCC Plumbing-Heating-Cooling Contractors Association
<https://www.phccweb.org>

NBS National Bureau of Standards
See - NIST

NBBI The National Board of Boiler and Pressure Vessel Inspectors
<https://www.nationalboard.org>

NEC National Electric Code
See - NFPA National Fire Protection Association

NEMA National Electrical Manufacturers Association
<https://www.nema.org>

NFPA National Fire Protection Association
<https://www.nfpa.org>

NHLA National Hardwood Lumber Association
<https://www.nhla.com>

NIH National Institute of Health
<https://www.nih.gov>

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

11-01-20

NIST National Institute of Standards and Technology
<https://www.nist.gov>

NELMA Northeastern Lumber Manufacturers Association, Inc.
<http://www.nelma.org>

NPA National Particleboard Association
(See CPA, Composite Panel Association)

NSF National Sanitation Foundation
<http://www.nsf.org>

OSHA Occupational Safety and Health Administration
Department of Labor
<https://www.osha.gov>

PCA Portland Cement Association
<https://www.cement.org>

PCI Precast Prestressed Concrete Institute
<https://www.pci.org>

PPI Plastics Pipe Institute
<https://www.plasticpipe.org>

PEI Porcelain Enamel Institute
<http://www.porcelainenamel.com>

PTI Post-Tensioning Institute
<http://www.post-tensioning.org>

RFCI Resilient Floor Covering Institute
<https://www.rfci.com>

RIS Redwood Inspection Service
(See Western Wood Products Association)
<https://www.wwpa.org>

SCMA Southern Cypress Manufacturers Association
<http://www.cypressinfo.org>

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

11-01-20

SDI Steel Door Institute
<http://www.steeldoor.org>

SJI Steel Joist Institute
<https://www.steeljoist.org>

SMACNA Sheet Metal & Air-Conditioning Contractors'
National Association
<https://www.smacna.org>

SSPC The Society for Protective Coatings
<https://www.sspc.org>

STI Steel Tank Institute
<https://www.steeltank.com>

SWI Steel Window Institute
<https://www.steelwindows.com>

TCNA Tile Council of North America
<https://www.tcnatile.com>

TEMA Tubular Exchanger Manufacturers Association
<http://www.tema.org>

TPI Truss Plate Institute
<https://www.tpinst.org>

UBC The Uniform Building Code
(See ICC)

UL Underwriters' Laboratories Incorporated
<https://www.ul.com>

ULC Underwriters' Laboratories of Canada
<https://www.ulc.ca>

WCLB West Coast Lumber Inspection Bureau
<http://www.wclib.org>

WDMA Window and Door Manufacturers Association

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

11-01-20

<https://www.wdma.com>

WRCLA Western Red Cedar Lumber Association

<https://www.realcedar.com>

WWPA Western Wood Products Association

<http://www.wwpa.org>

- - - E N D - - -

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

02-01-21

SECTION 01 45 00
QUALITY CONTROL

PART 1 - GENERAL

1.1 DESCRIPTION

This section specifies requirements for Contractor Quality Control (CQC) for Design-Bid-Build (DBB) projects.

1.2 APPLICABLE PUBLICATIONS

- A. The publication listed below form a part of this specification to the extent referenced. The publications are referred to within the text by the basic designation only.
- B. ASTM International (ASTM)
 - 1. D3740 - (2012a) Minimum Requirements for Agencies Engaged in the Testing and/or Inspection of Soil and Rock as Used in Engineering Design and Construction
 - 2. E329 - (2014a) Standard Specification for Agencies Engaged in the Testing and/or Inspection of Materials Used in Construction

1.3 SUBMITTALS

Government approval is required for all submittals. CQC inspection reports shall be submitted under this Specification section and follow the [Applicable CQC Control Phase (Preparatory, Initial, or Follow-Up)]: [Applicable Specification section] naming convention.

- 1. Preconstruction Submittals
 - a. Interim CQC Plan
 - b. CQC Plan
- 2. Test Reports
 - a. Verification Statement

PART 2 PRODUCTS - NOT USED

PART 3 - EXECUTION

3.1 GENERAL REQUIREMENTS

Establish and maintain an effective quality control (QC) system. that complies with the FAR Clause 52.246.12 titled "Inspection of Construction". QC consists of plans, procedures, and organization

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

02-01-21

necessary to produce an end product which complies with the Contract requirements. The QC system covers all design and construction operations, both onsite and offsite, and be keyed to the proposed design and construction sequence. The project superintendent will be held responsible for the quality of work and is subject to removal by the Contracting Office or Authorized designee for non-compliance with the quality requirements specified in the Contract. In this context the highest level manager responsible for the overall construction activities at the site, including quality and production is the project superintendent. The project superintendent maintains a physical presence at the site at all times and is responsible for all construction and related activities at the site, except as otherwise acceptable to the Contracting Officer.

3.2 CQC PLAN:

- A. Submit the CQC Plan no later than 15 days after receipt of Notice to Proceed (NTP) proposed to implement the requirements of the FAR Clause 52.246.12 titled "Inspection of Construction". The Government will consider an Interim CQC Plan for the first 15 days of operation, which must be accepted within 7 calendar days of NTP. Construction will be permitted to begin only after acceptance of the CQC Plan or acceptance of an Interim plan applicable to the particular feature of work to be started. Work outside of the accepted Interim CQC Plan will not be permitted to begin until acceptance of a CQC Plan or another Interim CQC Plan containing the additional work scope is accepted.
- B. Content of the CQC Plan: Include, as a minimum, the following to cover all design and construction operations, both onsite and offsite, including work by subcontractors, designers of record consultants, architects/engineers (A/E), fabricators, suppliers, and purchasing agents:
 1. A description of the QC organization, including a chart showing lines of authority and acknowledgement that the CQC staff will implement the three phase control system for all aspects of the work specified. Include a CQC System Manager that reports to the project superintendent.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

02-01-21

2. The name, qualifications (in resume format) duties, responsibilities, and authorities of each person assigned a CQC function.
3. A copy of the letter to the CQC System Manager signed by an authorized official of the firm which describes the responsibilities and delegates sufficient authorities to adequately perform the functions of the CQC System Manager, including authority to stop work which is not in compliance with the Contract. Letters of direction to all other various quality control representatives outlining duties, authorities, and responsibilities will be issued by the CQC System Manager. Furnish copies of these letters to the Contracting Officer or Authorized designee.
4. Procedures for scheduling, reviewing, certifying, and managing submittals including those of subcontractors, designers of record, consultants, A/E's offsite fabricators, suppliers and purchasing agents. These procedures must be in accordance with Section 01 33 23 Shop Drawings, Product Data, and Samples.
5. Control, verification, and acceptance of testing procedures for each specific test to include the test name, specification paragraph requiring test, feature of work to be tested, test frequency, and person responsible for each test. (Laboratory facilities approved by the Contracting Officer or Authorized designee are required to be used)
6. Procedures for tracking Preparatory, Initial, and Follow-Up control phases and control, verification, and acceptance tests including documentation.
7. Procedures for tracking design and construction deficiencies from identification through acceptable corrective action. Establish verification procedures that identified deficiencies have been corrected.
8. Reporting procedures, including proposed reporting formats.
9. A list of the definable features of work. A definable feature of work is a task which is separate and distinct from other tasks has separate control requirements, and is identified by different trades or disciplines, or it is work by the same trade in a different environment. Although each section of specifications can generally

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

02-01-21

be considered as a definable feature of work, there are frequently more than one definable feature under a particular section. This list will be agreed upon during the Coordination meeting.

10. Coordinate schedule work with Special Inspections required by Section 01 45 35 Special Inspections, the Statement of Special Inspections and Schedule of Special Inspections.

- C. Acceptance of Plan: Acceptance of the Contractor's plan is required prior to the start of design and construction. Acceptance is conditional and will be predicated on satisfactory performance during the design and construction. The Government reserves the right to require the Contractor to make changes in the CQC Plan and operations including removal of personnel as necessary, to obtain the quality specified.
- D. Notification of Changes: After acceptance of the CQC Plan, notify the Contracting Officer or Authorized designee in writing of any proposed change. Proposed changes are subject to acceptance by the Government prior to implementation by the Contractor.

COORDINATION MEETING:

- 3.3 After the Pre-construction Conference Post-award Conference before start of design or construction, and prior to acceptance by the Government of the CQC Plan, meet with the Contracting Officer or Authorized designee to discuss the Contractor's quality control system. Submit the CQC Plan a minimum of 7 calendar days prior to the Coordination Meeting. During the meeting, a mutual understanding of the system details must be developed, including the forms for recording the CC operations, design activities (if applicable), control activities, testing, administration of the system for both onsite and offsite work, and the interrelationship of Contractor's Management and control with the Government's Quality Assurance. Minutes of the meeting will be prepared by the Government, signed by both the Contractor and Contracting Officer or Authorized designee and will become a part of the contract file. There can be occasions when subsequent conferences will be called by either party to reconfirm mutual understandings or address deficiencies in the CQC system or procedures which can require corrective action by the Contractor.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

02-01-21

3.4 QUALITY CONTROL ORGANIZATION:

- A. **Personnel Requirements:** The requirements for the CQC organization are a Safety and Health Manager, CQC System Manager, a Design Quality Manager (if applicable), and sufficient number of additional qualified personnel to ensure safety and Contract compliance. The Safety and Health Manager shall satisfy the requirements of Specification 01 35 26 Safety Requirements and reports directly to a senior project (or corporate) official independent from the CQC System Manager. The Safety and Health Manager will also serve as a member of the CQC Staff. Personnel identified in the technical provisions as requiring specialized skills to assure the required work is being performed properly will also be included as part of the CQC organization. The Contractor's CQC staff maintains a presence at the site at all times during progress of the work and have complete authority and responsibility to take any action necessary to ensure Contract compliance. The CQC staff will be subject to acceptance by the Contracting Officer or Authorized designee. Provide adequate office space, filing systems, and other resources as necessary to maintain an effective and fully functional CQC organization. Promptly complete and furnish all letters, material submittals, shop drawings submittals, schedules and all other project documentation to the CQC organization. The CQC organization is responsible to maintain these documents and records at the site at all times, except as otherwise acceptable to the Government.
- B. **CQC System Manager:** Identify as CQC System Manager an individual within the onsite work organization that is responsible for overall management of CQC and has the authority to act in all CQC matters for the Contractor. The CQC system Manager is required to be a graduate engineer, graduate architect, or a graduate of construction management, with a minimum of PM or SRE to determine qualifications based on project complexity at construction review. The CQC System Manger is assigned as CQC System Manager but has duties as project superintendent in addition to quality control. Identify in the plan an alternate to serve in the event of the CDQC System Manager's absence. The requirements for the alternate are the same as the CQC System Manager.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
 St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

02-01-21

C. CQC Personnel: In addition to CQC personnel specified elsewhere in the contract, provide as part of the CQC organization specialized personnel to assist in the CQC System Manager for the following areas, as applicable: electrical, mechanical, civil, structural, environmental, architectural, materials technician submittals clerk, Commissioning Agent, and low voltage systems. These individuals or specified technical companies are directly employed by the General Contractor and cannot be employed by a supplier or subcontractor on this project; be responsible to the CQC System Manager; be physically present at the construction site during work on the specialized personnel's areas of responsibility; have the necessary education or experience in accordance with the Experience Matrix listed herein. These individuals can perform other duties but need to be allowed sufficient time to perform the specialized personnel's assigned quality controls duties as described in the CQC Plan. A single person can cover more than one area provided that the single person is qualified to perform QC activities in each designated and that workload allows.

EXPERIENCE MATRIX

Area	Qualifications
Civil	Graduate Civil Engineer or Construction Manager with 2 years' experience in the type of work being performed on this project or technician with 5 years related experience.
Mechanical	Graduate Mechanical Engineer with 2 years' experience or construction professional with 5 years of experience supervising mechanical features of work in the field with a construction company.
Electrical	Graduate Electrical Engineer with 2 years related experience or construction professional with 5 years of experience supervising electrical features of work in the field with a construction company.

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
 St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

02-01-21

Area	Qualifications
Structural	Graduate Civil Engineer (with Structural Track or Focus), Structural Engineer, or Construction Manager with 2 years' experience or construction professional with 5 years' experience supervising structural features of work in the field with a construction company.
Architectural	Graduate Architect with 2 years' experience or construction professional with 5 years of related experience.
Environmental	Graduate Environmental Engineer with 3 years' experience.
Submittals	Submittal Clerk with 1 year experience.
Concrete, Pavement, and Soils	Materials Technician with 2 years' experience for the appropriate area.
Testing, Adjusting, and Balancing (TAB)	Specialist must be a member of AABC or an experienced technician of the firm certified by the NEBB.
Design Quality Control Manager	Registered Architect or Professional Engineer

D. **Additional Requirements:** In addition to the above experience and education requirements, the CQC System Manager and Alternate CQC System Manager are required to have completed the Construction Quality Management (CQM) for Construction course. If the CQC System Manager does not have a current specification, obtain the CQM for Contractors course identification within 90 days of award. This course is periodically offered by the Naval Facilities Engineering Command and the Army Corps of Engineers. Contact the Contracting Officer or Authorized designee for information on the next scheduled class.

E. **Organizational Changes:** Maintain the CQC staff at full strength at all times. When it is necessary to make changes to the CQC staff, revise the CQC Plan to reflect the changes and submit the changes to the Contracting Officer or Authorized designee for acceptance.

3.5 **SUBMITTALS AND DELIVERABLES:** Submittals have to comply with the requirements in Section 01 33 23 Shop Drawings, Product Data, and Samples. The CQC organization is responsible for certifying that all submittals and deliverables are in compliance with the contract requirements. When Section 01 91 00 General Commissioning Requirements

Contract No. 36C26319D0022
 Station Project No. 656-400
 Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

02-01-21

is included in the contract, the submittals required by the section have to be coordinated with the Section 01 33 23 Shop Drawings, Product Data, and Samples to ensure adequate time is allowed for each type of submittal required.

3.6 CONTROL:

A. CQC is the means by which the Contractor ensures that the construction, to include that of subcontractors and suppliers, complies with the requirements of the contract. At least three phases of control are required to be conducted by the CQC System Manager for each definable feature of the construction work as follows:

1. Preparatory Phase: This phase is performed prior to beginning work on each definable feature of work after all required plans/documents/materials are approved/accepted, and after copies are at the work site. This phase includes:
 - a. A review of each paragraph of applicable specifications, references codes, and standards. Make available during the preparatory inspection a copy of those sections of referenced codes and standards applicable to that portion of the work to be accomplished in the field. Maintain and make available in the field for use by Government personnel until final acceptance of the work.
 - b. Review of the Contract drawings.
 - c. Check to assure that all materials and equipment have been tested, submitted, and approved.
 - d. Review of provisions that have been made to provide required control inspection and testing.
 - e. Review Special Inspections required by Section 01 45 35 Special Inspections, that Statement of Special Inspections and the Schedule of Specials Inspections.
 - f. Examination of the work area to assure that all required preliminary work has been completed and is in compliance with the Contract.
 - g. Examination of required materials, equipment, and sample work to assure that they are on hand conform to approved shop drawings or submitted data, and are properly stored.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

02-01-21

- h. Review of the appropriate Activity Hazard Analysis (AHA) to assure safety requirements are met.
 - i. Discussion of procedures for controlling quality of the work including repetitive deficiencies. Document construction tolerances and workmanship standards - contract defined or industry standard if not contract defined - for that feature of work.
 - j. Check to ensure that the portion of the plan for the work to be performed has been accepted by the Contracting Officer.
 - k. Discussion of the initial control phase.
 - l. The Government needs to be notified at least 48 hours or 2 calendar days in advance of beginning the Preparatory control phase. Include a meeting conducted by the CQC System Manager and attended by the superintendent, other CQC personnel (as applicable), and the foreman responsible for the definable feature. Document the results of the Preparatory phase actions by separate minutes prepared by the CQC System Manager and attach to the daily CQC report. Instruct applicable workers as to the acceptable level of workmanship required in order to meet contract specifications.
- B. Initial Phase: This phase is accomplished at the beginning of a definable feature of work. Accomplish the following:
- 1. Check work to ensure that it is in full compliance with contract requirements. Review minutes of the Preparatory meeting.
 - 2. Verify adequacy of controls to ensure full contract compliance. Verify the required control inspection and testing is in compliance with the contract.
 - 3. Establish level of workmanship and verify that it meets minimum acceptable workmanship standards. Compare with required sample panels as appropriate.
 - 4. Resolve all differences.
 - 5. Check safety to include compliance with an upgrading of the safety plan and activity hazard analysis. Review the activity analysis with each worker.
 - 6. The Government needs to be notified at least 48 hours or 2 calendar days in advance of beginning the initial phase for definable

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

02-01-21

features of work. Prepare separate minutes of this phase by the CQC System Manager and attach to the daily CQC report. Indicate the exact location of initial phase for definable feature of work for future reference and comparison with Follow-Up phases.

7. The initial phase for each definable feature of work is repeated for each new crew to work onsite, or any time acceptable specified quality standards are not being met.
 8. Coordinate scheduled work with Special Inspections required by Section 01 45 35 Special Inspections, the Statement of Special Inspections, and the Schedule of Special Inspections.
- C. Follow-Up Phase: Perform daily checks to assure control activities, including control testing, are providing continued compliance with contract requirements until the completion of the particular feature of work. Record the checks in the CQC documentation. Conduct final Follow-Up checks and correct all deficiencies prior to the start of additional features of work which may be affected by the deficient work. Do not build upon nor conceal non-conforming work. Coordinate scheduled work with Special Inspections required by Section 01 45 35 Special Inspections, the Statement of Special Inspections, and the Schedule of Special Inspections
- D. Additional Preparatory and Initial Phases on the same definable features of work if: the quality ongoing work is unacceptable; if there are changes in the applicable CQC staff, onsite production supervision or work crew; if work on a definable feature is resumed after a substantial period of inactivity, or if other problems develop.

3.7 TESTS

- A. Testing Procedure: Perform specified or required tests to verify that control measures are adequate to provide a product which conforms to contract requirements. Upon request, furnish to the Government duplicate samples of test specimens for possible testing by the Government. Testing includes operation and acceptance test when specified. Procure the services of a Department of Veteran Affairs approved testing laboratory or establish an approved testing laboratory at the project site. Perform the following activities and record and provide the following data:

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

02-01-21

1. Verify that testing procedures comply with contract requirements.
 2. Verify that facilities and testing equipment are available and comply with testing standards.
 3. Check test instrument calibration data against certified standards.
 4. Verify that recording forms and test identification control number system, including all of the test documentation requirements, have been prepared.
 5. Record results of all tests taken, both passing and failing on the CQC report for the date taken. Specification paragraph reference, location where tests were taken, and the unique sequential control number identifying the test. If approved by the Contracting Officer or Authorized designee, actual test reports are submitted later with a reference to the test number and date taken. Provide an information copy of tests performed by an offsite or commercial test facility directly to the Contracting Officer or Authorized designee. Failure to submit timely test reports as stated results in nonpayment for related work performed and disapproval of the test facility for this Contract.
- B. Testing Laboratories: All testing laboratories must be validated through the procedures contained in Specification section 01 45 29 Testing Laboratory Services.
1. Capability Check: The Government reserves the right to check laboratory equipment in the proposed laboratory for compliance with the standards set forth in the contract specifications and to check the laboratory technician's testing procedures and techniques. Laboratories utilized for testing soils, concrete, asphalt and steel is required to meet criteria detailed in ASTM D3740 and ASTM E329.
 2. Capability Recheck: If the selected laboratory fails the capability check, the Contractor will be assessed a charge equal to value of recheck to reimburse the Government for each succeeding recheck of the laboratory or the checking of a subsequently selected laboratory. Such costs will be deducted from the Contract amount due the Contractor.
- C. Onsite Laboratory: The Government reserves the right to utilize the Contractor's control testing laboratory and equipment to make assurance

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

02-01-21

tests, and to check the Contractor's testing procedures, techniques, and test results at no additional cost to the Government.

3.8 COMPLETION INSPECTION

- A. Punch-Out Inspection: Conduct an inspection of the work by the CQC system Manager near the end of the work, or any increment of the work established by a time stated FAR 52.211-10 - Commencement, Prosecution, and Completion of Work, or by the specifications. Prepare and include in the CQC documentation a punch list of items which do not conform to the approved drawings and specifications. Include within the list of deficiencies the estimated date by which the deficiencies will be corrected. Make a second inspection the CQC System Manager or staff to ascertain that all deficiencies have been corrected. Once this is accomplished, notify the Government that the facility is ready for the Government Pre-Final Inspection.
- B. Pre-Final Inspection: The Government will perform the Pre-Final Inspection to verify that the facility is complete and ready to be occupied. A Government Pre-Final Punch List may be developed as a result of this inspection. Ensure that all items on this list have been corrected before notifying the Government, so that a Final Acceptance Inspection with the customer can be scheduled. Correct any items noted on the Pre-Final Inspection in a timely manner. These inspections and any deficiency corrections required by this paragraph need to be accomplished within the time slated for completion of the entire work or any particular increment of the work if the project is divided into increments by separate construction completion dates.
- C. Final Acceptance Inspection: The Contractor's QC Inspection personnel, plus the superintendent or other primary management person, and the Contracting Officer's Authorized designee is required to be in attendance at the Final Acceptance Inspection. Additional Government personnel can also be in attendance. The Final Acceptance Inspection will be formally scheduled by the Contracting Officer's or Authorized designee based upon results of the Pre-Final Inspection. Notify the Contracting Officer through the Resident Engineer office at least 14 days prior to the Final Acceptance Inspection and include the Contractor's assurance that all specific items previously identified to

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

02-01-21

the Contractor as being unacceptable, along with all remaining work performed under the contract, will be complete and acceptable by the date schedule for the Final Acceptance Inspection. Failure of the Contractor to have all contract work acceptably complete for this inspection will be cause for the Contracting Officer to bill the Contractor for the Government's additional inspection cost in accordance with FAR Clause 52.246-12 titled "Inspection of Construction".

3.9 DOCUMENTATION

- A. Quality Control Activities: Maintain current records providing factual evidence that required QC activities and tests have been performed. Include in these records the work of subcontractors and suppliers on an acceptable form that includes, as a minimum, the following information:
1. The name and area of responsibility of the Contractor/Subcontractor
 2. Operating plant/equipment with hours worked, idle, or down for repair.
 3. Work performed each day, giving location, description, and by whom. When Network Analysis (NAS) is used, identify each phase of work performed each day by NAS activity number.
 4. Test and control activities performed with results and references to specification/drawing requirements. Identify the Control Phase (Preparatory, Initial, and/or Follow-Up). List deficiencies noted, along with corrective action.
 5. Quantity of materials received at the site with statement as to acceptability, storage, and reference to specification/drawing requirements.
 6. Submittals and deliverables reviewed, with Contract reference, by whom, and action taken.
 7. Offsite surveillance activities, including actions taken.
 8. Job safety evaluations stating what was checked, results, and instructions or corrective actions.
 9. Instructions given/received and conflicts in plans and specifications.
 10. Provide documentation of design quality control activities. For independent design reviews, provide, as a minimum, identification of

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

02-01-21

the Independent Technical Reviewer (ITR) team, the ITR review comments, responses, and the record of resolution of the comments.

- B. Verification Statement: Indicate a description of trades working on the project; the number of personnel working; weather conditions encountered; and any delays encountered. Cover both conforming and deficient features and include a statement that equipment and materials incorporated in the work and workmanship comply with the Contract. Furnish the original and one copy of these records in report form to the Government daily with 1 week after the date covered by the report, except that reports need not be submitted for days on which no work is performed. As a minimum, prepare and submit on report for every 7 days of no work and on the last day of a no work period. All calendar days need to be accounted for throughout the life of the contract. The first report following a day of no work will be for that day only. Reports need to be signed and dated by the CQC System Manager. Include copies of test reports and copies of reports prepared by all subordinate QC personnel within the CQC System Manager Report.

3.10 SAMPLE FORMS

Consult the COR for Station Standard Forms. If not available from the Station, templates of various quality control reports can be found on the Whole Building Design Guide website at

[https://www.wbdg.org/FFC/NAVGRAPH/01%2045%2000.00%2020 quality control reports.pdf](https://www.wbdg.org/FFC/NAVGRAPH/01%2045%2000.00%2020%20quality%20control%20reports.pdf)

- 3.11 **NOTIFICATION OF NONCOMPLIANCE:** The Contracting Officer or Authorized designee will notify the Contractor of any detected noncompliance with the foregoing requirements. The Contractor should take immediate corrective action after receipt of such notice. Such notice, when delivered to the Contractor at the work site will be deemed sufficient for the purpose of notification. If the Contractor fails or refuses to comply promptly, the Contracting Officer can issue an order stopping all or part of the work until satisfactory corrective action has been taken. No part of the time lost due to such stop orders will be made

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

02-01-21

the subject of claim for extension of time or for excess costs or
damages by the Contractor.

--- End of Section ---

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

11-01-18

SECTION 01 45 29
TESTING LABORATORY SERVICES

PART 1 - GENERAL

1.1 DESCRIPTION:

This section specifies materials testing activities and inspection services required during project construction to be provided by a Testing Laboratory retained by the General Contractor .

1.2 APPLICABLE PUBLICATIONS:

- A. The publications listed below form a part of this specification to the extent referenced. The publications are referred to in the text by the basic designation only.
- B. American Association of State Highway and Transportation Officials (AASHTO):
 - T27-11.....Standard Method of Test for Sieve Analysis of Fine and Coarse Aggregates
 - T96-02 (R2006).....Standard Method of Test for Resistance to Degradation of Small-Size Coarse Aggregate by Abrasion and Impact in the Los Angeles Machine
 - T99-10.....Standard Method of Test for Moisture-Density Relations of Soils Using a 2.5 Kg (5.5 lb.) Rammer and a 305 mm (12 in.) Drop
 - T104-99 (R2007).....Standard Method of Test for Soundness of Aggregate by Use of Sodium Sulfate or Magnesium Sulfate
 - T180-10.....Standard Method of Test for Moisture-Density Relations of Soils using a 4.54 kg (10 lb.) Rammer and a 457 mm (18 in.) Drop
 - T191-02 (R2006).....Standard Method of Test for Density of Soil In-Place by the Sand-Cone Method
 - T310-13.....Standard Method of Test for In-place Density and Moisture Content of Soil and Soil-aggregate by Nuclear Methods (Shallow Depth)
- C. American Concrete Institute (ACI):
 - 506.4R-94 (R2004).....Guide for the Evaluation of Shotcrete

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

11-01-18

- D. American Society for Testing and Materials (ASTM):
- A370-12.....Standard Test Methods and Definitions for
Mechanical Testing of Steel Products
 - A416/A416M-10.....Standard Specification for Steel Strand,
Uncoated Seven-Wire for Prestressed Concrete
 - C31/C31M-10.....Standard Practice for Making and Curing
Concrete Test Specimens in the Field
 - C33/C33M-11a.....Standard Specification for Concrete Aggregates
 - C39/C39M-12.....Standard Test Method for Compressive Strength
of Cylindrical Concrete Specimens
 - C109/C109M-11b.....Standard Test Method for Compressive Strength
of Hydraulic Cement Mortars
 - C136-06.....Standard Test Method for Sieve Analysis of Fine
and Coarse Aggregates
 - C138/C138M-10b.....Standard Test Method for Density (Unit Weight),
Yield, and Air Content (Gravimetric) of
Concrete
 - C140-12.....Standard Test Methods for Sampling and Testing
Concrete Masonry Units and Related Units
 - C143/C143M-10a.....Standard Test Method for Slump of Hydraulic
Cement Concrete
 - C172/C172M-10.....Standard Practice for Sampling Freshly Mixed
Concrete
 - C173/C173M-10b.....Standard Test Method for Air Content of freshly
Mixed Concrete by the Volumetric Method
 - C330/C330M-09.....Standard Specification for Lightweight
Aggregates for Structural Concrete
 - C567/C567M-11.....Standard Test Method for Density Structural
Lightweight Concrete
 - C780-11.....Standard Test Method for Pre-construction and
Construction Evaluation of Mortars for Plain
and Reinforced Unit Masonry
 - C1019-11.....Standard Test Method for Sampling and Testing
Grout

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

11-01-18

- C1064/C1064M-11.....Standard Test Method for Temperature of Freshly
Mixed Portland Cement Concrete
- C1077-11c.....Standard Practice for Agencies Testing Concrete
and Concrete Aggregates for Use in Construction
and Criteria for Testing Agency Evaluation
- C1314-11a.....Standard Test Method for Compressive Strength
of Masonry Prisms
- D422-63(2007).....Standard Test Method for Particle-Size Analysis
of Soils
- D698-07e1.....Standard Test Methods for Laboratory Compaction
Characteristics of Soil Using Standard Effort
- D1140-00(2006).....Standard Test Methods for Amount of Material in
Soils Finer than No. 200 Sieve
- D1143/D1143M-07e1.....Standard Test Methods for Deep Foundations
Under Static Axial Compressive Load
- D1188-07e1.....Standard Test Method for Bulk Specific Gravity
and Density of Compacted Bituminous Mixtures
Using Coated Samples
- D1556-07.....Standard Test Method for Density and Unit
Weight of Soil in Place by the Sand-Cone Method
- D1557-09.....Standard Test Methods for Laboratory Compaction
Characteristics of Soil Using Modified Effort
(56,000ft lbf/ft³ (2,700 KNm/m³))
- D2166-06.....Standard Test Method for Unconfined Compressive
Strength of Cohesive Soil
- D2167-08).....Standard Test Method for Density and Unit
Weight of Soil in Place by the Rubber Balloon
Method
- D2216-10.....Standard Test Methods for Laboratory
Determination of Water (Moisture) Content of
Soil and Rock by Mass
- D2974-07a.....Standard Test Methods for Moisture, Ash, and
Organic Matter of Peat and Other Organic Soils

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

11-01-18

D3666-11.....Standard Specification for Minimum Requirements
for Agencies Testing and Inspecting Road and
Paving Materials

D3740-11.....Standard Practice for Minimum Requirements for
Agencies Engaged in Testing and/or Inspection
of Soil and Rock as used in Engineering Design
and Construction

D6938-10.....Standard Test Method for In-Place Density and
Water Content of Soil and Soil-Aggregate by
Nuclear Methods (Shallow Depth)

E94-04 (2010).....Standard Guide for Radiographic Examination

E164-08.....Standard Practice for Contact Ultrasonic
Testing of Weldments

E329-11c.....Standard Specification for Agencies Engaged in
Construction Inspection, Testing, or Special
Inspection

E543-09.....Standard Specification for Agencies Performing
Non-Destructive Testing

E605-93 (R2011).....Standard Test Methods for Thickness and Density
of Sprayed Fire Resistive Material (SFRM)
Applied to Structural Members

E709-08.....Standard Guide for Magnetic Particle
Examination

E1155-96 (R2008).....Determining FF Floor Flatness and FL Floor
Levelness Numbers

F3125/F3125M-15.....Standard Specification for High Strength
Structural Bolts, Steel and Alloy Steel, Heat
Treated, 120 ksi (830 MPa) and 150 ksi (1040
MPa) Minimum Tensile Strength, Inch and Metric
Dimensions

E. American Welding Society (AWS):

D1.D1.1M-10.....Structural Welding Code-Steel

1.3 REQUIREMENTS:

A. Accreditation Requirements: Construction materials testing laboratories
must be accredited by a laboratory accreditation authority and will be

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

11-01-18

required to submit a copy of the Certificate of Accreditation and Scope of Accreditation. The laboratory's scope of accreditation must include the appropriate ASTM standards (i.e., E329, C1077, D3666, D3740, A880, E543) listed in the technical sections of the specifications.

Laboratories engaged in Hazardous Materials Testing shall meet the requirements of OSHA and EPA. The policy applies to the specific laboratory performing the actual testing, not just the "Corporate Office."

- B. Inspection and Testing: Testing laboratory shall inspect materials and workmanship and perform tests described herein and additional tests requested by Contracting Officer's Representative (COR). When it appears materials furnished, or work performed by Contractor fail to meet construction contract requirements, Testing Laboratory shall direct attention of Contracting Officer's Representative to such failure.
- C. Written Reports: Testing laboratory shall submit test reports to Contracting Officer's Representative, Contractor, unless other arrangements are agreed to in writing by the Contracting Officer's Representative. Submit reports of tests that fail to meet construction contract requirements on colored paper.
- D. Verbal Reports: Give verbal notification to Contracting Officer's Representative immediately of any irregularity.

PART 2 - PRODUCTS (NOT USED)

PART 3 - EXECUTION

3.1 EARTHWORK:

- A. General: The Testing Laboratory shall provide qualified personnel, materials, equipment, and transportation as required to perform the services identified/required herein, within the agreed to schedule and/or time frame. The work to be performed shall be as identified herein and shall include but not be limited to the following:
 - 1. Observe fill and subgrades during proof-rolling to evaluate suitability of surface material to receive fill or base course. Provide recommendations to the Contracting Officer's Representative regarding suitability or unsuitability of areas where proof-rolling was observed. Where unsuitable results are observed, witness

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

11-01-18

excavation of unsuitable material and recommend to Contracting Officer's Representative extent of removal and replacement of unsuitable materials and observe proof-rolling of replaced areas until satisfactory results are obtained.

2. Provide full time observation of fill placement and compaction and field density testing in building areas and provide full time observation of fill placement and compaction and field density testing in pavement areas to verify that earthwork compaction obtained is in accordance with contract documents.
3. Provide supervised geotechnical technician to inspect excavation, subsurface preparation, and backfill for structural fill.

B. Testing Compaction:

1. Determine maximum density and optimum moisture content for each type of fill, backfill and subgrade material used, in compliance with ASTM D1557.
2. Make field density tests in accordance with the primary testing method following ASTM D6938 wherever possible. Field density tests utilizing ASTM D1556, AASHTO T191, or ASTM D2167 shall be utilized on a case-by-case basis only if there are problems with the validity of the results from the primary method due to specific site field conditions. Should the testing laboratory propose these alternative methods, they should provide satisfactory explanation to the Contracting Officer's Representative before the tests are conducted.
 - a. Foundation Wall Backfill: One test per 30 m (100 feet) of each layer of compacted fill but in no case fewer than two tests.
 - b. Pavement Subgrade: One test for each 335 m² (400 square yards), but in no case fewer than two tests.
 - c. Curb, Gutter, and Sidewalk: One test for each 90 m (300 feet), but in no case fewer than two tests.
 - d. Trenches: One test at maximum 30 m (100 foot) intervals per 1200 mm (4 foot) of vertical lift and at changes in required density, but in no case fewer than two tests.

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

11-01-18

- C. Fill and Backfill Material Gradation: One test per 20 cubic yards stockpiled or in-place source material. Gradation of fill and backfill material shall be determined in accordance with ASTM D1140.
- D. Testing for Footing Bearing Capacity: Evaluate if suitable bearing capacity material is encountered in footing subgrade.
- E. Testing Materials: Test suitability of on-site and off-site borrow as directed by Contracting Officer's Representative.

3.2 FOUNDATION PILES (NOT USED)

3.3 FOUNDATION CAISSONS (NOT USED)

3.4 LANDSCAPING (NOT USED)

3.5 ASPHALT CONCRETE PAVING:

A. Aggregate Base Course:

- 1. Determine maximum density and optimum moisture content for aggregate base material in accordance with AASHTO T180, Method D.
- 2. Make a minimum of three field density tests on each day's final compaction on each aggregate course in accordance with ASTM D1556.
- 3. Sample and test aggregate as necessary to ensure compliance with specification requirements for gradation, wear, and soundness as specified in the applicable state highway standards and specifications.

B. Asphalt Concrete:

- 1. Aggregate: Sample and test aggregates in stockpile and hot-bins as necessary to ensure compliance with specification requirements for gradation (AASHTO T27), wear (AASHTO T96), and soundness (AASHTO T104).
- 2. Temperature: Check temperature of each load of asphalt concrete at mixing plant and at site of paving operation.
- 3. Density: Make a minimum of two field density tests in accordance with ASTM D1188 of asphalt base and surface course for each day's paving operation.

3.6 SITE WORK CONCRETE:

Test site work concrete including materials for concrete as required in Article CONCRETE of this section.

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

11-01-18

3.7 POST-TENSIONING OF CONCRETE (NOT USED)

3.8 CONCRETE:

A. Batch Plant Inspection and Materials Testing:

1. Perform continuous batch plant inspection until concrete quality is established to satisfaction of Contracting Officer's Representative with concurrence of Contracting Officer and perform periodic inspections thereafter as determined by Contracting Officer's Representative.
2. Periodically inspect and test batch proportioning equipment for accuracy and report deficiencies to Contracting Officer's Representative.
3. Sample and test mix ingredients as necessary to ensure compliance with specifications.
4. Sample and test aggregates daily and as necessary for moisture content. Test the dry rodded weight of the coarse aggregate whenever a sieve analysis is made, and when it appears there has been a change in the aggregate.
5. Certify, in duplicate, ingredients and proportions and amounts of ingredients in concrete conform to approved trial mixes. When concrete is batched or mixed off immediate building site, certify (by signing, initialing or stamping thereon) on delivery slips (duplicate) that ingredients in truck-load mixes conform to proportions of aggregate weight, cement factor, and water-cement ratio of approved trial mixes.

B. Field Inspection and Materials Testing:

1. Provide a technician at site of placement at all times to perform concrete sampling and testing.
2. Review the delivery tickets of the ready-mix concrete trucks arriving on-site. Notify the Contractor if the concrete cannot be placed within the specified time limits or if the type of concrete delivered is incorrect. Reject any loads that do not comply with the Specification requirements. Rejected loads are to be removed from the site at the Contractor's expense. Any rejected concrete that is placed will be subject to removal.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

11-01-18

3. Take concrete samples at point of placement in accordance with ASTM C172. Mold and cure compression test cylinders in accordance with ASTM C31. Make at least three cylinders for each 40 m³ (50 cubic yards) or less of each concrete type, and at least three cylinders for any one day's pour for each concrete type. Label each cylinder with an identification number. Contracting Officer's Representative may require additional cylinders to be molded and cured under job conditions.
4. Perform slump tests in accordance with ASTM C143. Test the first truck each day, and every time test cylinders are made. Test pumped concrete at the hopper and at the discharge end of the hose at the beginning of each day's pumping operations to determine change in slump.
5. Determine the air content of concrete per ASTM C173. For concrete required to be air-entrained, test the first truck and every 20 m³ (25 cubic yards) thereafter each day. For concrete not required to be air-entrained, test every 80 m³ (100 cubic yards) at random. For pumped concrete, initially test concrete at both the hopper and the discharge end of the hose to determine change in air content.
6. If slump or air content fall outside specified limits, make another test immediately from another portion of same batch.
7. Perform unit weight tests in compliance with ASTM C138 for normal weight concrete and ASTM C567 for lightweight concrete. Test the first truck and each time cylinders are made.
8. Notify laboratory technician at batch plant of mix irregularities and request materials and proportioning check.
9. Verify that specified mixing has been accomplished.
10. Environmental Conditions: Determine the temperature per ASTM C1064 for each truckload of concrete during hot weather and cold weather concreting operations:
 - a. When ambient air temperature falls below 4.4 degrees C (40 degrees F), record maximum and minimum air temperatures in each 24-hour period; record air temperature inside protective enclosure; record minimum temperature of surface of hardened concrete.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

11-01-18

- b. When ambient air temperature rises above 29.4 degrees C (85 degrees F), record maximum and minimum air temperature in each 24-hour period; record minimum relative humidity; record maximum wind velocity; record maximum temperature of surface of hardened concrete.
11. Inspect the reinforcing steel placement, including bar size, bar spacing, top and bottom concrete cover, proper tie into the chairs, and grade of steel prior to concrete placement. Submit detailed report of observations.
12. Observe conveying, placement, and consolidation of concrete for conformance to specifications.
13. Observe condition of formed surfaces upon removal of formwork prior to repair of surface defects and observe repair of surface defects.
14. Observe curing procedures for conformance with specifications, record dates of concrete placement, start of preliminary curing, start of final curing, end of curing period.
15. Observe preparations for placement of concrete:
- a. Inspect handling, conveying, and placing equipment, inspect vibrating and compaction equipment.
 - b. Inspect preparation of construction, expansion, and isolation joints.
16. Observe preparations for protection from hot weather, cold weather, sun, and rain, and preparations for curing.
17. Observe concrete mixing:
- a. Monitor and record amount of water added at project site.
 - b. Observe minimum and maximum mixing times.
18. Measure concrete flatwork for levelness and flatness as follows:
- a. Perform Floor Tolerance Measurements F_F and F_L in accordance with ASTM E1155. Calculate the actual overall F- numbers using the inferior/superior area method.
 - b. Perform all floor tolerance measurements within 48 hours after slab installation and prior to removal of shoring and formwork.
 - c. Provide the Contractor and the Contracting Officer's Representative with the results of all profile tests, including a

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

11-01-18

running tabulation of the overall F_r and F_L values for all slabs installed to date, within 72 hours after each slab installation.

19. Other inspections:

- a. Grouting under base plates.
- b. Grouting anchor bolts and reinforcing steel in hardened concrete.

C. Laboratory Tests of Field Samples:

1. Test compression test cylinders for strength in accordance with ASTM C39. For each test series, test one cylinder at 7 days and one cylinder at 28 days. Use remaining cylinder as a spare tested as directed by Contracting Officer's Representative. Compile laboratory test reports as follows: Compressive strength test shall be result of one cylinder, except when one cylinder shows evidence of improper sampling, molding or testing, in which case it shall be discarded, and strength of spare cylinder shall be used.
2. Make weight tests of hardened lightweight structural concrete in accordance with ASTM C567.
3. Furnish certified compression test reports (duplicate) to Contracting Officer's Representative. In test report, indicate the following information:
 - a. Cylinder identification number and date cast.
 - b. Specific location at which test samples were taken.
 - c. Type of concrete, slump, and percent air.
 - d. Compressive strength of concrete in MPa (psi).
 - e. Weight of lightweight structural concrete in kg/m^3 (pounds per cubic feet).
 - f. Weather conditions during placing.
 - g. Temperature of concrete in each test cylinder when test cylinder was molded.
 - h. Maximum and minimum ambient temperature during placing.
 - i. Ambient temperature when concrete sample in test cylinder was taken.
 - j. Date delivered to laboratory and date tested.

3.9 REINFORCEMENT:

- A. Review mill test reports furnished by Contractor.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

11-01-18

3.10 SHOTCRETE (NOT USED)

3.11 PRESTRESSED CONCRETE (NOT USED)

3.12 ARCHITECTURAL PRECAST CONCRETE (NOT USED)

3.13 MASONRY:

A. Mortar Tests:

1. Laboratory compressive strength test:
 - a. Comply with ASTM C780.
 - b. Obtain samples during or immediately after discharge from batch mixer.
 - c. Furnish molds with 50 mm (2 inch), 3 compartment gang cube.
 - d. Test one sample at 7 days and 2 samples at 28 days.
2. Two tests during first week of operation; one test per week after initial test until masonry completion.

B. Grout Tests:

1. Laboratory compressive strength test:
 - a. Comply with ASTM C1019.
 - b. Test one sample at 7 days and 2 samples at 28 days.
 - c. Perform test for each 230 m² (2500 square feet) of masonry.

C. Masonry Unit Tests:

1. Laboratory Compressive Strength Test:
 - a. Comply with ASTM C140.
 - b. Test 3 samples for each 460 m² (5000 square feet) of wall area.

- D. Prism Tests: For each type of wall construction indicated, test masonry prisms per ASTM C1314 for each 460 m² (5000 square feet) of wall area. Prepare one set of prisms for testing at 7 days and one set for testing at 28 days.

3.14 STRUCTURAL STEEL:

- A. General: Provide shop and field inspection and testing services to certify structural steel work is done in accordance with contract documents. Welding shall conform to AWS D1.1 Structural Welding Code.

B. Prefabrication Inspection:

1. Review design and shop detail drawings for size, length, type and location of all welds to be made.
2. Approve welding procedure qualifications either by pre-qualification or by witnessing qualifications tests.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

11-01-18

3. Approve welder qualifications by certification or retesting.
4. Approve procedure for control of distortion and shrinkage stresses.
5. Approve procedures for welding in accordance with applicable sections of AWS D1.1.

C. Fabrication and Erection:

1. Weld Inspection:

- a. Inspect welding equipment for capacity, maintenance and working condition.
- b. Verify specified electrodes and handling and storage of electrodes in accordance with AWS D1.1.
- c. Inspect preparation and assembly of materials to be welded for conformance with AWS D1.1.
- d. Inspect preheating and inter-pass temperatures for conformance with AWS D1.1.
- e. Measure 25 percent of fillet welds.
- f. Welding Magnetic Particle Testing: Test in accordance with ASTM E709 for a minimum of:
 - 1) 20 percent of all shear plate fillet welds at random, final pass only.
 - 2) 20 percent of all continuity plate and bracing gusset plate fillet welds, at random, final pass only.
 - 3) 100 percent of tension member fillet welds (i.e., hanger connection plates and other similar connections) for root and final passes.
 - 4) 20 percent of length of built-up column member partial penetration and fillet welds at random for root and final passes.
 - 5) 100 percent of length of built-up girder member partial penetration and fillet welds for root and final passes.
- g. Welding Ultrasonic Testing: Test in accordance with ASTM E164 and AWS D1.1 for 100 percent of all full penetration welds, braced and moment frame column splices, and a minimum of 20 percent of all other partial penetration column splices, at random.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

11-01-18

- h. Welding Radiographic Testing: Test in accordance with ASTM E94, and AWS D1.1 for 5 percent of all full penetration welds at random.
 - i. Verify that correction of rejected welds are made in accordance with AWS D1.1.
 - j. Testing and inspection do not relieve the Contractor of the responsibility for providing materials and fabrication procedures in compliance with the specified requirements.
2. Bolt Inspection:
- a. Inspect high-strength bolted connections in accordance AISC Specifications for Structural Joints Using ASTM F3125 Bolts.
 - b. Slip-Critical Connections: Inspect 10 percent of bolts, but not less than 2 bolts, selected at random in each connection in accordance with AISC Specifications for Structural Joints Using ASTM F3125 Bolts. Inspect all bolts in connection when one or more are rejected.
 - c. Fully Pre-tensioned Connections: Inspect 10 percent of bolts, but not less than 2 bolts, selected at random in 25 percent of connections in accordance with AISC Specification for Structural Joints Using ASTM F3125 Bolts. Inspect all bolts in connection when one or more are rejected.
 - d. Bolts installed by turn-of-nut tightening may be inspected with calibrated wrench when visual inspection was not performed during tightening.
 - e. Snug Tight Connections: Inspect 10 percent of connections verifying that plies of connected elements have been brought into snug contact.
 - f. Inspect field erected assemblies; verify locations of structural steel for plumbness, level, and alignment.
- D. Submit inspection reports, record of welders and their certification, and identification, and instances of noncompliance to Contracting Officer's Representative.

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

11-01-18

3.15 STEEL DECKING (NOT USED)

3.16 SHEAR CONNECTOR STUDS:

- A. Provide field inspection and testing services required by AWS D.1 to insure shear connector studs have been installed in accordance with contract documents.
- B. Tests: Test 20 percent of headed studs for fastening strength in accordance with AWS D1.1.
- C. Submit inspection reports, certification, and instances of noncompliance to Contracting Officer's Representative.

3.17 SPRAYED-ON FIREPROOFING (NOT USED)

3.18 TYPE OF TEST:

Approximate Number of Tests Required

A. Earthwork:

Laboratory Compaction Test, Soils:

(ASTM D698) 100

Field Density, Soils (AASHTO T191, T205, or T310) 100

Penetration Test, Soils 20

B. Aggregate Base:

Laboratory Compaction, (AASHTO T180) 40

Field Density, (AASHTO T191) 40

Aggregate, Base Course Gradation (AASHTO T27) 10

Wear (AASHTO T96) 10

Soundness (AASHTO T104) 10

D. Asphalt Concrete:

Field Density, (AASHTO T230) 20

Aggregate, Asphalt Concrete Gradation (AASHTO T27) 20

Wear (AASHTO T96) 20

Soundness (AASHTO T104) 20

E. Concrete:

Making and Curing Concrete Test Cylinders (ASTM C31) 35

Compressive Strength, Test Cylinders (ASTM C39) 35

Concrete Slump Test (ASTM C143) 7

Concrete Air Content Test (ASTM C173) 7

Unit Weight, Lightweight Concrete (ASTM C567) N/A

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

	11-01-18
Aggregate, Normal Weight: Gradation (ASTM C33)	N/A
Deleterious Substances (ASTM C33)	N/A
Soundness (ASTM C33)	N/A
Abrasion (ASTM C33)	N/A
Aggregate, Lightweight Gradation (ASTM C330)	N/A
Deleterious Substances (ASTM C330)	N/A
Unit Weight (ASTM C330)	N/A
Flatness and Levelness Readings (ASTM E1155) (number of days)	1
F. Reinforcing Steel:	
Tensile Test (ASTM A370)	_____
Bend Test (ASTM A370)	_____
Mechanical Splice (ASTM A370)	_____
Welded Splice Test (ASTM A370)	_____
I. Masonry:	
Prism Tests (ASTM C1314)	4
J. Structural Steel:	
Ultrasonic Testing of Welds (ASTM E164)	N/A
Magnetic Particle Testing of Welds (ASTM E709)	10
Radiographic Testing of Welds (ASTM E94)	N/A

- - - E N D - - -

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

06-01-21

SECTION 01 45 35
SPECIAL INSPECTIONS

PART 1 - GENERAL

1.1 DESCRIPTION

- A. This guide specification will be applicable to both new buildings and existing building rehabilitations/renovations. In addition to the Special Inspection and testing specified requirements, a registered design professional must perform structural observations during construction. All observed deficiencies will be immediately reported to the Contracting Officer. The registered design professional performing these observations will be a representative of the Designer of Record (DOR) for the building being constructed.
- B. Structural observations are required for the following project conditions per IBC Chapter 17:
 - 1. Seismic Design Category D, E or F; and assigned to Risk Cat III, IV or V.
 - 2. Seismic Design Category D, E or F; and with a height greater than 22860 mm 75 ft.
 - 3. Seismic Design Category E, assigned to Risk Category I or II and the building is greater than two stories above grade plane.
 - 4. Nominal design wind speed in excess of 49 m/sec 110 mph; and assigned to Risk Cat III, IV or V.
 - 5. Nominal design wind speed in excess of 49 m/sec 110 mph; and with a height greater than 23 m 75 ft.

1.2 APPLICABLE PUBLICATIONS

- A. The publication listed below form a part of this specification to the extent referenced. The publications are referred to within the text by the basic designation only.
- B. American Society of Civil Engineers (ASCE)
 - 1. ASCE 7 - (2010; Errata 2011; Supp 2 2013) Minimum Design Loads for Buildings and Other Structures
- C. International Code Council (ICC)
 - 2. ICC IBC - (2015) International Building Code

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

06-01-21

1.3 GENERAL REQUIREMENTS

- A. Perform Special Inspections in accordance with the Statement of Special Inspections, Schedule of Special Inspections and Chapter 17 of ICC IBC. The Statement of Special Inspections and Schedule of Special Inspections are included as an attachment to this specification. Special Inspections are to be performed by an independent third party and are intended to ensure that the work of the prime contractor is in accordance with the Contract Documents and applicable building codes. Special inspections do not take the place of the three phases of control inspections performed by the Contractor's QC Manager or any testing and inspections required by other sections of the specifications.
- B. Structural observations will be performed by the Government. The contractor must provide notification to the Contracting Officer 14 days prior to each period of installation of structural components.

1.4 DEFINITIONS

- A. Continuous Special Inspections - The constant monitoring of specific tasks by a special inspector. These inspections must be carried out continuously over the duration of the particular tasks.
- B. Periodic Special Inspections - Special Inspections by the special inspector who is intermittently present where the work to be inspected has been or is being performed. Specific time interval on a specific Special Inspection should be indicated on the Schedule of Special Inspections.
- C. Perform - Perform these Special Inspections tasks for each welded joint or member.
- D. Observe - Observe these Special Inspections items on a random daily basis. Operations need not be delayed pending these inspections.
- E. Special Inspector (SI) - A qualified person retained by the contractor and approved by the Contracting Officer as having the competence necessary to inspect a particular type of construction requiring Special Inspections. The SI must be an independent third party hired directly by the Prime Contractor.
- F. Associate Special Inspector (ASI) - A qualified person who assists the SI in performing Special Inspections but must perform inspection under

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

06-01-21

the direct supervision of the SI and cannot perform inspections without the SI on site.

- G. Third Party - A third party inspector must not be company employee of the Contractor or any Sub-Contractor performing the work to be inspected.
- H. Special Inspector of Record (SIOR) - SIOR must be an independent third party hired directly by the Prime Contractor and is required for the following project conditions:
 - 1. Seismic Design Category D, E, or F; and assigned to Risk Category III, IV, or V.
 - 2. Seismic Design Category D, E, or F; and with a height greater than 22860mm 75 ft.
 - 3. Seismic Design Category E, assigned to Risk Category I or II and the building is greater than two (2) stories above grade plane.
 - 4. Nominal design wind speed in excess of 49 m/sec 100 mph; and assigned to Risk Category III, IV, or V.
 - 5. Nominal design wind speed in excess of 49 mm/sec 100mph; and with a height greater than 23m 75ft.
 - 6. In addition to these conditions, the DOR is encouraged to consider using an SIOR on large magnitude or critical projects where this additional level of quality control is affordable.
- I. Contracting Officer - The Government official having overall authority for administrative contracting actions. Certain contracting actions may be delegated to the Contracting Officer's Representative (COR).
- J. Contractor's Quality Control (QC) Manager - An individual retained by the prime contractor and qualified in accordance with the Section 01 45 00.00 10 QUALITY CONTROL having the overall responsibility for the contractor's QC organization.
- K. Designer of Record (DOR) - A registered design professional is contracted by the Government as an A/E responsible for the overall design and review of submittal documents prepared by others. The DOR is registered or licensed to practice their respective design profession as defined by the statutory requirements of the professional registration laws in state in which the design professional works. The

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

06-01-21

DOR is also referred to as the Engineer of Record (EOR) in design code documents.

- L. Statement of Special Inspections (SSI) - A document developed by the DOR identifying the material, systems, components and work required to have Special Inspections and covering the following:
1. List of the Architectural Designated Seismic Systems - these components are in or attached to a Risk Category IV or V structure and are needed for continued operation of the facility or their failure could impair the continued operation of the facility.
 2. List of the Mechanical Designated Seismic Systems
 - a. For Seismic Design Category C or Risk V, list the following:
 - 1) Heating, ventilation, and air-conditioning (HVAC) ductwork containing hazardous materials and anchorage of such ductwork
 - 2) Piping systems and mechanical units containing flammable, combustible, or highly toxic materials.
 - b. For Seismic Design Category D, E, or F or Risk Category V list mechanical system that meet one of the following:
 - 1) Life safety component required to function after an earthquake
 - 2) Component that contains hazardous content,
 - 3) All components in an essential facility needed for continued operation after an earthquake.
 3. List of the Electrical Designated Systems
 - a. For Seismic Design Category C or Risk V, list the anchorage of electrical equipment used for emergency or standby power systems.
 - b. For Seismic Design Category D, E or F list electrical system that meet one of the following:
 - 1) Life safety component required to function after an earthquake
 - 2) Component that contains hazardous content,
 - 3) All components in an essential facility needed for continued operation after an earthquake.
 4. List of elements that are part of the progressive collapse resistance system.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

06-01-21

- a. Provide a description of the following as they apply:
- 1) Elements of the tie force system consisting of internal longitudinal and transverse, vertical, and peripheral tie.
 - 2) Elements of the alternate path system.
 - 3) Elements having enhanced local resistance. The Statement of Special Inspections and the Schedule of Special Inspections will be included as an attachment to this specification.
 - a) Schedule of Special Inspections - A schedule which lists each of the required Special Inspections, the extent to which each Special Inspections is to be performed, and the required frequency for each in accordance with ICC IBC Chapter 17.
 - b) Designated Seismic System - Those nonstructural components that require design in accordance with ASCE 7 Chapter 13 and for which the component importance factor, I_p , is greater than 1.0. This designation applies to systems that are required to be operational following the Design Earthquake for RC I - IV structures and following the MCER for RC V structures. All systems in RC V facilities designated as MC-1 in accordance with UFC 3-310-04 are considered part of the Designated Seismic Systems. Designated Seismic Systems will be identified by Owner and will have an Importance Factor $I_p = 1.5$.

M. Submittals: Government approval is required for all submittals. CQC Special Inspection reports shall be submitted under this Specification section and follow the [Special Inspection]: [Applicable Specification section or description] naming convention. Submit the following:

1. SD-01 Preconstruction Submittals;
2. SIOR Letter of Acceptance;
3. Special Inspections Project Manual;
4. Special Inspections Agency's Written Practices
5. NDT Procedures and Equipment' Calibration Records;
6. SD-06 Test Reports;
7. Special Inspections
8. Daily Reports;

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

06-01-21

9. Special Inspections; Biweekly Reports;
 10. SD-07 Certificates;
 11. Fabrication Plant
 12. Steel Truss Plant;
 13. Wood Truss Plant;
 14. AC472 Accreditation;
 15. Steel Joist Institute Membership;
 16. Precast Concrete Institute (PCI) Certified Plant;
 17. Certificate of Compliance;
 18. Special Inspector of Record Qualifications;
 19. Special Inspector Qualifications;
 20. Qualification Records for NDT technicians;
 21. SD-11 Closeout Submittals;
 22. Interim Final Report of Special Inspections;
 23. Comprehensive Final Report of Special Inspections;
- N. Special Inspector Qualifications: Submit qualifications for each SI, ASI, and the SIOR from the following certifying associations: Associated Air Balance Council (AABC); American Concrete Institute (ACI); Association of the Wall and Ceiling Industry (AWCI); American Welding Society (AWS); Factory Mutual (FM); International Code Council (ICC); Nondestructive Testing (NDT); National Institute for Certification in Engineering Technologies (NICET); Precast/Prestressed Concrete Institute (PCI); Post-Tensioning Institute (PTI); Underwriters Laboratories (UL). Qualifications should be in accordance with the following minimums.

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

06-01-21

QUALIFICATIONS

Area	Special Inspector	Associated Special Inspector	SIOR
Steel Construction and High Strength Bolting	ICC Structural Steel and Bolting Special Inspector certificate with on year of related experience, or Registered Professional Engineer with related experience.	Engineer-In-Training with one year of related experience.	
Welding Structural Steel (For highly complex steel use only AWS Certified Welding Inspectors)	ICC Welding Special Inspector certificate with one year of related experience or AWS Certified Welding Inspector	AWS Certified Associate Welding Inspector	
Nondestructive Testing of Welds	NDT Level II Certificate	NDT Level II Certificate plus one year of related experience	
Cold Formed Steel Framing	ICC Structural Steel and Bolting Special Inspector certificate with on year of related experience, or ICC Commercial Building Inspector with one year of experience; or Registered Professional Engineer with related experience.	Engineer-In-Training with one year of related experience.	

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

06-01-21

Area	Special Inspector	Associated Special Inspector	SIOR
Concrete Construction	ICC Reinforced Concrete Special Inspector Certificate with one year of related experience, or ACI Concrete Construction Special Inspector, or NICET Concrete Technician Level III Certificate in Construction Materials Testing, or, Registered Professional Engineer with related experience	ACI Concrete Construction Special Inspector in Training, or Engineer-In-Training with one year of related experience	
Masonry Construction	ICC Structural Masonry Special Inspector Certificate with one year of related experience, or Registered Professional Engineer with related experience	Engineer-In-Training with one year of related experience	

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

06-01-21

Area	Special Inspector	Associated Special Inspector	SIOR
Verification of Site Soil Condition, Fill Placement, and Load-Bearing Requirements	ICC Soils Special Inspector Certificate with one year of related experience, or NICET Soils Technician Level II Certificate in Construction Material Testing, or NICET Geotechnical Engineering Technician Level II Construction or Generalist Certificate, or Geologist-In-Training with one year of related experience, or Registered Professional Engineer with related experience	NICET Soils Technician Level I Certificate in Construction Material Testing with one year of related experience, or NICET Geotechnical Engineering Technician Level I Construction, or Generalist Certificate with one year of related experience, or Engineer-In-Training with one year of related experience	
Fire-Resistant Penetrations and Joints	Passed the UL Firestop Exam with one year of related experience, or Passed the FM Firestop Exam with one year of related experience, or Registered Professional Engineer with related experience	Engineer-In-Training with one year of related experience.	
Smoke Control	AABC Technician Certification with one year of related experience, or Registered Professional Engineer with related experience	Engineer-In-Training with one year of related experience.	
SIOR			Registered Professional Engineer

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

06-01-21

PART 2 - PRODUCTS

2.1 FABRICATORS SPECIAL INSPECTION

- A. Special Inspections of fabricator's work performed in the fabricator's shop is required to be inspected in accordance with the Statement of Special Inspections and the Schedule of Special Inspections unless the fabricator is certified by the approved agency to perform such work without Special Inspections. Submit the applicable certification(s) from the following list to the Contracting Officer for information to allow work performed in the fabricator's shop to not be subjected to Special Inspections.
- B. The following certifications meet the requirements for fabricator approval in accordance with paragraph 1704.2.5.2 of IBC:
1. American Institute of Steel Construction (AISC) Certified Fabrication Plant, Category STD.
 2. Truss Plate Institute (TPI) steel truss plate quality assurance program certification.
 3. Truss Plate Institute (TPI) wood truss plate quality assurance program certification.
 4. International Accreditation Service, AC472 Accreditation Steel Joist Institute Membership
 5. Precast Concrete Institute (PCI) Certified Plant, Group C
- C. At the completion of fabrication, submit a certificate of compliance, to be included with the comprehensive final report of Special **Inspections, stating that the materials supplied and work performed by the fabricator are in accordance the construction documents.**

PART 3 - EXECUTION

3.1 RESPONSIBILITIES MATRIX

Inspector	Responsibility	Condition
SIOR	a. Supervise all Special Inspectors required by the contract documents and the IBC. b. Submit a SIOR Letter of Acceptance to the Contracting Officer attesting to acceptance of the duties of SIOR, signed and sealed by the SIOR.	Applicable when SIOR is required

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

06-01-21

Inspector	Responsibility	Condition
	c. Verify the qualifications of all of the Special Inspectors. d. Verify the qualifications of fabricators.	
	e. Submit Special Inspections agency's written practices for the monitoring and control of the agency's operations to include the following: <ol style="list-style-type: none"> 1. The agency's procedures for the selection and administration of inspection personnel, describing the training, experience and examination requirements for qualifications and certification of inspection personnel. 2. The agency's inspection procedures, including general inspection, material controls, and visual welding inspection. f. Submit qualification records for nondestructive testing (NDT) technicians designated for the project. Submit NDT procedures and equipment calibration records for NDT to be performed and equipment to be used for the project.	Applicable when SIOR is required and when the structural design is required to follow AISC341 for seismic design of steel structures
	g. Prepare a Special Inspections Project Manual, which will cover the following: <ol style="list-style-type: none"> 1. Roles and responsibilities of the following individuals during Special Inspections: SIOR, SI, General Contractor, Subcontractors, QC Manager, and DOR. 2. Organizational chart and/or communication plan, indicating lines of communication 3. Contractor's internal plan for scheduling inspections. Address items such as timeliness of inspection requests, who to contact for inspection requests, and availability of alternate inspectors. Contractor's internal plan for scheduling inspections. Address items such as timeliness of inspection requests, who to contact for inspection requests, and availability of alternate inspectors. 4. Indicate the government reporting procedures. 5. Propose forms or templates to be used by SI and SIOR to document inspections. 6. Indicate procedures for tracking nonconforming work and verification that corrective work is complete. 	Applicable when SIOR is required

Contract No. 36C26319D0022
 Station Project No. 656-400
 Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

06-01-21

Inspector	Responsibility	Condition
	<p>7. Indicate how the SIOR and/or SI will participate in weekly QC meetings.</p> <p>8. Indicate how Special Inspections of shop fabricated items will be handled when the fabricator's shop is not certified per paragraph FABRICATOR SPECIAL INSPECTIONS.</p> <p>9. Include a section in the manual that covers each specific item requiring Special Inspections that is indicated on the Schedule of Special Inspections. Provide names and qualifications of each special inspector who will be performing the Special Inspections for each specific item. Provide detail on how the Special Inspections are to be carried out for each item so that the expectations are clear for the General Contractor and the Subcontractor performing the work. Make a copy of the Special Inspections Project Manual available on the job site during construction. Submit a copy of the Special Inspections Project Manual for approval.</p> <p>h. Attend coordination and mutual understanding meeting where the information in the Special Inspections Project Manual will be reviewed to verify that all parties have a clear understanding of the Special Inspections provisions and the individual duties and responsibilities of each party.</p> <p>i. Maintain a 3- ring binder for the Special Inspector's daily and biweekly reports and the Special Inspections Project Manual. This file must be located in a conspicuous place in the project trailer/office to allow review by the Contracting Officer and the DOR.</p> <p>j. Submit a copy of the Special Inspector's daily reports to the QC Manager.</p> <p>k. Discrepancies that are observed during Special Inspections must be reported to the QC Manager for correction. If discrepancies are not corrected before the special inspector leaves the site the observed discrepancies must be documented in the daily report.</p> <p>l. Submit a biweekly Special Inspections report until all work requiring Special Inspections is complete. A report is required for each biweekly period in which Special Inspections activity occurs, and must include the following:</p>	

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

06-01-21

Inspector	Responsibility	Condition
	<ol style="list-style-type: none"> 1. A brief summary of the work performed during the reporting time frame. 2. Changes and/or discrepancies with the drawings, specifications, and mechanical or electrical component certification if they require seismic systems, that were observed during the reporting period. 3. Discrepancies which were resolved or corrected. 4. A list of nonconforming items requiring resolution. 5. All applicable test results including nondestructive testing reports. 	
QC Manager	<ol style="list-style-type: none"> a. If there is no SIOR, QC Manager must Supervise all Special Inspectors required by the contract documents and the IBC; Verify the qualifications of all of the Special Inspectors; Verify the qualifications of fabricators; Maintain a 3-ring binder for the Special Inspector's daily and biweekly reports. This file must be located in a conspicuous place in the project trailer/office to allow review by the Contracting Officer and the DOR. 	Applicable when SIOR is not required
	<ol style="list-style-type: none"> b. Maintain a rework items list that includes discrepancies noted on the Special Inspectors daily report. 	n/a
Special Inspectors	<ol style="list-style-type: none"> a. Inspect all elements of the project for which the special inspector is qualified to inspect and are identified in the Schedule of Special Inspections. b. Attend preparatory phase meetings related to the Definable Feature of Work (DFOW) for which the special inspector is qualified to inspect. 	
	<ol style="list-style-type: none"> c. Submit Special Inspections agency's written practices for the monitoring and control of the agency's operations to include the following: <ol style="list-style-type: none"> 1. The agency's procedures for the selection and administration of inspection personnel, describing the training, experience and examination requirements for qualifications and certification of inspection personnel. 	Applicable when SIOR is NOT required and when the structural design is required to follow AISC 341 for seismic

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

06-01-21

Inspector	Responsibility	Condition
	<p>2. The agency's inspection procedures, including general inspection, material controls, and visual welding inspection.</p> <p>d. Submit qualification records for nondestructive testing (NDT) technicians designated for the project.</p> <p>e. Submit NDT procedures and equipment calibration records for NDT to be performed and equipment to be used for the project.]</p>	<p>design of steel structures</p>
	<p>f. Submit a copy of the daily reports to the QC Manager.</p> <p>g. Discrepancies that are observed during Special Inspections must be reported to the QC Manager for correction. If discrepancies are not corrected before the special inspector leaves the site the observed discrepancies must be documented in the daily report.</p> <p>h. Submit a biweekly Special Inspection Report until all inspections are complete. A report is required for each biweekly period in which Special Inspections activity occurs, and must include the following:</p> <ol style="list-style-type: none"> 1. A brief summary of the work performed during the reporting time frame 2. Changes and/or discrepancies with the drawings, specifications, and mechanical or electrical component certification if they require seismic systems that were observed during the reporting period. 3. Discrepancies which were resolved or corrected. 4. A list of nonconforming items requiring resolution. 5. All applicable test result including nondestructive testing reports. <p>j. At the completion of the project submit a comprehensive final report of Special Inspections that documents the Special Inspections completed for the project and corrections of all discrepancies noted in the daily reports. The comprehensive final report of Special Inspections must be signed, dated and indicate the certification of the special inspector qualifying them to conduct the inspection.</p>	<p>Applicable when SIOR is not required</p>

Contract No. 36C26319D0022
 Station Project No. 656-400
 Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

06-01-21

Inspector	Responsibility	Condition
	k. Submit daily reports to the SIOR	Applicable when SIOR is required

3.2 DEFECTIVE WORK

Check work as it progresses, but failure to detect any defective work or materials must in no way prevent later rejection if defective work or materials are discovered, nor obligate the Government to accept such work.

-- End of Section -

Project: P234 - Maintenance Hangar
 Location: Anytown, VA
 Project #: 12345678
 Date: 4/10/2017

STATEMENT OF SPECIAL INSPECTIONS

Project Seismic Design Category: E
 Project Risk Category: IV
 Project Design Wind Speed (mph): 100
 Number of Stories: 2
 Structure Height Above Grade (ft): 70
 Hazardous Occupancy or attached to such? No Group H Occupancies (2015 IBC, Section 415)

Special Inspector of Record (SIOR)

A Special Inspector of Record (SIOR) IS required (per UFGS 01 45 35, Section 1.3.8)

SIOR Name (Registered Professional): John Doe P.E.
 Professional Registration Number: C222222
 Consulting Firm Name (if any): ABC Structural Consulting
 SIOR Office AND Mobile Phone Number: 1234567895 (Mobile), 123456789 (Office)

Lateral Force Resisting System (LFRS)

2015 IBC 1704.3.2 and 1704.3.3

Following is a listing of critical main wind/seismic force resisting systems for this structure. Carefully inspect these elements as part of the roles and responsibilities of the Special Inspector (reference the Schedule of Special Inspections for inspection checklists).

Vertical LFRS Elements	Notes
Ordinary Concentric Braced Frames	North - South Direction Only, See Plan
Special Concentric Braced Frames	Lettered Gridline only, see plan for call out
Ordinary Steel Moment resisting Frames (SMRF)	Both orthogonal Directions, See plan for call out
Ordinary Reinforced Concrete Shearwalls	See Key Notes
Concrete Grade Beams Resisting Lateral Loads	Office Portion Only, see plan key notes
Ordinary Reinforced Masonry Shear Walls	High Bay, Numbered Gridlines only, see plan
OSB Sheathed Shear Walls (nailing, sill bolting, Etc)	See schedule on plan
Shear Wall Hold Downs	Identified on Plan & in Detail Sheet X.XX
Horizontal LFRS Elements	Notes
Continuous Roof Ties	See Key Notes on Roof Plan
Collector Elements	Identified on plan with key notes
Concrete over metal deck	2nd floor and roof
Metal Roof Deck & Related Fastening System	See Roof Plan
Out of Plane Wall Connections	See Structural Details XX & XX
Diaphragm Cross Rod Bracing	See Roof Plan for locations
Cast in Place Concrete Floor and Roof Diaphragms	See sheet XX for details and rebar schedule
Special Force Transfer Connection	See Detail X on Sheet X.XX

Statement of Special Inspections Page 1 of 2

Project: P234 - Maintenance Hangar
 Location: Anytown, VA
 Project #: 12345678
 Date: 4/10/2017

Designated Seismic Systems (DSS)

(2015 IBC 1705.13.3.4) (ASCE 7-10, 13.2.2, C13.2.2) (UFC 3-310-04, 2-11.2 & 2-13.2.2)

Non-structural 'Designated Seismic Systems' (DSS) must remain operable and contain hazardous substances following a

ELECTRICAL Designated Seismic Systems (DSS) Requiring a Certificate of Compliance	
1.	DSS Emergency or Standby Power System
2.	DSS Component XX
3.	DSS Component XX
4.	DSS Component XX
5.	DSS Component XX

If additional space is required, append an additional sheet listing the remaining DSS

MECHANICAL/PLUMBING Designated Seismic Systems (DSS) Requiring a Certificate of Compliance	
1.	DSS Gas lines and associated fittings, anchorage, & flexible Connections
2.	DSS Component XX
3.	DSS Component XX
4.	DSS Component XX
5.	DSS Component XX
6.	DSS Component XX

If additional space is required, append an additional sheet listing the remaining DSS

OTHER Designated Seismic Systems (DSS) Requiring a Certificate of Compliance	
1.	DSS Building egress stair systems
2.	DSS Building fire sprinkler systems
3.	DSS Component XX
4.	DSS Component XX
5.	DSS Component XX
6.	DSS Component XX

Final Walk Down Inspection and Report

(UFC 3 301 01 SECTION 2-2.4.3)

Designated Seismic Systems shall receive a final walk-down inspection by the Registered Design Professional in Responsible Charge

Final Walk Down Report, Prepared by the Registered Design Professional in Responsible Charge, Must Include:

1. Record observations of Final Walk Down Inspection
2. Document that Inspections were performed in accordance with the Schedule of Special Inspections
3. Document that all Designated Seismic Systems are installed according to construction/manufacture document requirements, and that Compliance Certificates have been collected (UFC 03 301 01, 2-13.2.2.1).

USER NOTES (Not intended to print)

< Edit Blue text/cells only

SPECIAL INSPECTOR OF RECORD (SIOR) DETERMINATION

< The Special Inspector of Record (SIOR) is a DOD mandate. Enter the requested data to determine whether an SIOR is required or is not required.

< For DB contracts insert the SIOR contact information. For DBB contracts enter, "Contractor to provide prior to construction start".

< The SIOR must be a registered professional engineer, and must not be an employee of the General Contractor, or an employee of a Sub-Contractor performing construction for this project.

LATERAL FORCE RESISTING SYSTEM IDENTIFICATION

Example entries are provided, replace/delete as necessary

DESIGNATED SEISMIC SYSTEMS (DSS)

This section identifies whether Designated Seismic Systems apply to this project or do not apply. Additionally, and where DSS apply, some explanation is provided below for what a Designated Seismic System is for this specific project.

< Designated Seismic Systems APPLY to this project. List all Designated Seismic Systems in the blue tables below.

DSS for this project are nonstructural components with an importance factor of 1.5 AND with the following project conditions (UFC 3-310 SECTION 2-11.2) (ASCE 7-10, 13.1.3):

1. The component is required to function for life-safety purposes after an earthquake, including fire sprinkler systems and egress stairways (RC I thru V + SDC C thru F).
2. The component conveys, supports, or otherwise contains toxic, highly toxic, or explosive substances where the quantity of the a material exceeds a threshold quantity established by the authority having jurisdiction and is sufficient to pose a threat to the public if released (RC I thru V + SDC C thru F).
3. The component is in, or attached to, a Risk Category IV or V structure, and it is needed for continued operation of the facility, or its failure could impair the continued operation of the facility (RC IV thru V + SDC C thru F).
4. The component conveys, supports, or otherwise contains hazardous substances and is attached to a structure, or portion thereof, classified by the authority having jurisdiction as a hazardous occupancy (RC I thru V + SDC C thru F).

FINAL WALK DOWN INSPECTION AND REPORT FOR NON-STRUCTURAL DSS

< A non-structural DSS final walk down inspection applies to this project

< ...Certificates of compliance documenting that the requirements are met shall be submitted to the building official (2015 IBC 1704.5 & 1705.13.3) and shall be maintained in a file identified as "Equipment Certification Documentation". This file shall be part of the final project O&M Manual

NEXT: COMPLETE THE **SCHEDULE OF SPECIAL INSPECTIONS TEMPLATE**.

Edit, print, and append the **Schedule of Special Inspections Template** to this **Statement of Special Inspections** and insert both at the back of the project **Special Inspections Specification** **01 45 35**.

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

01-01-21

SECTION 01 57 19
TEMPORARY ENVIRONMENTAL CONTROLS

PART 1 - GENERAL

1.1 DESCRIPTION

- A. This section specifies the control of environmental pollution and damage that the Contractor must consider for air, water, and land resources. It includes management of visual aesthetics, noise, solid waste, radiant energy, and radioactive materials, as well as other pollutants and resources encountered or generated by the Contractor. The Contractor is obligated to consider specified control measures with the costs included within the various contract items of work.
- B. Environmental pollution and damage is defined as the presence of chemical, physical, or biological elements or agents which:
1. Adversely affect human health or welfare,
 2. Unfavorably alter ecological balances of importance to human life,
 3. Effect other species of importance to humankind, or;
 4. Degrade the utility of the environment for aesthetic, cultural, and historical purposes.
- C. Definitions of Pollutants:
1. Chemical Waste: Petroleum products, bituminous materials, salts, acids, alkalis, herbicides, pesticides, organic chemicals, and inorganic wastes.
 2. Debris: Combustible and noncombustible wastes, such as leaves, tree trimmings, ashes, and waste materials resulting from construction or maintenance and repair work.
 3. Sediment: Soil and other debris that has been eroded and transported by runoff water.
 4. Solid Waste: Rubbish, debris, garbage, and other discarded solid materials resulting from industrial, commercial, and agricultural operations and from community activities.
 5. Surface Discharge: The term "Surface Discharge" implies that the water is discharged with possible sheeting action and subsequent soil erosion may occur. Waters that are surface discharged may terminate in drainage ditches, storm sewers, creeks, and/or "water

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

01 57 19 -1

10/28/2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

01-01-21

of the United States" and would require a permit to discharge water from the governing agency.

- 6. Rubbish: Combustible and noncombustible wastes such as paper, boxes, glass and crockery, metal and lumber scrap, tin cans, and bones.
- 7. Sanitary Wastes:
 - a. Sewage: Domestic sanitary sewage and human and animal waste.
 - b. Garbage: Refuse and scraps resulting from preparation, cooking, dispensing, and consumption of food.

1.2 QUALITY CONTROL

- A. Establish and maintain quality control for the environmental protection of all items set forth herein.
- B. Record on daily reports any problems in complying with laws, regulations, and ordinances. Note any corrective action taken.

1.3 REFERENCES

- A. The publications listed below form a part of this specification to the extent referenced. The publications are referred to in the text by basic designation only.
- B. U.S. National Archives and Records Administration (NARA):
33 CFR 328.....Definitions

1.4 SUBMITTALS

- A. In accordance with Section, 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES, furnish the following:
 - 1. Environmental Protection Plan: After the contract is awarded and prior to the commencement of the work, the Contractor shall meet with the Contracting Officer's Representative (COR) to discuss the proposed Environmental Protection Plan and to develop mutual understanding relative to details of environmental protection. Not more than 20 days after the meeting, the Contractor shall prepare and submit to the Contracting Officer for approval, a written and/or graphic Environmental Protection Plan including, but not limited to, the following:
 - a. Name(s) of person(s) within the Contractor's organization who is (are) responsible for ensuring adherence to the Environmental Protection Plan.

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

01-01-21

- b. Name(s) and qualifications of person(s) responsible for manifesting hazardous waste to be removed from the site.
 - c. Name(s) and qualifications of person(s) responsible for training the Contractor's environmental protection personnel.
 - d. Description of the Contractor's environmental protection personnel training program.
 - e. A list of Federal, State, and local laws, regulations, and permits concerning environmental protection, pollution control, noise control and abatement that are applicable to the Contractor's proposed operations and the requirements imposed by those laws, regulations, and permits.
 - f. Methods for protection of features to be preserved within authorized work areas including trees, shrubs, vines, grasses, ground cover, landscape features, air and water quality, fish and wildlife, soil, historical, and archeological and cultural resources.
 - g. Procedures to provide the environmental protection that comply with the applicable laws and regulations. Describe the procedures to correct pollution of the environment due to accident, natural causes, or failure to follow the procedures as described in the Environmental Protection Plan.
 - h. Permits, licenses, and the location of the solid waste disposal area.
 - i. Environmental Monitoring Plans for the job site including land, water, air, and noise.
 - j. Work Area Plan showing the proposed activity in each portion of the area and identifying the areas of limited use or nonuse. Plan should include measures for marking the limits of use areas. This plan may be incorporated within the Erosion Control Plan.
 - k. Inclusion of "best management practices" and methodologies.
- B. Approval of the Contractor's Environmental Protection Plan will not relieve the Contractor of responsibility for adequate and continued control of pollutants and other environmental protection measures.

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

01-01-21

1.5 PROTECTION OF ENVIRONMENTAL RESOURCES

- A. Protect environmental resources within the project boundaries and those affected outside the limits of permanent work during the entire period of this contract. Confine activities to areas defined by the specifications and drawings.
- B. Protection of Land Resources: Prior to construction, identify all land resources to be preserved within the work area. Do not remove, cut, deface, injure, or destroy land resources including trees, shrubs, vines, grasses, topsoil, and landforms without permission from the COR. Do not fasten or attach ropes, cables, or guys to trees for anchorage unless specifically authorized, or where special emergency use is permitted. Provide erosion control plans, in phases where required.
 - 1. Work Area Limits: Prior to any construction, mark the areas that require work to be performed under this contract. Mark or fence isolated areas within the general work area that are to be saved and protected. Protect monuments, works of art, and markers before construction operations begin. Convey to all personnel the purpose of marking and protecting all necessary objects.
 - 2. Protection of Landscape: Protect trees, shrubs, vines, grasses, landforms, and other landscape features shown on the drawings to be preserved by marking, fencing, or using any other approved techniques.
 - a. Box and protect from damage existing trees and shrubs to remain on the construction site.
 - b. Immediately repair all damage to existing trees and shrubs by trimming, cleaning, and painting with antiseptic tree paint.
 - c. Do not store building materials or perform construction activities closer to existing trees or shrubs than the farthest extension of their limbs.
 - 3. Reduction of Exposure of Unprotected Erodible Soils: Plan and conduct earthwork to minimize the duration of exposure of unprotected soils. Clear areas in reasonably sized increments only as needed to use. Form earthwork to final grade as shown. Immediately protect side slopes and back slopes upon completion of rough grading.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

01-01-21

4. Temporary Protection of Disturbed Areas: Construct diversion ditches, benches, and berms to retard and divert runoff from the construction site to protected drainage areas approved under paragraph 208 of the Clean Water Act.
 - a. Sediment Basins: Trap sediment from construction areas in temporary or permanent sediment basins that accommodate the runoff of a local 2023 storm. After each storm, pump the basins dry and remove the accumulated sediment. Control overflow/drainage with paved weirs or by vertical overflow pipes, draining from the surface.
 - b. Reuse or conserve the collected topsoil sediment as directed by the COR. Topsoil use and requirements are specified in Section 31 20 00, EARTH MOVING.
 - c. Institute effluent quality monitoring programs as required by Federal, State, and local environmental agencies.
5. Erosion and Sedimentation Control Devices: The erosion and sediment controls selected and maintained by the Contractor shall be such that water quality standards are not violated as a result of the Contractor's activities.
6. Manage borrow areas on and off Government property to minimize erosion and to prevent sediment from entering nearby water courses or lakes.
7. Manage and control spoil areas on and off Government property to limit spoil and prevent erosion of soil or sediment from entering nearby water courses or lakes.
8. Protect adjacent areas from despoilment by temporary excavations and embankments.
9. Handle and dispose of solid wastes in such a manner that will prevent contamination of the environment. Place solid wastes (excluding clearing debris) in containers that are emptied on a regular schedule. Transport all solid waste off Government property and dispose of waste in compliance with Federal, State, and local requirements.

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

01-01-21

10. Store chemical waste away from the work areas in corrosion resistant containers and dispose of waste in accordance with Federal, State, and local regulations.
 11. Handle discarded materials other than those included in the solid waste category as directed by the COR.
- C. Protection of Water Resources: Keep construction activities under surveillance, management, and control to avoid pollution of surface and ground waters and sewer systems. Implement management techniques to control water pollution by the listed construction activities that are included in this contract.
1. Washing and Curing Water: Do not allow wastewater directly derived from construction activities to enter water areas. Collect and place wastewater in retention ponds allowing the suspended material to settle, the pollutants to separate, or the water to evaporate.
 2. Control movement of materials and equipment at stream crossings during construction to prevent violation of water pollution control standards of the Federal, State, or local government.
 3. Monitor water areas affected by construction.
- D. Protection of Fish and Wildlife Resources: Keep construction activities under surveillance, management, and control to minimize interference with, disturbance of, or damage to fish and wildlife. Prior to beginning construction operations, list species that require specific attention along with measures for their protection.
- E. Protection of Air Resources: Keep construction activities under surveillance, management, and control to minimize pollution of air resources. Burning is not permitted on the job site. Keep activities, equipment, processes, and work operated or performed, in strict accordance with the State of Minnesota and Federal emission and performance laws and standards. Maintain ambient air quality standards set by the Environmental Protection Agency, for those construction operations and activities specified.
1. Particulates: Control dust particles, aerosols, and gaseous by-products from all construction activities, processing, and preparation of materials (such as from asphaltic batch plants) at

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

01-01-21

all times, including weekends, holidays, and hours when work is not in progress.

2. **Particulates Control:** Maintain all excavations, stockpiles, haul roads, permanent and temporary access roads, plant sites, spoil areas, borrow areas, and all other work areas within or outside the project boundaries free from particulates which would cause a hazard or a nuisance. Sprinklering, chemical treatment of an approved type, light bituminous treatment, baghouse, scrubbers, electrostatic precipitators, or other methods are permitted to control particulates in the work area.
 3. **Hydrocarbons and Carbon Monoxide:** Control monoxide emissions from equipment to Federal and State allowable limits.
 4. **Odors:** Control odors of construction activities and prevent obnoxious odors from occurring.
- F. **Reduction of Noise:** Minimize noise using every action possible. Perform noise-producing work in less sensitive hours of the day or week as directed by the COR. Maintain noise-produced work at or below the decibel levels and within the time periods specified.
1. Perform construction activities involving repetitive, high-level impact noise only between 8:00 a.m. and 6:00 p.m unless otherwise permitted by local ordinance or the COR. Repetitive impact noise on the property shall not exceed the following dB limitations:

Time Duration of Impact Noise	Sound Level in dB
More than 12 minutes in any hour	70
Less than 30 seconds of any hour	85
Less than three minutes of any hour	80
Less than 12 minutes of any hour	75

2. Provide sound-deadening devices on equipment and take noise abatement measures that are necessary to comply with the requirements of this contract, consisting of, but not limited to, the following:
 - a. Maintain maximum permissible construction equipment noise levels at 15 meter (50 feet) (dBA):

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

01 57 19 -7

10/28/2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
 St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

01-01-21

EARTHMOVING		MATERIALS HANDLING	
FRONT LOADERS	75	CONCRETE MIXERS	75
BACKHOES	75	CONCRETE PUMPS	75
DOZERS	75	CRANES	75
TRACTORS	75	DERRICKS IMPACT	75
SCAPERS	80	PILE DRIVERS	95
GRADERS	75	JACK HAMMERS	75
TRUCKS	75	ROCK DRILLS	80
PAVERS, STATIONARY	80	PNEUMATIC TOOLS	80
PUMPS	75	BLASTING	--
GENERATORS	75	SAWS	75
COMPRESSORS	75	VIBRATORS	75

- b. Use shields or other physical barriers to restrict noise transmission.
 - c. Provide soundproof housings or enclosures for noise-producing machinery.
 - d. Use efficient silencers on equipment air intakes.
 - e. Use efficient intake and exhaust mufflers on internal combustion engines that are maintained so equipment performs below noise levels specified.
 - f. Line hoppers and storage bins with sound deadening material.
 - g. Conduct truck loading, unloading, and hauling operations so that noise is kept to a minimum.
3. Measure sound level for noise exposure due to the construction at least once every five successive working days while work is being performed above 55 dB(A) noise level. Measure noise exposure at the property line or 15 m (50 feet) from the noise source, whichever is greater. Measure the sound levels on the A weighing network of a General-Purpose sound level meter at slow response. To minimize the effect of reflective sound waves at buildings, take measurements at 900 to 1800 mm (three to six feet) in front of any building face. Submit the recorded information to the COR noting any problems and the alternatives for mitigating actions.

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

01-01-21

- G. Restoration of Damaged Property: If any direct or indirect damage is done to public or private property resulting from any act, omission, neglect, or misconduct, the Contractor shall restore the damaged property to a condition equal to that existing before the damage at no additional cost to the Government. Repair, rebuild, or restore property as directed or make good such damage in an acceptable manner.
- H. Final Clean-up: On completion of project and after removal of all debris, rubbish, and temporary construction, Contractor shall leave the construction area in a clean condition satisfactory to the COR. Cleaning shall include off the station disposal of all items and materials not required to be salvaged, as well as all debris and rubbish resulting from demolition and new work operations.

- - - E N D - - -

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

07-01-15

SECTION 01 58 16
TEMPORARY INTERIOR SIGNAGE

PART 1 GENERAL

DESCRIPTION

This section specifies temporary interior signs.

PART 2 PRODUCTS

2.1 TEMPORARY SIGNS

- A. Fabricate from 50 Kg (110 pound) mat finish white paper.
- B. Cut to 100 mm (4-inch) wide by 300 mm (12 inch) long size tag.
- C. Punch 3 mm (1/8-inch) diameter hole centered on 100 mm (4-inch) dimension of tag. Edge of Hole spaced approximately 13 mm (1/2-inch) from one end on tag.
- D. Reinforce hole on both sides with gummed cloth washer or other suitable material capable of preventing tie pulling through paper edge.
- E. Ties: Steel wire 0.3 mm (0.0120-inch) thick, attach to tag with twist tie, leaving 150 mm (6-inch) long free ends.

PART 3 EXECUTION

3.1 INSTALLATION

- A. Install temporary signs attached to room door frame or room doorknob, lever, or pull for doors on corridor openings.
- B. Mark on signs with felt tip marker having approximately 3 mm (1/8-inch) wide stroke for clearly legible numbers or letters.
- C. Identify room with numbers as designated on floor plans.

3.2 LOCATION

- A. Install on doors that have room, corridor, and space numbers shown.
- B. Doors that do not require signs are as follows:
 - 1. Corridor barrier doors (cross-corridor) in corridor with same number.
 - 2. Folding doors or partitions.
 - 3. Toilet or bathroom doors within and between rooms.
 - 4. Communicating doors in partitions between rooms with corridor entrance doors.
 - 5. Closet doors within rooms.
- C. Replace missing, damaged, or illegible signs.

- - - E N D - - -

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

04-01-22

SECTION 01 74 19
CONSTRUCTION WASTE MANAGEMENT

PART 1 - GENERAL

1.1 DESCRIPTION

- A. This section specifies the requirements for the management of non-hazardous building construction and demolition waste.
- B. Waste disposal in landfills shall be minimized to the greatest extent possible. Of the inevitable waste that is generated, as much of the waste material as economically feasible shall be salvaged, recycled or reused.
- C. Contractor shall use all reasonable means to divert construction and demolition waste from landfills and incinerators, and facilitate their salvage and recycle not limited to the following:
 - 1. Waste Management Plan development and implementation.
 - 2. Techniques to minimize waste generation.
 - 3. Sorting and separating of waste materials.
 - 4. Salvage of existing materials and items for reuse or resale.
 - 5. Recycling of materials that cannot be reused or sold.
- D. At a minimum the following waste categories shall be diverted from landfills:
 - 1. Soil.
 - 2. Inserts (eg, concrete, masonry and asphalt).
 - 3. Clean dimensional wood and palette wood.
 - 4. Green waste (biodegradable landscaping materials).
 - 5. Engineered wood products (plywood, particle board and I-joists, etc).
 - 6. Metal products (eg, steel, wire, beverage containers, copper, etc).
 - 7. Cardboard, paper and packaging.
 - 8. Bitumen roofing materials.
 - 9. Plastics (eg, ABS, PVC).
 - 10. Carpet and/or pad.
 - 11. Gypsum board.
 - 12. Insulation.
 - 13. Paint.
 - 14. Fluorescent lamps.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

04-01-22

1.2 RELATED WORK

- A. Section 02 41 00, DEMOLITION.
- B. Section 01 00 00, GENERAL REQUIREMENTS.
 - 1. Lead Paint: Section 02 83 33.13, LEAD BASED PAINT REMOVAL AND DISPOSAL.
 - 2. Sustainability Specifications: Section 01 81 13, SUSTAINABLE CONSTRUCTION REQUIREMENTS.

1.3 QUALITY ASSURANCE

- A. Contractor shall practice efficient waste management when sizing, cutting and installing building products. Processes shall be employed to ensure the generation of as little waste as possible. Construction Demolition waste includes products of the following:
 - 1. Excess or unusable construction materials.
 - 2. Packaging used for construction products.
 - 3. Poor planning and/or layout.
 - 4. Construction error.
 - 5. Over ordering.
 - 6. Weather damage.
 - 7. Contamination.
 - 8. Mishandling.
 - 9. Breakage.
- B. Establish and maintain the management of non-hazardous building construction and demolition waste set forth herein. Conduct a site assessment to estimate the types of materials that will be generated by demolition and construction.
- C. Contractor shall develop and implement procedures to recycle construction and demolition waste to a minimum of 50 percent.
- D. Contractor shall be responsible for implementation of any special programs involving rebates or similar incentives related to recycling. Any revenues or savings obtained from salvage or recycling shall accrue to the contractor.
- E. Contractor shall provide all demolition, removal and legal disposal of materials. Contractor shall ensure that facilities used for recycling, reuse and disposal shall be permitted for the intended use to the extent required by local, state, federal regulations. The Whole

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

04-01-22

Building Design Guide website://www.wbdg.org/tools/cwm.php provides a Construction Waste Management Database that contains information on companies that haul, collect, and process recyclable debris from construction projects.

- F. Contractor shall assign a specific area to facilitate separation of materials for reuse, salvage, recycling, and return. Such areas are to be kept neat and clean and clearly marked in order to avoid contamination or mixing of materials.
- G. Contractor shall provide on-site instructions and supervision of separation, handling, salvaging, recycling, reuse and return methods to be used by all parties during waste generating stages.
- H. Record on daily reports any problems in complying with laws, regulations and ordinances with corrective action taken.

1.4 TERMINOLOGY

- A. Class III Landfill: A landfill that accepts non-hazardous resources such as household, commercial and industrial waste resulting from construction, remodeling, repair and demolition operations.
- B. Clean: Untreated and unpainted; uncontaminated with adhesives, oils, solvents, mastics and like products.
- C. Construction and Demolition Waste: Includes all non-hazardous resources resulting from construction, remodeling, alterations, repair and demolition operations.
- D. Dismantle: The process of parting out a building in such a way as to preserve the usefulness of its materials and components.
- E. Disposal: Acceptance of solid wastes at a legally operating facility for the purpose of landfilling (includes Class III landfills and inert fills).
- F. Inert Backfill Site: A location, other than inert fill or other disposal facility, to which inert materials are taken for the purpose of filling an excavation, shoring or other soil engineering operation.
- G. Inert Fill: A facility that can legally accept inert waste, such as asphalt and concrete exclusively for the purpose of disposal.
- H. Inert Solids/Inert Waste: Non-liquid solid resources including, but not limited to, soil and concrete that does not contain hazardous waste or soluble pollutants at concentrations in excess of water-quality

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

04-01-22

objectives established by a regional water board and does not contain significant quantities of decomposable solid resources.

- I. Mixed Debris: Loads that include commingled recyclable and non-recyclable materials generated at the construction site.
- J. Mixed Debris Recycling Facility: A solid resource processing facility that accepts loads of mixed construction and demolition debris for the purpose of recovering re-usable and recyclable materials and disposing non-recyclable materials.
- K. Permitted Waste Hauler: A company that holds a valid permit to collect and transport solid wastes from individuals or businesses for the purpose of recycling or disposal.
- L. Recycling: The process of sorting, cleansing, treating, and reconstituting materials for the purpose of using the altered form in the manufacture of a new product. Recycling does not include burning, incinerating or thermally destroying solid waste.
 - 1. On-site Recycling - Materials that are sorted and processed on site for use in an altered state in the work, i.e., concrete crushed for use as a sub-base in paving.
 - 2. Off-site Recycling - Materials hauled to a location and used in an altered form in the manufacture of new products.
- M. Recycling Facility: An operation that can legally accept materials for the purpose of processing the materials into an altered form for the manufacture of new products. Depending on the types of materials accepted and operating procedures, a recycling facility may or may not be required to have a solid waste facility permit or be regulated by the local enforcement agency.
- N. Reuse: Materials that are recovered for use in the same form, on-site or off-site.
- O. Return: To give back reusable items or unused products to vendors for credit.
- P. Salvage: To remove waste materials from the site for resale or re-use by a third party.
- Q. Source-Separated Materials: Materials that are sorted by type at the site for the purpose of reuse and recycling.

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

04-01-22

- R. Solid Waste: Materials that have been designated as non-recyclable and are discarded for the purposes of disposal.
- S. Transfer Station: A facility that can legally accept solid waste for the purpose of temporarily storing the materials for re-loading onto other trucks and transporting them to a landfill for disposal or recovering some materials for re-use or recycling.

1.5 SUBMITTALS

- A. In accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, and SAMPLES, furnish the following:
- B. Prepare and submit to the Contract Office Representative (COR) a written demolition debris management plan. The plan shall include, but not be limited to, the following information:
 - 1. Procedures to be used for debris management.
 - 2. Techniques to be used to minimize waste generation.
 - 3. Analysis of the estimated job site waste to be generated:
 - a. List of each material and quantity to be salvaged, reused, recycled.
 - b. List of each material and quantity proposed to be taken to a landfill.
 - 4. Detailed description of the Means/Methods to be used for material handling.
 - a. On site: Material separation, storage, protection where applicable.
 - b. Off site: Transportation means and destination. Include list of materials.
 - 1) Description of materials to be site-separated and self-hauled to designated facilities.
 - 2) Description of mixed materials to be collected by designated waste haulers and removed from the site.
 - a) The names and locations of mixed debris reuse and recycling facilities or sites.
 - b) The names and locations of trash disposal landfill facilities or sites.
 - c) Documentation that the facilities or sites are approved to receive the materials.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

04-01-22

- C. Designated Manager responsible for instructing personnel, supervising, documenting and administer over meetings relevant to the Waste Management Plan.
- D. Monthly summary of construction and demolition debris diversion and disposal, quantifying all materials generated at the work site and disposed of or diverted from disposal through recycling (with weight tickets, not estimates).
- E. Target waste diversion rate by material and an overall diversion rate.
- F. Final report documenting the results of implementation of the preconstruction waste management plan.

1.6 APPLICABLE PUBLICATIONS

- A. Publications listed below form a part of this specification to the extent referenced. Publications are referenced by the basic designation only. In the event that criteria requirements conflict, the most stringent requirements shall be met.
- B. U.S. Green Building Council (USGBC): LEED Green Building Rating System for New Construction
 - 1. Green Building Initiative (GBI): Green Globes for New Construction 2019

1.7 RECORDS

- A. Maintain records to document the quantity of waste generated; the quantity of waste diverted through sale, reuse, or recycling; and the quantity of waste disposed by landfill or incineration. Records shall be kept in accordance with the LEED Reference Guide and LEED Template. Weight tickets are required. Estimates not accepted.

PART 2 - PRODUCTS

2.1 MATERIALS

- A. List of each material and quantity to be salvaged, recycled, reused.
- B. List of each material and quantity proposed to be taken to a landfill.
- C. Material tracking data: Receiving parties, dates removed, transportation costs, weight tickets, tipping fees, manifests, invoices, net total costs or savings.

PART 3 - EXECUTION

3.1 COLLECTION

- A. Provide all necessary containers, bins and storage areas to facilitate effective waste management.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

04-01-22

- B. Clearly identify containers, bins and storage areas so that recyclable materials are separated from trash and can be transported to respective recycling facility for processing.
- C. Hazardous wastes shall be separated, stored, disposed of according to local, state, federal regulations.

3.2 DISPOSAL

- A. Contractor shall be responsible for transporting and disposing of materials that cannot be delivered to a source-separated or mixed materials recycling facility to a transfer station or disposal facility that can accept the materials in accordance with state and federal regulations.
- B. Construction or demolition materials with no practical reuse or that cannot be salvaged or recycled shall be disposed of at a landfill or incinerator.

3.3 REPORT

- A. With each application for progress payment, submit a summary of construction and demolition debris diversion and disposal including beginning and ending dates of period covered.
- B. Quantify all materials diverted from landfill disposal through salvage or recycling during the period with the receiving parties, dates removed, transportation costs, weight tickets, manifests, invoices. Include the net total costs or savings for each salvaged or recycled material.
- C. Quantify all materials disposed of during the period with the receiving parties, dates removed, transportation costs, weight tickets, tipping fees, manifests, invoices. Include the net total costs for each disposal.

- - - E N D - - -

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

10-01-17

SECTION 01 81 13
SUSTAINABLE CONSTRUCTION REQUIREMENTS

PART 1 - GENERAL

1.1 DESCRIPTION

- A. This Section describes general requirements and procedures to comply with federal mandates and U.S. Department of Veterans Affairs (VA) policies for sustainable construction.
- B. The Design Professional has selected materials and utilized integrated design processes that achieve the Government's objectives. Contractor is responsible to maintain and support these objectives in developing means and methods for performing work and in proposing product substitutions or changes to specified processes. Obtain approval from Contracting Officer for all changes and substitutions to materials or processes. Proposed changes must meet, or exceed, materials or processes specified.

1.2 RELATED WORK

- A. Section 01 57 19 TEMPORARY ENVIRONMENTAL CONTROLS.
- B. Section 01 74 19 CONSTRUCTION WASTE MANAGEMENT.
- C. Section 01 91 00 GENERAL COMMISSIONING REQUIREMENTS.

1.3 DEFINITIONS

- A. Recycled Content: Recycled content of materials is defined according to Federal Trade Commission Guides for the Use of Environmental Marketing Claims (16 CFR Part 260). Recycled content value of a material assembly is determined by weight. Recycled fraction of assembly is multiplied by cost of assembly to determine recycled content value.
 - 1. "Post-Consumer" material is defined as waste material generated by households or by commercial, industrial, and institutional facilities in their role as end users of the product, which can no longer be used for its intended purpose.
 - 2. "Pre-Consumer" material is defined as material diverted from waste stream during the manufacturing process. Excluded is reutilization of materials such as rework, regrind, or scrap generated in a process and capable of being reclaimed within the same process that generated it.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

01 81 13-1

10/28/2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

10-01-17

- B. Biobased Products: Biobased products are derived from plants and other renewable agricultural, marine, and forestry materials and provide an alternative to conventional petroleum derived products. Biobased products include diverse categories such as lubricants, cleaning products, inks, fertilizers, and bioplastics.
- C. Low Pollutant-Emitting Materials: Materials and products which are minimally odorous, irritating, or harmful to comfort and well-being of installers and occupants.
- D. Volatile Organic Compounds (VOC): Chemicals that are emitted as gases from certain solids or liquids. VOCs include a variety of chemicals, some of which may have short- and long-term adverse health effects.

1.4 REFERENCE STANDARDS

- A. Carpet and Rug Institute Green Label Plus program.
- B. U.S. Department of Agriculture BioPreferred program (USDA BioPreferred).
- C. U.S. Environmental Protection Agency Comprehensive Procurement Guidelines (CPG).
- D. U.S. Environmental Protection Agency WaterSense Program (WaterSense).
- E. U.S. Environmental Protection Agency ENERGY STAR Program (ENERGY STAR).
- F. U. S. Department of Energy Federal Energy Management Program (FEMP).
- G. Green Electronic Council EPEAT Program (EPEAT).

1.5 SUBMITTALS

- A. All submittals to be provided by contractor to COR.
- B. Sustainability Action Plan:
 - 1. Submit documentation as required by this section; provide additional copies of typical submittals required under technical sections when sustainable construction requires copies of record submittals.
 - 2. Within 30 days after Preconstruction Meeting provide a narrative plan for complying with requirements stipulated within this section.
 - 3. Sustainability Action Plan must:
 - a. Make reference to sustainable construction submittals defined by this section.
 - b. Address all items listed under PERFORMANCE CRITERIA.
 - c. Indicate individual(s) responsible for implementing the plan.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

10-01-17

- C. Low Pollutant-Emitting Materials Tracking Spreadsheet: Within 30 days after Preconstruction Meeting provide a preliminary Low Pollutant-Emitting Materials Tracking Spreadsheet. The Low Pollutant-Emitting Materials Tracking Spreadsheet must be an electronic file and include all materials on Project in categories described under Low Pollutant-Emitting Materials in 01 81 13.
- D. Construction Indoor Air Quality (IAQ) Management Plan:
1. Not more than 30 days after Preconstruction Meeting provide a Construction IAQ Management Plan as an electronic file including descriptions of the following:
 - a. Instruction procedures for meeting or exceeding minimum requirements of ANSI/SMACNA 008-2008, Chapter 3, including procedures for HVAC Protection, Source Control, Pathway Interruption, Housekeeping, and Scheduling.
 - b. Instruction procedures for protecting absorptive materials stored on-site or installed from moisture damage.
 - c. Schedule of submission of photographs of on-site construction IAQ management measures such as protection of ducts and on-site stored oil installed absorptive materials.
 - d. Instruction procedures if air handlers must be used during construction, including a description of filtration media to be used at each return air grille.
 - e. Instruction procedure for replacing all air-filtration media immediately prior to occupancy after completion of construction, including a description of filtration media to be used at each air handling or air supply unit.
 - f. Instruction procedures and schedule for implementing building flush-out.
- E. Product Submittals:
1. Recycled Content: Submit product data from manufacturer indicating percentages by weight of post-consumer and pre-consumer recycled content for products having recycled content (excluding MEP systems equipment and components).
 2. Biobased Content: Submit product data for products to be installed or used which are included in any of the USDA BioPreferred program's

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

01 81 13-3

10/28/2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

10-01-17

- product categories. Data to include percentage of biobased content and source of biobased material.
3. Low Pollutant-Emitting Materials: Submit product data confirming compliance with relevant requirements for all materials on Project in categories described under Low Pollutant-Emitting Materials in 01 81 13.
 4. For applicable products and equipment, submit product documentation confirming ENERGY STAR label, FEMP certification, WaterSense, and/or EPEAT certification.
- F. Sustainable Construction Progress Reports: Concurrent with each Application for Payment, submit a Sustainable Construction Progress Report to confirm adherence with Sustainability Action Plan.
1. Include narratives of revised strategies for bringing work progress into compliance with plan and product submittal data.
 2. Include updated and current Low Pollutant-Emitting Materials Tracking Spreadsheet.
 3. Include construction waste tracking, in tons or cubic yards, including waste description, whether diverted or landfilled, hauler, and percent diverted for comingled quantities; and excluding land-clearing debris and soil. Provide haul receipts and documentation of diverted percentages for comingled wastes.
- G. Closeout Submittals: Within 14 days after Substantial Completion provide the following:
1. Final version of Low Pollutant-Emitting Materials Tracking Spreadsheet.
 2. Manufacturer's cut sheets and product data highlighting the Minimum Efficiency Reporting Value (MERV) for filtration media installed at return air grilles during construction if permanently installed air handling units are used during construction.
 3. Manufacturer's cut sheets and product data highlighting the Minimum Efficiency Reporting Value (MERV) for final filtration media in air handling units.
 4. Minimum 18 construction photographs including six photographs taken on three different occasions during construction of ANSI/SMACNA 008-2008, Chapter 3 approaches employed, along with a brief description

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

10-01-17

of each approach, documenting implementation of IAQ management measures, such as protection of ducts and on-site stored or installed absorptive materials.

5. Flush-out Documentation:
 - a. Product data for filtration media used during flush-out.
 - b. Product data for filtration media installed immediately prior to occupancy.
 - c. Signed statement describing building air flush-out procedures including dates when flush-out was begun and completed and statement that filtration media was replaced after flush-out.

1.6 QUALITY ASSURANCE

- A. Preconstruction Meeting: After award of Contract and prior to commencement of Work, schedule and conduct meeting with Contract Officer's Representative (COR) and Architect to discuss the Project Sustainable Action Plan content as it applies to submittals, project delivery, required Construction Indoor Air Quality (IAQ) Management Plan, and other Sustainable Construction Requirements. The purpose of this meeting is to develop a mutual understanding of the Sustainable Construction Requirements and coordination of contractor's management of these requirements with the Contracting Officer and the Construction Quality Manager.
- B. Construction Job Conferences: Status of compliance with Sustainable Construction Requirements of these specifications will be an agenda item at regular job meetings conducted during the course of work at the site.

1.7 APPLICABLE PUBLICATIONS

- A. Publications listed below form a part of this specification to extent referenced. Publications are referenced in text by basic designation only. Comply with applicable provisions and recommendations of the following, except as otherwise shown or specified.
- B. Green Seal Standard GS-11, Paints, 1st Edition, May 20, 1993.
- C. Green Seal Standard GC-03, Anti-Corrosive Paints, 2nd Edition, January 7, 1997.
- D. Green Seal Standard GC-36, Commercial Adhesives, October 19, 2000.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

01 81 13-5

10/28/2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

10-01-17

- E. South Coast Air Quality Management District (SCAQMD) Rule 1113, Architectural Coatings, rules in effect on January 1, 2004.
- F. South Coast Air Quality Management District (SCAQMD) Rule 1168, July 1, 2005 and rule amendment date of January 7, 2005.
- G. Sheet Metal and Air Conditioning National Contractors' Association (SMACNA) IAQ Guidelines for Occupied Buildings under Construction, 2nd Edition (ANSI/SMACNA 008-2008), Chapter 3.
- H. Federal Trade Commission Guides for the Use of Environmental Marketing Claims (16 CFR Part 260).
- I. ASHRAE Standard 52.2-2007.

PART 2 - PRODUCTS

2.1 PERFORMANCE CRITERIA

- A. Construction waste diversion from landfill disposal must comprise at least 50 percent of total construction waste, excluding land clearing debris and soil. Alternative daily cover (ADC) does not qualify as material diverted from disposal.
- B. Low Pollutant-Emitting Materials:
 - 1. Adhesives, sealants and sealant primers applied on site within the weatherproofing membrane must comply with VOC limits of SCAQMD Rule 1168:
 - a. Flooring Adhesives and Sealants:
 - 1) Indoor carpet adhesives: 50 g/L.
 - 2) Subfloor Adhesives: 50 g/L.
 - 3) Ceramic Tile Adhesives and Grout: 65 g/L.
 - 4) Cove Base Adhesives: 50 g/L.
 - 5) Multipurpose Construction Adhesives: 70 g/L.
 - 6) Porous Material (Except Wood) Substrate: 50 g/L.
 - 7) Wood Substrate: 30 g/L.
 - 8) Architectural Non-Porous Sealant Primer: 250 g/L.
 - 9) Architectural Porous Sealant Primer: 775 g/L.
 - 10) Other Sealant Primer: 750 g/L.
 - 11) Structural Wood Member Adhesive: 140 g/L.
 - 12) Architectural Sealant: 250 g/L.
 - 13) Other Sealant: 420 g/L.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

10-01-17

- b. Non-Flooring Adhesives and Sealants:
- 1) Drywall and Panel Adhesives: 50 g/L.
 - 2) Multipurpose Construction Adhesives: 70 g/L.
 - 3) Porous Material (Except Wood) Substrate Adhesive: 50 g/L.
 - 4) Wood Substrate Adhesive: 30 g/L.
 - 5) Architectural Non-Porous Sealant Primer: 250 g/L.
 - 6) Architectural Porous Sealant Primer: 775 g/L.
 - 7) Other Sealant Primer: 750 g/L.
 - 8) Contact Adhesive: 80 g/L.
 - 9) Special Purpose Contact Adhesive: 250 g/L.
 - 10) Structural Wood Member Adhesive: 140 g/L.
 - 11) Architectural Sealants: 250 g/L.
 - 12) Other Sealants: 420 g/L.
2. Aerosol adhesives applied on site within the weatherproofing membrane must comply with the following Green Seal GS-36.
- a. Aerosol Adhesive, General-Purpose Mist Spray: 65 percent VOCs by weight.
 - b. Aerosol Adhesive, General-Purpose Web Spray: 55 percent VOCs by weight.
 - c. Special-Purpose Aerosol Adhesive (All Types): 70 percent VOCs by weight.
3. Paints and coatings applied on site within the weatherproofing membrane must comply with the following criteria:
- a. VOC content limits for paints and coatings established in Green Seal Standard GS-11.
 - b. VOC content limit for anti-corrosive and anti-rust paints applied to interior ferrous metal substrates of 250 g/L established in Green Seal GC-03.
 - c. Clear wood finishes, floor coatings, stains, primers, sealers, and shellacs applied to interior elements must not exceed VOC content limits established in SCAQMD Rule 1113.
 - d. Comply with the following VOC content limits:
 - 1) Anti-Corrosive/Antirust Paints: 250 g/L.
 - 2) Clear Wood Finish, Lacquer: 550 g/L.
 - 3) Clear Wood Finish, Sanding Sealer: 350 g/L.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

01 81 13-7

10/28/2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

10-01-17

- 4) Clear Wood Finish, Varnish: 350 g/L.
- 5) Floor Coating: 100 g/L.
- 6) Interior Flat Paint, Coating or Primer: 50 g/L.
- 7) Interior Non-Flat Paint, Coating or Primer: 150 g/L.
- 8) Sealers and Undercoaters: 200 g/L.
- 9) Stain: 250 g/L.
- 10) Concrete Curing Compounds: 350 g/L.
- 11) Waterproofing Sealers: 250 g/L.
- 12) Low-Solids Coatings: 120 g/L.
- 13) Carpet installed in building interior must comply with one of the following:
 - a) Meet testing and product requirements of the Carpet and Rug Institute Green Label Plus program.
 - b) Maximum VOC concentrations specified in CDPH Standard Method V1.1-2010, using office scenario at the 14 day time point.
 - c) Each non-carpet flooring element installed in building interior which is not inherently non-emitting (stone, ceramic, powder-coated metals, plated or anodized metal, glass, concrete, clay brick, and unfinished or untreated solid wood flooring) must comply with one of the following:
 - d) Meet requirements of the FloorScore standard as shown with testing by an independent third-party.
 - e) Maximum VOC concentrations specified in CDPH Standard Method V1.1-2010, using office scenario at 14-day time point.
4. Laminating adhesives used to fabricate on-site and shop-applied composite wood and agrifiber assemblies must not contain added urea-formaldehyde.

C. Recycled Content:

1. Any products being installed or used that are listed on EPA Comprehensive Procurement Guidelines designated product list must meet or exceed the EPA's recycled content recommendations. The EPA Comprehensive Procurement Guidelines categories include:
 - a. Building insulation.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

10-01-17

- b. Cement and concrete.
 - c. Consolidated and reprocessed latex paint.
 - d. Floor tiles.
 - e. Laminated paperboard.
 - f. Modular threshold ramps.
 - g. Nonpressure pipe.
 - h. Roofing materials.
 - i. Nylon carpet and nylon carpet backing.
 - j. Compost and fertilizer made from recovered organic materials.
 - k. Hydraulic mulch.
 - l. Lawn and garden edging.
- D. Biobased Content:
- 1. Materials and equipment being installed or used that are listed on the USDA BioPreferred program product category list must meet or exceed USDA's minimum biobased content threshold. Refer to individual specification sections for detailed requirements applicable to that section.
 - a. USDA BioPreferred program categories include:
 - 1) Adhesive and Mastic Removers.
 - 2) Carpets.
 - 3) Cleaners.
 - 4) Corrosion Preventatives.
 - 5) Erosion Control Materials.
 - 6) Dust Suppressants.
 - 7) Fertilizers.
 - 8) Floor Cleaners and Protectors.
 - 9) Floor Coverings (Non-Carpet).
 - 10) Glass Cleaners.
 - 11) Hydraulic Fluids.
 - 12) Industrial Cleaners.
 - 13) Interior Paints and Coatings.
 - 14) Mulch and Compost Materials.
 - 15) Multipurpose Cleaners.
 - 16) Multipurpose Lubricants.
 - 17) Packaging Films.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

01 81 13-9

10/28/2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

10-01-17

- 18) Paint Removers.
 - 19) Wastewater Systems Coatings.
 - 20) Concrete Sealers.
 - 21) Wood Stains.
- E. Materials, products, and equipment being installed which fall into a category covered by the WaterSense program must be WaterSense-labeled or meet or exceed WaterSense program performance requirements, unless disallowed for infection control reasons.
- 1. WaterSense categories include:
 - a. Bathroom Faucets
 - b. Commercial Toilets
- F. Materials, products, and equipment being installed which fall into any of the following product categories must be Energy Star-labeled.
- 1. Applicable Energy Star product categories as of 09/14/2017 include:
 - a. Plumbing:
 - 1) Water Heaters.
 - b. Electrical:
 - 1) Light Fixtures.
- G. Materials, products, and equipment being installed which fall into any of the following categories must be FEMP-designated. FEMP-designated product categories as of 09/14/2017 include:
- 1. Boilers (Commercial).
 - 2. Electric Chillers, Air-Cooled (Commercial).
 - 3. Electric Chillers, Water-Cooled (Commercial).
 - 4. Light Emitting Diode (LED) Luminaires.

PART 3 - EXECUTION

3.1 FIELD QUALITY CONTROL

- A. Construction Indoor Air Quality Management:
 - 1. During construction, meet or exceed recommended control measures of ANSI/SMACNA 008-2008, Chapter 3.
 - 2. Protect stored on-site and installed absorptive materials from moisture damage.
 - 3. If permanently installed air handlers are used during construction, filtration media with a minimum efficiency reporting value (MERV) of

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

01 81 13-10

10/28/2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

10-01-17

- 8 must be used at each return air grille, as determined by ASHRAE Standard 52.2-1999 (with errata but without addenda). Replace all filtration media immediately prior to occupancy.
4. Perform building flush-out as follows:
 - a. After construction ends, prior to occupancy and with interior finishes installed, perform a building flush-out by supplying a total volume of 14000 cu. ft. of outdoor air per sq. ft. of floor area while maintaining an internal temperature of at least 60 degrees Fahrenheit and a relative humidity no higher than 60 percent. OR
 - b. If occupancy is desired prior to flush-out completion, the space may be occupied following delivery of a minimum of 3500 cu. ft. of outdoor air per sq. ft. of floor area to the space. Once a space is occupied, it must be ventilated at a minimum rate of 0.30 cfm per sq. ft. of outside air or design minimum outside air rate determined until a total of 14000 cu. ft./sq. ft. of outside air has been delivered to the space. During each day of flush-out period, ventilation must begin a minimum of three hours prior to occupancy and continue during occupancy.
 5. Provide construction dust control to comply with SCAQMD Rule 403.

-----END-----

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

04-01-22

SECTION 01 91 00
GENERAL COMMISSIONING REQUIREMENTS

PART 1 - GENERAL

1.1 COMMISSIONING DESCRIPTION

- A. This Section 01 91 00 GENERAL COMMISSIONING REQUIREMENTS shall form the basis of the construction phase commissioning process and procedures. The Commissioning Agent shall add, modify, and refine the commissioning procedures, as approved by the Department of Veterans Affairs (VA), to suit field conditions and actual manufacturer's equipment, incorporate test data and procedure results, and provide detailed scheduling for all commissioning tasks.
- B. Various sections of the project specifications require equipment startup, testing, and adjusting services. Requirements for startup, testing, and adjusting services specified in the Division 7, Division 21, Division 22, Division 23, Division 26, Division 27, Division 28, and Division 31 series sections of these specifications are intended to be provided in coordination with the commissioning services and are not intended to duplicate services. The Contractor shall coordinate the work required by individual specification sections with the commissioning services requirements specified herein.
- C. Where individual testing, adjusting, or related services are required in the project specifications and not specifically required by this commissioning requirements specification, the specified services shall be provided and copies of documentation, as required by those specifications shall be submitted to the VA and the Commissioning Agent to be indexed for future reference.
- D. Where training or educational services for VA are required and specified in other sections of the specifications, including but not limited to Division 7, Division 8, Division 21, Division 22, Division 23, Division 26, Division 27, Division 28, and Division 31 series sections of the specification, these services are intended to be provided in addition to the training and educational services specified herein.
- E. Commissioning is a systematic process of verifying that the building systems perform interactively according to the construction documents

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

04-01-22

and the VA's operational needs. The commissioning process shall encompass and coordinate the system documentation, equipment startup, control system calibration, testing and balancing, performance testing and training. Commissioning during the construction and post-occupancy phases is intended to achieve the following specific objectives according to the contract documents:

1. Verify that the applicable equipment and systems are installed in accordance with the contract documents and according to the manufacturer's recommendations.
2. Verify and document proper integrated performance of equipment and systems.
3. Verify that Operations & Maintenance documentation is complete.
4. Verify that all components requiring servicing can be accessed, serviced and removed without disturbing nearby components including ducts, piping, cabling or wiring.
5. Verify that the VA's operating personnel are adequately trained to enable them to operate, monitor, adjust, maintain, and repair building systems in an effective and energy-efficient manner.
6. Document the successful achievement of the commissioning objectives listed above.

F. The commissioning process does not take away from or reduce the responsibility of the Contractor to provide a finished and fully functioning product.

1.2 CONTRACTUAL RELATIONSHIPS

- A. For this construction project, the Department of Veterans Affairs contracts with a Contractor to provide construction services. The contracts are administered by the VA Contracting Officer and the Resident Engineer as the designated representative of the Contracting Officer. On this project, the authority to modify the contract in any way is strictly limited to the authority of the Contracting Officer.
- B. In this project, only two contract parties are recognized and communications on contractual issues are strictly limited to VA Resident Engineer and the Contractor. It is the practice of the VA to require that communications between other parties to the contracts (Subcontractors and Vendors) be conducted through the Resident Engineer

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

04-01-22

and Contractor. It is also the practice of the VA that communications between other parties of the project (Commissioning Agent and Architect/Engineer) be conducted through the Resident Engineer.

- C. Whole Building Commissioning is a process that relies upon frequent and direct communications, as well as collaboration between all parties to the construction process. By its nature, a high level of communication and cooperation between the Commissioning Agent and all other parties (Architects, Engineers, Subcontractors, Vendors, third party testing agencies, etc.) is essential to the success of the Commissioning effort.
- D. With these fundamental practices in mind, the commissioning process described herein has been developed to recognize that, in the execution of the Commissioning Process, the Commissioning Agent must develop effective methods to communicate with every member of the construction team involved in delivering commissioned systems while simultaneously respecting the exclusive contract authority of the Contracting Officer and Resident Engineer. Thus, the procedures outlined in this specification must be executed within the following limitations:
1. No communications (verbal or written) from the Commissioning Agent shall be deemed to constitute direction that modifies the terms of any contract between the Department of Veterans Affairs and the Contractor.
 2. Commissioning Issues identified by the Commissioning Agent will be delivered to the Resident Engineer and copied to the designated Commissioning Representatives for the Contractor and subcontractors on the Commissioning Team for information only in order to expedite the communication process. These issues must be understood as the professional opinion of the Commissioning Agent and as suggestions for resolution.
 3. In the event that any Commissioning Issues and suggested resolutions are deemed by the Resident Engineer to require either an official interpretation of the construction documents or require a modification of the contract documents, the Contracting Officer or Resident Engineer will issue an official directive to this effect.

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

04-01-22

4. All parties to the Commissioning Process shall be individually responsible for alerting the Resident Engineer of any issues that they deem to constitute a potential contract change prior to acting on these issues.
5. Authority for resolution or modification of design and construction issues rests solely with the Contracting Officer with appropriate technical guidance from the Architect/Engineer and/or Commissioning Agent.

1.3 RELATED WORK

- A. Section 01 00 00 GENERAL REQUIREMENTS.
- B. Section 01 32.16.15 PROJECT SCHEDULES (SMALL PROJECTS - DESIGN/BID/BUILD)
- C. Section 01 33 23 SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES
- D. Section 01 81 13 SUSTAINABLE CONSTRUCTION REQUIREMENTS
- E. Section 21 08 00 COMMISSIONING OF FIRE PROTECTION SYSTEMS.
- F. Section 23 08 00 COMMISSIONING OF HVAC SYSTEMS.
- G. Section 26 08 00 COMMISSIONING OF ELECTRICAL SYSTEMS.

1.4 SUMMARY

- A. This Section includes general requirements that apply to implementation of commissioning without regard to systems, subsystems, and equipment being commissioned.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

04-01-22

- B. The commissioning activities have been developed to support the VA requirements to meet guidelines for Federal Leadership in Environmental, Energy, and Economic Performance.
- C. The commissioning activities have been developed to support the Green Buildings Initiative's Green Globes rating program and to support delivery of project performance in accordance with the VA requirements developed for the project.

1.5 ACRONYMS

List of Acronyms	
Acronym	Meaning
A/E	Architect / Engineer Design Team
AHJ	Authority Having Jurisdiction
ASHRAE	Association Society for Heating Air Condition and Refrigeration Engineers
BOD	Basis of Design
BSC	Building Systems Commissioning

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

04-01-22

List of Acronyms	
Acronym	Meaning
CCTV	Closed Circuit Television
CD	Construction Documents
CMMS	Computerized Maintenance Management System
CO	Contracting Officer (VA)
COR	Contracting Officer's Representative (see also VA-RE)
COBie	Construction Operations Building Information Exchange
CPC	Construction Phase Commissioning
Cx	Commissioning
CxA	Commissioning Agent
CxM	Commissioning Manager
CxR	Commissioning Representative
DPC	Design Phase Commissioning
FPT	Functional Performance Test
GBI-GG	Green Building Initiative - Green Globes
HVAC	Heating, Ventilation, and Air Conditioning
LEED	Leadership in Energy and Environmental Design
NC	Department of Veterans Affairs National Cemetery
NCA	Department of Veterans Affairs National Cemetery Administration
NEBB	National Environmental Balancing Bureau
O&M	Operations & Maintenance
OPR	Owner's Project Requirements
PFC	Pre-Functional Checklist
PFT	Pre-Functional Test
SD	Schematic Design
SO	Site Observation
TAB	Test Adjust and Balance
VA	Department of Veterans Affairs
VAMC	VA Medical Center
VA CFM	VA Office of Construction and Facilities Management
VACO	VA Central Office
VA PM	VA Project Manager

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

04-01-22

List of Acronyms	
Acronym	Meaning
VA-RE	VA Resident Engineer
USGBC	United States Green Building Council

1.6 DEFINITIONS

Acceptance Phase Commissioning: Commissioning tasks executed after most construction has been completed, most Site Observations and Static Tests have been completed and Pre-Functional Testing has been completed and accepted. The main commissioning activities performed during this phase are verification that the installed systems are functional by conducting Systems Functional Performance tests and Owner Training.

Accuracy: The capability of an instrument to indicate the true value of a measured quantity.

Back Check: A back check is a verification that an agreed upon solution to a design comment has been adequately addressed in a subsequent design review

Basis of Design (BOD): The Engineer's Basis of Design is comprised of two components: the Design Criteria and the Design Narrative, these documents record the concepts, calculations, decisions, and product selections used to meet the Owner's Project Requirements (OPR) and to satisfy applicable regulatory requirements, standards, and guidelines.

Benchmarks: Benchmarks are the comparison of a building's energy usage to other similar buildings and to the building itself.. For example, ENERGY STAR Portfolio Manager is a frequently used and nationally recognized building energy benchmarking tool.

Building Information Modeling (BIM): Building Information Modeling is a parametric database which allows a building to be designed and constructed virtually in 3D, and provides reports both in 2D views and as schedules. This electronic information can be extracted and reused for pre-populating facility management CMMS systems. Building Systems Commissioning (BSC): NEBB acronym used to designate its commissioning program.

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

04-01-22

Calibrate: The act of comparing an instrument of unknown accuracy with a standard of known accuracy to detect, correlate, report, or eliminate by adjustment any variation in the accuracy of the tested instrument.

CCTV: Closed circuit Television. Normally used for security surveillance and alarm detections as part of a special electrical security system.

COBie: Construction Operations Building Information Exchange (COBie) is an electronic industry data format used to transfer information developed during design, construction, and commissioning into the Computer Maintenance Management Systems (CMMS) used to operate facilities. See the Whole Building Design Guide website for further information (<http://www.wbdg.org/resources/cobie.php>)

Commissionability: Defines a design component or construction process that has the necessary elements that will allow a system or component to be effectively measured, tested, operated and commissioned

Commissioning Agent (CxA): The qualified Commissioning Professional who administers the Cx process by managing the Cx team and overseeing the Commissioning Process. Where CxA is used in this specification it means the Commissioning Agent, members of his staff or appointed members of the commissioning team. Note that LEED uses the term Commissioning Authority in lieu of Commissioning Agent.

Commissioning Checklists: Lists of data or inspections to be verified to ensure proper system or component installation, operation, and function. Verification checklists are developed and used during all phases of the commissioning process to verify that the Owner's Project Requirements (OPR) is being achieved.

Commissioning Design Review: The commissioning design review is a collaborative review of the design professionals design documents for items pertaining to the following: owner's project requirements; basis of design; operability and maintainability (O&M) including documentation; functionality; training; energy efficiency, control systems' sequence of operations including building automation system features; commissioning specifications and the ability to functionally test the systems.

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

04-01-22

Commissioning Issue: A condition identified by the Commissioning Agent or other member of the Commissioning Team that adversely affects the commissionability, operability, maintainability, or functionality of a system, equipment, or component. A condition that is in conflict with the Contract Documents and/or performance requirements of the installed systems and components. (See also - Commissioning Observation).

Commissioning Manager (CxM): A qualified individual appointed by the Contractor to manage the commissioning process on behalf of the Contractor.

Commissioning Observation: An issue identified by the Commissioning Agent or other member of the Commissioning Team that does not conform to the project OPR, contract documents or standard industry best practices. (See also Commissioning Issue)

Commissioning Plan: A document that outlines the commissioning process, commissioning scope and defines responsibilities, processes, schedules, and the documentation requirements of the Commissioning Process.

Commissioning Process: A quality focused process for enhancing the delivery of a project. The process focuses upon verifying and documenting that the facility and all of its systems, components, and assemblies are planned, designed, installed, tested, can be operated, and maintained to meet the Owner's Project Requirements.

Commissioning Report: The final commissioning document which presents the commissioning process results for the project. Cx reports include an executive summary, the commissioning plan, issue log, correspondence, and all appropriate check sheets and test forms.

Commissioning Representative (CxR): An individual appointed by a sub-contractor to manage the commissioning process on behalf of the sub-contractor.

Commissioning Specifications: The contract documents that detail the objective, scope and implementation of the commissioning process as developed in the Commissioning Plan.

Commissioning Team: Individual team members whose coordinated actions are responsible for implementing the Commissioning Process.

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

04-01-22

Construction Phase Commissioning: All commissioning efforts executed during the construction process after the design phase and prior to the Acceptance Phase Commissioning.

Contract Documents (CD): Contract documents include design and construction contracts, price agreements and procedure agreements. Contract Documents also include all final and complete drawings, specifications and all applicable contract modifications or supplements.

Construction Phase Commissioning (CPC): All commissioning efforts executed during the construction process after the design phase and prior to the Acceptance Phase Commissioning.

Coordination Drawings: Drawings showing the work of all trades that are used to illustrate that equipment can be installed in the space allocated without compromising equipment function or access for maintenance and replacement. These drawings graphically illustrate and dimension manufacturers' recommended maintenance clearances. On mechanical projects, coordination drawings include structural steel, ductwork, major piping and electrical conduit and show the elevations and locations of the above components.

Data Logging: The monitoring and recording of temperature, flow, current, status, pressure, etc. of equipment using stand-alone data recorders.

Deferred System Test: Tests that cannot be completed at the end of the acceptance phase due to ambient conditions, schedule issues or other conditions preventing testing during the normal acceptance testing period.

Deficiency: See "Commissioning Issue".

Design Criteria: A listing of the VA Design Criteria outlining the project design requirements, including its source. These are used during the design process to show the design elements meet the OPR.

Design Intent: The overall term that includes the OPR and the BOD. It is a detailed explanation of the ideas, concepts, and criteria that are defined by the owner to be important. The design intent documents are utilized to provide a written record of these ideas, concepts and criteria.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

01 91 00 - 10

10/28/2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

04-01-22

Design Narrative: A written description of the proposed design solutions that satisfy the requirements of the OPR.

Design Phase Commissioning (DPC): All commissioning tasks executed during the design phase of the project.

Environmental Systems: Systems that use a combination of mechanical equipment, airflow, water flow and electrical energy to provide heating, ventilating, air conditioning, humidification, and dehumidification for the purpose of human comfort or process control of temperature and humidity.

Executive Summary: A section of the Commissioning report that reviews the general outcome of the project. It also includes any unresolved issues, recommendations for the resolution of unresolved issues and all deferred testing requirements.

Functionality: This defines a design component or construction process which will allow a system or component to operate or be constructed in a manner that will produce the required outcome of the OPR.

Functional Test Procedure (FTP): A written protocol that defines methods, steps, personnel, and acceptance criteria for tests conducted on components, equipment, assemblies, systems, and interfaces among systems.

Industry Accepted Best Practice: A design component or construction process that has achieved industry consensus for quality performance and functionality. Refer to the current edition of the NEBB Design Phase Commissioning Handbook for examples.

Installation Verification: Observations or inspections that confirm the system or component has been installed in accordance with the contract documents and to industry accepted best practices.

Integrated System Testing: Integrated Systems Testing procedures entail testing of multiple integrated systems performance to verify proper functional interface between systems. Typical Integrated Systems Testing includes verifying that building systems respond properly to loss of utility, transfer to emergency power sources, re-transfer from emergency power source to normal utility source; interface between HVAC controls and Fire Alarm systems for equipment shutdown, interface between Fire Alarm system and elevator control systems for elevator

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

04-01-22

recall and shutdown; interface between Fire Alarm System and Security Access Control Systems to control access to spaces during fire alarm conditions; and other similar tests as determined for each specific project.

Issues Log: A formal and ongoing record of problems or concerns - and their resolution - that have been raised by members of the Commissioning Team during the course of the Commissioning Process.

Lessons Learned Workshop: A workshop conducted to discuss and document project successes and identify opportunities for improvements for future projects.

Maintainability: A design component or construction process that will allow a system or component to be effectively maintained. This includes adequate room for access to adjust and repair the equipment.

Maintainability also includes components that have readily obtainable repair parts or service.

Manual Test: Testing using hand-held instruments, immediate control system readouts or direct observation to verify performance (contrasted to analyzing monitored data taken over time to make the 'observation').

Owner's Project Requirements (OPR): A written document that details the project requirements and the expectations of how the building and its systems will be used and operated. These include project goals, measurable performance criteria, cost considerations, benchmarks, success criteria, and supporting information.

Peer Review: A formal in-depth review separate from the commissioning review processes. The level of effort and intensity is much greater than a typical commissioning facilitation or extended commissioning review. The VA usually hires an independent third-party (called the IDIQ A/E) to conduct peer reviews.

Precision: The ability of an instrument to produce repeatable readings of the same quantity under the same conditions. The precision of an instrument refers to its ability to produce a tightly grouped set of values around the mean value of the measured quantity.

Pre-Design Phase Commissioning: Commissioning tasks performed prior to the commencement of design activities that includes project programming and the development of the commissioning process for the project

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

04-01-22

Pre-Functional Checklist (PFC): A form used by the contractor to verify that appropriate components are onsite, correctly installed, set up, calibrated, functional and ready for functional testing.

Pre-Functional Test (PFT): An inspection or test that is done before functional testing. PFT's include installation verification and system and component start up tests.

Procedure or Protocol: A defined approach that outlines the execution of a sequence of work or operations. Procedures are used to produce repeatable and defined results.

Range: The upper and lower limits of an instrument's ability to measure the value of a quantity for which the instrument is calibrated.

Resolution: This word has two meanings in the Cx Process. The first refers to the smallest change in a measured variable that an instrument can detect. The second refers to the implementation of actions that correct a tested or observed deficiency.

Site Observation Visit: On-site inspections and observations made by the Commissioning Agent for the purpose of verifying component, equipment, and system installation, to observe contractor testing, equipment start-up procedures, or other purposes.

Site Observation Reports (SO): Reports of site inspections and observations made by the Commissioning Agent. Observation reports are intended to provide early indication of an installation issue which will need correction or analysis.

Special System Inspections: Inspections required by a local code authority prior to occupancy and are not normally a part of the commissioning process.

Static Tests: Tests or inspections that validate a specified static condition such as pressure testing. Static tests may be specification or code initiated.

Start Up Tests: Tests that validate the component or system is ready for automatic operation in accordance with the manufactures requirements.

Systems Manual: A system-focused composite document that includes all information required for the owners operators to operate the systems.

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

04-01-22

Test Procedure: A written protocol that defines methods, personnel, and expectations for tests conducted on components, equipment, assemblies, systems, and interfaces among systems.

Testing: The use of specialized and calibrated instruments to measure parameters such as: temperature, pressure, vapor flow, air flow, fluid flow, rotational speed, electrical characteristics, velocity, and other data in order to determine performance, operation, or function.

Testing, Adjusting, and Balancing (TAB): A systematic process or service applied to heating, ventilating and air-conditioning (HVAC) systems and other environmental systems to achieve and document air and hydronic flow rates. The standards and procedures for providing these services are referred to as "Testing, Adjusting, and Balancing" and are described in the Procedural Standards for the Testing, Adjusting and Balancing of Environmental Systems, published by NEBB or AABC.

Thermal Scans: Thermographic pictures taken with an Infrared Thermographic Camera. Thermographic pictures show the relative temperatures of objects and surfaces and are used to identify leaks, thermal bridging, thermal intrusion, electrical overload conditions, moisture containment, and insulation failure.

Training Plan: A written document that details, in outline form the expectations of the operator training. Training agendas should include instruction on how to obtain service, operate, startup, shutdown and maintain all systems and components of the project.

Trending: Monitoring over a period of time with the building automation system.

Unresolved Commissioning Issue: Any Commissioning Issue that, at the time that the Final Report or the Amended Final Report is issued that has not been either resolved by the construction team or accepted by the VA. **Validation:** The process by which work is verified as complete and operating correctly:

1. First party validation occurs when a firm or individual verifying the task is the same firm or individual performing the task.
2. Second party validation occurs when the firm or individual verifying the task is under the control of the firm performing the task or has other possibilities of financial conflicts of interest in the

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

04-01-22

resolution (Architects, Designers, General Contractors and Third Tier Subcontractors or Vendors).

3. Third party validation occurs when the firm verifying the task is not associated with or under control of the firm performing or designing the task.

Verification: The process by which specific documents, components, equipment, assemblies, systems, and interfaces among systems are confirmed to comply with the criteria described in the Owner's Project Requirements.

Warranty Phase Commissioning: Commissioning efforts executed after a project has been completed and accepted by the Owner. Warranty Phase Commissioning includes follow-up on verification of system performance, measurement and verification tasks and assistance in identifying warranty issues and enforcing warranty provisions of the construction contract.

Warranty Visit: A commissioning meeting and site review where all outstanding warranty issues and deferred testing is reviewed and discussed.

Whole Building Commissioning: Commissioning of building systems such as Building Envelope, HVAC, Electrical, Special Electrical (Fire Alarm, Security & Communications), Plumbing and Fire Protection as described in this specification.

1.7 SYSTEMS TO BE COMMISSIONED

- A. Commissioning of a system or systems specified for this project is part of the construction process. Documentation and testing of these systems, as well as training of the VA's Operation and Maintenance personnel, is required in cooperation with the VA and the Commissioning Agent.

- B. The following systems will be commissioned as part of this project:

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

04-01-22

Systems To Be Commissioned	
System	Description
Direct Digital Control System**	Operator Interface Computer, Operator Work Station (including graphics, point mapping, trends, alarms), Network Communications Modules and Wiring, Integration Panels. [DDC Control panels will be commissioned with the systems controlled by the panel]
Chilled Water System**	DDC Control Panels (including integration with Building Control System)
Noise and Vibration Control	Noise and vibration levels for critical equipment such as Air Handlers, Chillers, Cooling Towers, Boilers, Generators, etc. will be commissioned as part of the system commissioning
Steam/Heating Hot Water System**	Condensate recovery, water treatment controls, interface with facility DDC system.
HVAC Air Handling Systems**	Air handling Units, humidifiers, DDC control panels.
HVAC Ventilation/Exhaust Systems	General exhaust, toilet exhaust
HVAC Energy Recovery Systems**	Heat Wheels
HVAC Terminal Unit Systems**	VAV Terminal Units, fan coil units, unit heaters

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

04-01-22

Systems To Be Commissioned	
System	Description
Decentralized Unitary HVAC Systems*	Split-system HVAC systems, controls, interface with facility DDC
Humidity Control Systems	Humidifiers, controls, interface with facility DDC
Hydronic Distribution Systems	Pumps, DDC control panels, heat exchangers
Electrical System Protective Device Study	Review reports, verify field settings consistent with Study
Low-Voltage Distribution System	Normal power distribution system, Life-safety power distribution system, critical power distribution system, equipment power distribution system, switchboards, distribution panels, panelboards, verify breaker testing results (injection current, etc)
Lighting & Lighting Control** Systems	Emergency lighting, occupancy sensors, lighting control systems, architectural dimming systems, theatrical dimming systems, exterior lighting and controls
Cathodic Protection Systems	Review 3rd party testing results.
Lightning Protection System	Witness 3rd party testing, review reports
Nurse Call & Code Blue Systems	Witness 3rd party testing, review reports

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
 St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

04-01-22

Systems To Be Commissioned	
System	Description
Security Emergency Call Systems	Witness 3rd party testing, review reports
Duress Alarm Systems	Witness 3rd party testing, review reports
Fire Detection and Alarm System	100% device acceptance testing, battery draw-down test, verify system monitoring, verify interface with other systems.
Loss of Power Response	Loss of power to building, loss of power to campus, restoration of power to building, restoration of power to campus.
Fire Alarm Response	Integrated System Response to Fire Alarm Condition and Return to Normal
Table Notes	
** Denotes systems that LEED requires to be commissioned to comply with the LEED Fundamental Commissioning pre-requisite.	

1.8 COMMISSIONING TEAM

- A. The commissioning team shall consist of, but not be limited to, representatives of Contractor, including Project Superintendent and subcontractors, installers, schedulers, suppliers, and specialists deemed appropriate by the Department of Veterans Affairs (VA) and Commissioning Agent.
- B. Members Appointed by Contractor:
 - 1. Contractor' Commissioning Manager: The designated person, company, or entity that plans, schedules and coordinates the commissioning activities for the construction team.
 - 2. Contractor's Commissioning Representative(s): Individual(s), each having authority to act on behalf of the entity he or she represents, explicitly organized to implement the commissioning process through coordinated actions.

Contract No. 36C26319D0022
 Station Project No. 656-400
 Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

04-01-22

C. Members Appointed by VA:

1. Commissioning Agent: The designated person, company, or entity that plans, schedules, and coordinates the commissioning team to implement the commissioning process. The VA will engage the CxA under a separate contract.
2. User: Representatives of the facility user and operation and maintenance personnel.
3. A/E: Representative of the Architect and engineering design professionals.

1.9 VA'S COMMISSIONING RESPONSIBILITIES

- A. Appoint an individual, company or firm to act as the Commissioning Agent.
- B. Assign operation and maintenance personnel and schedule them to participate in commissioning team activities including, but not limited to, the following:
 - i. Coordination meetings
 - ii. Training in operation and maintenance of systems, subsystems, and equipment.
 - iii. Testing meetings.
 - iv. Witness and assist in Systems Functional Performance Testing.
 - v. Demonstration of operation of systems, subsystems, and equipment.
- C. Provide the Construction Documents, prepared by Architect and approved by VA, to the Commissioning Agent and for use in managing the commissioning process, developing the commissioning plan, systems manuals, and reviewing the operation and maintenance training plan.

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

04-01-22

1.10 CONTRACTOR'S COMMISSIONING RESPONSIBILITIES

- A. The Contractor shall assign a Commissioning Manager to manage commissioning activities of the Contractor, and subcontractors.
- B. The Contractor shall ensure that the commissioning responsibilities outlined in these specifications are included in all subcontracts and that subcontractors comply with the requirements of these specifications.
- C. The Contractor shall ensure that each installing subcontractor shall assign representatives with expertise and authority to act on behalf of the subcontractor and schedule them to participate in and perform commissioning team activities including, but not limited to, the following:
 - 1. Participate in commissioning coordination meetings.
 - 2. Conduct operation and maintenance training sessions in accordance with approved training plans.
 - 3. Verify that Work is complete and systems are operational according to the Contract Documents, including calibration of instrumentation and controls.
 - 4. Evaluate commissioning issues and commissioning observations identified in the Commissioning Issues Log, field reports, test reports or other commissioning documents. In collaboration with entity responsible for system and equipment installation, recommend corrective action.
 - 5. Review and comment on commissioning documentation.
 - 6. Participate in meetings to coordinate Systems Functional Performance Testing.
 - 7. Provide schedule for operation and maintenance data submittals, equipment startup, and testing to Commissioning Agent for incorporation into the commissioning plan.
 - 8. Provide information to the Commissioning Agent for developing commissioning plan.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

04-01-22

9. Participate in training sessions for VA's operation and maintenance personnel.
10. Provide technicians who are familiar with the construction and operation of installed systems and who shall develop specific test procedures to conduct Systems Functional Performance Testing of installed systems.

1.11 COMMISSIONING AGENT'S RESPONSIBILITIES

- A. Organize and lead the commissioning team.
- B. Prepare the commissioning plan. See Paragraph 1.11-A of this specification Section for further information.
- C. Review and comment on selected submittals from the Contractor for general conformance with the Construction Documents. Review and comment on the ability to test and operate the system and/or equipment, including providing gages, controls and other components required to operate, maintain, and test the system. Review and comment on performance expectations of systems and equipment and interfaces between systems relating to the Construction Documents.
- D. At the beginning of the construction phase, conduct an initial construction phase coordination meeting for the purpose of reviewing the commissioning activities and establishing tentative schedules for operation and maintenance submittals; operation and maintenance training sessions; TAB Work; Pre-Functional Checklists, Systems Functional Performance Testing; and project completion.
- E. Convene commissioning team meetings for the purpose of coordination, communication, and conflict resolution; discuss status of the commissioning processes. Responsibilities include arranging for facilities, preparing agenda and attendance lists, and notifying participants. The Commissioning Agent shall prepare and distribute minutes to commissioning team members and attendees within five workdays of the commissioning meeting.
- F. Observe construction and report progress, observations and issues. Observe systems and equipment installation for adequate accessibility for maintenance and component replacement or repair, and for general conformance with the Construction Documents.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

04-01-22

- G. Prepare Project specific Pre-Functional Checklists and Systems Functional Performance Test procedures.
- H. Coordinate Systems Functional Performance Testing schedule with the Contractor.
- I. Witness selected systems startups.
- J. Verify selected Pre-Functional Checklists completed and submitted by the Contractor.
- K. Witness and document Systems Functional Performance Testing.
- L. Compile test data, inspection reports, and certificates and include them in the systems manual and commissioning report.

- M. Review and comment on operation and maintenance (O&M) documentation and systems manual outline for compliance with the Contract Documents. Operation and maintenance documentation requirements are specified in Paragraph 1.25, Section 01 00 00 GENERAL REQUIREMENTS.
- N. Review operation and maintenance training program developed by the Contractor. Verify training plans provide qualified instructors to conduct operation and maintenance training.
- O. Prepare commissioning Field Observation Reports.
- P. Prepare the Final Commissioning Report.
- Q. Return to the site at 10 months into the 12 month warranty period and review with facility staff the current building operation and the condition of outstanding issues related to the original and seasonal Systems Functional Performance Testing. Also interview facility staff and identify problems or concerns they have operating the building as originally intended. Make suggestions for improvements and for recording these changes in the O&M manuals. Identify areas that may come under warranty or under the original construction contract. Assist facility staff in developing reports, documents and requests for services to remedy outstanding problems.
- R. Assemble the final commissioning documentation, including the Final Commissioning Report and Addendum to the Final Commissioning Report.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

04-01-22

1.12 COMMISSIONING DOCUMENTATION

- A. Commissioning Plan: A document, prepared by Commissioning Agent, that outlines the schedule, allocation of resources, and documentation requirements of the commissioning process, and shall include, but is not limited, to the following:
1. Plan for delivery and review of submittals, systems manuals, and other documents and reports. Identification of the relationship of these documents to other functions and a detailed description of submittals that are required to support the commissioning processes. Submittal dates shall include the latest date approved submittals must be received without adversely affecting commissioning plan.
 2. Description of the organization, layout, and content of commissioning documentation (including systems manual) and a detailed description of documents to be provided along with identification of responsible parties.
 3. Identification of systems and equipment to be commissioned.
 4. Schedule of Commissioning Coordination meetings.
 5. Identification of items that must be completed before the next operation can proceed.
 6. Description of responsibilities of commissioning team members.
 7. Description of observations to be made.
 8. Description of requirements for operation and maintenance training.
 9. Schedule for commissioning activities with dates coordinated with overall construction schedule.
 10. Process and schedule for documenting changes on a continuous basis to appear in Project Record Documents.
 11. Process and schedule for completing prestart and startup checklists for systems, subsystems, and equipment to be verified and tested.
 12. Preliminary Systems Functional Performance Test procedures.
- B. Systems Functional Performance Test Procedures: The Commissioning Agent will develop Systems Functional Performance Test Procedures for each system to be commissioned, including subsystems, or equipment and interfaces or interlocks with other systems. Systems Functional Performance Test Procedures will include a separate entry, with space for comments, for each item to be tested. Preliminary Systems

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

01 91 00 - 28

10/28/2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

04-01-22

Functional Performance Test Procedures will be provided to the VA, Architect/Engineer, and Contractor for review and comment. The Systems Performance Test Procedure will include test procedures for each mode of operation and provide space to indicate whether the mode under test responded as required. Each System Functional Performance Test procedure, regardless of system, subsystem, or equipment being tested, shall include, but not be limited to, the following:

1. Name and identification code of tested system.
 2. Test number.
 3. Time and date of test.
 4. Indication of whether the record is for a first test or retest following correction of a problem or issue.
 5. Dated signatures of the person performing test and of the witness, if applicable.
 6. Individuals present for test.
 7. Observations and Issues.
 8. Issue number, if any, generated as the result of test.
- C. Pre-Functional Checklists: The Commissioning Agent will prepare Pre-Functional Checklists. Pre-Functional Checklists shall be completed and signed by the Contractor, verifying that systems, subsystems, equipment, and associated controls are ready for testing. The Commissioning Agent will spot check Pre-Functional Checklists to verify accuracy and readiness for testing. Inaccurate or incomplete Pre-Functional Checklists shall be returned to the Contractor for correction and resubmission.
- D. Test and Inspection Reports: The Commissioning Agent will record test data, observations, and measurements on Systems Functional Performance Test Procedure. The report will also include recommendation for system acceptance or non-acceptance. Photographs, forms, and other means appropriate for the application shall be included with data. Commissioning Agent Will compile test and inspection reports and test and inspection certificates and include them in systems manual and commissioning report.

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

04-01-22

- E. Corrective Action Documents: The Commissioning Agent will document corrective action taken for systems and equipment that fail tests. The documentation will include any required modifications to systems and equipment and/or revisions to test procedures, if any. The Commissioning Agent will witness and document any retesting of systems and/or equipment requiring corrective action and document retest results.
- F. Commissioning Issues Log: The Commissioning Agent will prepare and maintain Commissioning Issues Log that describes Commissioning Issues and Commissioning Observations that are identified during the Commissioning process. These observations and issues include, but are not limited to, those that are at variance with the Contract Documents. The Commissioning Issues Log will identify and track issues as they are encountered, the party responsible for resolution, progress toward resolution, and document how the issue was resolved. The Master Commissioning Issues Log will also track the status of unresolved issues.
1. Creating ~~a~~ Commissioning Issues Log Entry:
 - a. Identify the issue with unique numeric or alphanumeric identifier by which the issue may be tracked.
 - b. Assign a descriptive title for the issue.
 - c. Identify date and time of the issue.
 - d. Identify test number of test being performed at the time of the observation, if applicable, for cross reference.
 - e. Identify system, subsystem, and equipment to which the issue applies.
 - f. Identify location of system, subsystem, and equipment.
 - g. Include information that may be helpful in diagnosing or evaluating the issue.
 - h. Note recommended corrective action.
 - i. Identify commissioning team member responsible for corrective action.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

04-01-22

- j. Identify expected date of correction.
 - k. Identify person that identified the issue.
2. Documenting Issue Resolution:
- a. Log date correction is completed or the issue is resolved.
 - b. Describe corrective action or resolution taken. Include description of diagnostic steps taken to determine root cause of the issue, if any.
 - c. Identify changes to the Contract Documents that may require action.
 - d. State that correction was completed and system, subsystem, and equipment are ready for retest, if applicable.
 - e. Identify person(s) who corrected or resolved the issue.
 - f. Identify person(s) verifying the issue resolution.
- G. Final Commissioning Report: The Commissioning Agent will document results of the commissioning process, including unresolved issues, and performance of systems, subsystems, and equipment. The Commissioning Report will indicate whether systems, subsystems, and equipment have been properly installed and are performing according to the Contract Documents. This report will be used by the Department of Veterans Affairs when determining that systems will be accepted. This report will be used to evaluate systems, subsystems, and equipment and will serve as a future reference document during VA occupancy and operation. It shall describe components and performance that exceed requirements of the Contract Documents and those that do not meet requirements of the Contract Documents. The commissioning report will include, but is not limited to, the following:
- 1. Lists and explanations of substitutions; compromises; variances with the Contract Documents; record of conditions; and, if appropriate, recommendations for resolution. Design Narrative documentation maintained by the Commissioning Agent.
 - 2. Commissioning plan.
 - 3. Pre-Functional Checklists completed by the Contractor, with annotation of the Commissioning Agent review and spot check.
 - 4. Systems Functional Performance Test Procedures, with annotation of test results and test completion.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

04-01-22

- 5, Commissioning Issues Log.
6. Listing of deferred and off-season test(s) not performed, including the schedule for their completion.
- H. Addendum to Final Commissioning Report: The Commissioning Agent will prepare an Addendum to the Final Commissioning Report near the end of the Warranty Period. The Addendum will indicate whether systems, subsystems, and equipment are complete and continue to perform according to the Contract Documents. The Addendum to the Final Commissioning Report shall include, but is not limited to, the following:
1. Documentation of deferred and off-season test(s) results.
 2. Completed Systems Functional Performance Test Procedures for off season test(s).
 3. Documentation that unresolved system performance issues have been resolved.
 4. Updated Commissioning Issues Log, including status of unresolved issues.
 5. Identification of potential Warranty Claims to be corrected by the Contractor.
- I. Systems Manual: The Commissioning Agent will gather required information and compile the Systems Manual. The Systems Manual will include, but is not limited to, the following:
1. Design Narrative, including system narratives, schematics, single-line diagrams, flow diagrams, equipment schedules, and changes made throughout the Project.
 2. Reference to Final Commissioning Plan.
 3. Reference to Final Commissioning Report.
 4. Approved Operation and Maintenance Data as submitted by the Contractor.

1.13 SUBMITTALS

- A. Preliminary Commissioning Plan Submittal: The Commissioning Agent has prepared a Preliminary Commissioning Plan based on the final Construction Documents. The Preliminary Commissioning Plan is included as an Appendix to this specification section. The Preliminary

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

04-01-22

Commissioning Plan is provided for information only. It contains preliminary information about the following commissioning activities:

1. The Commissioning Team: A list of commissioning team members by organization.
2. Systems to be commissioned. A detailed list of systems to be commissioned for the project. This list also provides preliminary information on systems/equipment submittals to be reviewed by the Commissioning Agent; preliminary information on Pre-Functional Checklists that are to be completed; preliminary information on Systems Performance Testing, including information on testing sample size (where authorized by the VA).
3. Commissioning Team Roles and Responsibilities: Preliminary roles and responsibilities for each Commissioning Team member.
4. Commissioning Documents: A preliminary list of commissioning-related documents, include identification of the parties responsible for preparation, review, approval, and action on each document.
5. Commissioning Activities Schedule: Identification of Commissioning Activities, including Systems Functional Testing, the expected duration and predecessors for the activity.
6. Pre-Functional Checklists: Preliminary Pre-Functional Checklists for equipment, components, subsystems, and systems to be commissioned. These Preliminary Pre-Functional Checklists provide guidance on the level of detailed information the Contractor shall include on the final submission.
7. Systems Functional Performance Test Procedures: Preliminary step-by-step System Functional Performance Test Procedures to be used during Systems Functional Performance Testing. These Preliminary Systems Functional Performance procedures provide information on the level of testing rigor, and the level of Contractor support required during performance of system's testing.

B. Final Commissioning Plan Submittal: Based on the Final Construction Documents and the Contractor's project team, the Commissioning Agent will prepare the Final Commissioning Plan as described in this section. The Commissioning Agent will submit three hard copies and three sets of electronic files of Final Commissioning Plan. The Contractor shall

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

04-01-22

review the Commissioning Plan and provide any comments to the VA. The Commissioning Agent will incorporate review comments into the Final Commissioning Plan as directed by the VA.

- C. Systems Functional Performance Test Procedure: The Commissioning Agent will submit preliminary Systems Functional Performance Test Procedures to the Contractor, and the VA for review and comment. The Contractor shall return review comments to the VA and the Commissioning Agent. The VA will also return review comments to the Commissioning Agent. The Commissioning Agent will incorporate review comments into the Final Systems Functional Test Procedures to be used in Systems Functional Performance Testing.
- D. Pre-Functional Checklists: The Commissioning Agent will submit Pre-Functional Checklists to be completed by the Contractor.
- E. Test and Inspection Reports: The Commissioning Agent will submit test and inspection reports to the VA with copies to the Contractor and the Architect/Engineer.
- F. Corrective Action Documents: The Commissioning Agent will submit corrective action documents to the VA Resident Engineer with copies to the Contractor and Architect.
- G. Preliminary Commissioning Report Submittal: The Commissioning Agent will submit three electronic copies of the preliminary commissioning report. One electronic copy, with review comments, will be returned to the Commissioning Agent for preparation of the final submittal.
- H. Final Commissioning Report Submittal: The Commissioning Agent will submit four sets of electronically formatted information of the final commissioning report to the VA. The final submittal will incorporate comments as directed by the VA.
- I. Data for Commissioning:
 - 1. The Commissioning Agent will request in writing from the Contractor specific information needed about each piece of commissioned equipment or system to fulfill requirements of the Commissioning Plan.
 - 2. The Commissioning Agent may request further documentation as is necessary for the commissioning process or to support other VA data collection requirements, including Construction Operations Building

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

04-01-22

Information Exchange (COBIE), Building Information Modeling (BIM),
etc.

1.14 COMMISSIONING PROCESS

- A. The Commissioning Agent will be responsible for the overall management of the commissioning process as well as coordinating scheduling of commissioning tasks with the VA and the Contractor. As directed by the VA, the Contractor shall incorporate Commissioning tasks, including, but not limited to, Systems Functional Performance Testing (including predecessors) with the Master Construction Schedule.
- B. Within 30 days of contract award, the Contractor shall designate a specific individual as the Commissioning Manager (CxM) to manage and lead the commissioning effort on behalf of the Contractor. The Commissioning Manager shall be the single point of contact and communications for all commissioning related services by the Contractor.
- C. Within 30 days of contract award, the Contractor shall ensure that each subcontractor designates specific individuals as Commissioning Representatives (CXR) to be responsible for commissioning related tasks. The Contractor shall ensure the designated Commissioning Representatives participate in the commissioning process as team members providing commissioning testing services, equipment operation, adjustments, and corrections if necessary. The Contractor shall ensure that all Commissioning Representatives shall have sufficient authority to direct their respective staff to provide the services required, and to speak on behalf of their organizations in all commissioning related contractual matters.

1.15 QUALITY ASSURANCE

- A. Instructor Qualifications: Factory authorized service representatives shall be experienced in training, operation, and maintenance procedures for installed systems, subsystems, and equipment.
- B. Test Equipment Calibration: The Contractor shall comply with test equipment manufacturer's calibration procedures and intervals.

Recalibrate test instruments immediately whenever instruments have been

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

04-01-22

repaired following damage or dropping. Affix calibration tags to test instruments. Instruments shall have been calibrated within six months prior to use.

1.16 COORDINATION

- A. Management: The Commissioning Agent will coordinate the commissioning activities with the VA and Contractor. The Commissioning Agent will submit commissioning documents and information to the VA. All commissioning team members shall work together to fulfill their contracted responsibilities and meet the objectives of the contract documents.
- B. Scheduling: The Contractor shall work with the Commissioning Agent and the VA to incorporate the commissioning activities into the construction schedule. The Commissioning Agent will provide sufficient information (including, but not limited to, tasks, durations and predecessors) on commissioning activities to allow the Contractor and the VA to schedule commissioning activities. All parties shall address scheduling issues and make necessary notifications in a timely manner in order to expedite the project and the commissioning process. The Contractor shall update the Master Construction as directed by the VA.
- C. Initial Schedule of Commissioning Events: The Commissioning Agent will provide the initial schedule of primary commissioning events in the Commissioning Plan and at the commissioning coordination meetings. The Commissioning Plan will provide a format for this schedule. As construction progresses, more detailed schedules will be developed by the Contractor with information from the Commissioning Agent.
- D. Commissioning Coordinating Meetings: The Commissioning Agent will conduct periodic Commissioning Coordination Meetings of the commissioning team to review status of commissioning activities, to discuss scheduling conflicts, and to discuss upcoming commissioning process activities.
- E. Pretesting Meetings: The Commissioning Agent will conduct pretest meetings of the commissioning team to review startup reports, Pre-Functional Checklist results, Systems Functional Performance Testing procedures, testing personnel and instrumentation requirements.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

04-01-22

- F. Systems Functional Performance Testing Coordination: The Contractor shall coordinate testing activities to accommodate required quality assurance and control services with a minimum of delay and to avoid necessity of removing and replacing construction to accommodate testing and inspecting. The Contractor shall coordinate the schedule times for tests, inspections, obtaining samples, and similar activities.

PART 2 - PRODUCTS

2.1 TEST EQUIPMENT

- A. The Contractor shall provide all standard and specialized testing equipment required to perform Systems Functional Performance Testing. Test equipment required for Systems Functional Performance Testing will be identified in the detailed System Functional Performance Test Procedure prepared by the Commissioning Agent.
- B. Data logging equipment and software required to test equipment shall be provided by the Contractor.
- C. All testing equipment shall be of sufficient quality and accuracy to test and/or measure system performance with the tolerances specified in the Specifications. If not otherwise noted, the following minimum requirements apply: Temperature sensors and digital thermometers shall have a certified calibration within the past year to an accuracy of 0.5 °C (1.0 °F) and a resolution of + or - 0.1 °C (0.2 °F). Pressure sensors shall have an accuracy of + or - 2.0% of the value range being measured (not full range of meter) and have been calibrated within the last year. All equipment shall be calibrated according to the manufacturer's recommended intervals and following any repairs to the equipment. Calibration tags shall be affixed or certificates readily available.

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

04-01-22

PART 3 - EXECUTION

3.1 COMMISSIONING PROCESS ROLES AND RESPONSIBILITIES

A. The following table outlines the roles and responsibilities for the Commissioning Team members during the Construction Phase:

Construction Phase		CxA = Commissioning Agent COR = Resident Engineer Contracting Officer Representative A/E = Design Arch/Engineer PC = Prime Contractor O&M = Gov't Facility O&M					L = Lead P = Participate A = Approve R = Review O = Optional
Commissioning Roles & Responsibilities							
Category	Task Description	CxA	COR	A/E	PC	O&M	Notes
Meetings	Construction Commissioning Kick Off meeting	L	A	P	P	O	
	Commissioning Meetings	L	A	P	P	O	
	Project Progress Meetings	P	A	P	L	O	
	Controls Meeting	L	A	P	P	O	

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

04-01-22

Construction Phase		CxA = Commissioning Agent COR = Resident Engineer Contracting Officer Representative A/E = Design Arch/Engineer PC = Prime Contractor O&M = Gov't Facility O&M					L = Lead P = Participate A = Approve R = Review O = Optional	
Category	Task Description	CxA	COR	A/E	PC	O&M	Notes	
Commissioning Roles & Responsibilities								
Coordination	Coordinate with [OGC's, AHJ, Vendors, etc.] to ensure that Cx interacts properly with other systems as needed to support the OPR and BOD.	L	A	P	P	N/A		
Cx Plan & Spec	Final Commissioning Plan	L	A	R	R	O		
Schedules	Duration Schedule for Commissioning Activities	L	A	R	R	N/A		
OPR and BOD	Maintain OPR on behalf of Owner	L	A	R	R	O		
	Maintain BOD/DID on behalf of Owner	L	A	R	R	O		
Document Reviews	TAB Plan Review	L	A	R	R	O		
	Submittal and Shop Drawing Review	R	A	R	L	O		
	Review Contractor Equipment Startup Checklists	L	A	R	R	N/A		

Contract No. 36C26319D0022
 Station Project No. 656-400
 Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

04-01-22

Construction Phase		CxA = Commissioning Agent COR = Resident Engineer Contracting Officer Representative A/E = Design Arch/Engineer PC = Prime Contractor O&M = Gov't Facility O&M					L = Lead P = Participate A = Approve R = Review O = Optional	
Category	Task Description	CxA	COR	A/E	PC	O&M	Notes	
Commissioning Roles & Responsibilities								
	Review Change Orders, ASI, and RFI	L	A	R	R	N/A		
Site Observations	Witness Factory Testing	P	A	P	L	O		
	Construction Observation Site Visits	L	A	R	R	O		
Functional Test Protocols	Final Pre-Functional Checklists	L	A	R	R	O		
	Final Functional Performance Test Protocols	L	A	R	R	O		
Technical Activities	Issues Resolution Meetings	P	A	P	L	O		
Reports and Logs	Status Reports	L	A	R	R	O		
	Maintain Commissioning Issues Log	L	A	R	R	O		

Contract No. 36C26319D0022
 Station Project No. 656-400
 Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
 St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

04-01-22

Construction Phase		Commissioning Roles & Responsibilities					Legend	
Commissioning Roles & Responsibilities		CxA = Commissioning Agent COR = Resident Engineer Contracting Officer Representative A/E = Design Arch/Engineer PC = Prime Contractor O&M = Gov't Facility O&M					L = Lead P = Participate A = Approve R = Review O = Optional	
Category	Task Description	CxA	COR	A/E	PC	O&M	Notes	

B. The following table outlines the roles and responsibilities for the Commissioning Team members during the Acceptance Phase:

Acceptance Phase		Commissioning Roles & Responsibilities					Legend	
Commissioning Roles & Responsibilities		CxA = Commissioning Agent COR = Resident Engineer Contracting Officer Representative A/E = Design Arch/Engineer PC = Prime Contractor O&M = Gov't Facility O&M					L = Lead P = Participate A = Approve R = Review O = Optional	
Category	Task Description	CxA	COR	A/E	PC	O&M	Notes	
Meetings	Commissioning Meetings	L	A	P	P	O		
	Project Progress Meetings	P	A	P	L	O		
	Pre-Test Coordination Meeting	L	A	P	P	O		

Contract No. 36C26319D0022
 Station Project No. 656-400
 Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

04-01-22

Acceptance Phase		CxA = Commissioning Agent COR = Resident Engineer Contracting Officer Representative A/E = Design Arch/Engineer PC = Prime Contractor O&M = Gov't Facility O&M					L = Lead P = Participate A = Approve R = Review O = Optional
Category	Task Description	CxA	COR	A/E	PC	O&M	Notes
	Commissioning Roles & Responsibilities						
	Lessons Learned and Commissioning Report Review Meeting	L	A	P	P	O	
Coordination	Coordinate with [OGC's, AHJ, Vendors, etc.] to ensure that Cx interacts properly with other systems as needed to support OPR and BOD	L	P	P	P	O	
Cx Plan & Spec	Maintain/Update Commissioning Plan	L	A	R	R	O	
Schedules	Prepare Functional Test Schedule	L	A	R	R	O	
OPR and BOD	Maintain OPR on behalf of Owner	L	A	R	R	O	
	Maintain BOD/DID on behalf of Owner	L	A	R	R	O	
Document Reviews	Review Completed Pre-Functional Checklists	L	A	R	R	O	
	Pre-Functional Checklist Verification	L	A	R	R	O	
	Review Operations & Maintenance Manuals	L	A	R	R	R	
	Training Plan Review	L	A	R	R	R	

Contract No. 36C26319D0022
 Station Project No. 656-400
 Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

04-01-22

Acceptance Phase		CxA = Commissioning Agent COR = Resident Engineer Contracting Officer Representative A/E = Design Arch/Engineer PC = Prime Contractor O&M = Gov't Facility O&M					L = Lead P = Participate A = Approve R = Review O = Optional
Category	Task Description	CxA	COR	A/E	PC	O&M	Notes
Commissioning Roles & Responsibilities							
	Warranty Review	L	A	R	R	O	
	Review TAB Report	L	A	R	R	O	
Site Observations	Construction Observation Site Visits	L	A	R	R	O	
	Witness Selected Equipment Startup	L	A	R	R	O	
Functional Test Protocols	TAB Verification	L	A	R	R	O	
	Systems Functional Performance Testing	L	A	P	P	P	
	Retesting	L	A	P	P	P	
Technical Activities	Issues Resolution Meetings	P	A	P	L	O	
	Systems Training	L	S	R	P	P	
Reports and Logs	Status Reports	L	A	R	R	O	
	Maintain Commissioning Issues Log	L	A	R	R	O	
	Final Commissioning Report	L	A	R	R	R	
	Prepare Systems Manuals	L	A	R	R	R	

Contract No. 36C26319D0022
 Station Project No. 656-400
 Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

04-01-22

C. The following table outlines the roles and responsibilities for the Commissioning Team members during the Warranty Phase:

Warranty Phase		CxA = Commissioning Agent COR = Resident Engineer Contracting Officer Representative A/E = Design Arch/Engineer PC = Prime Contractor O&M = Gov't Facility O&M					L = Lead P = Participate A = Approve R = Review O = Optional
Commissioning Roles & Responsibilities							
Category	Task Description	CxA	COR	A/E	PC	O&M	Notes
Meetings	Post-Occupancy User Review Meeting	L	A	O	P	P	

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

04-01-22

Warranty Phase		CxA = Commissioning Agent COR = Resident Engineer Contracting Officer Representative A/E = Design Arch/Engineer PC = Prime Contractor O&M = Gov't Facility O&M					L = Lead P = Participate A = Approve R = Review O = Optional
Commissioning Roles & Responsibilities							
Category	Task Description	CxA	COR	A/E	PC	O&M	Notes
Site Observations	Periodic Site Visits	L	A	O	O	P	
Functional Test Protocols	Deferred and/or seasonal Testing	L	A	O	P	P	
Technical Activities	Issues Resolution Meetings	L	S	O	O	P	
	Post-Occupancy Warranty Checkup and review of Significant Outstanding Issues	L	A		R	P	
Reports and Logs	Final Commissioning Report Amendment	L	A		R	R	
	Status Reports	L	A		R	R	

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

04-01-22

3.2 STARTUP, INITIAL CHECKOUT, AND PRE-FUNCTIONAL CHECKLISTS

A. The following procedures shall apply to all equipment and systems to be commissioned, according to Part 1, Systems to Be Commissioned.

1. Pre-Functional Checklists are important to ensure that the equipment and systems are hooked up and operational. These ensure that Systems Functional Performance Testing may proceed without unnecessary delays. Each system to be commissioned shall have a full Pre-Functional Checklist completed by the Contractor prior to Systems Functional Performance Testing. No sampling strategies are used.
 - a. The Pre-Functional Checklist will identify the trades responsible for completing the checklist. The Contractor shall ensure the appropriate trades complete the checklists.
 - b. The Commissioning Agent will review completed Pre-Functional Checklists and field-verify the accuracy of the completed checklist using sampling techniques.
2. Startup and Initial Checkout Plan: The Contractor shall develop detailed startup plans for all equipment. The primary role of the Contractor in this process is to ensure that there is written documentation that each of the manufacturer recommended procedures have been completed. Parties responsible for startup shall be identified in the Startup Plan and in the checklist forms.
 - a. The Contractor shall develop the full startup plan by combining (or adding to) the checklists with the manufacturer's detailed startup and checkout procedures from the O&M manual data and the field checkout sheets normally used by the Contractor. The plan shall include checklists and procedures with specific boxes or lines for recording and documenting the checking and inspections of each procedure and a summary statement with a signature block at the end of the plan.
 - b. The full startup plan shall at a minimum consist of the following items:
 - 1) The Pre-Functional Checklists.
 - 2) The manufacturer's standard written startup procedures copied from the installation manuals with check boxes by each procedure and a signature block added by hand at the end.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

04-01-22

- 3) The manufacturer's normally used field checkout sheets.
 - c. The Commissioning Agent will submit the full startup plan to the VA and Contractor for review. Final approval will be by the VA.
 - d. The Contractor shall review and evaluate the procedures and the format for documenting them, noting any procedures that need to be revised or added.
3. Sensor and Actuator Calibration
- a. All field installed temperature, relative humidity, CO2 and pressure sensors and gages, and all actuators (dampers and valves) on all equipment shall be calibrated using the methods described in Division 21, Division 22, Division 23, Division 26, Division 27, and Division 28 specifications.
 - b. All procedures used shall be fully documented on the Pre-Functional Checklists or other suitable forms, clearly referencing the procedures followed and written documentation of initial, intermediate and final results.
4. Execution of Equipment Startup
- a. Four weeks prior to equipment startup, the Contractor shall schedule startup and checkout with the VA and Commissioning Agent. The performance of the startup and checkout shall be directed and executed by the Contractor.
 - b. The Commissioning Agent will observe the startup procedures for selected pieces of primary equipment.
 - c. The Contractor shall execute startup and provide the VA and Commissioning Agent with a signed and dated copy of the completed startup checklists, and contractor tests.
 - d. Only individuals that have direct knowledge and witnessed that a line item task on the Startup Checklist was actually performed shall initial or check that item off. It is not acceptable for witnessing supervisors to fill out these forms.

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

04-01-22

3.3 DEFICIENCIES, NONCONFORMANCE, AND APPROVAL IN CHECKLISTS AND STARTUP

- A. The Contractor shall clearly list any outstanding items of the initial startup and Pre-Functional Checklist procedures that were not completed successfully, at the bottom of the procedures form or on an attached sheet. The procedures form and any outstanding deficiencies shall be provided to the VA and the Commissioning Agent within two days of completion.
- B. The Commissioning Agent will review the report and submit comments to the VA. The Commissioning Agent will work with the Contractor to correct and verify deficiencies or uncompleted items. The Commissioning Agent will involve the VA and others as necessary. The Contractor shall correct all areas that are noncompliant or incomplete in the checklists in a timely manner and shall notify the VA and Commissioning Agent as soon as outstanding items have been corrected. The Contractor shall submit an updated startup report and a Statement of Correction on the original noncompliance report. When satisfactorily completed, the Commissioning Agent will recommend approval of the checklists and startup of each system to the VA.
- C. The Contractor shall be responsible for resolution of deficiencies as directed the VA.

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

04-01-22

3.4 PHASED COMMISSIONING (NOT USED)

3.5 DDC SYSTEM TRENDING FOR COMMISSIONING

- A. Trending is a method of testing as a standalone method or to augment manual testing. The Contractor shall trend any and all points of the system or systems at intervals specified below.
- B. Alarms are a means to notify the system operator that abnormal conditions are present in the system. Alarms shall be structured into three tiers - Critical, Priority, and Maintenance.
 - 1. Critical alarms are intended to be alarms that require the immediate attention of and action by the Operator. These alarms shall be displayed on the Operator Workstation in a popup style window that is graphically linked to the associated unit's graphical display. The popup style window shall be displayed on top of any active window within the screen, including non DDC system software.
 - 2. Priority level alarms are to be printed to a printer which is connected to the Operator's Workstation located within the engineer's office. Additionally, Priority level alarms shall be able to be monitored and viewed through an active alarm application. Priority level alarms are alarms which shall require reaction from the operator or maintenance personnel within a normal work shift, and not immediate action.
 - 3. Maintenance alarms are intended to be minor issues which would require examination by maintenance personnel within the following shift. These alarms shall be generated in a scheduled report automatically by the DDC system at the start of each shift. The generated maintenance report will be printed to a printer located within the engineer's office.
- C. The Contractor shall provide a wireless internet network in the building for use during controls programming, checkout, and commissioning. This network will allow project team members to more effectively program, view, manipulate and test control devices while being in the same room as the controlled device.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

04-01-22

- D. The Contractor shall provide graphical trending through the DDC control system of systems being commissioned. Trending requirements are indicated below and included with the Systems Functional Performance Test Procedures. Trending shall occur before, during and after Systems Functional Performance Testing. The Contractor shall be responsible for producing graphical representations of the trended DDC points that show each system operating properly during steady state conditions as well as during the System Functional Testing. These graphical reports shall be submitted to the Resident Engineer and Commissioning Agent for review and analysis before, during dynamic operation, and after Systems Functional Performance Testing. The Contractor shall provide, but not limited to, the following trend requirements and trend submissions:
1. Pre-testing, Testing, and Post-testing - Trend reports of trend logs and graphical trend plots are required as defined by the Commissioning Agent. The trend log points, sampling rate, graphical plot configuration, and duration will be dictated by the Commissioning Agent. At any time during the Commissioning Process the Commissioning Agent may recommend changes to aspects of trending as deemed necessary for proper system analysis. The Contractor shall implement any changes as directed by the Resident Engineer. Any pre-test trend analysis comments generated by the Commissioning Team should be addressed and resolved by the Contractor, as directed by the Resident Engineer, prior to the execution of Systems Functional Performance Testing.
 2. Dynamic plotting - The Contractor shall also provide dynamic plotting during Systems Functional Performance testing at frequent intervals for points determined by the Systems Functional Performance Test Procedure. The graphical plots will be formatted and plotted at durations listed in the Systems Functional Performance Test Procedure.
 3. Graphical plotting - The graphical plots shall be provided with a dual y-axis allowing 15 or more trend points (series) plotted simultaneously on the graph with each series in distinct color. The plots will further require title, axis naming, legend etc. all described by the Systems Functional Performance Test Procedure. If

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

04-01-22

this cannot be sufficiently accomplished directly in the Direct Digital Control System then it is the responsibility of the Contractor to plot these trend logs in Microsoft Excel.

4. The following tables indicate the points to be trended and alarmed by system. The Operational Trend Duration column indicates the trend duration for normal operations. The Testing Trend Duration column indicates the trend duration prior to Systems Functional Performance Testing and again after Systems Functional Performance Testing. The Type column indicates point type: AI = Analog Input, AO = Analog Output, DI = Digital Input, DO = Digital Output, Calc = Calculated Point. In the Trend Interval Column, COV = Change of Value. The Alarm Type indicates the alarm priority; C = Critical, P = Priority, and M = Maintenance. The Alarm Range column indicates when the point is considered in the alarm state. The Alarm Delay column indicates the length of time the point must remain in an alarm state before the alarm is recorded in the DDC. The intent is to allow minor, short-duration events to be corrected by the DDC system prior to recording an alarm.

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

04-01-22

Dual-Path Air Handling Unit Trending and Alarms							
Point	Type	Trend Interval	Operational Trend Duration	Testing Trend Duration	Alarm Type	Alarm Range	Alarm Delay
OA Temperature	AI	15 Min	24 hours	3 days	N/A		
RA Temperature	AI	15 Min	24 hours	3 days	N/A		
RA Humidity	AI	15 Min	24 hours	3 days	P	>60% RH	10 min
Mixed Air Temp	AI	None	None	None	N/A		
SA Temp	AI	15 Min	24 hours	3 days	C	±5°F from SP	10 min
Supply Fan Speed	AI	15 Min	24 hours	3 days	N/A		
Return Fan Speed	AI	15 Min	24 hours	3 days	N/A		
RA Pre-Filter Status	AI	None	None	None	N/A		
OA Pre-Filter Status	AI	None	None	None	N/A		
After Filter Status	AI	None	None	None	N/A		
SA Flow	AI	15 Min	24 hours	3 days	C	±10% from SP	10 min
OA Supply Temp	AI	15 Min	24 hours	3 days	P	±5°F from SP	10 min
RA Supply Temp	AI	15 Min	24 hours	3 days	N/A		
RA CHW Valve Position	AI	15 Min	24 hours	3 days	N/A		
OA CHW Valve Position	AI	15 Min	24 hours	3 days	N/A		
OA HW Valve Position	AI	15 Min	24 hours	3 days	N/A		
OA Flow	AI	15 Min	24 hours	3 days	P	±10% from SP	5 min
RA Flow	AI	15 Min	24 hours	3 days	P	±10% from SP	5 min
Initial UVC Intensity (%)	AI	None	None	None	N/A		
Duct Pressure	AI	15 Min	24 hours	3 days	C	±25% from SP	6 min

Contract No. 36C26319D0022
 Station Project No. 656-400
 Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

04-01-22

Dual-Path Air Handling Unit Trending and Alarms							
Point	Type	Trend Interval	Operational Trend Duration	Testing Trend Duration	Alarm Type	Alarm Range	Alarm Delay
Supply Fan Status	DI	COV	24 hours	3 days	C	Status <> Command	10 min
Return Fan Status	DI	COV	24 hours	3 days	C	Status <> Command	10 Min
High Static Status	DI	COV	24 hours	3 days	P	True	1 min
Fire Alarm Status	DI	COV	24 hours	3 days	C	True	5 min
Freeze Stat Level 1	DI	COV	24 hours	3 days	C	True	10 min
Freeze Stat Level 2	DI	COV	24 hours	3 days	C	True	5 min
Freeze Stat Level 3	DI	COV	24 hours	3 days	P	True	1 min
Fire/Smoke Damper Status	DI	COV	24 hours	3 days	P	Closed	1 min
Emergency AHU Shutdown	DI	COV	24 hours	3 days	P	True	1 min
Exhaust Fan #1 Status	DI	COV	24 hours	3 days	C	Status <> Command	10 min
Exhaust Fan #2 Status	DI	COV	24 hours	3 days	C	Status <> Command	10 min
OA Alarm	DI	COV	24 hours	3 days	C	True	10 min
High Static Alarm	DI	COV	24 hours	3 days	C	True	10 min
Power Failure	DI	COV	24 hours	3 days	P	True	1 min
Supply Fan Speed	AO	15 Min	24 hours	3 days	N/A		
Return Fan Speed	AO	15 Min	24 hours	3 days	N/A		
RA CHW Valve Position	AO	15 Min	24 hours	3 days	N/A		

Contract No. 36C26319D0022
 Station Project No. 656-400
 Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

04-01-22

Dual-Path Air Handling Unit Trending and Alarms							
Point	Type	Trend Interval	Operational Trend Duration	Testing Trend Duration	Alarm Type	Alarm Range	Alarm Delay
OA CHW Valve Position	AO	15 Min	24 hours	3 days	N/A		
OA HW Valve Position	AO	15 Min	24 hours	3 days	N/A		
Supply Fan S/S	DO	COV	24 hours	3 days	N/A		
Return Fan S/S	DO	COV	24 hours	3 days	N/A		
Fire/Smoke Dampers	DO	COV	24 hours	3 days	N/A		
Exhaust Fan S/S	DO	COV	24 hours	3 days	N/A		
Exhaust Fan S/S	DO	COV	24 hours	3 days	N/A		
Exhaust Fan S/S	DO	COV	24 hours	3 days	N/A		
AHU Energy	Calc	1 Hour	30 day	N/A	N/A		

Terminal Unit (VAV, etc.) Trending and Alarms							
Point	Type	Trend Interval	Operational Trend Duration	Testing Trend Duration	Alarm Type	Alarm Range	Alarm Delay
Space Temperature	AI	15 Min	12 hours	3 days	P	±5°F from SP	10 min
Air Flow	AI	15 Min	12 hours	3 days	P	±5°F from SP	10 min
SA Temperature	AI	15 Min	12 hours	3 days	P	±5°F from SP	10 min
Local Setpoint	AI	15 Min	12 hours	3 days	M	±10°F from SP	60 min
Space Humidity	AI	15 Min	12 hours	3 days	P	> 60% RH	5 min
Unoccupied Override	DI	COV	12 hours	3 days	M	N/A	12 Hours
Refrigerator Alarm	DI	COV	12 hours	3 days	C	N/A	10 min

Contract No. 36C26319D0022
 Station Project No. 656-400
 Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

04-01-22

Terminal Unit (VAV, etc.) Trending and Alarms							
Point	Type	Trend Interval	Operational Trend Duration	Testing Trend Duration	Alarm Type	Alarm Range	Alarm Delay
Damper Position	AO	15 Minutes	12 hours	3 days	N/A		
Heating coil Valve Position	AO	15 Minutes	12 hours	3 days	N/A		

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

04-01-22

2-Pipe Fan Coil Unit Trending and Alarms							
Point	Type	Trend Interval	Operational Trend Duration	Testing Trend Duration	Alarm Type	Alarm Range	Alarm Delay
Space Temperature	AI	15 Minutes	12 hours	3 days	P	±5°F from SP	10 min
SA Temperature	AI	15 Minutes	12 hours	3 days	P	±5°F from SP	10 min
Pre-Filter Status	AI	None	None	None	M	> SP	1 hour
Water Sensor	DI	COV	12 hours	3 days	M	N/A	30 Min
Cooling Coil Valve Position	AO	15 Minutes	12 hours	3 days	N/A		
Fan Coil ON/OFF	DO	COV	12 hours	3 days	M	Status <> Command	30 min

Unit Heater Trending and Alarms							
Point	Type	Trend Interval	Operational Trend Duration	Testing Trend Duration	Alarm Type	Alarm Range	Alarm Delay
Space Temperature	AI	15 Minutes	12 hours	3 days	P	±5°F from SP	10 min
Heating Valve Position	AO	15 Minutes	12 hours	3 days	N/A		
Unit Heater ON/OFF	DO	COV	12 hours	3 days	M	Status <> Command	30 min

Steam and Condensate Pumps Trending and Alarms							
Point	Type	Trend Interval	Operational Trend Duration	Testing Trend Duration	Alarm Type	Alarm Range	Alarm Delay

Contract No. 36C26319D0022
 Station Project No. 656-400
 Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

04-01-22

Steam and Condensate Pumps Trending and Alarms							
Point	Type	Trend Interval	Operational Trend Duration	Testing Trend Duration	Alarm Type	Alarm Range	Alarm Delay
Condensate Pump Run Hours	AI	15 Minutes	12 hours	3 days	N/A		
Condensate Flow (GPM)	AI	15 Minutes	12 hours	3 days	N/A		
Condensate Pump Start/Stop	DO	COV	12 hours	3 days	P	Status <> Command	10 min

Domestic Hot Water Trending and Alarms							
Point	Type	Trend Interval	Operational Trend Duration	Testing Trend Duration	Alarm Type	Alarm Range	Alarm Delay
Domestic HW Temperature	AI	15 Minute	12 Hours	3 days	C	> 135 °F	10 Min
Domestic HW Temperature	AI	15 Minute	12 Hours	3 days	P	±5°F from SP	10 Min
Dom. Circ. Pump #1 Status	DI	COV	12 Hours	3 days	M	Status <> Command	30 min

Contract No. 36C26319D0022
 Station Project No. 656-400
 Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

04-01-22

Domestic Hot Water Trending and Alarms							
Point	Type	Trend Interval	Operational Trend Duration	Testing Trend Duration	Alarm Type	Alarm Range	Alarm Delay
Dom. Circ. Pump #1 Start/Stop	DO	COV	12 Hours	3 days	N/A		
Domestic HW Start/Stop	DO	COV	12 Hours	3 days	N/A		

Hydronic Hot Water Trending and Alarms							
Point	Type	Trend Interval	Operational Trend Duration	Testing Trend Duration	Alarm Type	Alarm Range	Alarm Delay
System HWS Temperature	AI	15 min	12 hours	3 days	C	±5°F from SP	10 Min
System HWR Temperature	AI	15 min	12 hours	3 days	M	±15°F from SP	300 Min
HX-1 Entering Temperature	AI	15 min	12 hours	3 days	P	±5°F from SP	10 Min
HX-1 Leaving Temperature	AI	15 min	12 hours	3 days	P	±5°F from SP	10 Min
System Flow (GPM)	AI	15 min	12 hours	3 days	N/A		
System Differential Pressure	AI	15 min	12 hours	3 days	P	±10% from SP	8 Min
				3 days			
HW Pump 1 Status	DI	COV	12 Hours	3 days	C	Status <> Command	30 min
HW Pump 2 Status	DI	COV	12 Hours	3 days	C	Status <> Command	30 min
HW Pump 1 VFD Speed	AO	15 Min	12 Hours	3 days	N/A		

Contract No. 36C26319D0022
 Station Project No. 656-400
 Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

04-01-22

Hydronic Hot Water Trending and Alarms							
Point	Type	Trend Interval	Operational Trend Duration	Testing Trend Duration	Alarm Type	Alarm Range	Alarm Delay
HW Pump 2 VFD Speed	AO	15 Min	12 Hours	3 days	N/A		
Steam Station #1 1/3 Control Valve Position	AO	15 Min	12 Hours	3 days	N/A		
Steam Station #1 2/3 Control Valve Position	AO	15 Min	12 Hours	3 days	N/A		
Steam Station Bypass Valve Position	AO	15 Min	12 Hours	3 days	N/A		
HW Pump 1 Start/Stop	DO	COV	12 Hours	3 days	N/A		
HW Pump 2 Start/Stop	DO	COV	12 Hours	3 days	N/A		
HWR #1 Valve	DO	COV	12 Hours	3 days	N/A		
HWR #2 Valve	DO	COV	12 Hours	3 days	N/A		

Contract No. 36C26319D0022
 Station Project No. 656-400
 Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

04-01-22

E. The Contractor shall provide the following information prior to Systems Functional Performance Testing. Any documentation that is modified after submission shall be recorded and resubmitted to the Resident Engineer and Commissioning Agent.

1. Point-to-Point checkout documentation;
2. Sensor field calibration documentation including system name, sensor/point name, measured value, DDC value, and Correction Factor.
3. A sensor calibration table listing the referencing the location of procedures to following in the O&M manuals, and the frequency at which calibration should be performed for all sensors, separated by system, subsystem, and type. The calibration requirements shall be submitted both in the O&M manuals and separately in a standalone document containing all sensors for inclusion in the commissioning documentation. The following table is a sample that can be used as a template for submission.

SYSTEM		
Sensor	Calibration Frequency	O&M Calibration Procedure Reference
Discharge air temperature	Once a year	Volume I Section D.3.aa
Discharge static pressure	Every 6 months	Volume II Section A.1.c

4. Loop tuning documentation and constants for each loop of the building systems. The documentation shall be submitted in outline or

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

04-01-22

table separated by system, control type (e.g. heating valve temperature control); proportional, integral and derivative constants, interval (and bias if used) for each loop. The following table is a sample that can be used as a template for submission.

AIR HANDLING UNIT AHU-1				
Control Reference	Proportional Constant	Integral Constant	Derivative Constant	Interval
Heating Valve Output	1000	20	10	2 sec.

3.6 SYSTEMS FUNCTIONAL PERFORMANCE TESTING

- A. This paragraph applies to Systems Functional Performance Testing of systems for all referenced specification Divisions.
- B. Objectives and Scope: The objective of Systems Functional Performance Testing is to demonstrate that each system is operating according to the Contract Documents. Systems Functional Performance Testing facilitates bringing the systems from a state of substantial completion to full dynamic operation. Additionally, during the testing process, areas of noncompliant performance are identified and corrected, thereby improving the operation and functioning of the systems. In general, each system shall be operated through all modes of operation (seasonal, occupied, unoccupied, warm-up, cool-down, part- and full-load, fire alarm and emergency power) where there is a specified system response. The Contractor shall verify each sequence in the sequences of operation. Proper responses to such modes and conditions as power failure, freeze condition, low oil pressure, no flow, equipment failure, etc. shall also be tested.
- C. Development of Systems Functional Performance Test Procedures: Before Systems Functional Performance Test procedures are written, the Contractor shall submit all requested documentation and a current list of change orders affecting equipment or systems, including an updated points list, program code, control sequences and parameters. Using the testing parameters and requirements found in the Contract Documents and approved submittals and shop drawings, the Commissioning Agent will develop specific Systems Functional Test Procedures to verify and

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

04-01-22

document proper operation of each piece of equipment and system to be commissioned. The Contractor shall assist the Commissioning Agent in developing the Systems Functional Performance Test procedures as requested by the Commissioning Agent i.e. by answering questions about equipment, operation, sequences, etc. Prior to execution, the Commissioning Agent will provide a copy of the Systems Functional Performance Test procedures to the VA, the Architect/Engineer, and the Contractor, who shall review the tests for feasibility, safety, equipment and warranty protection.

- D. Purpose of Test Procedures: The purpose of each specific Systems Functional Performance Test is to verify and document compliance with the stated criteria of acceptance given on the test form. Representative test formats and examples are found in the Commissioning Plan for this project. (The Commissioning Plan is issued as a separate document and is available for review.) The test procedure forms developed by the Commissioning Agent will include, but not be limited to, the following information:
1. System and equipment or component name(s)
 2. Equipment location and ID number
 3. Unique test ID number, and reference to unique Pre-Functional Checklists and startup documentation, and ID numbers for the piece of equipment
 4. Date
 5. Project name
 6. Participating parties
 7. A copy of the specification section describing the test requirements
 8. A copy of the specific sequence of operations or other specified parameters being verified
 9. Formulas used in any calculations
 10. Required pretest field measurements
 11. Instructions for setting up the test.
 12. Special cautions, alarm limits, etc.
 13. Specific step-by-step procedures to execute the test, in a clear, sequential and repeatable format

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

04-01-22

14. Acceptance criteria of proper performance with a Yes / No check box to allow for clearly marking whether or not proper performance of each part of the test was achieved.
 15. A section for comments.
 16. Signatures and date block for the Commissioning Agent. A place for the Contractor to initial to signify attendance at the test.
- E. Test Methods: Systems Functional Performance Testing shall be achieved by manual testing (i.e. persons manipulate the equipment and observe performance) and/or by monitoring the performance and analyzing the results using the control system's trend log capabilities or by standalone data loggers. The Contractor and Commissioning Agent shall determine which method is most appropriate for tests that do not have a method specified.
1. Simulated Conditions: Simulating conditions (not by an overwritten value) shall be allowed, although timing the testing to experience actual conditions is encouraged wherever practical.
 2. Overwritten Values: Overwriting sensor values to simulate a condition, such as overwriting the outside air temperature reading in a control system to be something other than it really is, shall be allowed, but shall be used with caution and avoided when possible. Such testing methods often can only test a part of a system, as the interactions and responses of other systems will be erroneous or not applicable. Simulating a condition is preferable. e.g., for the above case, by heating the outside air sensor with a hair blower rather than overwriting the value or by altering the appropriate setpoint to see the desired response. Before simulating conditions or overwriting values, sensors, transducers and devices shall have been calibrated.
 3. Simulated Signals: Using a signal generator which creates a simulated signal to test and calibrate transducers and DDC constants is generally recommended over using the sensor to act as the signal generator via simulated conditions or overwritten values.
 4. Altering Setpoints: Rather than overwriting sensor values, and when simulating conditions is difficult, altering setpoints to test a sequence is acceptable. For example, to see the Air Conditioning compressor lockout initiate at an outside air temperature below 12 C

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

01 91 00 - 67

10/28/2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

04-01-22

(54 F), when the outside air temperature is above 12 C (54 F), temporarily change the lockout setpoint to be 2 C (4 F) above the current outside air temperature.

5. Indirect Indicators: Relying on indirect indicators for responses or performance shall be allowed only after visually and directly verifying and documenting, over the range of the tested parameters, that the indirect readings through the control system represent actual conditions and responses. Much of this verification shall be completed during systems startup and initial checkout.
- F. Setup: Each function and test shall be performed under conditions that simulate actual conditions as closely as is practically possible. The Contractor shall provide all necessary materials, system modifications, etc. to produce the necessary flows, pressures, temperatures, etc. necessary to execute the test according to the specified conditions. At completion of the test, the Contractor shall return all affected building equipment and systems, due to these temporary modifications, to their pretest condition.
- G. Sampling: No sampling is allowed in completing Pre-Functional Checklists. Sampling is allowed for Systems Functional Performance Test Procedures execution. The Commissioning Agent will determine the sampling rate. If at any point, frequent failures are occurring and testing is becoming more troubleshooting than verification, the Commissioning Agent may stop the testing and require the Contractor to perform and document a checkout of the remaining units, prior to continuing with Systems Functional Performance Testing of the remaining units.
- H. Cost of Retesting: The cost associated with expanded sample System Functional Performance Tests shall be solely the responsibility of the Contractor. Any required retesting by the Contractor shall not be

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

04-01-22

considered a justified reason for a claim of delay or for a time extension by the Contractor.

- I. Coordination and Scheduling: The Contractor shall provide a minimum of 7 days' notice to the Commissioning Agent and the VA regarding the completion schedule for the Pre-Functional Checklists and startup of all equipment and systems. The Commissioning Agent will schedule Systems Functional Performance Tests with the Contractor and VA. The Commissioning Agent will witness and document the Systems Functional Performance Testing of systems. The Contractor shall execute the tests in accordance with the Systems Functional Performance Test Procedure.
- J. Testing Prerequisites: In general, Systems Functional Performance Testing will be conducted only after Pre-Functional Checklists have been satisfactorily completed. The control system shall be sufficiently tested and approved by the Commissioning Agent and the VA before it is used to verify performance of other components or systems. The air balancing and water balancing shall be completed before Systems Functional Performance Testing of air-related or water-related equipment or systems are scheduled. Systems Functional Performance Testing will proceed from components to subsystems to systems. When the proper performance of all interacting individual systems has been achieved, the interface or coordinated responses between systems will be checked.
- K. Problem Solving: The Commissioning Agent will recommend solutions to problems found, however the burden of responsibility to solve, correct and retest problems is with the Contractor.

3.7 DOCUMENTATION, NONCONFORMANCE AND APPROVAL OF TESTS

- A. Documentation: The Commissioning Agent will witness and document the results of all Systems Functional Performance Tests using the specific procedural forms developed by the Commissioning Agent for that purpose. Prior to testing, the Commissioning Agent will provide these forms to the VA and the Contractor for review and approval. The Contractor shall include the filled out forms with the O&M manual data.
- B. Nonconformance: The Commissioning Agent will record the results of the Systems Functional Performance Tests on the procedure or test form. All

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

04-01-22

items of nonconformance issues will be noted and reported to the VA on Commissioning Field Reports and/or the Commissioning Master Issues Log.

1. Corrections of minor items of noncompliance identified may be made during the tests. In such cases, the item of noncompliance and resolution shall be documented on the Systems Functional Test Procedure.
2. Every effort shall be made to expedite the systems functional Performance Testing process and minimize unnecessary delays, while not compromising the integrity of the procedures. However, the Commissioning Agent shall not be pressured into overlooking noncompliant work or loosening acceptance criteria to satisfy scheduling or cost issues, unless there is an overriding reason to do so by direction from the VA.
3. As the Systems Functional Performance Tests progresses and an item of noncompliance is identified, the Commissioning Agent shall discuss the issue with the Contractor and the VA.
4. When there is no dispute on an item of noncompliance, and the Contractor accepts responsibility to correct it:
 - a. The Commissioning Agent will document the item of noncompliance and the Contractor's response and/or intentions. The Systems Functional Performance Test then continues or proceeds to another test or sequence. After the day's work is complete, the Commissioning Agent will submit a Commissioning Field Report to the VA. The Commissioning Agent will also note items of noncompliance and the Contractor's response in the Master Commissioning Issues Log. The Contractor shall correct the item of noncompliance and report completion to the VA and the Commissioning Agent.
 - b. The need for retesting will be determined by the Commissioning Agent. If retesting is required, the Commissioning Agent and the Contractor shall reschedule the test and the test shall be repeated.
5. If there is a dispute about item of noncompliance, regarding whether it is an item of noncompliance, or who is responsible:

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

04-01-22

- a. The item of noncompliance shall be documented on the test form with the Contractor's response. The item of noncompliance with the Contractor's response shall also be reported on a Commissioning Field Report and on the Master Commissioning Issues Log.
- b. Resolutions shall be made at the lowest management level possible. Other parties are brought into the discussions as needed. Final interpretive and acceptance authority is with the Department of Veterans Affairs.
- c. The Commissioning Agent will document the resolution process.
- d. Once the interpretation and resolution have been decided, the Contractor shall correct the item of noncompliance, report it to the Commissioning Agent. The requirement for retesting will be determined by the Commissioning Agent. If retesting is required, the Commissioning Agent and the Contractor shall reschedule the test. Retesting shall be repeated until satisfactory performance is achieved.

C. Cost of Retesting: The cost to retest a System Functional Performance Test shall be solely the responsibility of the Contractor. Any required retesting by the Contractor shall not be considered a justified reason for a claim of delay or for a time extension by the Contractor.

D. Failure Due to Manufacturer Defect: If 10%, or three, whichever is greater, of identical pieces (size alone does not constitute a

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

04-01-22

difference) of equipment fail to perform in compliance with the Contract Documents (mechanically or substantively) due to manufacturing defect, not allowing it to meet its submitted performance specifications, all identical units may be considered unacceptable by the VA. In such case, the Contractor shall provide the VA with the following:

1. Within one week of notification from the VA, the Contractor shall examine all other identical units making a record of the findings. The findings shall be provided to the VA within two weeks of the original notice.
 2. Within two weeks of the original notification, the Contractor shall provide a signed and dated, written explanation of the problem, cause of failures, etc. and all proposed solutions which shall include full equipment submittals. The proposed solutions shall not significantly exceed the specification requirements of the original installation.
 3. The VA shall determine whether a replacement of all identical units or a repair is acceptable.
 4. Two examples of the proposed solution shall be installed by the Contractor and the VA shall be allowed to test the installations for up to one week, upon which the VA will decide whether to accept the solution.
 5. Upon acceptance, the Contractor shall replace or repair all identical items, at their expense and extend the warranty accordingly, if the original equipment warranty had begun. The replacement/repair work shall proceed with reasonable speed beginning within one week from when parts can be obtained.
- E. Approval: The Commissioning Agent will note each satisfactorily demonstrated function on the test form. Formal approval of the Systems Functional Performance Test shall be made later after review by the Commissioning Agent and by the VA. The Commissioning Agent will evaluate each test and report to the VA using a standard form. The VA will give final approval on each test using the same form, and provide signed copies to the Commissioning Agent and the Contractor.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

04-01-22

3.8 DEFERRED TESTING

- A. Unforeseen Deferred Systems Functional Performance Tests: If any Systems Functional Performance Test cannot be completed due to the building structure, required occupancy condition or other conditions, execution of the Systems Functional Performance Testing may be delayed upon approval of the VA. These Systems Functional Performance Tests shall be conducted in the same manner as the seasonal tests as soon as possible. Services of the Contractor to conduct these unforeseen Deferred Systems Functional Performance Tests shall be negotiated between the VA and the Contractor.
- B. Deferred Seasonal Testing: Deferred Seasonal Systems Functional Performance Tests are those that must be deferred until weather conditions are closer to the systems design parameters. The Commissioning Agent will review systems parameters and recommend which Systems Functional Performance Tests should be deferred until weather conditions more closely match systems parameters. The Contractor shall review and comment on the proposed schedule for Deferred Seasonal Testing. The VA will review and approve the schedule for Deferred Seasonal Testing. Deferred Seasonal Systems Functional Performances Tests shall be witnessed and documented by the Commissioning Agent. Deferred Seasonal Systems Functional Performance Tests shall be executed by the Contractor in accordance with these specifications.

3.9 OPERATION AND MAINTENANCE TRAINING REQUIREMENTS

- A. Training Preparation Conference: Before operation and maintenance training, the Commissioning Agent will convene a training preparation conference to include VA's Resident Engineer, VA's Operations and Maintenance personnel, and the Contractor. The purpose of this conference will be to discuss and plan for Training and Demonstration of VA Operations and Maintenance personnel.
- B. The Contractor shall provide training and demonstration as required by other Division 21, Division 22, Division 23, Division 26, Division 27, Division 28, and Division 31 sections. The Training and Demonstration shall include, but is not limited to, the following:
 - 1. Review the Contract Documents.
 - 2. Review installed systems, subsystems, and equipment.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

04-01-22

3. Review instructor qualifications.
 4. Review instructional methods and procedures.
 5. Review training module outlines and contents.
 6. Review course materials (including operation and maintenance manuals).
 7. Review and discuss locations and other facilities required for instruction.
 8. Review and finalize training schedule and verify availability of educational materials, instructors, audiovisual equipment, and facilities needed to avoid delays.
 9. For instruction that must occur outside, review weather and forecasted weather conditions and procedures to follow if conditions are unfavorable.
- C. Training Module Submittals: The Contractor shall submit the following information to the VA and the Commissioning Agent:
1. Instruction Program: Submit two copies of outline of instructional program for demonstration and training, including a schedule of proposed dates, times, length of instruction time, and instructors' names for each training module. Include learning objective and outline for each training module. At completion of training, submit two complete training manuals for VA's use.
 2. Qualification Data: Submit qualifications for facilitator and/or instructor.
 3. Attendance Record: For each training module, submit list of participants and length of instruction time.
 4. Evaluations: For each participant and for each training module, submit results and documentation of performance-based test.
 5. Demonstration and Training Recording:
 - a. General: Engage a qualified commercial photographer to record demonstration and training. Record each training module separately. Include classroom instructions and demonstrations, board diagrams, and other visual aids, but not student practice. At beginning of each training module, record each chart containing learning objective and lesson outline.

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

04-01-22

- b. Video Format: Provide high quality color DVD color on standard size DVD disks.
 - c. Recording: Mount camera on tripod before starting recording, unless otherwise necessary to show area of demonstration and training. Display continuous running time.
 - d. Narration: Describe scenes on video recording by audio narration by microphone while demonstration and training is recorded. Include description of items being viewed. Describe vantage point, indicating location, direction (by compass point), and elevation or story of construction.
 - e. Submit two copies within seven days of end of each training module.
6. Transcript: Prepared on 8-1/2-by-11-inch paper, punched and bound in heavy-duty, 3-ring, vinyl-covered binders. Mark appropriate identification on front and spine of each binder. Include a cover sheet with same label information as the corresponding videotape. Include name of Project and date of videotape on each page.
- D. Quality Assurance:
- 1. Facilitator Qualifications: A firm or individual experienced in training or educating maintenance personnel in a training program similar in content and extent to that indicated for this Project, and whose work has resulted in training or education with a record of successful learning performance.
 - 2. Instructor Qualifications: A factory authorized service representative, complying with requirements in Division 01 Section "Quality Requirements," experienced in operation and maintenance procedures and training.
 - 3. Photographer Qualifications: A professional photographer who is experienced photographing construction projects.
- E. Training Coordination:
- 1. Coordinate instruction schedule with VA's operations. Adjust schedule as required to minimize disrupting VA's operations.
 - 2. Coordinate instructors, including providing notification of dates, times, length of instruction time, and course content.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

01 91 00 - 75

10/28/2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

04-01-22

3. Coordinate content of training modules with content of approved emergency, operation, and maintenance manuals. Do not submit instruction program until operation and maintenance data has been reviewed and approved by the VA.

F. Instruction Program:

1. Program Structure: Develop an instruction program that includes individual training modules for each system and equipment not part of a system, as required by individual Specification Sections, and as follows:
 - a. Fire protection systems, including fire alarm, fire pumps, and fire suppression systems.
 - b. Intrusion detection systems.
 - c. Conveying systems, including elevators, wheelchair lifts, escalators, and automated materials handling systems.
 - d. Medical equipment, including medical gas equipment and piping.
 - e. Laboratory equipment, including laboratory air and vacuum equipment and piping.
 - f. Heat generation, including boilers, feedwater equipment, pumps, steam distribution piping, condensate return systems, heating hot water heat exchangers, and heating hot water distribution piping.
 - g. Refrigeration systems, including chillers, cooling towers, condensers, pumps, and distribution piping.
 - h. HVAC systems, including air handling equipment, air distribution systems, and terminal equipment and devices.
 - i. HVAC instrumentation and controls.
 - j. Electrical service and distribution, including switchgear, transformers, switchboards, panelboards, uninterruptible power supplies, and motor controls.
 - k. Packaged engine generators, including synchronizing switchgear/switchboards, and transfer switches.
 - l. Lighting equipment and controls.
 - m. Communication systems, including intercommunication, surveillance, nurse call systems, public address, mass evacuation, voice and data, and entertainment television equipment.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

04-01-22

- n. Site utilities including lift stations, condensate pumping and return systems, and storm water pumping systems.
- G. Training Modules: Develop a learning objective and teaching outline for each module. Include a description of specific skills and knowledge that participants are expected to master. For each module, include instruction for the following:
1. Basis of System Design, Operational Requirements, and Criteria:
Include the following:
 - a. System, subsystem, and equipment descriptions.
 - b. Performance and design criteria if Contractor is delegated design responsibility.
 - c. Operating standards.
 - d. Regulatory requirements.
 - e. Equipment function.
 - f. Operating characteristics.
 - g. Limiting conditions.
 - H, Performance curves.
 2. Documentation: Review the following items in detail:
 - a. Emergency manuals.
 - b. Operations manuals.
 - c. Maintenance manuals.
 - d. Project Record Documents.
 - e. Identification systems.
 - f. Warranties and bonds.
 - g. Maintenance service agreements and similar continuing commitments.
 3. Emergencies: Include the following, as applicable:
 - a. Instructions on meaning of warnings, trouble indications, and error messages.
 - b. Instructions on stopping.
 - c. Shutdown instructions for each type of emergency.
 - d. Operating instructions for conditions outside of normal operating limits.
 - e. Sequences for electric or electronic systems.
 - f. Special operating instructions and procedures.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

04-01-22

4. Operations: Include the following, as applicable:
 - a. Startup procedures.
 - b. Equipment or system break-in procedures.
 - c. Routine and normal operating instructions.
 - d. Regulation and control procedures.
 - e. Control sequences.
 - f. Safety procedures.
 - g. Instructions on stopping.
 - h. Normal shutdown instructions.
 - i. Operating procedures for emergencies.
 - j. Operating procedures for system, subsystem, or equipment failure.
 - k. Seasonal and weekend operating instructions.
 - l. Required sequences for electric or electronic systems.
 - m. Special operating instructions and procedures.
5. Adjustments: Include the following:
 - a. Alignments.
 - b. Checking adjustments.
 - c. Noise and vibration adjustments.
 - d. Economy and efficiency adjustments.
6. Troubleshooting: Include the following:
 - a. Diagnostic instructions.
 - b. Test and inspection procedures.
7. Maintenance: Include the following:
 - a. Inspection procedures.
 - b. Types of cleaning agents to be used and methods of cleaning.
 - c. List of cleaning agents and methods of cleaning detrimental to product.
 - d. Procedures for routine cleaning
 - e. Procedures for preventive maintenance.
 - f. Procedures for routine maintenance.
 - g. Instruction on use of special tools.
8. Repairs: Include the following:
 - a. Diagnosis instructions.
 - b. Repair instructions.

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

04-01-22

- c. Disassembly; component removal, repair, and replacement; and reassembly instructions.
 - d. Instructions for identifying parts and components.
 - e. Review of spare parts needed for operation and maintenance.
- H. Training Execution:
- 1. Preparation: Assemble educational materials necessary for instruction, including documentation and training module. Assemble training modules into a combined training manual. Set up instructional equipment at instruction location.
 - 2. Instruction:
 - a. Facilitator: Engage a qualified facilitator to prepare instruction program and training modules, to coordinate instructors, and to coordinate between Contractor and Department of Veterans Affairs for number of participants, instruction times, and location.
 - b. Instructor: Engage qualified instructors to instruct VA's personnel to adjust, operate, and maintain systems, subsystems, and equipment not part of a system.
 - 1) The Commissioning Agent will furnish an instructor to describe basis of system design, operational requirements, criteria, and regulatory requirements.
 - 2) The VA will furnish an instructor to describe VA's operational philosophy.
 - 3) The VA will furnish the Contractor with names and positions of participants.
 - 3. Scheduling: Provide instruction at mutually agreed times. For equipment that requires seasonal operation, provide similar instruction at start of each season. Schedule training with the VA and the Commissioning Agent with at least seven days' advance notice.
 - 4. Evaluation: At conclusion of each training module, assess and document each participant's mastery of module by use of an oral, or a written, performance-based test.

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

04-01-22

5. Cleanup: Collect used and leftover educational materials and remove from Project site. Remove instructional equipment. Restore systems and equipment to condition existing before initial training use.

I. Demonstration and Training Recording:

1. General: Engage a qualified commercial photographer to record demonstration and training. Record each training module separately. Include classroom instructions and demonstrations, board diagrams, and other visual aids, but not student practice. At beginning of each training module, record each chart containing learning objective and lesson outline.
2. Video Format: Provide high quality color DVD color on standard size DVD disks.
3. Recording: Mount camera on tripod before starting recording, unless otherwise necessary to show area of demonstration and training. Display continuous running time.
4. Narration: Describe scenes on videotape by audio narration by microphone while demonstration and training are recorded. Include description of items being viewed. Describe vantage point, indicating location, direction (by compass point), and elevation or story of construction.

----- END -----

DIVISION 02

EXISTING CONDITIONS

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

08-01-17

SECTION 02 41 00
DEMOLITION

PART 1 - GENERAL

1.1 DESCRIPTION:

This section specifies demolition and removal of portions of buildings and other structures.

1.2 RELATED WORK:

- A. Demolition and removal of roads, walks, curbs, and on-grade slabs outside buildings to be demolished: Section 31 20 00, EARTH MOVING.
- B. Safety Requirements: Section 01 35 26 Safety Requirements Article, ACCIDENT PREVENTION PLAN (APP).
- C. Disconnecting utility services prior to demolition: Section 01 00 00, GENERAL REQUIREMENTS.
- D. Reserved items that are to remain the property of the Government: Section 01 00 00, GENERAL REQUIREMENTS.
- E. Asbestos Removal: Section 02 82 11, TRADITIONAL ASBESTOS ABATEMENT.
- F. Lead Paint: Section 02 83 33.13, LEAD-BASED PAINT REMOVAL AND DISPOSAL.
- G. Environmental Protection: Section 01 57 19, TEMPORARY ENVIRONMENTAL CONTROLS.
- H. Construction Waste Management: Section 01 74 19 CONSTRUCTION WASTE MANAGEMENT.
- I. Infectious Control: Section 01 35 26, SAFETY REQUIREMENTS.

1.3 PROTECTION:

- A. Perform demolition in such manner as to eliminate hazards to persons and property; to minimize interference with use of adjacent areas, utilities and structures or interruption of use of such utilities; and to provide free passage to and from such adjacent areas of structures. Comply with requirements of GENERAL CONDITIONS Article, ACCIDENT PREVENTION.
- B. Provide safeguards, including warning signs, barricades, temporary fences, warning lights, and other similar items that are required for protection of all personnel during demolition and removal operations. Comply with requirements of Section 01 00 00, GENERAL REQUIREMENTS,

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

08-01-17

Article PROTECTION OF EXISTING VEGETATION, STRUCTURES, EQUIPMENT,
UTILITIES AND IMPROVEMENTS.

- C. Maintain fences, barricades, lights, and other similar items around exposed excavations until such excavations have been completely filled.
- D. Provide enclosed dust chutes with control gates from each floor to carry debris to truck beds and govern flow of material into truck. Provide overhead bridges of tight board or prefabricated metal construction at dust chutes to protect persons and property from falling debris.
- E. Prevent spread of flying particles and dust. Sprinkle rubbish and debris with water to keep dust to a minimum. Do not use water if it results in hazardous or objectionable condition such as, but not limited to; ice, flooding, or pollution. Vacuum and dust the work area daily.
- F. In addition to previously listed fire and safety rules to be observed in performance of work, include following:
 - 1. No wall or part of wall shall be permitted to fall outwardly from structures.
 - 2. Wherever a cutting torch or other equipment that might cause a fire is used, provide and maintain fire extinguishers nearby ready for immediate use. Instruct all possible users in use of fire extinguishers.
 - 3. Keep hydrants clear and accessible at all times. Prohibit debris from accumulating within a radius of 4500 mm (15 feet) of fire hydrants.
- G. Before beginning any demolition work, the Contractor shall survey the site and examine the drawings and specifications to determine the extent of the work. The contractor shall take necessary precautions to avoid damages to existing items to remain in place, to be reused, or to remain the property of the Health Care System; any damaged items shall be repaired or replaced as approved by the Contracting Officer's Representative (COR). The Contractor shall coordinate the work of this section with all other work and shall construct and maintain shoring, bracing, and supports as required. The Contractor shall ensure that structural elements are not overloaded and shall be responsible for

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

02 41 00-2

10/28/2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

08-01-17

increasing structural supports or adding new supports as may be required as a result of any cutting, removal, or demolition work performed under this contract. Do not overload structural elements. Provide new supports and reinforcement for existing construction weakened by demolition or removal works. Repairs, reinforcement, or structural replacement must have COR's approval.

- H. The work shall comply with the requirements of Section 01 57 19, TEMPORARY ENVIRONMENTAL CONTROLS.
- I. The work shall comply with the requirements of Section 01 00 00, GENERAL REQUIREMENTS and Section 01 35 26, SAFETY REQUIREMENTS.

1.4 UTILITY SERVICES (NOT USED)

- A. Demolish and remove outside utility service lines shown to be removed.
- B. Remove abandoned outside utility lines that would interfere with installation of new utility lines and new construction.

PART 2 - PRODUCTS (NOT USED)

PART 3 - EXECUTION

3.1 DEMOLITION:

- A. Debris, including brick, concrete, stone, metals and similar materials shall become property of Contractor and shall be disposed of by him daily, off the Health Care System property to avoid accumulation at the demolition site. Materials that cannot be removed daily shall be stored in areas specified by the COR. Break up concrete slabs below grade that do not require removal from present location into pieces not exceeding 600 mm (24 inches) square to permit drainage. Contractor shall dispose debris in compliance with applicable federal, state or local permits, rules and/or regulations.
- C. Remove and legally dispose of all materials. Materials removed shall become property of contractor and shall be disposed of in compliance with applicable federal, state or local permits, rules and/or regulations.
- D. Remove existing utilities uncovered by work and terminate in a manner conforming to the nationally recognized code covering the specific utility and approved by the COR. When Utility lines are encountered

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

08-01-17

that are not indicated on the drawings, the COR shall be notified prior to further work in that area.

3.2 CLEAN-UP:

On completion of work of this section and after removal of all debris, leave site in clean condition satisfactory to COR. Clean-up shall include disposal off the Health Care System property of all items and materials not required to remain the property of the Government as well as all debris and rubbish resulting from demolition operations.

- - - E N D - - -

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

12-11

SECTION 02 42 00
CUTTING, REMOVAL, DEMOLITION, RESTORATION AND PATCHING

PART 1 - GENERAL

1.1 SCOPE

- A. Refer to SECTION 01 00 00, GENERAL REQUIREMENTS, for special requirements, protection, constraints, timing of work, scheduling of work, enclosures and similar requirements relating to this Section.
- B. This Section covers cutting, demolition, removal work, patching, leveling and restoration work as necessary to accomplish and complete all work under this contract, including any relocation or reuse of existing materials, equipment, systems, or other work, as well as the disposition of salvaged materials or debris. This Section applies to all work under this contract, including general construction, mechanical and electrical work.
- C. Contractor and his subcontractors shall examine the spaces/work site themselves to determine the actual conditions and requirements. All removals, demolition, cutting, restoration, new installations and other work shall be accomplished to transform the existing spaces and conditions to the new conditions required under the Contract, as well as to accomplish all tie-in work of new to existing.
- D. It is the intent that, unless specifically shown on the schedules, or is inherent in the work to be accomplished under the general construction work of the area, that each Contractor shall perform the demolition, cutting, removals, relocations, patching and leveling, and restoration as will be required to accomplish the work under their contracts. All work indicated on the schedules shall be accomplished by the General Contractor.
- E. Except for general demolition of entire areas, it is the intent that at each area or space the Contractor and each subcontractor shall make removals, perform cutting or demolition and accomplish relocations of work normal to his trade (i.e., Mechanical Contractor removes or relocates piping, ductwork and similar. At areas of general demolition of entire area spaces, the Mechanical Contractor shall make removals

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

02 42 00-1

10/28/2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

12-11

normal to their trade or may be called for, for reuse or relocation, make any relocations and cutoffs, terminate, or otherwise discontinue services that will be abandoned, shall be removed to the nearest active main. The General Contractor shall then demolish or remove all unwanted electrical or mechanical materials, items or elements in the area.

- F. Contractor is required to restore all finishes, surfaces, items, & materials as required to accommodate new finishes. For example, if wallpaper, vinyl wall covering, ceramic wall tile, etc., is existing on wall, and new wall finish calls for wall to be painted, Contractor is required to remove existing wall paper, vinyl wall covering, ceramic wall tile, etc., to accommodate new painted finish. These surfaces are required to be verified prior to bid, as no change to contract will be provided after award if existing finishes are clearly present.

PART 2 - MATERIALS

2.1 SALVAGEABLE MATERIALS TO BE STORED BY OWNER (VA)

- A. The owner shall mark or tag existing materials, equipment or other items that are to be retained during a pre-demolition walk through. Salvageable materials and items designated or marked to remain the property of the government shall be carefully removed by applicable trades, protected from damage and stored adjacent to the removal area as directed.
- B. Consult the Contracting Officer's Representative (COR) concerning any possible salvageable items prior to demolition thereof. Carefully remove and salvage any materials designated to be retained.
- C. Any materials not wanted by the government shall be removed from the site by the Contractor, without additional cost to the government.
- D. Removal from the area and the site to the government's storage area shall be by the Contractor.

PART 3 - EXECUTION

3.1 TEMPORARY PROTECTION

- A. Provide temporary bracing, shoring, needling and support during demolition, cutting, remodeling and related new construction necessary

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

02 42 00-2

10/28/2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

12-11

for the execution of the work and the protection of persons and property. Perform all work with appropriate supports, protection and methods to prevent collapse, settling or damage to property or persons. Provide adequate supports for the loads to be carried, with loads properly distributed, and including to lower levels and sound bearing, if necessary.

- B. Provide protective covering and enclosures necessary to prevent damage to existing spaces and materials to remain.
- C. Provide dust proof temporary enclosures (including above ceilings) separating areas under demolition and remodeling from the remainder of the buildings as well as temporary filters at ductwork. If work produces fumes or odors that impact patient care or staff operations, granulated active carbon filters shall be provided for all HVAC intake units where operations provide these odors or fumes. Provide temporary hinged doors in temporary enclosures where necessary. Temporary and permanent doors shall be completely sealed with tape or other suitable material during demolition work and shall remain sealed until dust has settled.

3.2 MECHANICAL AND ELECTRICAL WORK EXPOSED

- A. Where unknown mechanical piping, ductwork or electrical conduit is exposed during removal of partitions, walls, floors and ceilings, the removal or re-routing shall be by the Mechanical or Electrical Contractor as applicable. The Contractor is to provide at minimum labor and materials required for one journeyman electrician or plumber 40-manhours to relocate these utilities. Re-routed piping shall be located where directed and shall be re-connected to maintain all functions in proper operation. Abandoned piping and ducts shall not be left in place except as directed by COR. There shall be no "dead end" water, sewer, medical gas, or vent piping existing in the completed work.
- B. Removals, capping or otherwise terminating services which are abandoned or need to be abandoned, shall be accomplished without additional cost to the government, whether shown or noted on drawings or otherwise

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

02 42 00-3

10/28/2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

12-11

encountered.

- C. Contractor is to remove all old abandoned oval pneumatic tube lines, transfer boxes, and related equipment and components exposed within the construction area. The Contractor is to provide at minimum labor and materials required for one electrician or laborer 40-manhours for removal.

3.3 WORK OF EACH CONTRACT

- A. The General Contractor and each subcontractor shall carefully review the contract documents, including those primarily for other trades, with respect to the coordination of demolition, removal and remodeling work and perform such removals normal to their respective trade as may be shown, noted, or otherwise required. Cutting and patching incidental to demolition, removal and/or remodeling of general construction work shall be construed as the work of the General Contractor when shown or indicated on the general construction drawings or schedules or specifically noted or called for on documents primarily for other trades as being accomplished by the General Contractor. Other Contractors shall perform such other cutting, demolition, patching, replacement and restoration as may be required to accomplish their part of the work.

3.4 PAINTING

- A. Any painting to match adjacent or surrounding areas.

3.5 LEVELING OF FLOORS

- A. Contractor shall submit for approval - brand of floor leveler to be used. Leveler shall include additive for waterproofing.

3.6 PATCHING

- A. Contractor shall be responsible for all patching required as a result of installation of new work.
- B. Contractor shall furnish all related components, trims, etc., required to complete the work.

- - -END- - -

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

00419

**SECTION 02 82 11
TRADITIONAL ASBESTOS ABATEMENT**

TABLE OF CONTENTS

1.1 SUMMARY OF THE WORK.....1
1.1.1 CONTRACT DOCUMENTS AND RELATED REQUIREMENTS.....1
1.1.2 EXTENT OF WORK.....1
1.1.3 RELATED WORK.....1
1.1.4 TASKS.....2
1.1.5 CONTRACTORS USE OF PREMISES.....2
1.2 VARIATIONS IN QUANTITY.....2
1.3 STOP ASBESTOS REMOVAL.....2
1.4 DEFINITIONS.....3
1.4.1 GENERAL.....3
1.4.2 GLOSSARY.....3
1.4.3 REFERENCED STANDARDS ORGANIZATIONS.....10
1.5 APPLICABLE CODES AND REGULATIONS.....11
1.5.1 GENERAL APPLICABILITY OF CODES, REGULATIONS, AND STANDARDS.....11
1.5.2 Asbestos Abatement CONTRACTOR RESPONSIBILITY.....12
1.5.3 FEDERAL REQUIREMENTS.....12
1.5.4 STATE REQUIREMENTS.....13
1.5.5 LOCAL REQUIREMENTS (NOT USED).....13
1.5.6 STANDARDS.....13
1.5.7 EPA GUIDANCE DOCUMENTS.....14
1.5.8 NOTICES.....14
1.5.9 PERMITS/LICENSES.....14
1.5.10 POSTING AND FILING OF REGULATIONS.....15
1.5.11 VA RESPONSIBILITIES.....15
1.5.12 EMERGENCY ACTION PLAN AND ARRANGEMENTS.....15
1.5.13 PRE-CONSTRUCTION MEETING.....16
1.6 PROJECT COORDINATION.....17
1.6.1 PERSONNEL.....17
1.7 RESPIRATORY PROTECTION.....18

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

04-19

1.7.1 GENERAL - RESPIRATORY PROTECTION PROGRAM.....18

1.7.2 RESPIRATORY PROTECTION PROGRAM COORDINATOR.....18

1.7.3 SELECTION AND USE OF RESPIRATORS.....18

1.7.4 MINIMUM RESPIRATORY PROTECTION.....18

1.7.5 MEDICAL WRITTEN OPINION.....18

1.7.6 RESPIRATOR FIT TEST.....19

1.7.7 RESPIRATOR FIT CHECK.....19

1.7.8 MAINTENANCE AND CARE OF RESPIRATORS.....19

1.7.9 SUPPLIED AIR SYSTEMS.....19

1.8 WORKER PROTECTION.....19

1.8.1 TRAINING OF ABATEMENT PERSONNEL.....19

1.8.2 MEDICAL EXAMINATIONS.....19

1.8.3 REGULATED AREA ENTRY PROCEDURE.....20

1.8.4 DECONTAMINATION PROCEDURE.....20

1.8.5 REGULATED AREA REQUIREMENTS.....21

1.9 DECONTAMINATION FACILITIES.....21

1.9.1 DESCRIPTION.....21

1.9.2 GENERAL REQUIREMENTS.....21

1.9.3 TEMPORARY FACILITIES TO THE PDF AND W/EDF.....21

1.9.4 PERSONNEL DECONTAMINATION FACILITY (PDF).....21

1.9.5 WASTE/EQUIPMENT DECONTAMINATION FACILITY (W/EDF).....23

1.9.6 WASTE/EQUIPMENT DECONTAMINATION PROCEDURES.....24

PART 2 - PRODUCTS, MATERIALS AND EQUIPMENT.....25

2.1 MATERIALS AND EQUIPMENT.....25

2.1.1 GENERAL REQUIREMENTS.....25

2.2 MONITORING, INSPECTION AND TESTING.....26

2.2.1 GENERAL.....26

2.2.2 SCOPE OF SERVICES OF THE VPIH/CIH CONSULTANT.....27

2.2.3 MONITORING, INSPECTION AND TESTING BY CONTRACTOR CPIH/CIH.....28

2.3 ASBESTOS HAZARD ABATEMENT pLAN.....29

2.4 SUBMITTALS.....29

2.4.1 PRE-START MEETING SUBMITTALS.....29

2.4.2 SUBMITTALS DURING ABATEMENT.....31

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

04-19

2.4.3 SUBMITTALS AT COMPLETION OF ABATEMENT.....32

2.5 ENCAPSULANTS.....32

2.5.1 TYPES OF ENCAPSULANTS.....32

2.5.2 PERFORMANCE REQUIREMENTS.....32

2.5.3 CERTIFICATES OF COMPLIANCE.....33

PART 3 - EXECUTION.....33

3.1 REGULATED AREA PREPARATIONS.....33

3.1.1 SITE SECURITY.....33

3.1.2 SIGNAGE AND POWER MANAGEMENT.....34

3.1.3 NEGATIVE PRESSURE FILTRATION SYSTEM.....34

3.1.3.1 DESIGN AND LAYOUT.....34

3.1.3.2 NEGATIVE AIR MACHINES (HEPA UNITS).....35

3.1.3.3 PRESSURE DIFFERENTIAL.....36

3.1.3.4 MONITORING.....36

3.1.3.5 AUXILIARY GENERATOR.....36

3.1.3.6 SUPPLEMENTAL MAKE-UP AIR INLETS.....37

3.1.3.7 TESTING THE SYSTEM.....37

3.1.3.8 DEMONSTRATION OF THE NEGATIVE PRESSURE FILTRATION SYSTEM.....37

3.1.3.9 USE OF THE NEGATIVE PRESSURE FILTRATION SYSTEM DURING ABATEMENT
OPERATIONS.....38

3.1.3.10 DISMANTLING THE SYSTEM.....38

3.1.4 CONTAINMENT BARRIERS AND COVERINGS IN THE REGULATED AREA.....38

3.1.4.1 GENERAL.....38

3.1.4.2 PREPARATION PRIOR TO SEALING THE REGULATED AREA.....39

3.1.4.3 CONTROLLING ACCESS TO THE REGULATED AREA.....39

3.1.4.4 CRITICAL BARRIERS.....39

3.1.4.5 PRIMARY BARRIERS.....39

3.1.4.6 SECONDARY BARRIERS.....40

3.1.4.7 EXTENSION OF THE REGULATED AREA.....40

3.1.4.8 FIRESTOPPING (NOT USED).....40

3.1.5 SANITARY FACILITIES.....40

3.1.6 PERSONAL PROTECTIVE EQUIPMENT.....40

3.1.7 PRE-CLEANING.....40

3.1.8 PRE-ABATEMENT ACTIVITIES.....41

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

04-19

3.1.8.1 PRE-ABATEMENT MEETING.....41

3.1.8.2 PRE-ABATEMENT CONSTRUCTION AND OPERATIONS.....42

3.1.8.3 PRE-ABATEMENT INSPECTIONS AND PREPARATIONS.....42

3.2 REMOVAL OF ACM.....43

3.2.1 WETTING ACM.....43

3.2.2 SECONDARY BARRIER AND WALKWAYS.....43

3.2.3 WET REMOVAL OF ACM.....43

3.2.4 WET REMOVAL OF AMOSITE (NOT USED).....45

3.2.5 REMOVAL OF ACM/DIRT FLOORS AND OTHER SPECIAL PROCEDURES (NOT USED).....45

3.3 LOCKDOWN ENCAPSULATION.....45

3.3.1 GENERAL.....45

3.3.2 DELIVERY AND STORAGE.....45

3.3.3 WORKER PROTECTION.....45

3.3.4 ENCAPSULATION OF SCRATCH COAT PLASTER OR PIPING (NOT USED).....45

3.3.5 SEALING EXPOSED EDGES.....45

3.4 DISPOSAL OF ACM WASTE MATERIALS.....46

3.4.1 GENERAL.....46

3.4.2 PROCEDURES.....46

3.5 PROJECT DECONTAMINATION.....46

3.5.1 GENERAL.....46

3.5.2 REGULATED AREA CLEARANCE.....47

3.5.3 WORK DESCRIPTION.....47

3.5.4 PRE-DECONTAMINATION CONDITIONS.....47

3.5.5 FIRST CLEANING.....47

3.5.6 PRE-CLEARANCE INSPECTION AND TESTING.....47

3.5.7 LOCKDOWN ENCAPSULATION OF ABATED SURFACES (NOT USED).....48

3.6 FINAL VISUAL INSPECTION AND AIR CLEARANCE TESTING.....48

3.6.1 GENERAL.....48

3.6.2 FINAL VISUAL INSPECTION.....48

3.6.3 FINAL AIR CLEARANCE TESTING.....48

3.6.4 FINAL AIR CLEARANCE PROCEDURES.....48

3.6.5 CLEARANCE SAMPLING USING PCM49

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

04-19

3.6.6 CLEARANCE SAMPLING USING TEM - EQUAL TO OR MORE THAN 260LF/160SF: (NOT USED)..... 49

3.6.7 LABORATORY TESTING OF PCM SAMPLES..... 49

3.6.8 LABORATORY TESTING OF TEM SAMPLES (NOT USED).....49

3.6.9 LABORATORY TESTING OF BULK SAMPLES..... 49

3.7 ABATEMENT CLOSEOUT AND CERTIFICATE OF COMPLIANCE.....50

3.7.1 COMPLETION OF ABATEMENT WORK.....50

3.7.2 CERTIFICATE OF COMPLETION BY CONTRACTOR.....50

3.7.3 WORK SHIFTS.....50

3.7.4 RE-INSULATION (NOT USED).....50

ATTACHMENT #1.....51

ATTACHMENT #2.....53

ATTACHEMENT #3..... 55

ATTACHMENT #4.....56

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

04-19

SECTION 02 82 11

CLASS I NEGATIVE PRESSURE ENCLOSURE ASBESTOS ABATEMENT SPECIFICATIONS

PART 1 - GENERAL

1.1 SUMMARY OF THE WORK

1.1.1 CONTRACT DOCUMENTS AND RELATED REQUIREMENTS

Drawings, general provisions of the contract, including general and supplementary conditions and other Division 01 specifications, shall apply to the work of this section. The contract documents show the work to be done under the contract and related requirements and conditions impacting the project. Related requirements and conditions include applicable codes and regulations, notices and permits, existing site conditions and restrictions on use of the site, requirements for partial owner occupancy during the work, coordination with other work and the phasing of the work. In the event the Asbestos Abatement Contractor discovers a conflict in the contract documents and/or requirements or codes, the conflict must be brought to the immediate attention of the Contracting Officer for resolution. Whenever there is a conflict or overlap in the requirements, the most stringent shall apply. Any actions taken by the Contractor without obtaining guidance from the Contracting Officer shall become the sole risk and responsibility of the Asbestos Abatement Contractor. All costs incurred due to such action are also the responsibility of the Asbestos Abatement Contractor.

1.1.2 EXTENT OF WORK

- A. Below is a brief description of the estimated quantities of asbestos containing materials to be abated. These quantities are for informational purposes only and are based on the best information available at the time of the specification preparation. The Contractor shall satisfy himself as the actual quantities to be abated. Nothing in this section may be interpreted as limiting the extent of work otherwise required by this contract and related documents.
- B. Removal, clean-up and disposal of asbestos containing materials (ACM) and asbestos/waste contaminated elements in an appropriate regulated area for the following approximate quantities;
 - (200) square(feet) of asbestos-containing wallboard adhesive
 - (2) roof drain pipe ends with <1 square (feet) asbestos-containing bituminous coating
 - (29) window units with asbestos-containing glazing compound and caulking and lead based paint (LBP)

1.1.3 RELATED WORK

- A. Section 02 41 00, DEMOLITION.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

04-19

- B. Section 02 82 13.13, GLOVEBAG ASBESTOS ABATEMENT.
- C. Section 02 82 13.19, ASBESTOS FLOOR TILE AND MASTIC ABATEMENT.

- D. Section 02 83 33.13, LEAD-BASED PAINT REMOVAL AND DISPOSAL.

1.1.4 TASKS

The work tasks are summarized briefly as follows:

- A. Pre-abatement activities including pre-abatement meeting(s), inspection(s), notifications, permits, submittal approvals, regulated area preparations, emergency procedures arrangements, and standard operating procedures for asbestos abatement work.
- B. Abatement activities including removal, encapsulation, , clean-up and disposal of ACM waste, recordkeeping, security, air monitoring, and inspections.
- C. Cleaning and decontamination activities including final visual inspection, clearance air monitoring and certification of decontamination.

1.1.5 CONTRACTORS USE OF PREMISES

- A. The Contractor and Contractor's personnel shall cooperate fully with the VA representative/consultant to facilitate efficient use of buildings and areas within buildings. The Contractor shall perform the work in accordance with the VA specifications, drawings, phasing plan and in compliance with any/all applicable Federal, State and Local regulations and requirements.
- B. The Contractor shall use the existing facilities in the building strictly within the limits indicated in contract documents as well as the approved VA Design and Construction Procedures. Any variation from the arrangements shown on drawings shall be secured in writing from the VA representative through the pre-abatement plan of action.

1.2 VARIATIONS IN QUANTITY

The quantities and locations of ACM as indicated on the drawings and the extent of work included in this section are estimated which are limited by the physical constraints imposed by occupancy of the buildings and accessibility to ACM. Accordingly, minor variations (+/- 5%) in quantities of ACM within the regulated area are considered as having no impact on contract price and time requirements of this contract. Where additional work is required beyond the above variation, the contractor shall provide unit prices for newly discovered ACM and those prices shall be used for additional work required under the contractor.

1.3 STOP ASBESTOS REMOVAL

If the Contracting Officer; their field representative; (the facility Safety Officer/Manager or their designee, or the VA Professional Industrial Hygienist/Certified Industrial Hygienist (VPIH/CIH) presents a verbal **Stop Asbestos Removal Order**, the Contractor/Personnel shall immediately stop all asbestos removal and maintain HEPA filtered negative

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

04-19

pressure air flow in the containment and adequately wet any exposed ACM. If a verbal Stop Asbestos Removal Order is issued, the VA shall follow-up with a written order to the Contractor as soon as it is practicable. The Contractor shall not resume any asbestos removal activity until authorized to do so in writing by the VA Contracting Officer. A stop asbestos removal order may be issued at any time the VA Contracting Officer determines abatement conditions/activities are not within VA specification, regulatory requirements or that an imminent hazard exists to human health or the environment. Work stoppage will continue until conditions have been corrected to the satisfaction of the VA. Standby time and costs for corrective actions will be borne by the Contractor, including the VPIH/CIH time. The occurrence of any of the following events shall be reported immediately by the Contractor's competent person to the VA Contracting Office or field representative using the most expeditious means (e.g., verbal or telephonic), followed up with written notification to the Contracting Officer as soon as practical. The Contractor shall immediately stop asbestos removal/disturbance activities and initiate fiber reduction activities:

- A. Airborne PCM analysis results equal to or greater than 0.01 f/cc outside a regulated area;
- B. breach or break in regulated area containment barrier(s);
- C. less than -0.02" WCG pressure in the regulated area;
- D. serious injury/death at the site;
- E. fire/safety emergency at the site;
- F. respiratory protection system failure;
- G. power failure or loss of wetting agent; or
- H. any visible emissions observed outside the regulated area.

1.4 DEFINITIONS

1.4.1 GENERAL

Definitions and explanations here are neither complete nor exclusive of all terms used in the contract documents, but are general for the work to the extent they are not stated more explicitly in another element of the contract documents. Drawings must be recognized as diagrammatic in nature and not completely descriptive of the requirements indicated therein.

1.4.2 GLOSSARY

Abatement - Procedures to control fiber release from asbestos-containing materials. Includes removal, encapsulation, enclosure, demolition, and renovation activities related to asbestos containing materials (ACM).

Aerosol - Solid or liquid particulate suspended in air.

Adequately wet - Sufficiently mixed or penetrated with liquid to prevent the release of particulates. If visible emissions are observed coming from the ACM, then that material has not been adequately wetted.

Aggressive method - Removal or disturbance of building material by sanding, abrading, grinding, or other method that breaks, crumbles, or disintegrates intact ACM.

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

04-19

Aggressive sampling - EPA AHERA defined clearance sampling method using air moving equipment such as fans and leaf blowers to aggressively disturb and maintain in the air residual fibers after abatement.

AHERA - Asbestos Hazard Emergency Response Act. Asbestos regulations for schools issued in 1987.

Aircell - Pipe or duct insulation made of corrugated cardboard which contains asbestos.

Air monitoring - The process of measuring the fiber content of a known volume of air collected over a specified period of time. The NIOSH 7400 Method, Issue 2 is used to determine the fiber levels in air. For personal samples and clearance air testing using Phase Contrast Microscopy (PCM) analysis. NIOSH Method 7402 can be used when it is necessary to confirm fibers counted by PCM as being asbestos. The AHERA TEM analysis may be used for background, area samples and clearance samples when required by this specification, or at the discretion of the VPIH/CIH as appropriate.

Air sample filter - The filter used to collect fibers which are then counted. The filter is made of mixed cellulose ester membrane for PCM (Phase Contrast Microscopy) and polycarbonate for TEM (Transmission Electron Microscopy)

Amended water - Water to which a surfactant (wetting agent) has been added to increase the penetrating ability of the liquid.

Asbestos - Includes chrysotile, amosite, crocidolite, tremolite asbestos, anthophyllite asbestos, actinolite asbestos, and any of these minerals that have been chemically treated or altered. Asbestos also includes PACM, as defined below.

Asbestos Hazard Abatement Plan (AHAP) - Asbestos work procedures required to be submitted by the contractor before work begins.

Asbestos-containing material (ACM) - Any material containing more than one percent of asbestos.

Asbestos contaminated elements (ACE) - Building elements such as ceilings, walls, lights, or ductwork that are contaminated with asbestos.

Asbestos-contaminated soil (ACS) - Soil found in the work area or in adjacent areas such as crawlspaces or pipe tunnels which is contaminated with asbestos-containing material debris and cannot be easily separated from the material.

Asbestos-containing waste (ACW) material - Asbestos-containing material or asbestos contaminated objects requiring disposal.

Asbestos Project Monitor - Some states require that any person conducting asbestos abatement clearance inspections and clearance air sampling be licensed as an asbestos project monitor.

Asbestos waste decontamination facility - A system consisting of drum/bag washing facilities and a temporary storage area for cleaned containers of asbestos waste. Used as the exit for waste and equipment leaving the regulated area. In an emergency, it may be used to evacuate personnel.

Authorized person - Any person authorized by the VA, the Contractor, or government agency and required by work duties to be present in regulated areas.

Authorized visitor - Any person approved by the VA; the contractor; or any government agency representative having jurisdiction over the regulated area (e.g., OSHA, Federal and State EPA).

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

04-19

Barrier - Any surface that isolates the regulated area and inhibits fiber migration from the regulated area.

Containment Barrier - An airtight barrier consisting of walls, floors, and/or ceilings of sealed plastic sheeting which surrounds and seals the outer perimeter of the regulated area.

Critical Barrier - The barrier responsible for isolating the regulated area from adjacent spaces, typically constructed of plastic sheeting secured in place at openings such as doors, windows, or any other opening into the regulated area.

Primary Barrier - Plastic barriers placed over critical barriers and exposed directly to abatement work.

Secondary Barrier - Any additional plastic barriers used to isolate and provide protection from debris during abatement work.

Breathing zone - The hemisphere forward of the shoulders with a radius of about 150 - 225 mm (6 - 9 inches) from the worker's nose.

Bridging encapsulant - An encapsulant that forms a layer on the surface of the ACM.

Building/facility owner - The legal entity, including a lessee, which exercises control over management and recordkeeping functions relating to a building and/or facility in which asbestos activities take place.

Bulk testing - The collection and analysis of suspect asbestos containing materials.

Certified Industrial Hygienist (CIH) - A person certified in the comprehensive practice of industrial hygiene by the American Board of Industrial Hygiene.

Class I asbestos work - Activities involving the removal of Thermal System Insulation (TSI) and surfacing ACM and Presumed Asbestos Containing Material (PACM).

Class II asbestos work - Activities involving the removal of ACM which is not thermal system insulation or surfacing material. This includes, but is not limited to, the removal of asbestos-containing wallboard, floor tile and sheeting, roofing and siding shingles, and construction mastic.

Clean room/Changing room - An uncontaminated room having facilities for the storage of employee's street clothing and uncontaminated materials and equipment.

Clearance sample - The final air sample taken after all asbestos work has been done and visually inspected. Performed by the VA's professional industrial hygiene consultant/Certified Industrial Hygienist (VPIH/CIH).

Closely resemble - The major workplace conditions which have contributed to the levels of historic asbestos exposure, are no more protective than conditions of the current workplace.

Competent person - In addition to the definition in 29 CFR 1926.32(f), one who is capable of identifying existing asbestos hazards in the workplace and selecting the appropriate control strategy for asbestos exposure, who has the authority to take prompt corrective measures to eliminate them, as specified in 29 CFR 1926.32(f); in addition, for Class I and II work who is specially trained in a training course which meets the criteria of EPA's Model Accreditation Plan (40 CFR 763) for supervisor.

Contractor's Professional Industrial Hygienist (CPIH/CIH) - The asbestos abatement contractor's industrial hygienist. The industrial hygienist

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

04-19

must meet the qualification requirements of a PIH and may be a certified industrial hygienist (CIH).

Count - Refers to the fiber count or the average number of fibers greater than five microns in length with a length-to-width (aspect) ratio of at least 3 to 1, per cubic centimeter of air.

Crawlspace - An area which can be found either in or adjacent to the work area. This area has limited access and egress and may contain asbestos materials and/or asbestos contaminated soil.

Decontamination area/unit - An enclosed area adjacent to and connected to the regulated area and consisting of an equipment room, shower room, and clean room, which is used for the decontamination of workers, materials, and equipment that are contaminated with asbestos.

Demolition - The wrecking or taking out of any load-supporting structural member and any related razing, removing, or stripping of asbestos products.

VA Total - means a building or substantial part of the building is completely removed, torn or knocked down, bulldozed, flattened, or razed, including removal of building debris.

Disposal bag - Typically 6 mil thick sift-proof, dustproof, leak-tight container used to package and transport asbestos waste from regulated areas to the approved landfill. Each bag/container must be labeled/marked in accordance with EPA, OSHA and DOT requirements.

Disturbance - Activities that disrupt the matrix of ACM or PACM, crumble or pulverize ACM or PACM, or generate visible debris from ACM or PACM. Disturbance includes cutting away small amounts of ACM or PACM, no greater than the amount that can be contained in one standard sized glove bag or waste bag in order to access a building component. In no event shall the amount of ACM or PACM so disturbed exceed that which can be contained in one glove bag or disposal bag which shall not exceed 60 inches in length or width.

Drum - A rigid, impermeable container made of cardboard fiber, plastic, or metal which can be sealed in order to be sift-proof, dustproof, and leak-tight.

Employee exposure - The exposure to airborne asbestos that would occur if the employee were not wearing respiratory protection equipment.

Encapsulant - A material that surrounds or embeds asbestos fibers in an adhesive matrix and prevents the release of fibers.

Encapsulation - Treating ACM with an encapsulant.

Enclosure - The construction of an air tight, impermeable, permanent barrier around ACM to control the release of asbestos fibers from the material and also eliminate access to the material.

Equipment room - A contaminated room located within the decontamination area that is supplied with impermeable bags or containers for the disposal of contaminated protective clothing and equipment.

Fiber - A particulate form of asbestos, 5 microns or longer, with a length to width (aspect) ratio of at least 3 to 1.

Fibers per cubic centimeter (f/cc) - Abbreviation for fibers per cubic centimeter, used to describe the level of asbestos fibers in air.

Filter - Media used in respirators, vacuums, or other machines to remove particulate from air.

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

04-19

Firestopping - Material used to close the open parts of a structure in order to prevent a fire from spreading.

Friable asbestos containing material - Any material containing more than one (1) percent or asbestos as determined using the method specified in appendix A, Subpart F, 40 CFR 763, section 1, Polarized Light Microscopy, that, when dry, can be crumbled, pulverized, or reduced to powder by hand pressure.

Glovebag - Not more than a 60 x 60 inch impervious plastic bag-like enclosure affixed around an asbestos-containing material, with glove-like appendages through which materials and tools may be handled.

High efficiency particulate air (HEPA) filter - An ASHRAE MERV 17 filter capable of trapping and retaining at least 99.97 percent of all mono-dispersed particles of 0.3 micrometers in diameter.

HEPA vacuum - Vacuum collection equipment equipped with a HEPA filter system capable of collecting and retaining asbestos fibers.

Homogeneous area - An area of surfacing, thermal system insulation or miscellaneous ACM that is uniform in color, texture and date of application.

HVAC - Heating, Ventilation and Air Conditioning

Industrial hygienist (IH) - A professional qualified by education, training, and experience to anticipate, recognize, evaluate and develop controls for occupational health hazards. Meets definition requirements of the American Industrial Hygiene Association (AIHA).

Industrial hygienist technician (IH Technician) - A person working under the direction of an IH or CIH who has special training, experience, certifications and licenses required for the industrial hygiene work assigned. Some states require that an industrial hygienist technician conducting asbestos abatement clearance inspection and clearance air sampling be licensed as an asbestos project monitor.

Intact - The ACM has not crumbled, been pulverized, or otherwise deteriorated so that the asbestos is no longer likely to be bound with its matrix.

Lockdown - Applying encapsulant, after a final visual inspection, on all abated surfaces at the conclusion of ACM removal prior to removal of critical barriers.

National Emission Standards for Hazardous Air Pollutants (NESHAP) - EPA's rule to control emissions of asbestos to the environment (40 CFR part 61, Subpart M).

Negative initial exposure assessment - A demonstration by the employer which complies with the criteria in 29 CFR 1926.1101 (f)(2)(iii), that employee exposure during an operation is expected to be consistently below the PEL.

Negative pressure - Air pressure which is lower than the surrounding area, created by exhausting air from a sealed regulated area through HEPA equipped filtration units. OSHA requires maintaining -0.02" water column gauge inside the negative pressure enclosure.

Negative pressure respirator - A respirator in which the air pressure inside the facepiece is negative during inhalation relative to the air pressure outside the respirator facepiece.

Non-friable ACM - Material that contains more than 1 percent asbestos but cannot be crumbled, pulverized, or reduced to powder by hand pressure.

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

04-19

Organic vapor cartridge - The type of cartridge used on air purifying respirators to remove organic vapor hazardous air contaminants.

Outside air - The air outside buildings and structures, including, but not limited to, the air under a bridge or in an open ferry dock.

Owner/operator - Any person who owns, leases, operates, controls, or supervises the facility being demolished or renovated or any person who owns, leases, operates, controls, or supervises the demolition or renovation operation, or both.

Penetrating encapsulant - Encapsulant that is absorbed into the ACM matrix without leaving a surface layer.

Personal sampling/monitoring - Representative air samples obtained in the breathing zone for one or workers within the regulated area using a filter cassette and a calibrated air sampling pump to determine asbestos exposure.

Permissible exposure limit (PEL) - The level of exposure OSHA allows for an 8 hour time weighted average. For asbestos fibers, the eight (8) hour time weighted average PEL is 0.1 fibers per cubic centimeter (0.1 f/cc) of air and the 30-minute Excursion Limit is 1.0 fibers per cubic centimeter (1 f/cc).

Personal protective equipment (PPE) - equipment designed to protect user from injury and/or specific job hazard. Such equipment may include protective clothing, hard hats, safety glasses, and respirators.

Pipe tunnel - An area, typically located adjacent to mechanical spaces or boiler rooms in which the pipes servicing the heating system in the building are routed to allow the pipes to access heating elements. These areas may contain asbestos pipe insulation, asbestos fittings, or asbestos-contaminated soil.

Polarized light microscopy (PLM) - Light microscopy using dispersion staining techniques and refractive indices to identify and quantify the type(s) of asbestos present in a bulk sample.

Polyethylene sheeting - Strong plastic barrier material 4 to 6 mils thick, semi-transparent, flame retardant per NFPA 241.

Positive/negative fit check - A method of verifying the seal of a facepiece respirator by temporarily occluding the filters and breathing in (inhaling) and then temporarily occluding the exhalation valve and breathing out (exhaling) while checking for inward or outward leakage of the respirator respectively.

Presumed ACM (PACM) - Thermal system insulation, surfacing, and flooring material installed in buildings prior to 1981. If the building owner has actual knowledge, or should have known through the exercise of due diligence that other materials are ACM, they too must be treated as PACM. The designation of PACM may be rebutted pursuant to 29 CFR 1926.1101 (b).

Professional IH - An IH who meets the definition requirements of AIHA; meets the definition requirements of OSHA as a "Competent Person" at 29 CFR 1926.1101 (b); has completed two specialized EPA approved courses on management and supervision of asbestos abatement projects; has formal training in respiratory protection and waste disposal; and has a minimum of four projects of similar complexity with this project of which at least three projects serving as the supervisory IH. The PIH may be either the VA's PIH (VPIH) or Contractor's PIH (CPIH/CIH).

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

04-19

Project designer - A person who has successfully completed the training requirements for an asbestos abatement project designer as required by 40 CFR 763 Appendix C, Part I; (B) (5).

Assigned protection factor - A value assigned by OSHA/NIOSH to indicate the expected protection provided by each respirator class, when the respirator is properly selected and worn correctly. The number indicates the reduction of exposure level from outside to inside the respirator facepiece.

Qualitative fit test (QLFT) - A fit test using a challenge material that can be sensed by the wearer if leakage in the respirator occurs.

Quantitative fit test (QNFT) - A fit test using a challenge material which is quantified outside and inside the respirator thus allowing the determination of the actual fit factor.

Regulated area - An area established by the employer to demarcate where Class I, II, III asbestos work is conducted, and any adjoining area where debris and waste from such asbestos work may accumulate; and a work area within which airborne concentrations of asbestos exceed, or there is a reasonable possibility they may exceed the PEL.

Regulated ACM (RACM) - Friable ACM; Category I non-friable ACM that has become friable; Category I non-friable ACM that will be or has been subjected to sanding, grinding, cutting, or abrading or; Category II non-friable ACM that has a high probability of becoming or has become crumbled, pulverized, or reduced to powder by the forces expected to act on the material in the course of the demolition or renovation operation.

Removal - All operations where ACM, PACM and/or RACM is taken out or stripped from structures or substrates, including demolition operations.

Renovation - Altering a facility or one or more facility components in any way, including the stripping or removal of asbestos from a facility component which does not involve demolition activity.

Repair - Overhauling, rebuilding, reconstructing, or reconditioning of structures or substrates, including encapsulation or other repair of ACM or PACM attached to structures or substrates.

Shower room - The portion of the PDF where personnel shower before leaving the regulated area.

Supplied air respirator (SAR) - A respiratory protection system that supplies minimum Grade D respirable air per ANSI/Compressed Gas Association Commodity Specification for Air, G-7.1-1989.

Surfacing ACM - A material containing more than 1 percent asbestos that is sprayed, troweled on or otherwise applied to surfaces for acoustical, fireproofing and other purposes.

Surfactant - A chemical added to water to decrease water's surface tension thus making it more penetrating into ACM.

Thermal system ACM - A material containing more than 1 percent asbestos applied to pipes, fittings, boilers, breeching, tanks, ducts, or other structural components to prevent heat loss or gain.

Transmission electron microscopy (TEM) - A microscopy method that can identify and count asbestos fibers.

VA Professional Industrial Hygienist (VPIH/CIH) - The Department of Veterans Affairs Professional Industrial Hygienist must meet the qualifications of a PIH, and may be a Certified Industrial Hygienist (CIH).

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

04-19

VA Representative - The VA official responsible for on-going project work.
Visible emissions - Any emissions, which are visually detectable without the aid of instruments, coming from ACM/PACM/RACM/ACS or ACM waste material.

Waste/Equipment decontamination facility (W/EDF) - The area in which equipment is decontaminated before removal from the regulated area.

Waste generator - Any owner or operator whose act or process produces asbestos-containing waste material.

Waste shipment record - The shipping document, required to be originated and signed by the waste generator, used to track and substantiate the disposition of asbestos-containing waste material.

Wet cleaning - The process of thoroughly eliminating, by wet methods, any asbestos contamination from surfaces or objects.

1.4.3 REFERENCED STANDARDS ORGANIZATIONS

The following acronyms or abbreviations as referenced in contract/specification documents are defined to mean the associated names. Names and addresses may be subject to change.

- A. VA Department of Veterans Affairs
810 Vermont Avenue, NW
Washington, DC 20420
- B. AIHA American Industrial Hygiene Association
2700 Prosperity Avenue, Suite 250
Fairfax, VA 22031
703-849-8888
- C. ANSI American National Standards Institute
1430 Broadway
New York, NY 10018
212-354-3300
- D. ASTM American Society for Testing and Materials
1916 Race St.
Philadelphia, PA 19103
215-299-5400
- E. CFR Code of Federal Regulations
Government Printing Office
Washington, DC 20420
- F. CGA Compressed Gas Association
1235 Jefferson Davis Highway
Arlington, VA 22202
703-979-0900
- G. CS Commercial Standard of the National Institute of Standards and Technology (NIST)
U. S. Department of Commerce

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

04-19

Government Printing Office
Washington, DC 20420

H. EPA Environmental Protection Agency
401 M St., SW
Washington, DC 20460
202-382-3949

I. MIL-STD Military Standards/Standardization Division
Office of the Assistant Secretary of Defense
Washington, DC 20420

J. NIST National Institute for Standards and Technology
U. S. Department of Commerce
Gaithersburg, MD 20234
301-921-1000

K. NEC National Electrical Code (by NFPA)

L. NEMA National Electrical Manufacturer's Association
2101 L Street, N.W.
Washington, DC 20037

M. NFPA National Fire Protection Association
1 Batterymarch Park
P.O. Box 9101
Quincy, MA 02269-9101
800-344-3555

N. NIOSH National Institutes for Occupational Safety and Health
4676 Columbia Parkway
Cincinnati, OH 45226
513-533-8236

O. OSHA Occupational Safety and Health Administration
U.S. Department of Labor
Government Printing Office
Washington, DC 20402

P. UL Underwriters Laboratory
333 Pfingsten Rd.
Northbrook, IL 60062
312-272-8800

1.5 APPLICABLE CODES AND REGULATIONS

1.5.1 GENERAL APPLICABILITY OF CODES, REGULATIONS, AND STANDARDS

A. All work under this contract shall be done in strict accordance with all applicable Federal, State, and local regulations, standards and codes governing asbestos abatement, and any other trade work done in conjunction with the abatement. All applicable codes, regulations and standards are

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

04-19

adopted into this specification and will have the same force and effect as this specification.

- B. The most recent edition of any relevant regulation, standard, document or code shall be in effect. Where conflict among the requirements or with these specifications exists, the most stringent requirement(s) shall be utilized.
- C. Copies of all standards, regulations, codes and other applicable documents, including this specification and those listed in Section 1.5 shall be available at the worksite in the clean change area of the worker decontamination system.

1.5.2 ASBESTOS ABATEMENT CONTRACTOR RESPONSIBILITY

The Asbestos Abatement Contractor (Contractor) shall assume full responsibility and liability for compliance with all applicable Federal, State and Local regulations related to any and all aspects of the asbestos abatement project. The Contractor is responsible for providing and maintaining training, accreditations, medical exams, medical records, personal protective equipment (PPE) including respiratory protection including respirator fit testing, as required by applicable Federal, State and Local regulations. The Contractor shall hold the VA and VPIH/CIH consultants harmless for any Contractor's failure to comply with any applicable work, packaging, transporting, disposal, safety, health, or environmental requirement on the part of himself, his employees, or his subcontractors. The Contractor will incur all costs of the CPIH/CIH, including all sampling/analytical costs to assure compliance with OSHA/EPA/State requirements related to failure to comply with the regulations applicable to the work.

1.5.3 FEDERAL REQUIREMENTS

Federal requirements which govern of asbestos abatement include, but are not limited to, the following regulations.

- A. Occupational Safety and Health Administration (**OSHA**)
 - 1. Title 29 CFR 1926.1101 - Construction Standard for Asbestos
 - 2. Title 29 CFR 1910 Subpart I - Personal Protective Equipment
 - 3. Title 29 CFR 1910.134 - Respiratory Protection
 - 4. Title 29 CFR 1926 - Construction Industry Standards
 - 5. Title 29 CFR 1910.1020 - Access to Employee Exposure and Medical Records
 - 6. Title 29 CFR 1910.1200 - Hazard Communication
 - 7. Title 29 CFR 1910 Subpart K - Medical and First Aid
- B. Environmental Protection Agency (**EPA**):
 - 1. 40 CFR 61 Subpart A and M (Revised Subpart B) - National Emission Standard for Hazardous Air Pollutants - Asbestos.
 - 2. 40 CFR 763.80 - Asbestos Hazard Emergency Response Act (AHERA)
- C. Department of Transportation (**DOT**)
 - Title 49 CFR 100 - 185 - Transportation

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

04-19

1.5.4 STATE REQUIREMENTS

State requirements that apply to the asbestos abatement work, disposal, clearance, etc., include, but are not limited to, the following:
Minnesota Pollution Control Agency (MPCA):

1. The MPCA has been delegated the authority by the EPA to enforce NESHAP regulations. They may also review projects for compliance with MDH Asbestos Abatement Rules.
2. Guidance Regarding Proper Containment, Shipping and Final Disposal of Asbestos Residual Materials at MPCA-Permitted Landfills (*Minnesota Rules 7035.1700*)

Minnesota Department of Labor and Industry:

1. Maintenance and Repair of Buildings and Equipment-Asbestos (*Minnesota Rules 5205.0660*)
2. Demolition, Restoration, Remodeling Survey (*Minnesota Rules 5207.0035*)

Minnesota Department of Health:

1. Asbestos Abatement Rules (*Minnesota Rules 4620.3000 to 4620.3724 and Minnesota Statute Sections 326.70 to 326.81*)

1.5.5 LOCAL REQUIREMENTS (NOT USED)

1.5.6 STANDARDS

- A. Standards which govern asbestos abatement activities include, but are not limited to, the following:
 1. American National Standards Institute (ANSI) Z9.2-79 - Fundamentals Governing the Design and Operation of Local Exhaust Systems and ANSI Z88.2 - Practices for Respiratory Protection.
 2. Underwriters Laboratories (UL) 586-90 - UL Standard for Safety of HEPA Filter Units, 7th Edition.
- B. Standards which govern encapsulation work include, but are not limited to the following:
 1. American Society for Testing and Materials (ASTM)
- C. Standards which govern the fire and safety concerns in abatement work include, but are not limited to, the following:
 1. National Fire Protection Association (NFPA) 241 - Standard for Safeguarding Construction, Alteration, and Demolition Operations.
 2. NFPA 701 - Standard Methods for Fire Tests for Flame Resistant Textiles and Film.
 3. NFPA 101 - Life Safety Code

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

04-19

1.5.7 EPA GUIDANCE DOCUMENTS

- A. EPA guidance documents which discuss asbestos abatement work activities are listed below. These documents are made part of this section by reference. EPA publications can be ordered from (800) 424-9065.
- B. Guidance for Controlling ACM in Buildings (Purple Book) EPA 560/5-85-024
- C. Asbestos Waste Management Guidance EPA 530-SW-85-007
- D. A Guide to Respiratory Protection for the Asbestos Abatement Industry EPA-560-OPTS-86-001
- E. Guide to Managing Asbestos in Place (Green Book) TS 799 20T July 1990

1.5.8 NOTICES

- A. State and Local agencies: Send written notification as required by state and local regulations including the local fire department prior to beginning any work on ACM as follows:
- B. Copies of notifications shall be submitted to the VA for the facility's records in the same time frame notification are given to EPA, State, and Local authorities.
- C. At least ten (10) working days prior to commencement of work, submit "Notification of Asbestos Related Work" to:

Minnesota Pollution Control Agency
Industrial Division-Asbestos Program
520 Lafayette Road
St. Paul, MN 55155-4194

1.5.9 PERMITS

- A. The contractor shall apply for and have all required permits and licenses to perform asbestos abatement work as required by Federal, State, and Local regulations.
At least five (5) calendar days prior to commencement of work, submit "Notification of Asbestos Related Work" with a copy of a signed contract or other written evidence of the total cost of the abatement project and a check in the amount of one per cent of the total cost of the abatement project, made payable to "Minnesota Department of Health", to:

Minnesota Department of Health
Asbestos/Lead Compliance Unit
P.O. Box 64497
St. Paul, MN 55164-0975
651-201-4610/4620

The Contractor shall list the CPIH as the AIR MONITORING CONTRACTOR on the above referenced notification.

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

04-19

1.5.10 POSTING AND FILING OF REGULATIONS

- A. Maintain two (2) copies of applicable federal, state, and local regulations. Post one copy of each in the clean room at the regulated area where workers will have daily access to the regulations and keep another copy in the Contractor's office.

1.5.11 VA RESPONSIBILITIES

Prior to commencement of work:

- A. Notify occupants adjacent to regulated areas of project dates and requirements for relocation, if needed. Arrangements must be made prior to starting work for relocation of desks, files, equipment and personal possessions to avoid unauthorized access into the regulated area. **Note: Notification of adjacent personnel is required by OSHA in 29 CFR 1926.1101 (k) to prevent unnecessary or unauthorized access to the regulated area.**

1.5.12 EMERGENCY ACTION PLAN AND ARRANGEMENTS

- A. An Emergency Action Plan shall be developed prior to commencing abatement activities and shall be agreed to by the Contractor and the VA. The Plan shall meet the requirements of 29 CFR 1910.38 (a);(b).
- B. Emergency procedures shall be in written form and prominently posted in the clean room and equipment room of the decontamination unit. Everyone, prior to entering the regulated area, must read and sign these procedures to acknowledge understanding of the regulated area layout, location of emergency exits and emergency procedures.
- C. Emergency planning shall include written notification of police, fire, and emergency medical personnel of planned abatement activities; work schedule; layout of regulated area; and access to the regulated area, particularly barriers that may affect response capabilities.
- D. Emergency planning shall include consideration of fire, explosion, hazardous atmospheres, electrical hazards, slips/trips and falls, confined spaces, and heat stress illness. Written procedures for response to emergency situations shall be developed and employee training in procedures shall be provided.
- E. Employees shall be trained in regulated area/site evacuation procedures in the event of workplace emergencies.
 - 1. For non life-threatening situations - employees injured or otherwise incapacitated shall decontaminate following normal procedures with assistance from fellow workers, if necessary, before exiting the regulated area to obtain proper medical treatment.
 - 2. For life-threatening injury or illness, worker decontamination shall take least priority after measures to stabilize the injured worker, remove them from the regulated area, and secure proper medical treatment.
- F. Telephone numbers of any/all emergency response personnel shall be prominently posted in the clean room, along with the location of the nearest telephone.
- G. The Contractor shall provide verification of first aid/CPR training for personnel responsible for providing first aid/CPR. OSHA requires medical

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

04-19

assistance within 3-4 minutes of a life-threatening injury/illness. Bloodborne Pathogen training shall also be verified for those personnel required to provide first aid/CPR.

- H. The Emergency Action Plan shall provide for a Contingency Plan in the event that an incident occurs that may require the modification of the standard operating procedures during abatement. Such incidents include, but are not limited to, fire; accident; power failure; negative pressure failure; and supplied air system failure. The Contractor shall detail procedures to be followed in the event of an incident assuring that asbestos abatement work is stopped and wetting is continued until correction of the problem.

1.5.13 PRE-CONSTRUCTION MEETING

Prior to commencing the work, the Contractor shall meet with the VA Certified Industrial Hygienist (VPCIH) to present and review, as appropriate, the items following this paragraph. The Contractor's Competent Person(s) who will be on-site shall participate in the pre-start meeting. The pre-start meeting is to discuss and determine procedures to be used during the project. At this meeting, the Contractor shall provide:

- A. Proof of Contractor licensing.
- B. Proof the Competent Person(s) is trained and accredited and approved for working in this State. Verification of the experience of the Competent Person(s) shall also be presented.
- C. A list of all workers who will participate in the project, including experience and verification of training and accreditation.
- D. A list of and verification of training for all personnel who have current first-aid/CPR training. A minimum of one person per shift must have adequate training.
- E. Current medical written opinions for all personnel working on-site meeting the requirements of 29 CFR 1926.1101 (m).
- F. Current fit-tests for all personnel wearing respirators on-site meeting the requirements of 29 CFR 1926.1101 (h) and Appendix C.
- G. A copy of the Contractor's Asbestos Hazard Abatement Plan. In these procedures, the following information must be detailed, specific for this project.
 - 1. Regulated area preparation procedures;
 - 2. Notification requirements procedure of Contractor as required in 29 CFR 1926.1101 (d);
 - 3. Decontamination area set-up/layout and decontamination procedures for employees;
 - 4. Abatement methods/procedures and equipment to be used;
 - 5. Personal protective equipment to be used;
- H. At this meeting the Contractor shall provide all submittals as required.
- I. Procedures for handling, packaging and disposal of asbestos waste.
- J. Emergency Action Plan and Contingency Plan Procedures.

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

04-19

1.6 PROJECT COORDINATION

The following are the minimum administrative and supervisory personnel necessary for coordination of the work.

1.6.1 PERSONNEL

- A. Administrative and supervisory personnel shall consist of a qualified Competent Person(s) as defined by OSHA in the Construction Standards and the Asbestos Construction Standard; Contractor Professional Industrial Hygienist and Industrial Hygiene Technicians. These employees are the Contractor's representatives responsible for compliance with these specifications and all other applicable requirements.
- B. Non-supervisory personnel shall consist of an adequate number of qualified personnel to meet the schedule requirements of the project. Personnel shall meet required qualifications. Personnel utilized on-site shall be pre-approved by the VA representative. A request for approval shall be submitted for any person to be employed during the project giving the person's name; social security number; qualifications; accreditation card with color picture; Certificate of Worker's Acknowledgment; and Affidavit of Medical Surveillance and Respiratory Protection and current Respirator Fit Test.
- C. Minimum qualifications for Contractor and assigned personnel are:
 - 1. The Contractor has conducted within the last three (3) years, three (3) projects of similar complexity and dollar value as this project; has not been cited and penalized for serious violations of federal (and state as applicable) EPA and OSHA asbestos regulations in the past three (3) years; has adequate liability/occurrence insurance for asbestos work as required by the state; is licensed in applicable states; has adequate and qualified personnel available to complete the work; has comprehensive standard operating procedures for asbestos work; has adequate materials, equipment and supplies to perform the work.
 - 2. The Competent Person has four (4) years of abatement experience of which two (2) years were as the Competent Person on the project; meets the OSHA definition of a Competent Person; has been the Competent Person on two (2) projects of similar size and complexity as this project within the past three (3) years; has completed EPA AHERA/OSHA/State/Local training requirements/accreditation(s) and refreshers; and has all required OSHA documentation related to medical and respiratory protection.
 - 3. The Contractor Professional Industrial Hygienist/CIH (CPIH/CIH) shall have five (5) years of monitoring experience and supervision of asbestos abatement projects; has participated as senior IH on five (5) abatement projects, three (3) of which are similar in size and complexity as this project; has developed at least one complete standard operating procedure for asbestos abatement; has trained abatement personnel for three (3) years; has specialized EPA AHERA/OSHA training in asbestos abatement management, respiratory protection, waste disposal and asbestos inspection; has completed the NIOSH 582 Course or equivalent, Contractor/Supervisor course; and has appropriate medical/respiratory protection records/documentation.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

04-19

4. The Abatement Personnel shall have completed the EPA AHERA/OSHA abatement worker course; have training on the standard operating procedures of the Contractor; has one year of asbestos abatement experience within the past three (3) years of similar size and complexity; has applicable medical and respiratory protection documentation; has certificate of training/current refresher and State accreditation/license.

All personnel should be in compliance with OSHA construction safety training as applicable and submit certification.

1.7 RESPIRATORY PROTECTION

1.7.1 GENERAL - RESPIRATORY PROTECTION PROGRAM

The Contractor shall develop and implement a written Respiratory Protection Program (RPP) which is in compliance with the January 8, 1998 OSHA requirements found at 29 CFR 1926.1101 and 29 CFR 1910.Subpart I;134. ANSI Standard Z88.2-1992 provides excellent guidance for developing a respiratory protection program. All respirators used must be NIOSH approved for asbestos abatement activities. The written RPP shall, at a minimum, contain the basic requirements found at 29 CFR 1910.134 (c) (1) (i - ix) - Respiratory Protection Program.

1.7.2 RESPIRATORY PROTECTION PROGRAM COORDINATOR

The Respiratory Protection Program Coordinator (RPPC) must be identified and shall have two (2) years experience coordinating RPP of similar size and complexity. The RPPC must submit a signed statement attesting to the fact that the program meets the above requirements.

1.7.3 SELECTION AND USE OF RESPIRATORS

The procedure for the selection and use of respirators must be submitted to the VA as part of the Contractor's qualifications. The procedure must be written clearly enough for workers to understand. A copy of the Respiratory Protection Program must be available in the clean room of the decontamination unit for reference by employees or authorized visitors.

1.7.4 MINIMUM RESPIRATORY PROTECTION

Minimum respiratory protection shall be a full face powered air purifying respirator when fiber levels are maintained consistently at or below 0.5 f/cc. A higher level of respiratory protection may be provided or required, depending on fiber levels. Respirator selection shall meet the requirements of 29 CFR 1926.1101 (h); Table 1, except as indicated in this paragraph. Abatement personnel must have a respirator for their exclusive use.

1.7.5 MEDICAL WRITTEN OPINION

No employee shall be allowed to wear a respirator unless a physician or other licensed health care professional has provided a written determination they are medically qualified to wear the class of respirator

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

04-19

to be used on the project while wearing whole body impermeable garments and subjected to heat or cold stress.

1.7.6 RESPIRATOR FIT TEST

All personnel wearing respirators shall have a current qualitative/quantitative fit test which was conducted in accordance with 29 CFR 1910.134 (f) and Appendix A. Quantitative fit tests shall be done for PAPRs which have been put into a motor/blower failure mode.

1.7.7 RESPIRATOR FIT CHECK

The Competent Person shall assure that the positive/negative pressure user seal check is done each time the respirator is donned by an employee. Head coverings must cover respirator head straps. Any situation that prevents an effective facepiece to face seal as evidenced by failure of a user seal check shall preclude that person from wearing a respirator inside the regulated area until resolution of the problem.

1.7.8 MAINTENANCE AND CARE OF RESPIRATORS

The Respiratory Protection Program Coordinator shall submit evidence and documentation showing compliance with 29 CFR 1910.134 (h) Maintenance and Care of Respirators.

1.7.9 SUPPLIED AIR SYSTEMS

If a supplied air system is used, the system shall meet all requirements of 29 CFR 1910.134 and the ANSI/Compressed Gas Association (CGA) Commodity Specification for Air current requirements for Type 1 - Grade D breathing air. Low pressure systems are not allowed to be used on asbestos abatement projects. Supplied Air respirator use shall be in accordance with EPA/NIOSH publication EPA-560-OPTS-86-001 "A Guide to Respiratory Protection for the Asbestos Abatement Industry". The competent person on site will be responsible for the supplied air system to ensure the safety of the worker.

1.8 WORKER PROTECTION

1.8.1 TRAINING OF ABATEMENT PERSONNEL

Prior to beginning any abatement activity, all personnel shall be trained in accordance with OSHA 29 CFR 1926.1101 (k)(9) and any additional State/Local requirements. Training must include, at a minimum, the elements listed at 29 CFR 1926.1101 (k)(9)(viii). Training shall have been conducted by a third party, EPA/State approved trainer meeting the requirements of EPA 40 CFR 763 Appendix C (AHERA MAP). Initial training certificates and current refresher and accreditation proof must be submitted for each person working at the site.

1.8.2 MEDICAL EXAMINATIONS

Medical examinations meeting the requirements of 29 CFR 1926.1101 (m) shall be provided for all personnel working in the regulated area,

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

04-19

regardless of exposure levels. A current physician's written opinion as required by 29 CFR 1926.1101 (m) (4) shall be provided for each person and shall include in the medical opinion the person has been evaluated for working in a heat and cold stress environment while wearing personal protective equipment (PPE) and is able to perform the work without risk of material health impairment.

1.8.3 REGULATED AREA ENTRY PROCEDURE

The Competent Person shall ensure that each time workers enter the regulated area; they remove ALL street clothes in the clean room of the decontamination unit and put on new disposable coveralls, head coverings, a clean respirator, and then proceed through the shower room to the equipment room where they put on non-disposable required personal protective equipment.

1.8.4 DECONTAMINATION PROCEDURE

The Competent Person shall require all personnel to adhere to following decontamination procedures whenever they leave the regulated area.

- A. When exiting the regulated area, remove disposable coveralls, and ALL other clothes, disposable head coverings, and foot coverings or boots in the equipment room.
- B. Still wearing the respirator and completely naked, proceed to the shower. Showering is MANDATORY. Care must be taken to follow reasonable procedures in removing the respirator to avoid inhaling asbestos fibers while showering. The following procedure is required as a minimum:
 1. Thoroughly wet body including hair and face. If using a PAPR hold blower above head to keep filters dry.
 2. With respirator still in place, thoroughly decontaminate body, hair, respirator face piece, and all other parts of the respirator except the blower and battery pack on a PAPR. Pay particular attention to cleaning the seal between the face and respirator facepiece and under the respirator straps.
 3. Take a deep breath, hold it and/or exhale slowly, completely wetting hair, face, and respirator. While still holding breath, remove the respirator and hold it away from the face before starting to breathe.
- C. Carefully decontaminate the facepiece of the respirator inside and out. If using a PAPR, shut down using the following sequence: a) first cap inlets to filters; b) turn blower off to keep debris collected on the inlet side of the filter from dislodging and contaminating the outside of the unit; c) thoroughly decontaminate blower and hoses; d) carefully decontaminate battery pack with a wet rag being cautious of getting water in the battery pack thus preventing destruction. **(THIS PROCEDURE IS NOT A SUBSTITUTE FOR RESPIRATOR CLEANING!)**
- D. Shower and wash body completely with soap and water. Rinse thoroughly.
- E. Rinse shower room walls and floor to drain prior to exiting.
- F. Proceed from shower to clean room; dry off and change into street clothes or into new disposable work clothing.

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

04-19

1.8.5 REGULATED AREA REQUIREMENTS

The Competent Person shall meet all requirements of 29 CFR 1926.1101 (o) and assure that all requirements for regulated areas at 29 CFR 1926.1101 (e) are met. All personnel in the regulated area shall not be allowed to eat, drink, smoke, chew tobacco or gum, apply cosmetics, or in any way interfere with the fit of their respirator.

1.9 DECONTAMINATION FACILITIES

1.9.1 DESCRIPTION

Provide each regulated area with separate personnel decontamination facilities (PDF) and waste/equipment decontamination facilities (W/EDF). Ensure that the PDF are the only means of ingress and egress to the regulated area and that all equipment, bagged waste, and other material exit the regulated area only through the W/EDF.

1.9.2 GENERAL REQUIREMENTS

All personnel entering or exiting a regulated area must go through the PDF and shall follow the requirements at 29 CFR 1926.1101 (j) (1) and these specifications. All waste, equipment and contaminated materials must exit the regulated area through the W/EDF and be decontaminated in accordance with these specifications. Walls and ceilings of the PDF and W/EDF must be constructed of a minimum of 3 layers of 6 mil opaque fire retardant polyethylene sheeting and be securely attached to existing building components and/or an adequate temporary framework. A minimum of 3 layers of 6 mil poly shall also be used to cover the floor under the PDF and W/EDF units. Construct doors so that they overlap and secure to adjacent surfaces. Weight inner doorway sheets with layers of duct tape so that they close quickly after release. Put arrows on sheets so they show direction of travel and overlap. If the building adjacent area is occupied, construct a solid barrier on the occupied side(s) to protect the sheeting and reduce potential for non-authorized personnel entering the regulated area.

1.9.3 TEMPORARY FACILITIES TO THE PDF AND W/EDF

The Competent Person shall provide temporary water service connections to the PDF and W/EDF. Backflow prevention must be provided at the point of connection to the VA system. Water supply must be of adequate pressure and meet requirements of 29 CFR 1910.141(d) (3). Provide adequate temporary overhead electric power with ground fault circuit interruption (GFCI) protection. Provide a sub-panel equipped with GFCI protection for all temporary power in the clean room. Provide adequate lighting to provide a minimum of 50 foot candles in the PDF and W/EDF. Provide temporary heat, if needed, to maintain 70°F throughout the PDF and W/EDF.

1.9.4 PERSONNEL DECONTAMINATION FACILITY (PDF)

The PDF shall be isolated from the adjacent public area with a lockable, impermeable barrier. The Competent Person shall provide a PDF consisting of shower room which is contiguous to a clean room and equipment room via airlock chambers which is connected to the regulated area. The PDF must

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

04-19

be sized to accommodate the number of personnel scheduled for the project. The shower room, located in the center of the PDF, shall be fitted with as many portable showers as necessary to insure all employees can complete the entire decontamination procedure within 15 minutes. The PDF shall be constructed of opaque poly for privacy. The PDF shall be constructed to eliminate any parallel routes of egress without showering.

1. Clean Room: The clean room must be physically and visually separated from the rest of the building to protect the privacy of personnel changing clothes. The clean room shall be constructed of at least 3 layers of 6 mil opaque fire retardant poly to provide an air tight room. Provide a minimum of 2 - 900 mm (3 foot) wide 6 mil poly opaque fire retardant doorways. One doorway shall be the entry from outside the PDF and the second doorway shall be to the airlock prior to the shower room of the PDF. The floor of the clean room shall be maintained in a clean, dry condition. Shower overflow shall not be allowed into the clean room. Provide 1 storage locker per person. A portable fire extinguisher, minimum 10 pounds capacity, Type ABC, shall be provided in accordance with OSHA and NFPA Standard 10. All persons entering the regulated area shall remove all street clothing in the clean room and dress in disposable protective clothing and respiratory protection. Any person entering the clean room does so either from the outside with street clothing on or is coming from the shower room completely naked and thoroughly washed. Females required to enter the regulated area shall be ensured of their privacy throughout the entry/exit process by posting guards at both entry points to the PDF so no male can enter or exit the PDF during her stay in the PDF.
2. Shower Room: The Competent Person shall assure that the shower room is a completely water tight compartment to be used for the movement of all personnel from the clean room to the equipment room and for the showering of all personnel going from the equipment room to the clean room. Each shower shall be constructed so water runs down the walls of the shower and into a drip pan. Install a freely draining smooth floor on top of the shower pan. The shower room shall be separated from the rest of the building and from the clean room and equipment room using air tight walls made from at least 3 layers of 6 mil opaque fire retardant poly. The shower shall be equipped with a shower head and controls, hot and cold water, drainage, soap dish and continuous supply of soap, and shall be maintained in a sanitary condition throughout its use. The controls shall be arranged so an individual can shower without assistance. Provide a flexible hose shower head, hose bibs and all other items shown on Shower Schematic. Waste water will be pumped to a drain after being filtered through a minimum of a 100 micron sock in the shower drain; a 20 micron filter; and a final 5 micron filter. Filters will be changed a minimum of daily or more often as needed. Filter changes must be done in the shower to prevent loss of contaminated water. Hose down all shower surfaces after each shift and clean any debris from the shower pan. Residue is to be disposed of as asbestos waste.
3. Equipment Room: The Competent Person shall provide an equipment room which shall be an air tight compartment for the storage of work equipment/tools, reusable personal protective equipment, except for a

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System


St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

04-19

respirator and for use as a gross decontamination area for personnel exiting the regulated area. The equipment room shall be separated from the regulated area by a minimum 3 foot wide door made with 2 layers of 6 mil opaque fire retardant poly. The equipment room shall be separated from the regulated area, the shower room airlock and the rest of the building by air tight walls and ceiling constructed of a minimum of 3 layers of 6 mil opaque fire retardant poly. Damp wipe all surfaces of the equipment room after each shift change. Provide an additional loose layer of 6 mil fire retardant poly per shift change and remove this layer after each shift. If needed, provide a temporary electrical sub-panel equipped with GFCI in the equipment room to accommodate any equipment required in the regulated area.

4. The PDF shall be as follows: Clean room at the entrance followed by an airlock followed by a shower room followed by an airlock followed by an equipment room leading to the regulated area. Each doorway in the PDF shall be a minimum of 2 layers of 6 mil opaque fire retardant poly.

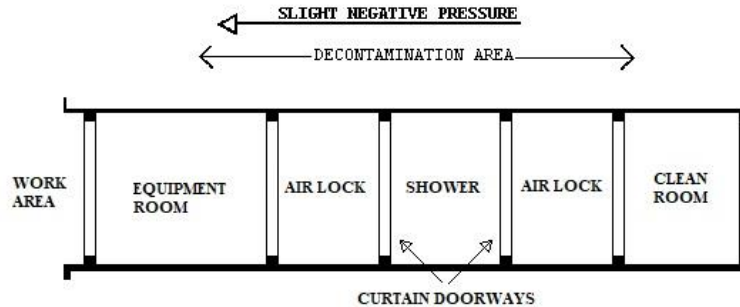

1.9.5 WASTE/EQUIPMENT DECONTAMINATION FACILITY (W/EDF)

The Competent Person shall provide an W/EDF consisting of a wash room, holding room, and clean room for removal of waste, equipment and contaminated material from the regulated area. Personnel shall not enter or exit the W/EDF except in the event of an emergency. Clean debris and residue in the W/EDF daily. All surfaces in the W/EDF shall be wiped/hosed down after each shift and all debris shall be cleaned from the shower pan. The W/EDF shall consist of the following:

1. Wash Down Station: Provide an enclosed shower unit in the regulated area just outside the Wash Room as an equipment bag and container cleaning station.
2. Wash Room: Provide a wash room for cleaning of bagged or containerized asbestos containing waste materials passed from the regulated area.

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System


St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

04-19

Construct the wash room using 50 x 100 mm (2" x 4") wood framing and 3 layers of 6 mil fire retardant poly. Locate the wash room so that packaged materials, after being wiped clean, can be passed to the Holding Room. Doorways in the wash room shall be constructed of 2 layers of 6 mil fire retardant poly.

3. Holding Room: Provide a holding room as a drop location for bagged materials passed from the wash room. Construct the holding room using 50 x 100 mm (2" x 4") wood framing and 3 layers of 6 mil fire retardant poly. The holding room shall be located so that bagged material cannot be passed from the wash room to the clean room unless it goes through the holding room. Doorways in the holding room shall be constructed of 2 layers of 6 mil fire retardant poly.
4. Clean Room: Provide a clean room to isolate the holding room from the exterior of the regulated area. Construct the clean room using 2 x 4 wood framing and 2 layers of 6 mil fire retardant poly. The clean room shall be located so as to provide access to the holding room from the building exterior. Doorways to the clean room shall be constructed of 2 layers of 6 mil fire retardant poly. When a negative pressure differential system is used, a rigid enclosure separation between the W/EDF clean room and the adjacent areas shall be provided.
5. The W/EDF shall be as follows: Wash Room leading to a Holding Room followed by a Clean Room leading to outside the regulated area. See diagram.

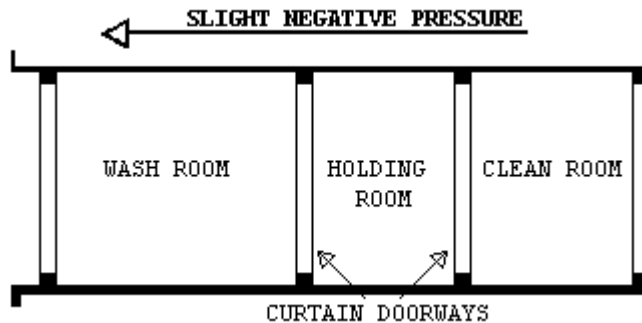

1.9.6 WASTE/EQUIPMENT DECONTAMINATION PROCEDURES

At the washdown station in the regulated area, thoroughly wet clean contaminated equipment and/or sealed polyethylene bags and pass into Wash Room after visual inspection. When passing anything into the Wash Room, close all doorways of the W/EDF, other than the doorway between the washdown station and the Wash Room. Keep all outside personnel clear of the W/EDF. Once inside the Wash Room, wet clean the equipment and/or bags. After cleaning and inspection, pass items into the Holding Room. Close all doorways except the doorway between the Holding Room and the Clean Room. Workers from the Clean Room/Exterior shall enter the Holding Room and remove the decontaminated/cleaned equipment/bags for removal and disposal. These personnel will not be required to wear PPE. At no time shall personnel from the clean side be allowed to enter the Wash Room.

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

04-19

PART 2 - PRODUCTS, MATERIALS AND EQUIPMENT

2.1 MATERIALS AND EQUIPMENT

2.1.1 GENERAL REQUIREMENTS

Prior to the start of work, the contractor shall provide and maintain a sufficient quantity of materials and equipment to assure continuous and efficient work throughout the duration of the project. Work shall not start unless the following items have been delivered to the site and the CPIH/CIH has submitted verification to the VA's representative.

- A. All materials shall be delivered in their original package, container or bundle bearing the name of the manufacturer and the brand name (where applicable).
- B. Store all materials subject to damage off the ground, away from wet or damp surfaces and under cover sufficient enough to prevent damage or contamination. Flammable and combustible materials cannot be stored inside buildings. Replacement materials shall be stored outside of the regulated area until abatement is completed.
- C. The Contractor shall not block or hinder use of buildings by patients, staff, and visitors to the VA in partially occupied buildings by placing materials/equipment in any unauthorized location.
- D. The Competent Person shall inspect for damaged, deteriorating or previously used materials. Such materials shall not be used and shall be removed from the worksite and disposed of properly.
- E. Polyethylene sheeting for walls in the regulated area shall be a minimum of 4-mils. For floors and all other uses, sheeting of at least 6-mil shall be used in widths selected to minimize the frequency of joints. Fire retardant poly shall be used throughout.
- F. The method of attaching polyethylene sheeting shall be agreed upon in advance by the Contractor and the VA and selected to minimize damage to equipment and surfaces. Method of attachment may include any combination of moisture resistant duct tape furring strips, spray glue, staples, nails, screws, lumber and plywood for enclosures or other effective procedures capable of sealing polyethylene to dissimilar finished or unfinished surfaces under both wet and dry conditions.
- G. Polyethylene sheeting utilized for the PDF shall be opaque white or black in color, 6 mil fire retardant poly.
- H. Installation and plumbing hardware, showers, hoses, drain pans, sump pumps and waste water filtration system shall be provided by the Contractor.
- I. An adequate number of HEPA vacuums, scrapers, sprayers, nylon brushes, brooms, disposable mops, rags, sponges, staple guns, shovels, ladders and scaffolding of suitable height and length as well as meeting OSHA requirements, fall protection devices, water hose to reach all areas in the regulated area, airless spray equipment, and any other tools, materials or equipment required to conduct the abatement project. All electrically operated hand tools, equipment, electric cords shall be connected to GFCI protection.
- J. Special protection for objects in the regulated area shall be detailed (e.g., plywood over carpeting or hardwood floors to prevent damage from scaffolds, water and falling material).

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

04-19

- K. Disposal bags - 2 layers of 6 mil poly for asbestos waste shall be pre-printed with labels, markings and address as required by OSHA, EPA and DOT regulations.
- L. The VA shall be provided an advance copy of the MSDS as required for all hazardous chemicals under OSHA 29 CFR 1910.1200 - Hazard Communication in the pre-start meeting submittal. Chlorinated compounds shall not be used with any spray adhesive, mastic remover or other product. Appropriate encapsulant(s) shall be provided.
- M. OSHA DANGER demarcation signs, as many and as required by OSHA 29 CFR 1926.1101(k) (7) shall be provided and placed by the Competent Person. All other posters and notices required by Federal and State regulations shall be posted in the Clean Room.
- N. Adequate and appropriate PPE for the project and number of personnel/shifts shall be provided. All personal protective equipment issued must be based on a written hazard assessment conducted under 29 CFR 1910.132(d).

2.2 MONITORING, INSPECTION AND TESTING

2.2.1 GENERAL

- A. Perform throughout abatement work monitoring, inspection and testing inside and around the regulated area in accordance with the OSHA and MDH requirements and these specifications. OSHA requires that the employee exposure to asbestos must not exceed 0.1 fiber per cubic centimeter (f/cc) of air, averaged over an 8-hour work shift. The CPIH/CIH is responsible for and shall inspect and oversee the performance of the Contractor IH Technician. The IH Technician shall continuously inspect and monitor conditions inside the regulated area to ensure compliance with these specifications. In addition, the CPIH/CIH shall personally manage air sample collection, analysis, and evaluation for personnel, regulated area, and adjacent area samples to satisfy OSHA and MDH requirements. Additional inspection and testing requirements are also indicated in other parts of this specification.
- B. The VA will employ an independent industrial hygienist (VPIH/CIH) consultant and/or use its own IH to perform various services on behalf of the VA. Performance of services provided by the VPIH/CIH shall not supersede nor eliminate the Contractor's responsibilities as required under MDH Asbestos Abatement Rules. The VPIH/CIH will perform the necessary monitoring, inspection, testing, and other support services to

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

04-19

ensure that VA patients, employees, and visitors will not be adversely affected by the abatement work, and that the abatement work proceeds in accordance with these specifications, that the abated areas or abated buildings have been successfully decontaminated. The work of the VPIH/CIH consultant in no way relieves the Contractor from their responsibility to perform the work in accordance with contract/specification requirements, to perform continuous inspection, air monitoring and testing for the safety of their employees and building occupants, and to perform other such services as specified. The cost of the VPIH/CIH and their services will be borne by the VA except for any repeat of final inspection and testing that may be required due to unsatisfactory initial results. Any repeated final inspections and/or testing, if required, will be paid for by the Contractor.

- C. If fibers counted by the VPIH/CIH and/or CPIH/CIH during abatement work, either inside or outside the regulated area, utilizing the NIOSH 7400 air monitoring method, exceed the specified respective limits, the Contractor shall stop work. The Contractor may request confirmation of the results by analysis of the samples by TEM. Request must be in writing and submitted to the VA's representative. Cost for the confirmation of results will be borne by the Contractor for both the collection and analysis of samples and for the time delay that may/does result for this confirmation. Confirmation sampling and analysis will be the responsibility of the CPIH with review and approval of the VPIH/CIH. An agreement between the CPIH/CIH and the VPIH/CIH shall be reached on the exact details of the confirmation effort, in writing, including such things as the number of samples, location, collection, quality control on-site, analytical laboratory, interpretation of results and any follow-up actions. This written agreement shall be co-signed by the IH's and delivered to the VA's representative.

2.2.2 SCOPE OF SERVICES OF THE VPIH/CIH CONSULTANT

- A. The purpose of the work of the VPIH/CIH is to: assure quality; adherence to the specification; resolve problems; prevent the spread of contamination beyond the regulated area; and assure clearance at the end of the project. In addition, their work includes performing the final inspection and testing to determine whether the regulated area or building has been adequately decontaminated. All air monitoring is to be done utilizing PCM/TEM. The VPIH/CIH will perform the following tasks:
1. Task 1: Perform continuous air monitoring, inspection, and testing outside the regulated area during actual abatement work to detect any faults in the regulated area isolation and any adverse impact on the surroundings from regulated area activities.
 2. Task 2: Perform unannounced visits to spot check overall compliance of work with contract/specifications. These visits may include any inspection, air monitoring, and testing inside and outside the regulated area and all aspects of the operation except personnel monitoring.
 3. Task 3: Provide support to the VA representative such as evaluation of submittals from the Contractor, resolution of conflicts, interpret data, etc.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

04-19

- 54 Task 4: Perform, in the presence of the VA representative, final inspection and testing of a decontaminated regulated area at the conclusion of the abatement to certify compliance with all regulations and VA requirements/specifications.
5. Task 5: Issue certificate of decontamination for each regulated area and project report.

- B. All documentation, inspection results and testing results generated by the VPIH/CIH will be available to the Contractor for information and consideration. The Contractor shall cooperate with and support the VPIH/CIH for efficient and smooth performance of their work.
- C. The monitoring and inspection results of the VPIH/CIH will be used by the VA to issue any Stop Removal orders to the Contractor during abatement work and to accept or reject a regulated area or building as decontaminated.

2.2.3 MONITORING, INSPECTION AND TESTING BY CONTRACTOR CPIH/CIH

The Contractor's CPIH/CIH is responsible for performing all duration and clearance air sampling and on-site analysis and inspections required by these specifications, as well as any and all regulatory requirements adopted by these specifications. The CPIH/CIH is responsible for the continuous monitoring of all subsystems and procedures which could affect the health and safety of the Contractor's personnel and building occupants. Safety and health conditions and the provision of those conditions inside the regulated area for all persons entering the regulated area is the exclusive responsibility of the Contractor/Competent Person. The person performing the personnel and area air monitoring outside and inside the regulated area shall be an IH Technician, who shall be trained and shall have specialized field experience in sampling and analysis. The IH Technician shall have successfully completed a NIOSH 582 Course or equivalent, a Minnesota Air Sampling Course and provide documentation. The IH Technician shall participate in the AIHA Asbestos Analysis Registry or participate in the Proficiency Analytic Testing program of AIHA for fiber counting quality control assurance. The IH Technician shall also be an accredited EPA AHERA/State Contractor/Supervisor or Abatement Worker and Building Inspector. The IH Technician shall have participated in five abatement projects collecting personal and area samples as well as responsibility for documentation on substantially similar projects in size and scope. The analytic laboratory used by the Contractor to analyze the samples shall be AIHA accredited for asbestos PAT and approved by the VA prior to start of the project. A daily log shall be maintained by the CPIH/CIH or IH Technician, documenting all OSHA requirements for air personal monitoring for asbestos in 29 CFR 1926.1101(f), (g) and Appendix A. This log shall be made available to the VA representative and the VPIH/CIH upon request. The log will contain, at a minimum, information on personnel or area samples, other persons represented by the sample, the date of sample collection, start and stop times for sampling, sample volume, flow rate, and fibers/cc. The CPIH/CIH shall collect and analyze samples for each representative job being done in the regulated area, i.e., removal,

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

04-19

wetting, clean-up, and load-out. No fewer than two personal samples per shift shall be collected and one area sample per 1,000 square feet of regulated area where abatement is taking place and one sample per shift in the clean room area shall be collected. In addition to the continuous monitoring required, the CPIH/CIH will perform inspection and testing at the final stages of abatement for each regulated area as specified in the CPIH/CIH responsibilities. Additionally, the CPIH/CIH will monitor and record pressure readings within the containment daily with a minimum of two readings at the beginning and at the end of a shift, and submit the data in the daily report.

2.3 ASBESTOS HAZARD ABATEMENT PLAN

The Contractor shall have established an Asbestos Hazard Abatement Plan (AHAP) in printed form and loose leaf folder consisting of simplified text, diagrams, sketches, and pictures that establish and explain clearly the procedures to be followed during all phases of the work by the Contractor's personnel. The AHAP must be modified as needed to address specific requirements of this project and the specifications. The AHAP shall be submitted for review and approval to the VA prior to the start of any abatement work. The minimum topics and areas to be covered by the AHAPs are:

- A. Minimum Personnel Qualifications
- B. Emergency Action Plan/Contingency Plans and Arrangements
- C. Security and Safety Procedures
- D. Respiratory Protection/Personal Protective Equipment Program and Training
- E. Medical Surveillance Program and Recordkeeping
- F. Regulated Area Requirements - Containment Barriers/Isolation of Regulated Area
- G. Decontamination Facilities and Entry/Exit Procedures (PDF and W/EDF)
- H. Negative Pressure Systems Requirements
- I. Monitoring, Inspections, and Testing
- J. Removal Procedures for ACM
- K. Removal of Contaminated Soil (if applicable)
- L. Encapsulation Procedures for ACM
- M. Disposal of ACM waste/equipment
- N. Regulated Area Decontamination/Clean-up
- O. Regulated Area Visual and Air Clearance
- P. Project Completion/Closeout

2.4 SUBMITTALS

2.4.1 PRE-START MEETING SUBMITTALS

Submit to the VA a minimum of 14 days prior to the pre-start meeting the following for review and approval. Meeting this requirement is a prerequisite for the pre-start meeting for this project:

- A. Submit a detailed work schedule for the entire project reflecting contract documents and the phasing/schedule requirements from the CPM chart.
- B. Submit a staff organization chart showing all personnel who will be working on the project and their capacity/function. Provide their qualifications, training, accreditations, and licenses, as appropriate.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

04-19

Provide a copy of the "Certificate of Worker's Acknowledgment" and the "Affidavit of Medical Surveillance and Respiratory Protection" for each person.

- C. Submit Asbestos Hazard Abatement Plan developed specifically for this project, incorporating the requirements of the specifications, prepared, signed and dated by the CPIH/CIH.
- D. Submit the specifics of the materials and equipment to be used for this project with manufacturer names, model numbers, performance characteristics, pictures/diagrams, and number available for the following:
 - 1. Supplied air system, negative air machines, HEPA vacuums, air monitoring pumps, calibration devices, pressure differential monitoring device and emergency power generating system.
 - 2. Waste water filtration system, shower system, containment barriers.
 - 3. Encapsulants, surfactants, hand held sprayers, airless sprayers, glovebags, and fire extinguishers.
 - 4. Respirators, protective clothing, personal protective equipment.
 - 5. Fire safety equipment to be used in the regulated area.
- E. Submit the name, location, and phone number of the approved landfill; proof/verification the landfill is approved for ACM disposal; the landfill's requirements for ACM waste; the type of vehicle to be used for transportation; and name, address, and phone number of subcontractor, if used. Proof of asbestos training for transportation personnel shall be provided.
- F. Submit required notifications and arrangements made with regulatory agencies having regulatory jurisdiction and the specific contingency/emergency arrangements made with local health, fire, ambulance, hospital authorities and any other notifications/arrangements.
- G. Submit the name, location and verification of the laboratory and/or personnel to be used for analysis of air and/or bulk samples. Personal air monitoring must be done in accordance with OSHA 29 CFR 1926.1101(f) and Appendix A. Area or clearance air monitoring shall be conducted in accordance with EPA AHERA protocols.
- H. Submit qualifications verification: Submit the following evidence of qualifications. Make sure that all references are current and verifiable by providing current phone numbers and documentation.
 - 1. Asbestos Abatement Company: Project experience within the past 3 years; listing projects first most similar to this project: Project Name; Type of Abatement; Duration; Cost; Reference Name/Phone Number; Final Clearance; Completion Date
 - 2. List of project(s) halted by owner, A/E, IH, regulatory agency in the last 3 years: Project Name; Reason; Date; Reference Name/Number; Resolution
 - 3. List asbestos regulatory citations (e.g., OSHA), notices of violations (e.g., Federal and state EPA), penalties, and legal actions taken against the company including and of the company's officers (including damages paid) in the last 3 years. Provide copies and all information needed for verification.
- I. Submit information on personnel: Provide a resume; address each item completely; copies of certificates, accreditations, and licenses. Submit an affidavit signed by the CPIH/CIH stating that all personnel submitted below have medical records in accordance with OSHA 29 CFR 1926.1101(m)

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

04-19

and 29 CFR 1910.20 and that the company has implemented a medical surveillance program and written respiratory protection program, and maintains recordkeeping in accordance with the above regulations. Submit the phone number and doctor/clinic/hospital used for medical evaluations.

1. CPIOH/CIH and IH Technician: Name; years of abatement experience; list of projects similar to this one; certificates, licenses, accreditations for proof of AHERA/OSHA specialized asbestos training; professional affiliations; number of workers trained; samples of training materials; samples of AHAPs developed; medical opinion; and current respirator fit test.
 2. Competent Person(s)/Supervisor(s): Number; names; social security numbers; years of abatement experience as Competent Person/Supervisor; list of similar projects in size/complexity as Competent Person/Supervisor; as a worker; certificates, licenses, accreditations; proof of AHERA/OSHA specialized asbestos training; maximum number of personnel supervised on a project; medical opinion (asbestos surveillance and respirator use); and current respirator fit test.
 3. Workers: Numbers; names; social security numbers; years of abatement experience; certificates, licenses, accreditations; training courses in asbestos abatement and respiratory protection; medical opinion (asbestos surveillance and respirator use); and current respirator fit test.
- J. Submit copies of State license for asbestos abatement; copy of insurance policy, including exclusions with a letter from agent stating in plain language the coverage provided and the fact that asbestos abatement activities are covered by the policy; copy of AHAPs incorporating the requirements of this specification; information on who provides your training, how often; who provides medical surveillance, how often; who performs and how is personal air monitoring of abatement workers conducted; a list of references of independent laboratories/IH's familiar with your air monitoring and standard operating procedures; and copies of monitoring results of the five referenced projects listed and analytical method(s) used.
- K. Rented equipment must be decontaminated prior to returning to the rental agency.
- L. Submit, before the start of work, the manufacturer's technical data for all types of encapsulants, all MSDS and application instructions.

2.4.2 SUBMITTALS DURING ABATEMENT

- A. The Competent Person shall maintain and submit a daily log at the regulated area documenting the dates and times of the following: purpose, attendees and summary of meetings; all personnel entering/exiting the regulated area; document and discuss the resolution of unusual events such as barrier breaching, equipment failures, emergencies, and any cause for stopping work; and representative air monitoring and results/TWA's/EL's. Submit this information daily to the VPIH/CIH.
- B. The CPIOH/CIH shall document and maintain the inspection and approval of the regulated area preparation prior to start of work and daily during work.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

04-19

1. Removal of any poly barriers.
2. Visual inspection/testing by the CPIH/CIH or IH Technician prior to application of lockdown encapsulant.
3. Packaging and removal of ACM waste from regulated area.
4. Disposal of ACM waste materials; copies of Waste Shipment Records/landfill receipts to the VA's representative on a weekly basis.

2.4.3 SUBMITTALS AT COMPLETION OF ABATEMENT

The CPIH/CIH shall submit a project report consisting of the daily log book requirements and documentation of events during the abatement project including Waste Shipment Records signed by the landfill's agent. It will also include information on the containment and transportation of waste from the containment with applicable Chain of Custody forms. The report shall include a certificate of completion, signed and dated by the CPIH/CIH, in accordance with Attachment #1. All clearance and perimeter area samples must be submitted. The VA Representative will retain the abatement report after completion of the project and provide copies of the abatement report to VAMC Office of Engineer and the Safety Office.

2.5 ENCAPSULANTS

2.5.1 TYPES OF ENCAPSULANTS

- A. The following four types of encapsulants, if used, must comply with performance requirements as stated in paragraph 2.6.2:
 1. Removal encapsulant - used as a wetting agent to remove ACM.
 2. Bridging encapsulant - provides a tough, durable coating on ACM.
 3. Penetrating encapsulant - penetrates/encapsulates ACM at least 13 mm (1/2").
 4. Lockdown encapsulant - seals microscopic fibers on surfaces after ACM removal.

2.5.2 PERFORMANCE REQUIREMENTS

Encapsulants shall meet the latest requirements of EPA; shall not contain toxic or hazardous substances; or solvents; and shall comply with the following performance requirements:

- A. General Requirements for all Encapsulants:
 1. ASTM E84: Flame spread of 25; smoke emission of 50.
 2. University of Pittsburgh Protocol: Combustion Toxicity; zero mortality.
 3. ASTM C732: Accelerated Aging Test; Life Expectancy - 20 years.
 4. ASTM E96: Permeability - minimum of 0.4 perms.
- B. Bridging/Penetrating Encapsulants:
 1. ASTM E736: Cohesion/Adhesion Test - 24 kPa (50 lbs/ft²).
 2. ASTM E119: Fire Resistance - 3 hours (Classified by UL for use on fibrous/cementitious fireproofing).
 3. ASTM D2794: Gardner Impact Test; Impact Resistance - minimum 11.5 kg-mm (43 in/lb).
 4. ASTM D522: Mandrel Bend Test; Flexibility - no rupture or cracking.

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

04-19

C. Lockdown Encapsulants:

1. ASTM E119: Fire resistance - 3 hours (tested with fireproofing over encapsulant applied directly to steel member).
2. ASTM E736: Bond Strength - 48 kPa (100 lbs/ft²) (test compatibility with cementitious and fibrous fireproofing).
3. In certain situations, encapsulants may have to be applied to hot pipes/equipment. The encapsulant must be able to withstand high temperatures without cracking or off-gassing any noxious vapors during application.

2.5.3 CERTIFICATES OF COMPLIANCE

The Contractor shall submit to the VA representative certification from the manufacturer indicating compliance with performance requirements for encapsulants when applied according to manufacturer recommendations.

PART 3 - EXECUTION

3.1 REGULATED AREA PREPARATIONS

3.1.1 SITE SECURITY

- A. Regulated area access is to be restricted only to authorized, trained/accredited and protected personnel. These may include the Contractor's employees, employees of Subcontractors, VA employees and representatives, State and local inspectors, and any other designated individuals. A list of authorized personnel shall be established prior to commencing the project and be posted in the clean room of the decontamination unit.
- B. Entry into the regulated area by unauthorized individuals shall be reported immediately to the Competent Person by anyone observing the entry. The Competent Person shall immediately require any unauthorized person to leave the regulated area and then notify the VA Contracting Officer or VA Representative using the most expeditious means.
- C. A log book shall be maintained in the clean room of the decontamination unit. Anyone who enters the regulated area must record their name, affiliation, time in, and time out for each entry.
- D. Access to the regulated area shall be through a single decontamination unit. All other access (doors, windows, hallways, etc.) shall be sealed or locked to prevent entry to or exit from the regulated area. The only exceptions for this requirement are the waste/equipment load-out area which shall be sealed except during the removal of containerized asbestos waste from the regulated area, and emergency exits. Emergency exits shall not be locked from the inside; however, they shall be sealed with poly sheeting and taped until needed. In any situation where exposure to high temperatures which may result in a flame hazard, fire retardant poly sheeting must be used.
- E. The Contractor's Competent Person shall control site security during abatement operations in order to isolate work in progress and protect adjacent personnel. A 24 hour security system shall be

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

04-19

provided at the entrance to the regulated area to assure that all entrants are logged in/out and that only authorized personnel are allowed entrance.

- F. The Contractor will have the VA's assistance in notifying adjacent personnel of the presence, location and quantity of ACM in the regulated area and enforcement of restricted access by the VA's employees.
- G. The regulated area shall be locked during non-working hours and secured by VA Representative or Competent Person. The VA Police should be informed of asbestos abatement regulated areas to provide security checks during facility rounds and emergency response.

3.1.2 SIGNAGE AND POWER MANAGEMENT

- A. Post OSHA DANGER signs meeting the specifications of OSHA 29 CFR 1926.1101 at any location and approaches to the regulated area where airborne concentrations of asbestos may exceed the PEL. Signs shall be posted at a distance sufficiently far enough away from the regulated area to permit any personnel to read the sign and take the necessary measures to avoid exposure. Additional signs will be posted following construction of the regulated area enclosure.
- B. Shut down and lock out/tag out electric power to the regulated area. Provide temporary power and lighting. Insure safe installation including GFCI of temporary power sources and equipment by compliance with all applicable electrical code and OSHA requirements for temporary electrical systems. Electricity shall be provided by the VA.
- C. Shut down and lock out/tag out heating, cooling, and air conditioning system (HVAC) components that are in, supply or pass through the regulated area. Investigate the regulated area and agree on pre-abatement condition with the VA's representative. Seal all intake and exhaust vents in the regulated area with duct tape and 2 layers of 6-mil poly. Also, seal any seams in system components that pass through the regulated area. Remove all contaminated HVAC system filters and place in labeled 6-mil polyethylene disposal bags for staging and eventual disposal as asbestos waste.

3.1.3 NEGATIVE PRESSURE FILTRATION SYSTEM

The Contractor shall provide enough HEPA negative air machines to continuously maintain a pressure differential of -0.02" water column gauge (WCG). The Competent Person shall determine the number of units needed for the regulated area by dividing the cubic feet in the regulated area by 15 and then dividing that result by the cubic feet per minute (CFM) for each unit to determine the number of units needed to continuously maintain a pressure differential of -0.02" WCG. Provide a standby unit in the event of machine failure and/or emergency in an adjacent area.

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

04-19

3.1.3.1 DESIGN AND LAYOUT

- A. Before start of work submit the design and layout of the regulated area and the negative air machines. The submittal shall indicate the number of, location of and size of negative air machines. The point(s) of exhaust, air flow within the regulated area, anticipated negative pressure differential, and supporting calculations for sizing shall be provided. In addition, submit the following:
1. Method of supplying power to the units and designation/location of the panels.
 2. Description of testing method(s) for correct air volume and pressure differential.
 3. If auxiliary power supply is to be provided for the negative air machines, provide a schematic diagram of the power supply and manufacturer's data on the generator and switch.

3.1.3.2 NEGATIVE AIR MACHINES (HEPA UNITS)

- A. Negative Air Machine Cabinet: The cabinet shall be constructed of steel or other durable material capable of withstanding potential damage from rough handling and transportation. The width of the cabinet shall be less than 30" in order to fit in standard doorways. The cabinet must be factory sealed to prevent asbestos fibers from being released during use, transport, or maintenance. Any access to and replacement of filters shall be from the inlet end. The unit must be on casters or wheels.
- B. Negative Air Machine Fan: The rating capacity of the fan must indicate the CFM under actual operating conditions. Manufacturer's typically use "free-air" (no resistance) conditions when rating fans. The fan must be a centrifugal type fan.
- C. Negative Air Machine Final Filter: The final filter shall be a HEPA filter. The filter media must be completely sealed on all edges within a structurally rigid frame. The filter shall align with a continuous flexible gasket material in the negative air machine housing to form an air tight seal. Each HEPA filter shall be certified by the manufacturer to have an efficiency of not less than 99.97%. Testing shall have been done in accordance with Military Standard MIL-STD-282 and Army Instruction Manual 136-300-175A. Each filter must bear a UL586 label to indicate ability to perform under specified conditions. Each filter shall be marked with the name of the manufacturer, serial number, air flow rating, efficiency and resistance, and the direction of test air flow.
- D. Negative Air Machine Pre-filters: The pre-filters, which protect the final HEPA filter by removing larger particles, are required to prolong the operating life of the HEPA filter. Two stages of pre-filtration are required. A first stage pre-filter shall be a low efficiency type for particles 10 µm or larger. A second stage pre-filter shall have a medium efficiency effective for

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

04-19

particles down to 5 µm or larger. Pre-filters shall be installed either on or in the intake opening of the NAM and the second stage filter must be held in place with a special housing or clamps.

- E. Negative Air Machine Instrumentation: Each unit must be equipped with a gauge to measure the pressure drop across the filters and to indicate when filters have become loaded and need to be changed. A table indicating the cfm for various pressure readings on the gauge shall be affixed near the gauge for reference or the reading shall indicate at what point the filters shall be changed, noting cfm delivery. The unit must have an elapsed time meter to show total hours of operation.
- F. Negative Air Machine Safety and Warning Devices: An electrical/mechanical lockout must be provided to prevent the fan from being operated without a HEPA filter. Units must be equipped with an automatic shutdown device to stop the fan in the event of a rupture in the HEPA filter or blockage in the discharge of the fan. Warning lights are required to indicate normal operation; too high a pressure drop across filters; or too low of a pressure drop across filters.
- G. Negative Air Machine Electrical: All electrical components shall be approved by the National Electrical Manufacturer's Association (NEMA) and Underwriters Laboratories (UL). Each unit must be provided with overload protection and the motor, fan, fan housing, and cabinet must be grounded.
- H. It is essential that replacement HEPA filters be tested using an "in-line" testing method, to ensure the seal around the periphery was not damaged during replacement. Damage to the outer HEPA filter seal could allow contaminated air to bypass the HEPA filter and be discharged to an inappropriate location. Contractor will provide written documentation of test results for negative air machine units with HEPA filters changed by the contractor or documentation when changed and tested by the contractor filters

3.1.3.3 PRESSURE DIFFERENTIAL

The fully operational negative air system within the regulated area shall continuously maintain a pressure differential of -0.02" water column gauge. Before any disturbance of any asbestos material, this shall be demonstrated to the VA by use of a pressure differential meter/manometer as required by OSHA 29 CFR 1926.1101(e) (5) (i). The Competent Person shall be responsible for providing, maintaining, and documenting the negative pressure and air changes as required by OSHA and this specification.

3.1.3.4 MONITORING

The pressure differential shall be continuously monitored and recorded between the regulated area and the area outside the regulated area with a monitoring device that incorporates a strip chart recorder. The strip chart recorder shall become part of the

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

04-19

project log and shall indicate at least -0.02" water column gauge for the duration of the project.

3.1.3.5 AUXILIARY GENERATOR

If the building is occupied during abatement, provide an auxiliary gasoline/diesel generator located outside the building in an area protected from the weather. In the event of a power failure of the general power grid and the VAMC emergency power grid, the generator must automatically start and supply power to a minimum of 50% of the negative air machines in operation.

3.1.3.6 SUPPLEMENTAL MAKE-UP AIR INLETS

Provide, as needed for proper air flow in the regulated area, in a location approved by the VA, openings in the plastic sheeting to allow outside air to flow into the regulated area. Auxiliary makeup air inlets must be located as far from the negative air machines as possible, off the floor near the ceiling, and away from the barriers that separate the regulated area from the occupied clean areas. Cover the inlets with weighted flaps which will seal in the event of failure of the negative pressure system.

3.1.3.7 TESTING THE SYSTEM

The negative pressure system must be tested before any ACM is disturbed in any way. After the regulated area has been completely prepared, the decontamination units set up, and the negative air machines installed, start the units up one at a time. Demonstrate and document the operation and testing of the negative pressure system to the VA using smoke tubes and a negative pressure gauge. Verification and documentation of adequate negative pressure differential across each barrier must be done at the start of each work shift.

3.1.3.8 DEMONSTRATION OF THE NEGATIVE PRESSURE FILTRATION SYSTEM

The demonstration of the operation of the negative pressure system to the VA shall include, but not be limited to, the following:

- A. Plastic barriers and sheeting move lightly in toward the regulated area.
- B. Curtains of the decontamination units move in toward regulated area.
- C. There is a noticeable movement of air through the decontamination units. Use the smoke tube to demonstrate air movement from the clean room to the shower room to the equipment room to the regulated area.
- D. Use smoke tubes to demonstrate air is moving across all areas in which work is to be done. Use a differential pressure gauge to indicate a negative pressure of at least -0.02" across

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

04-19

every barrier separating the regulated area from the rest of the building. Modify the system as necessary to meet the above requirements.

3.1.3.9 USE OF THE NEGATIVE PRESSURE FILTRATION SYSTEM DURING ABATEMENT OPERATIONS

- A. Start units before beginning any disturbance of ACM occurs. After work begins, the units shall run continuously, maintaining 4 actual air changes per hour at a negative pressure differential of -0.02" water column gauge, for the duration of the work until a final visual clearance and final air clearance has been successfully completed. No negative air units shall be shut down at any time unless authorized by the VA Contracting Officer, verbally and in writing.
- B. Pre-cleaning of ACM contaminated items shall be performed after the enclosure has been erected and negative pressure has been established in the work area. After items have been pre-cleaned and decontaminated, they may be removed from the work area for storage until the completion of abatement in the work area.
- C. Abatement work shall begin at a location farthest from the units and proceed towards them. If an electric failure occurs, the Competent Person shall stop all abatement work and immediately begin wetting all exposed asbestos materials for the duration of the power outage. Abatement work shall not resume until power is restored and all units are operating properly again.
- D. The negative air machines shall continue to run after all work is completed and until a final visual clearance and a final air clearance has been successfully completed for that regulated area.

3.1.3.10 DISMANTLING THE SYSTEM

After completion of the final visual and final air clearance has been obtained by the VPIH/CIH, the units may be shut down. The unit exterior surfaces shall have been completely decontaminated; pre-filters are not to be removed and the units inlet/outlet sealed with 2 layers of 6 mil poly immediately after shut down. No filter removal shall occur at the VA site following successful completion of site clearance. OSHA/EPA/DOT asbestos shall be attached to the units.

3.1.4 CONTAINMENT BARRIERS AND COVERINGS IN THE REGULATED AREA

3.1.4.1 GENERAL

Using critical barriers seal off the perimeter to the regulated area to completely isolate the regulated area from adjacent spaces. All surfaces in the regulated area must be covered to prevent contamination and to facilitate clean-up. Should

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

04-19

adjacent areas become contaminated as a result of the work, shall immediately stop work and clean up the contamination at no additional cost to the VA.

3.1.4.2 PREPARATION PRIOR TO SEALING THE REGULATED AREA

Place all tools, scaffolding, materials and equipment needed for working in the regulated area prior to erecting any plastic sheeting. All uncontaminated removable furniture, equipment and/or supplies shall be removed by the VA from the regulated area before commencing work. Any objects remaining in the regulated area shall be completely covered with 2 layers of 6-mil fire retardant poly sheeting and secured with duct tape. Lock out and tag out any HVAC/electrical systems in the regulated area.

3.1.4.3 CONTROLLING ACCESS TO THE REGULATED AREA

Access to the regulated area is allowed only through the personnel decontamination facility (PDF). All other means of access shall be eliminated and OSHA DANGER demarcation signs posted as required by OSHA. If the regulated area is adjacent to, or within view of an occupied area, provide a visual barrier of 6 mil opaque fire retardant poly to prevent building occupant observation. If the adjacent area is accessible to the public, the barrier must be solid with a lockable entrance and capable of withstanding the negative pressure.

3.1.4.4 CRITICAL BARRIERS

Completely separate any operations in the regulated area from adjacent areas using 2 layers of 6 mil fire retardant poly and duct tape. Individually seal with 2 layers of 6 mil poly and duct tape all HVAC openings into the regulated area. Individually seal all lighting fixtures, clocks, doors, windows, convectors, speakers, or any other objects/openings in the regulated area. Heat must be shut off any objects covered with poly.

3.1.4.5 PRIMARY BARRIERS

A. Cover the regulated area with two layers of 6 mil fire retardant poly on the floors and two layers of 4 mil, fire retardant poly on the walls, unless otherwise directed in writing by the VA representative. Floor layers must form a right angle with the wall and turn up the wall at least 300 mm (12"). Seams must overlap at least 1800 mm (6') and must be spray glued and taped. Install sheeting so that layers can be removed independently from each other. Carpeting shall be covered with three layers of 6 mil poly. Corrugated cardboard sheets must be placed between the bottom and middle layers of

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

04-19

poly. Mechanically support and seal with duct tape and glue all wall layers.

B. If stairs and ramps are covered with 6 mil plastic, two layers must be used. Provide 19 mm (3/4") exterior grade plywood treads held in place with duct tape/glue on the plastic. Do not cover rungs or rails with any isolation materials.

3.1.4.6 SECONDARY BARRIERS

A loose layer of 6 mil shall be used as a drop cloth to protect the primary layers from debris generated during the abatement. This layer shall be replaced as needed during the work and at a minimum once per work day.

3.1.4.7 EXTENSION OF THE REGULATED AREA

If the enclosure of the regulated area is breached in any way that could allow contamination to occur, the affected area shall be included in the regulated area and constructed as per this section. Decontamination measures must be started immediately and continue until air monitoring indicates background levels are met.

3.1.4.8 FIRESTOPPING (NOT USED)

3.1.5 SANITARY FACILITIES

The Contractor shall provide sanitary facilities for abatement personnel and maintain them in a clean and sanitary condition throughout the abatement project.

3.1.6 PERSONAL PROTECTIVE EQUIPMENT

Provide whole body clothing, head coverings, gloves and foot coverings and any other personal protective equipment as determined by conducting the hazard assessment required by OSHA at 29 CFR 1910.132 (d). The Competent Person shall ensure the integrity of personal protective equipment worn for the duration of the project. Duct tape shall be used to secure all suit sleeves to wrists and to secure foot coverings at the ankle.

3.1.7 PRE-CLEANING

The VA will provide water for abatement purposes. The Contractor shall connect to the existing VA system. The service to the shower(s) shall be supplied with backflow prevention.

Pre-cleaning of ACM contaminated items shall be performed after the enclosure has been erected and negative pressure has been established in the work area. All workers performing pre-cleaning activities must don

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

04-19

appropriate personal protective equipment (PPE), as specified throughout this document and as approved in the Contractor's work plan. After items have been pre-cleaned and decontaminated, they may be removed from the work area for storage until the completion of abatement in the work area.

Pre-clean all movable objects within the regulated area using a HEPA filtered vacuum and/or wet cleaning methods as appropriate. After cleaning, these objects shall be removed from the regulated area and carefully stored in an uncontaminated location. Drapes, clothing, upholstered furniture and other fabric items should be disposed of as asbestos contaminated waste. Cleaning these asbestos contaminated items utilizing HEPA vacuum techniques and off-premises steam cleaning is very difficult and cannot guarantee decontamination. Carpeting will be disposed of prior to abatement if in the regulated area. If ACM floor tile is attached to the carpet while the Contractor is removing the carpet that section of the carpet will be disposed of as asbestos waste.

Pre-clean all fixed objects in the regulated area using HEPA filtered vacuums and/or wet cleaning techniques as appropriate. Careful attention must be paid to machinery behind grills or gratings where access may be difficult but contamination may be significant. Also, pay particular attention to wall, floor and ceiling penetration behind fixed items. After pre-cleaning, enclose fixed objects with 2 layers of 6-mil poly and seal securely in place with duct tape. Objects (e.g., permanent fixtures, shelves, electronic equipment, laboratory tables, sprinklers, alarm systems, closed circuit TV equipment and computer cables) which must remain in the regulated area and that require special ventilation or enclosure requirements should be designated here along with specified means of protection. Contact the manufacturer for special protection requirements.

Pre-clean all surfaces in the regulated area using HEPA filtered vacuums and/or wet cleaning methods as appropriate. Do not use any methods that would raise dust such as dry sweeping or vacuuming with equipment not equipped with HEPA filters. Do not disturb asbestos-containing materials during this pre-cleaning phase.

3.1.8 PRE-ABATEMENT ACTIVITIES

3.1.8.1 PRE-ABATEMENT MEETING

The VA representative, upon receipt, review, and substantial approval of all pre-abatement submittals and verification by the CPIH/CIH that all materials and equipment required for the project are on the site, will arrange for a pre-abatement meeting between the Contractor, the CPIH/CIH, Competent Person(s), the VA representative(s), and the VPIH/CIH. The purpose of the meeting is to discuss any aspect of the submittals needing clarification or amplification and to discuss any aspect of the project execution and the sequence of the operation. The Contractor shall be prepared to provide any supplemental information/documentation to the VA's representative regarding any submittals, documentation, materials or equipment. Upon satisfactory resolution of any outstanding

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

04-19

issues, the VA's representative will issue a written order to proceed to the Contractor. No abatement work of any kind described in the following provisions shall be initiated prior to the VA written order to proceed.

3.1.8.2 PRE-ABATEMENT CONSTRUCTION AND OPERATIONS

- A. Perform all preparatory work for the first regulated area in accordance with the approved work schedule and with this specification.
- B. Upon completion of all preparatory work, the CPIH/CIH will inspect the work and systems and will notify the VA's representative when the work is completed in accordance with this specification. The VA's representative may inspect the regulated area and the systems with the VPIH/CIH and may require that upon satisfactory inspection, the Contractor's employees perform all major aspects of the approved AHAP(s), especially worker protection, respiratory systems, contingency plans, decontamination procedures, and monitoring to demonstrate satisfactory operation. The operational systems for respiratory protection and the negative pressure system shall be demonstrated for proper performance.
- C. The CPIH/CIH shall document the pre-abatement activities described above and deliver a copy to the VA's representative.
- D. Upon satisfactory inspection of the installation of and operation of systems the VA's representative will notify the Contractor in writing to proceed with the asbestos abatement work in accordance with this specification and all applicable regulations.

3.1.8.3 PRE-ABATEMENT INSPECTIONS AND PREPARATIONS

Before any work begins on the construction of the regulated area, the Contractor will:

- A. Conduct a space-by-space inspection with an authorized VA representative and prepare a written inventory of all existing damage in those spaces where asbestos abatement will occur. Still or video photography may be used to supplement the written damage inventory. Document will be signed and certified as accurate by both parties.
- B. A NESHAPS (destructive) ACM inspection should be conducted on all building structures that will be demolished. Ensure the following areas are inspected on the project: lay-in ceilings concealing ACM; ACM behind walls/windows from previous renovations; inside utility chases/walls; transite piping/ductwork/sheets; behind radiators; lab fume hoods; transite lab countertops; roofing materials; below window sills; water/sewer lines; electrical conduit coverings; crawlspaces (previous abatement contamination); flooring/mastic covered by carpeting/new flooring; exterior insulated wall panels; on underground fuel tanks; and steam line trench coverings.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

04-19

- C. Ensure that all furniture, machinery, equipment, curtains, drapes, blinds, and other movable objects required to be removed from the regulated area have been cleaned and removed or properly protected from contamination.
- D. If present and required, remove and dispose of carpeting from floors in the regulated area.

3.2 REMOVAL OF ACM

3.2.1 WETTING ACM

- A. Use amended water for the wetting of ACM prior to removal. The Competent Person shall assure the wetting of ACM meets the definition of "adequately wet" in the EPA NESHAP regulation and OSHA's "wet methods" for the duration of the project. A removal encapsulant may be used instead of amended water with written approval of the VA's representative.
- B. Amended Water: Provide water to which a surfactant has been added shall be used to wet the ACM and reduce the potential for fiber release during disturbance of ACM. The mixture must be equal to or greater than the wetting provided by water amended by a surfactant consisting one ounce of 50% polyoxyethylene ester and 50% polyoxyethylene ether mixed with 5 gallons (19L) of water.
- C. Removal Encapsulant: When authorized by VA, provide a penetrating encapsulant designed specifically for the removal of ACM. The material must, when used, result in adequate wetting of the ACM and retard fiber release during removal.

3.2.2 SECONDARY BARRIER AND WALKWAYS

- A. Install as a drop cloth a 6 mil poly sheet at the beginning of each work shift where removal is to be done during that shift. Completely cover floors and any walls within 10 feet (3 meters) of the area where work is to done. Secure the secondary barrier with duct tape to prevent it from moving or debris from getting behind it. Remove the secondary barrier at the end of the shift or as work in the area is completed. Keep residue on the secondary barrier wetted. When removing, fold inward to prevent spillage and place in a disposal bag.
- B. Install walkways using 6 mil black poly between the regulated area and the decontamination facilities (PDF and W/EDF) to protect the primary layers from contamination and damage. Install the walkways at the beginning of each shift and remove at the end of each shift.

3.2.3 WET REMOVAL OF ACM

- A. Adequately and thoroughly wet the ACM to be removed prior to removal with amended water or when authorized by VA, removal encapsulant to reduce/prevent fiber release to the air. Adequate time (at a minimum two hours) must be allowed for the amended water or removal encapsulant to saturate the ACM. Abatement personnel must not disturb dry ACM. Use a fine spray of amended water or removal encapsulant. Saturate the material sufficiently to wet to the substrate without causing excessive dripping.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

04-19

The material must be sprayed repeatedly/continuously during the removal process in order to maintain adequately wet conditions. Removal encapsulants must be applied in accordance with the manufacturer's written instructions. Perforate or carefully separate, using wet methods, an outer covering that is painted or jacketed in order to allow penetration and wetting of the material. Where necessary, carefully remove covering while wetting to minimize fiber release. **In no event shall dry removal occur except when authorized in writing by the VPIH/CIH and VA when a greater safety hazard (e.g., electricity) is present.**

- B. If ACM does not wet well with amended water due to composition, coating or jacketing, remove as follows:
1. Mist work area continuously with amended water whenever necessary to reduce airborne fiber levels.
 2. Remove saturated ACM in small sections. Do not allow material to dry out. As material is removed, bag material, while still wet into disposal bags. Twist the bag neck tightly, bend over (gooseneck) and seal with a minimum of three tight wraps of duct tape. Clean /decontaminate the outside of the bag of any residue and move to washdown station adjacent to W/EDF.
 3. Fireproofing or Architectural Finish on Scratch Coat: Spray with a fine mist of amended water or removal encapsulant. Allow time for saturation to the substrate. Do not over saturate causing excess dripping. Scrape material from substrate. Remove material in manageable quantities and control falling to staging or floor. If the falling distance is over 20 feet (6M), use a drop chute to contain material through descent. Remove residue remaining on the scratch coat after scraping is done using a stiff bristle hand brush. If a removal encapsulant is used, remove residue completely before the encapsulant dries. Periodically re-wet the substrate with amended water as needed to prevent drying of the material before the residue is removed from the substrate.
 4. Fireproofing or Architectural Finish on Wire Lath: Spray with a fine mist of amended water or removal encapsulant. Allow time to completely saturate the material. Do not over saturate causing excess dripping. If the surface has been painted or otherwise coated, cut small holes as needed and apply amended water or removal encapsulant from above. Cut saturated wire lath into 2' x 6' (50mm x 150mm) sections and cut hanger wires. Roll up complete with ACM, cover in burlap and hand place in disposal bag. Do not drop to floor. After removal of lath/ACM, remove any overspray on decking and structure using stiff bristle nylon brushes. Depending on hardness of overspray, scrapers may be needed for removal.
 5. Pipe/Tank/Vessel/Boiler Insulation: Remove the outer layer of wrap while spraying with amended water in order to saturate the ACM. Spray ACM with a fine mist of amended water or removal encapsulant. Allow time to saturate the material to the substrate. Cut bands holding pre-formed pipe insulation sections. Slit jacketing at the seams, remove and hand place in a disposal bag. Do not allow dropping to the floor. Remove molded fitting insulation/mud in large pieces and hand

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

04-19

place in a disposal bag. Remove any residue on pipe or fitting with a stiff bristle nylon brush. In locations where pipe fitting insulation is removed from fibrous glass or other non-asbestos insulated straight runs of pipe, remove fibrous material at least 6" from the point it contacts the ACM.

3.2.4 WET REMOVAL OF AMOSITE (NOT USED)

3.2.5 REMOVAL OF ACM/DIRT FLOORS AND OTHER SPECIAL PROCEDURES (NOT USED)

3.3 LOCKDOWN ENCAPSULATION

3.3.1 GENERAL

Lockdown encapsulation is an integral part of the ACM removal. At the conclusion of ACM removal and before removal of the primary barriers, the contractor shall encapsulate all surfaces with a lockdown encapsulant. Apply the lockdown encapsulant with an airless sprayer at a pressure and using a nozzle orifice as recommended by the manufacturer.

3.3.2 DELIVERY AND STORAGE

Deliver materials to the job site in original, new and unopened containers bearing the manufacturer's name and label as well as the following information: name of material, manufacturer's stock number, date of manufacture, thinning instructions, application instructions and the MSDS for the material.

3.3.3 WORKER PROTECTION

Before beginning work with any material for which an MSDS has been submitted, provide workers with any required personal protective equipment. The required personal protective equipment shall be used whenever exposure to the material might occur. In addition to OSHA/specification requirements for respiratory protection, a paint pre-filter and an organic vapor cartridge, at a minimum, shall be used in addition to the HEPA filter when an organic solvent based encapsulant is used. The CPHI/CIH shall be responsible for provision of adequate respiratory protection. Note: Flammable and combustible encapsulants shall not be used, unless authorized in writing by the VA.

3.3.4 ENCAPSULATION OF SCRATCH COAT PLASTER OR PIPING (NOT USED)

3.3.5 SEALING EXPOSED EDGES

Seal edges of ACM exposed by removal work which is inaccessible, such as a sleeve, wall penetration, etc., with two coats of bridging encapsulant. Prior to sealing, permit the exposed edges to dry completely to permit penetration of the bridging encapsulant.

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

04-19

3.4 DISPOSAL OF ACM WASTE MATERIALS

3.4.1 GENERAL

Dispose of waste ACM and debris which is packaged in accordance with these specifications, OSHA, EPA and DOT. The landfill requirements for packaging must also be met. Transport will be in compliance with 49 CFR 100-185 regulations. Disposal shall be done at an approved landfill. Disposal of non-friable ACM shall be done in accordance with applicable regulations.

3.4.2 PROCEDURES

- A. The VA must be notified at least 24 hours in advance of any waste removed from the containment.
- B. Asbestos waste shall be packaged and moved through the W/EDF into a covered transport container in accordance with procedures in this specification. Waste shall be double-bagged and wetted with amended water prior to disposal. Wetted waste can be very heavy. Bags shall not be overfilled. Bags shall be securely sealed to prevent accidental opening and/or leakage. The top shall be tightly twisted and goose necked prior to tightly sealing with at least three wraps of duct tape. Ensure that unauthorized persons do not have access to the waste material once it is outside the regulated area. All transport containers must be covered at all times when not in use. NESHAP signs must be on containers during loading and unloading. Material shall not be transported in open vehicles. If drums are used for packaging, the drums shall be labeled properly and shall not be re-used.
- C. Waste Load Out: Waste load out shall be done in accordance with the procedures in W/EDF Decontamination Procedures. Sealed waste bags shall be decontaminated on exterior surfaces by wet cleaning and/or HEPA vacuuming before being placed in the second waste bag and sealed, which then must also be wet wiped or HEPA vacuumed.
- D. Asbestos waste with sharp edged components, i.e., nails, screws, lath, strapping, tin sheeting, jacketing, metal mesh, etc., which might tear poly bags shall be wrapped securely in burlap before packaging and, if needed, use a poly lined fiber drum as the second container, prior to disposal.

3.5 PROJECT DECONTAMINATION

3.5.1 GENERAL

- A. The entire work related to project decontamination shall be performed under the close supervision and monitoring of the CPIH/CIH.
- B. If the asbestos abatement work is in an area which was contaminated prior to the start of abatement, the decontamination will be done by cleaning the primary barrier poly prior to its removal and cleanings of the surfaces of the regulated area after the primary barrier removal.
- C. If the asbestos abatement work is in an area which was uncontaminated prior to the start of abatement, the decontamination will be done by cleaning the primary barrier poly prior to its removal, thus preventing contamination of the building when the regulated area critical barriers are removed.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

04-19

3.5.2 REGULATED AREA CLEARANCE

Clearance air testing and other requirements which must be met before release of the Contractor and re-occupancy of the regulated area space are specified in Final Testing Procedures.

3.5.3 WORK DESCRIPTION

Decontamination includes the clearance air testing in the regulated area and the decontamination and removal of the enclosures/facilities installed prior to the abatement work including primary/critical barriers, PDF and W/EDF facilities, and negative pressure systems.

3.5.4 PRE-DECONTAMINATION CONDITIONS

- A. Before decontamination starts, all ACM waste from the regulated area shall be collected and removed, and the loose 6 mil layer of poly removed while being adequately wetted with amended water and disposed of along with any gross debris generated by the work.
- B. At the start of decontamination, the following shall be in place:
 - 1. Primary barriers consisting of 2 layers of 6 mil poly on the floor and 1 layer of 4 mil poly on the walls.
 - 2. Critical barriers consisting of 2 layers of 6 mil poly which is the sole barrier between the regulated area and openings to the rest of the building or outside.
 - 4. Decontamination facilities for personnel and equipment in operating condition and the negative pressure system in operation.

3.5.5 FIRST CLEANING

Carry out a first cleaning of all surfaces of the regulated area including items of remaining poly sheeting, tools, scaffolding, ladders/staging by wet methods and/or HEPA vacuuming. Do not use dry dusting/sweeping/air blowing methods. Use each surface of a wetted cleaning cloth one time only and then dispose of as contaminated waste. Continue this cleaning until there is no visible residue from abated surfaces or poly or other surfaces. Remove all filters in the air handling system and dispose of as ACM waste in accordance with these specifications. The negative pressure system shall remain in operation during this time. Additional cleaning(s) may be needed as determined by the CPIH/VPIH/CIH.

3.5.6 PRE-CLEARANCE INSPECTION AND TESTING

The CPIH/CIH and VPIH/CIH will perform a thorough and detailed visual inspection at the end of the cleaning to determine whether there is any visible residue in the regulated area. If the visual inspection is acceptable, the CPIH/CIH will perform pre-clearance sampling using aggressive clearance as detailed in 40 CFR 763 Subpart E (AHERA) Appendix A (III) (B) (7) (d). If the sampling results show values below 0.01 f/cc, then the Contractor shall notify the VA's representative of the results with a brief report from the CPIH/CIH documenting the inspection and sampling results and a statement verifying that the regulated area is

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

04-19

ready for lockdown encapsulation. The VA reserves the right to utilize their own VPIH/CIH to perform a pre-clearance inspection and testing for verification.

3.5.7 LOCKDOWN ENCAPSULATION OF ABATED SURFACES (NOT USED)

3.6 FINAL VISUAL INSPECTION AND AIR CLEARANCE TESTING

3.6.1 GENERAL

Notify the VA representative 24 hours in advance for the performance of the final visual inspection and testing. The final visual inspection and testing will be performed by the VPIH/CIH starting after the final cleaning.

3.6.2 FINAL VISUAL INSPECTION

Final visual inspection will include the entire regulated area, the PDF, all poly sheeting, seals over HVAC openings, doorways, windows, and any other openings. If any debris, residue, dust or any other suspect material is detected, the final cleaning shall be repeated at no cost to the VA. Dust/material samples may be collected and analyzed at no cost to the VA at the discretion of the VPIH/CIH to confirm visual findings. When the regulated area is visually clean the final testing can be done.

3.6.3 FINAL AIR CLEARANCE TESTING

- A. After an acceptable final visual inspection by the VPIH/CIH and CPIH/CIH, the VPIH/CIH and CPIH/CIH will perform the final clearance testing. Air samples will be collected and analyzed in accordance with procedures for AHERA in this specification. 5 PCM samples shall be collected for clearance and a minimum of one field blank. If the release criteria are not met, the Contractor shall repeat the final cleaning and continue decontamination procedures until clearance is achieved. **All Additional inspection and testing costs will be borne by the Contractor.**
- B. If release criteria are met, proceed to perform the abatement closeout and to issue the certificate of completion in accordance with these specifications.

3.6.4 FINAL AIR CLEARANCE PROCEDURES

- A. Work in a regulated area is complete when the regulated area is visually clean and airborne fiber levels have been reduced to or below 0.01 f/cc as measured by the MDH PCM protocol.
- B. Air Monitoring and Final Clearance Sampling: To determine if the elevated airborne fiber counts encountered during abatement operations have been reduced to the specified level, the VPIH/CIH and CPIH/CIH will secure samples and analyze them according to the following procedures:
 1. Fibers Counted: "Fibers" referred to in this section shall be either all fibers regardless of composition as counted in the NIOSH 7400 PCM method.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

04-19

2. Aggressive Sampling: All final air testing samples shall be collected using aggressive sampling techniques. Samples will be collected on 0.8 μ MCE filters for PCM analysis. A minimum of 2000 Liters of using calibrated pumps shall be collected for clearance samples. Before pumps are started, initiate aggressive air mixing sampling as detailed in 40 CFR 763 Subpart E (AHERA) Appendix A (III) (B) (7) (d) and MDHAAR Part 4620.3594(subp.2) (F) (1)&(2). Air samples will be collected in areas subject to normal air circulation away from corners, obstructed locations, and locations near windows, doors, or vents. After air sampling pumps have been shut off, circulating fans shall be shut off. The negative pressure system shall continue to operate.

3.6.5 CLEARANCE SAMPLING USING PCM

- A. The VPIH/CIH and CPIH/CIH will perform clearance samples as indicated by the specification.
- B. The NIOSH 7400 PCM method will be used for clearance sampling with a minimum collection volume of 2000 Liters of air. A minimum of 5 PCM clearance samples shall be collected. All samples must be equal to or less than 0.01 f/cc to clear the regulated area.

3.6.6 CLEARANCE SAMPLING USING TEM - EQUAL TO OR MORE THAN 260LF/160SF: TEM (NOT USED)

3.6.7 LABORATORY TESTING OF PCM CLEARANCE SAMPLES

The services of an AIHA accredited laboratory will be employed by the VA and the Asbestos Contractor to perform analysis for the PCM air samples. The accredited laboratory shall be successfully participating in the AIHA Proficiency Analytical Testing (PAT) program. Samples will be analyzed daily by the VPIH/CIH and CPIH/CIH so that verbal/faxed reports can be received within 24 hours. A complete record, certified by the laboratory, of all air monitoring tests and results will be furnished to the VA's representative and the Contractor.

3.6.8 LABORATORY TESTING OF TEM SAMPLES (NOT USED)

3.6.9 LABORATORY TESTING OF BULK SAMPLES

Samples shall be sent by the VPIH/CIH or CPIH/CIH to a NIST accredited laboratory for analysis by PLM. The laboratory shall be successfully participating in the NIST Bulk Asbestos Analysis (PLM) program. Verbal/faxed results from the laboratory shall be available within 24 hours after receipt of the samples. A complete record, certified by the laboratory, of all PLM results shall be furnished to the VA's representative and the Contractor.

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

04-19

3.7 ABATEMENT CLOSEOUT AND CERTIFICATE OF COMPLIANCE

3.7.1 COMPLETION OF ABATEMENT WORK

After thorough decontamination, seal negative air machines with 2 layers of 6 mil poly and duct tape to form a tight seal at the intake/outlet ends before removal from the regulated area. Complete asbestos abatement work upon meeting the regulated area visual and air clearance criteria and fulfilling the following:

- A. Remove all equipment and materials from the project area.
 - B. The Contractor shall provide enough HEPA negative air machines to continuously maintain a pressure differential of -0.02" water column gauge (WCG). The Competent Person shall determine the number of units needed for the regulated area by dividing the cubic feet in the regulated area by 15 and then dividing that result by the cubic feet per minute (CFM) for each unit to determine the number of units needed to continuously maintain a pressure differential of -0.02" WCG. Provide a standby unit in the event of machine failure and/or emergency in an adjacent area.
- Dispose of all packaged ACM waste as required.
- C. Repair or replace all interior finishes damaged during the abatement work, as required.
 - D. Fulfill other project closeout requirements as required in this specification.

3.7.2 CERTIFICATE OF COMPLETION BY CONTRACTOR

The CPIH/CIH shall complete and sign the "Certificate of Completion" in accordance with Attachment 1 at the completion of the abatement and decontamination of the regulated area.

3.7.3 WORK SHIFTS

All work shall be done during administrative hours (8:00 AM to 4:30 PM) Monday -Friday excluding Federal Holidays. Any change in the work schedule must be approved in writing by the VA Representative.

3.7.4 RE-INSULATION (NOT USED)

If required as part of the contract, replace all asbestos containing insulation/fire-proofing with suitable non-asbestos material. Provide MSDS's for all replacement materials in advance of installation for VA approval. Refer to Section 23 07 11, HVAC, PLUMBING, AND BOILER PLANT INSULATION.

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

04-19

ATTACHMENT #1

CERTIFICATE OF COMPLETION

DATE: _____ VA Project #: _____

PROJECT NAME: _____ Abatement Contractor: _____

VAMC/ADDRESS: _____

1. I certify that I have personally inspected, monitored and supervised the abatement work of (specify regulated area or Building):
which took place from / / to / /
2. That throughout the work all applicable requirements/regulations and the VA's specifications were met.
3. That any person who entered the regulated area was protected with the appropriate personal protective equipment and respirator and that they followed the proper entry and exit procedures and the proper operating procedures for the duration of the work.
4. That all employees of the Abatement Contractor engaged in this work were trained in respiratory protection, were experienced with abatement work, had proper medical surveillance documentation, were fit-tested for their respirator, and were not exposed at any time during the work to asbestos without the benefit of appropriate respiratory protection.
5. That I performed and supervised all inspection and testing specified and required by applicable regulations and VA specifications.
6. That the conditions inside the regulated area were always maintained in a safe and healthy condition and the maximum fiber count never exceeded 0.5 f/cc, except as described below.
7. That all abatement work was done in accordance with OSHA requirements and the manufacturer's recommendations.

CPIH/CIH
Signature/Date:.....
.....

CPIH/CIH
Name:.....
.....
Print

Abatement
Signature/Date:.....
.....
Contractor

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

04-19

Abatement

Contractor

Print

Name:
.....

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

04-19

ATTACHMENT #2

CERTIFICATE OF WORKER'S ACKNOWLEDGMENT

PROJECT NAME: _____ DATE: _____

PROJECT ADDRESS: _____

ABATEMENT CONTRACTOR'S NAME: _____

WORKING WITH ASBESTOS CAN BE HAZARDOUS TO YOUR HEALTH. INHALING ASBESTOS HAS BEEN LINKED WITH VARIOUS TYPES OF CANCERS. IF YOU SMOKE AND INHALE ASBESTOS FIBERS, YOUR CHANCES OF DEVELOPING LUNG CANCER IS GREATER THAN THAT OF THE NON-SMOKING PUBLIC.

Your employer's contract with the owner for the above project requires that: You must be supplied with the proper personal protective equipment including an adequate respirator and be trained in its use. You must be trained in safe and healthy work practices and in the use of the equipment found at an asbestos abatement project. You must receive/have a current medical examination for working with asbestos. These things shall be provided at no cost to you. By signing this certificate you are indicating to the owner that your employer has met these obligations.

RESPIRATORY PROTECTION: I have been trained in the proper use of respirators and have been informed of the type of respirator to be used on the above indicated project. I have a copy of the written Respiratory Protection Program issued by my employer. I have been provided for my exclusive use, at no cost, with a respirator to be used on the above indicated project.

TRAINING COURSE: I have been trained by a third party, State/EPA accredited trainer in the requirements for an AHERA/OSHA Asbestos Abatement Worker training course, 32 hours minimum duration. I currently have a valid State accreditation certificate. The topics covered in the course include, as a minimum, the following:

- Physical Characteristics and Background Information on Asbestos
- Potential Health Effects Related to Exposure to Asbestos
- Employee Personal Protective Equipment
- Establishment of a Respiratory Protection Program
- State of the Art Work Practices
- Personal Hygiene
- Additional Safety Hazards
- Medical Monitoring
- Air Monitoring
- Relevant Federal, State and Local Regulatory Requirements, Procedures, and Standards
- Asbestos Waste Disposal

MEDICAL EXAMINATION: I have had a medical examination within the past 12 months which was paid for by my employer. This examination included: health history, occupational history, pulmonary function test, and may have included a chest x-ray evaluation. The physician issued a positive written opinion after the examination.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

04-19

Signature: _____

Printed Name: _____

Social Security Number: _____

Witness: _____

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

04-19

ATTACHMENT #3

AFFIDAVIT OF MEDICAL SURVEILLANCE, RESPIRATORY PROTECTION AND TRAINING/ACCREDITATION

VA PROJECT NAME AND NUMBER: _____

VA MEDICAL FACILITY: _____

ABATEMENT CONTRACTOR'S NAME AND ADDRESS: _____

1. I verify that the following individual

Name: _____ Social Security Number: _____

who is proposed to be employed in asbestos abatement work associated with the above project by the named Abatement Contractor, is included in a medical surveillance program in accordance with 29 CFR 1926.1101(m), and that complete records of the medical surveillance program as required by 29 CFR 1926.1101(m)(n) and 29 CFR 1910.20 are kept at the offices of the Abatement Contractor at the following address.

Address: _____

2. I verify that this individual has been trained, fit-tested and instructed in the use of all appropriate respiratory protection systems and that the person is capable of working in safe and healthy manner as expected and required in the expected work environment of this project.

3. I verify that this individual has been trained as required by 29 CFR 1926.1101(k). This individual has also obtained a valid State accreditation certificate. Documentation will be kept on-site.

4. I verify that I meet the minimum qualifications criteria of the VA specifications for a CPIH.

Signature of CPIH/CIH: _____ Date: _____

Printed Name of CPIH/CIH: _____

Signature of Contractor: _____ Date: _____

Printed Name of Contractor: _____

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

04-19

ATTACHMENT #4

ABATEMENT CONTRACTOR/COMPETENT PERSON(S) REVIEW AND ACCEPTANCE OF THE VA'S ASBESTOS SPECIFICATIONS

VA Project Location: _____

VA Project #: _____

VA Project Description: _____

This form shall be signed by the Asbestos Abatement Contractor Owner and the Asbestos Abatement Contractor's Competent Person(s) prior to any start of work at the VA related to this Specification. If the Asbestos Abatement Contractor's/Competent Person(s) has not signed this form, they shall not be allowed to work on-site.

I, the undersigned, have read VA's Asbestos Specification regarding the asbestos abatement requirements. I understand the requirements of the VA's Asbestos Specification and agree to follow these requirements as well as all required rules and regulations of OSHA/EPA/DOT and State/Local requirements. I have been given ample opportunity to read the VA's Asbestos Specification and have been given an opportunity to ask any questions regarding the content and have received a response related to those questions. I do not have any further questions regarding the content, intent and requirements of the VA's Asbestos Specification.

At the conclusion of the asbestos abatement, I will certify that all asbestos abatement work was done in accordance with the VA's Asbestos Specification and all ACM was removed properly and no fibrous residue remains on any abated surfaces.

Abatement Contractor Owner's Signature _____ Date _____

Abatement Contractor Competent Person(s) _____ Date _____

- - END- - -

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

09-15

**SECTION 02 82 13.13
GLOVEBAG ASBESTOS ABATEMENT**

TABLE OF CONTENTS

PART 1 - GENERAL..... 1

1.1 SUMMARY OF THE WORK..... 1

1.1.1 CONTRACT DOCUMENTS AND RELATED REQUIREMENTS..... 1

1.1.2 EXTENT OF WORK..... 1

1.1.3 RELATED WORK..... 2

1.1.4 TASKS..... 2

1.1.5 ABATEMENT CONTRACTOR USE OF PREMISES..... 2

1.2 VARIATIONS IN QUANTITY..... 2

1.3 STOP ASBESTOS REMOVAL..... 3

1.4 DEFINITIONS..... 3

1.4.1 GENERAL..... 3

1.4.2 GLOSSARY..... 3

1.4.3 REFERENCED STANDARDS ORGANIZATIONS..... 10

1.5 APPLICABLE CODES AND REGULATIONS..... 12

1.5.1 GENERAL APPLICABILITY OF CODES, REGULATIONS, AND STANDARDS..... 12

1.5.2 ASBESTOS ABATEMENT CONTRACTOR RESPONSIBILITY..... 12

1.5.3 FEDERAL REQUIREMENTS..... 12

1.5.4 STATE REQUIREMENTS..... 13

1.5.5 LOCAL REQUIREMENTS (NOT USED)..... 13

1.5.6 STANDARDS..... 13

1.5.7 EPA GUIDANCE DOCUMENTS..... 14

1.5.8 NOTICES..... 14

1.5.9 PERMITS..... 14

1.5.10 POSTING AND FILING OF REGULATIONS..... 15

1.5.11 VA RESPONSIBILITIES..... 15

1.5.12 EMERGENCY ACTION PLAN AND ARRANGEMENTS..... 15

1.5.14 PRE-CONSTRUCTION MEETING..... 16

1.6 PROJECT COORDINATION..... 17

1.6.1 PERSONNEL..... 17

1.7 RESPIRATORY PROTECTION..... 18

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

09-15

1.7.1 GENERAL - RESPIRATORY PROTECTION PROGRAM..... 18

1.7.2 RESPIRATORY PROTECTION PROGRAM COORDINATOR..... 18

1.7.3 SELECTION AND USE OF RESPIRATORS..... 18

1.7.4 MINIMUM RESPIRATORY PROTECTION..... 18

1.7.5 MEDICAL WRITTEN OPINION..... 19

1.7.6 RESPIRATOR FIT TEST..... 19

1.7.7 RESPIRATOR FIT CHECK..... 19

1.7.8 MAINTENANCE AND CARE OF RESPIRATORS..... 19

1.8 WORKER PROTECTION..... 19

1.8.1 TRAINING OF ABATEMENT PERSONNEL..... 19

1.8.2 MEDICAL EXAMINATIONS..... 19

1.8.3 PERSONAL PROTECTIVE EQUIPMENT..... 20

1.8.4 REGULATED AREA ENTRY PROCEDURE..... 20

1.8.5 DECONTAMINATION PROCEDURE..... 20

1.8.6 REGULATED AREA REQUIREMENTS..... 21

1.9 DECONTAMINATION FACILITIES..... 21

1.9.1 DESCRIPTION..... 21

1.9.2 GENERAL REQUIREMENTS..... 21

1.9.3 TEMPORARY FACILITIES TO THE PDF AND W/EDF..... 21

1.9.4 PERSONNEL DECONTAMINATION FACILITY (PDF)..... 21

1.9.5 WASTE/EQUIPMENT DECONTAMINATION FACILITY (W/EDF) (NOT USED)..... 23

1.9.6 WASTE/EQUIPMENT DECONTAMINATION PROCEDURES (NOT USED)..... 23

PART 2 - PRODUCTS, MATERIALS AND EQUIPMENT..... 23

2.1 MATERIALS AND EQUIPMENT..... 23

2.1.1 GENERAL REQUIREMENTS (ALL ABATEMENT PROJECTS)..... 23

2.2 CONTAINMENT BARRIERS AND COVERINGS IN THE REGULATED AREA..... 25

2.2.1 GENERAL..... 25

2.2.2 PREPARATION PRIOR TO SEALING THE REGULATED AREA..... 25

2.2.3 CONTROLLING ACCESS TO THE REGULATED AREA..... 25

2.2.4 CRITICAL BARRIERS..... 25

2.2.5 SECONDARY BARRIERS-NOT USED..... 25

2.2.6 EXTENSION OF THE REGULATED AREA-NOT USED..... 25

2.2.7 FIRESTOPPING (NOT USED)..... 25

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

09-15

2.3 MONITORING, INSPECTION AND TESTING..... 25

2.3.1 GENERAL..... 25

2.3.2 SCOPE OF SERVICES OF THE VPIH/CIH CONSULTANT..... 26

2.3.3 MONITORING, INSPECTION AND TESTING BY ABATEMENT CONTRACTOR
CPIH/CIH..... 27

2.4 ASBESTOS HAZARD ABATEMENT PLAN..... 28

2.5 SUBMITTALS..... 29

2.5.1 PRE-START MEETING SUBMITTALS..... 29

2.5.2 SUBMITTALS DURING ABATEMENT..... 31

2.5.3 SUBMITTALS AT COMPLETION OF ABATEMENT..... 31

2.6 ENCAPSULANTS..... 31

2.6.1 TYPES OF ENCAPSULANTS..... 31

2.6.2 PERFORMANCE REQUIREMENTS..... 31

2.7 CERTIFICATES OF COMPLIANCE..... 32

2.8 RECYCLABLE PROTECTIVE CLOTHING..... 32

PART 3 - EXECUTION..... 32

3.1 REGULATED AREA PREPARATIONS..... 32

3.1.1 SITE SECURITY..... 32

3.1.2 OSHA DANGER SIGNS..... 33

3.1.3.1 SHUT DOWN - LOCK OUT ELECTRICAL..... 33

3.1.3.2 SHUT DOWN - LOCK OUT HVAC..... 33

3.1.4 CONTAINMENT BARRIERS AND COVERINGS FOR THE REGULATED AREA..... 34

3.1.4.1 GENERAL..... 34

3.1.4.2 PREPARATION PRIOR TO SEALING OFF..... 34

3.1.4.3 CONTROLLING ACCESS TO THE REGULATED AREA..... 34

3.1.4.4 CRITICAL BARRIERS..... 34

3.1.4.5 EXTENSION OF THE REGULATED AREA..... 34

3.1.4.6 FLOOR BARRIERS..... 35

3.1.5 SANITARY FACILITIES..... 35

3.1.6 PRE-CLEANING..... 35

3.1.6.1 PRE-CLEANING MOVABLE OBJECTS..... 35

3.1.6.2 PRE-CLEANING FIXED OBJECTS..... 35

3.1.6.3 PRE-CLEANING SURFACES IN THE REGULATED AREA..... 36

3.1.7 PRE-ABATEMENT ACTIVITIES..... 36

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

09-15

3.1.7.1 PRE-ABATEMENT MEETING.....	36
3.1.7.2 PRE-ABATEMENT INSPECTIONS AND PREPARATIONS.....	36
3.1.7.3 PRE-ABATEMENT CONSTRUCTION AND OPERATIONS.....	37
3.2 REMOVAL OF PIPINF ACM.....	37
3.2.1 WETTING MATERIALS.....	37
3.2.2 SECONDARY BARRIER AND WALKWAYS.....	37
3.2.3 WET REMOVAL OF ACM.....	38
3.3 GLOVEBAG REMOVAL PROCEDURES.....	38
3.3.1 GENERAL.....	38
3.3.2 NEGATIVE PRESSURE GLOVEBAG PROCEDURE.....	39
3.4 LOCKDOWN ENCAPSULATION.....	39
3.4.1 GENERAL.....	39
3.4.2 SEALING EXPOSED EDGES.....	40
3.5 DISPOSAL OF ACM WASTE MATERIALS.....	40
3.5.1 GENERAL.....	40
3.5.2 PROCEDURES.....	40
3.6 PROJECT DECONTAMINATION.....	40
3.6.1 GENERAL.....	40
3.6.2 REGULATED AREA CLEARANCE.....	41
3.6.3 WORK DESCRIPTION.....	41
3.6.4 PRE-DECONTAMINATION CONDITIONS.....	41
3.6.5 FIRST CLEANING.....	41
3.6.6 PRE-CLEARANCE INSPECTION AND TESTING.....	41
3.6.7 LOCKDOWN ENCAPSULATION OF ABATED SURFACES.....	42
3.7 FINAL VISUAL INSPECTIOns AND AIR CLEARANCE TESTING.....	42
3.7.1 GENERAL.....	42
3.7.2 FINAL VISUAL INSPECTION.....	42
3.7.3 DURATION/FINAL AIR CLEARANCE TESTING.....	42
3.7.4 DURATION/FINAL AIR CLEARANCE PROCEDURES.....	42
3.7.5 CLEARANCE SAMPLING USING PCM.....	43
3.7.6 CLEARANCE SAMPLING USING TEM (NOT USED).....	43
3.7.7 LABORATORY TESTING OF PCM SAMPLES.....	43
3.7.8 LABORATORY TESTING OF TEM SAMPLES (NOT USED).....	43

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

	09-15
3.8 ABATEMENT CLOSEOUT AND CERTIFICATE OF COMPLIANCE.....	43
3.8.1 COMPLETION OF ABATEMENT WORK.....	43
3.8.2 CERTIFICATE OF COMPLETION BY CONTRACTOR.....	44
3.8.3 WORK SHIFTS.....	44
3.8.4 RE-INSULATION (NOT USED).....	44
ATTACHMENT #1.....	45
ATTACHMENT #2.....	46
ATTACHMENT #3.....	48
ATTACHMENT #4.....	49

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

09-15

PART 1 - GENERAL

1.1 SUMMARY OF THE WORK

1.1.1 CONTRACT DOCUMENTS AND RELATED REQUIREMENTS

Drawings, general provisions of the contract, including general and supplementary conditions and other Division 01 specifications, shall apply to the work of this section. The contract documents show the work to be done under the contract and related requirements and conditions impacting the project. Related requirements and conditions include applicable codes and regulations, notices and permits, existing site conditions and restrictions on use of the site, requirements for partial owner occupancy during the work, coordination with other work and the phasing of the work. In the event the Asbestos Abatement Contractor discovers a conflict in the contract documents and/or requirements or codes, the conflict must be brought to the immediate attention of the Contracting Officer for resolution. Whenever there is a conflict or overlap in the requirements, the most stringent shall apply. Any actions taken by the Contractor without obtaining guidance from the Contracting Officer shall become the sole risk and responsibility of the Asbestos Abatement Contractor. All costs incurred due to such action are also the responsibility of the Asbestos Abatement Contractor.

1.1.2 EXTENT OF WORK

- A. Below is a brief description of the estimated quantities of asbestos containing materials to be abated by the glovebag method. These quantities are for informational purposes only and are based on the best information available at the time of the specification preparation. The Contractor shall satisfy himself as the actual quantities to be abated. Nothing in this section may be interpreted as limiting the extent of work otherwise required by this contract and related documents.

- B. Removal, clean-up and disposal of ACM piping and fittings and asbestos contaminated elements in an appropriate regulated area in the following approximate quantities:

(50) linear (feet), under full containment, of asbestos-containing pipe insulation with mudded fittings. This is an estimated amount of material which may be present and exposed as a result of wall and ceiling demolition within the Suite 120 work area (see Drawing HA002, Asbestos Abatement Key Note A6). The removal of (50) linear (feet) of asbestos-containing pipe insulation w/mudded fittings per linear foot, under full containment, will be reflected in the Lump Sum Base Bid. A unit price for the removal, under full containment, will be used as an Add/Deduct on a Change Order, based on the actual amount removed.

(150) linear (feet) of asbestos-containing pipe insulation with mudded fittings, via Whole Component removal utilizing Glovebags if necessary, of asbestos-containing pipe insulation with mudded fittings. This is an estimated amount of material which may be present and exposed as a result of wall and ceiling demolition (see Drawings HA002, Asbestos Abatement

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

09-15

Key Note A7). The removal of (150) linear (feet) of asbestos-containing pipe insulation w/mudded fittings, via Whole Component removal utilizing Glovebags if necessary, will be reflected in the Lump Sum Base Bid. A unit price for the removal, via Whole Component removal utilizing Glovebags if necessary, of asbestos-containing pipe insulation with mudded fittings, will be used as an Add/Deduct on a Change Order, based on the actual amount removed.

1.1.3 RELATED WORK

- A. Section 02 41 00, DEMOLITION.
- C. Section 02 82 11, TRADITIONAL ASBESTOS ABATEMENT.
- D. SECTION 02 82 13.19, ASBESTOS FLOOR TILE AND MASTIC ABATEMENT.
- E. SECTION 02 83 33.13 LEAD-BASED PAINT REMOVAL AND DISPOSAL.

1.1.4 TASKS

The work tasks are summarized briefly as follows:

- A. Pre-abatement activities including pre-abatement meeting(s), inspection(s), notifications, permits, submittal approvals, work-site preparations, emergency procedures arrangements, and Asbestos Hazard Abatement Plans for glovebag asbestos abatement work.
- B. Abatement activities including removal, clean-up and disposal of ACM waste, recordkeeping, security, air monitoring, and inspections.
- C. Cleaning and decontamination activities including final visual inspection, air monitoring and certification of decontamination.

1.1.5 ABATEMENT CONTRACTOR USE OF PREMISES

- A. The Contractor and Contractor's personnel shall cooperate fully with the VA representative/consultant to facilitate efficient use of buildings and areas within buildings. The Contractor shall perform the work in accordance with the VA specifications, drawings, phasing plan and in compliance with any/all applicable Federal, State and Local regulations and requirements.
- B. The Contractor shall use the existing facilities in the building strictly within the limits indicated in contract documents as well as the approved VA Design and Construction Procedures. Any variation from the arrangements shown on drawings shall be secured in writing from the VA representative through the pre-abatement plan of action.

1.2 VARIATIONS IN QUANTITY

The quantities and locations of ACM as indicated on the drawings and the extent of work included in this section are estimated, which are limited by the physical constraints imposed by occupancy of the buildings and accessibility to ACM. Accordingly, minor variations (+/- 5%) in quantities of ACM within the regulated area are considered as having no impact on contract price and time requirements of this contract. Where additional work is required beyond the above variation, the contractor shall provide unit prices for newly discovered ACM and those prices shall be used for additional work required under the contractor.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

09-15

1.3 STOP ASBESTOS REMOVAL

If the Contracting Officer; their field representative; (the facility Safety Officer/Manager or their designee, or the VA Professional Industrial Hygienist/ Certified Industrial Hygienist (VPIH/CIH) presents a verbal **Stop Asbestos Removal Order**, the Contractor/Personnel shall immediately stop all asbestos removal and maintain HEPA filtered negative pressure air flow in the containment and adequately wet any exposed ACM. If a verbal Stop Asbestos Removal Order is issued, the VA shall follow-up with a written order to the Contractor as soon as it is practicable. The Contractor shall not resume any asbestos removal activity until authorized to do so in writing by the VA Contracting Officer. A stop asbestos removal order may be issued at any time the VA Contracting Officer determines abatement conditions/activities are not within VA specification, regulatory requirements or that an imminent hazard exists to human health or the environment. Work stoppage will continue until conditions have been corrected to the satisfaction of the VA. Standby time and costs for corrective actions will be borne by the Contractor, including the VPIH/CIH time. The occurrence of any of the following events shall be reported immediately by the Contractor's competent person to the VA Contracting Office or field representative using the most expeditious means (e.g., verbal or telephonic), followed up with written notification to the Contracting Officer as soon as practical. The Contractor shall immediately stop asbestos removal/disturbance activities and initiate fiber reduction activities:

- A. Airborne PCM analysis results equal to or greater than 0.01 f/cc outside a regulated area;
- B. breach or break in regulated area containment barrier(s);
- C. less than -0.02" WCG pressure in the regulated area;
- D. serious injury/death at the site;
- E. fire/safety emergency at the site;
- F. respiratory protection system failure;
- G. power failure or loss of wetting agent; or
- H. any visible emissions observed outside the regulated area.

1.4 DEFINITIONS

1.4.1 GENERAL

Definitions and explanations here are neither complete nor exclusive of all terms used in the contract documents, but are general for the work to the extent they are not stated more explicitly in another element of the contract documents. Drawings must be recognized as diagrammatic in nature and not completely descriptive of the requirements indicated therein.

1.4.2 GLOSSARY

Abatement - Procedures to control fiber release from asbestos-containing materials. Includes removal, encapsulation, enclosure, demolition, and renovation activities related to asbestos containing materials (ACM).

Aerosol - Solid or liquid particulate suspended in air.

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

09-15

Adequately wet - Sufficiently mixed or penetrated with liquid to prevent the release of particulates. If visible emissions are observed coming from the ACM, then that material has not been adequately wetted.

Aggressive method - Removal or disturbance of building material by sanding, abrading, grinding, or other method that breaks, crumbles, or disintegrates intact ACM.

Aggressive sampling - EPA AHERA defined clearance sampling method using air moving equipment such as fans and leaf blowers to aggressively disturb and maintain in the air residual fibers after abatement.

AHERA - Asbestos Hazard Emergency Response Act. Asbestos regulations for schools issued in 1987.

Aircell - Pipe or duct insulation made of corrugated cardboard which contains asbestos.

Air monitoring - The process of measuring the fiber content of a known volume of air collected over a specified period of time. The NIOSH 7400 Method, Issue 2 is used to determine the fiber levels in air. For personal samples and clearance air testing using Phase Contrast Microscopy (PCM) analysis. NIOSH Method 7402 can be used when it is necessary to confirm fibers counted by PCM as being asbestos. The AHERA TEM analysis may be used for background, area samples and clearance samples when required by this specification, or at the discretion of the VPIH/CIH as appropriate.

Air sample filter - The filter used to collect fibers which are then counted. The filter is made of mixed cellulose ester membrane for PCM (Phase Contrast Microscopy) and polycarbonate for TEM (Transmission Electron Microscopy)

Amended water - Water to which a surfactant (wetting agent) has been added to increase the penetrating ability of the liquid.

Asbestos - Includes chrysotile, amosite, crocidolite, tremolite asbestos, anthophyllite asbestos, actinolite asbestos, and any of these minerals that have been chemically treated or altered. Asbestos also includes PACM, as defined below.

Asbestos Hazard Abatement Plan (AHAP) - Asbestos work procedures required to be submitted by the contractor before work begins.

Asbestos-containing material (ACM) - Any material containing more than one percent of asbestos.

Asbestos contaminated elements (ACE) - Building elements such as ceilings, walls, lights, or ductwork that are contaminated with asbestos.

Asbestos-contaminated soil (ACS) - Soil found in the work area or in adjacent areas such as crawlspaces or pipe tunnels which is contaminated with asbestos-containing material debris and cannot be easily separated from the material.

Asbestos-containing waste (ACW) material - Asbestos-containing material or asbestos contaminated objects requiring disposal.

Asbestos Project Monitor - Some states require that any person conducting asbestos abatement clearance inspections and clearance air sampling be licensed as an asbestos project monitor.

Asbestos waste decontamination facility - A system consisting of drum/bag washing facilities and a temporary storage area for cleaned containers of asbestos waste. Used as the exit for waste and equipment leaving the regulated area. In an emergency, it may be used to evacuate personnel.

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

09-15

Authorized person - Any person authorized by the VA, the Contractor, or government agency and required by work duties to be present in regulated areas.

Authorized visitor - Any person approved by the VA; the contractor; or any government agency representative having jurisdiction over the regulated area (e.g., OSHA, Federal and State EPA).

Barrier - Any surface that isolates the regulated area and inhibits fiber migration from the regulated area.

Containment Barrier - An airtight barrier consisting of walls, floors, and/or ceilings of sealed plastic sheeting which surrounds and seals the outer perimeter of the regulated area.

Critical Barrier - The barrier responsible for isolating the regulated area from adjacent spaces, typically constructed of plastic sheeting secured in place at openings such as doors, windows, or any other opening into the regulated area.

Primary Barrier - Plastic barriers placed over critical barriers and exposed directly to abatement work.

Secondary Barrier - Any additional plastic barriers used to isolate and provide protection from debris during abatement work.

Breathing zone - The hemisphere forward of the shoulders with a radius of about 150 - 225 mm (6 - 9 inches) from the worker's nose.

Bridging encapsulant - An encapsulant that forms a layer on the surface of the ACM.

Building/facility owner - The legal entity, including a lessee, which exercises control over management and recordkeeping functions relating to a building and/or facility in which asbestos activities take place.

Bulk testing - The collection and analysis of suspect asbestos containing materials.

Certified Industrial Hygienist (CIH) - A person certified in the comprehensive practice of industrial hygiene by the American Board of Industrial Hygiene.

Class I asbestos work - Activities involving the removal of Thermal System Insulation (TSI) and surfacing ACM and Presumed Asbestos Containing Material (PACM).

Class II asbestos work - Activities involving the removal of ACM which is not thermal system insulation or surfacing material. This includes, but is not limited to, the removal of asbestos-containing wallboard, floor tile and sheeting, roofing and siding shingles, and construction mastic.

Clean room/Changing room - An uncontaminated room having facilities for the storage of employee's street clothing and uncontaminated materials and equipment.

Clearance sample - The final air sample taken after all asbestos work has been done and visually inspected. Performed by the VA's professional industrial hygiene consultant/Certified Industrial Hygienist (VPIH/CIH).

Closely resemble - The major workplace conditions which have contributed to the levels of historic asbestos exposure, are no more protective than conditions of the current workplace.

Competent person - In addition to the definition in 29 CFR 1926.32(f), one who is capable of identifying existing asbestos hazards in the workplace and selecting the appropriate control strategy for asbestos exposure, who has the authority to take prompt corrective measures to

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

09-15

eliminate them, as specified in 29 CFR 1926.32(f); in addition, for Class I and II work who is specially trained in a training course which meets the criteria of EPA's Model Accreditation Plan (40 CFR 763) for supervisor.

Contractor's Professional Industrial Hygienist (CPIH/CIH) - The asbestos abatement contractor's industrial hygienist. The industrial hygienist must meet the qualification requirements of a PIH and may be a certified industrial hygienist (CIH).

Count - Refers to the fiber count or the average number of fibers greater than five microns in length with a length-to-width (aspect) ratio of at least 3 to 1, per cubic centimeter of air.

Crawlspace - An area which can be found either in or adjacent to the work area. This area has limited access and egress and may contain asbestos materials and/or asbestos contaminated soil.

Decontamination area/unit - An enclosed area adjacent to and connected to the regulated area and consisting of an equipment room, shower room, and clean room, which is used for the decontamination of workers, materials, and equipment that are contaminated with asbestos.

Demolition - The wrecking or taking out of any load-supporting structural member and any related razing, removing, or stripping of asbestos products.

VA Total - means a building or substantial part of the building is completely removed, torn or knocked down, bulldozed, flattened, or razed, including removal of building debris.

Disposal bag - Typically 6 mil thick sift-proof, dustproof, leak-tight container used to package and transport asbestos waste from regulated areas to the approved landfill. Each bag/container must be labeled/marked in accordance with EPA, OSHA and DOT requirements.

Disturbance - Activities that disrupt the matrix of ACM or PACM, crumble or pulverize ACM or PACM, or generate visible debris from ACM or PACM. Disturbance includes cutting away small amounts of ACM or PACM, no greater than the amount that can be contained in one standard sized glove bag or waste bag, in order to access a building component. In no event shall the amount of ACM or PACM so disturbed exceed that which can be contained in one glove bag or disposal bag and shall not exceed 60 inches in length or width.

Drum - A rigid, impermeable container made of cardboard fiber, plastic, or metal which can be sealed in order to be sift-proof, dustproof, and leak-tight.

Employee exposure - The exposure to airborne asbestos that would occur if the employee were not wearing respiratory protection equipment.

Encapsulant - A material that surrounds or embeds asbestos fibers in an adhesive matrix and prevents the release of fibers.

Encapsulation - Treating ACM with an encapsulant.

Enclosure - The construction of an air tight, impermeable, permanent barrier around ACM to control the release of asbestos fibers from the material and also eliminate access to the material.

Equipment room - A contaminated room located within the decontamination area that is supplied with impermeable bags or containers for the disposal of contaminated protective clothing and equipment.

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

09-15

Fiber - A particulate form of asbestos, 5 microns or longer, with a length to width (aspect) ratio of at least 3 to 1.

Fibers per cubic centimeter (f/cc) - Abbreviation for fibers per cubic centimeter, used to describe the level of asbestos fibers in air.

Filter - Media used in respirators, vacuums, or other machines to remove particulate from air.

Firestopping - Material used to close the open parts of a structure in order to prevent a fire from spreading.

Friable asbestos containing material - Any material containing more than one (1) percent or asbestos as determined using the method specified in appendix A, Subpart F, 40 CFR 763, section 1, Polarized Light Microscopy, that, when dry, can be crumbled, pulverized, or reduced to powder by hand pressure.

Glovebag - Not more than a 60 x 60 inch impervious plastic bag-like enclosure affixed around an asbestos-containing material, with glove-like appendages through which materials and tools may be handled.

High efficiency particulate air (HEPA) filter - An ASHRAE MERV 17 filter capable of trapping and retaining at least 99.97 percent of all mono-dispersed particles of 0.3 micrometers in diameter.

HEPA vacuum - Vacuum collection equipment equipped with a HEPA filter system capable of collecting and retaining asbestos fibers.

Homogeneous area - An area of surfacing, thermal system insulation or miscellaneous ACM that is uniform in color, texture and date of application.

HVAC - Heating, Ventilation and Air Conditioning

Industrial hygienist (IH) - A professional qualified by education, training, and experience to anticipate, recognize, evaluate and develop controls for occupational health hazards. Meets definition requirements of the American Industrial Hygiene Association (AIHA).

Industrial hygienist technician (IH Technician) - A person working under the direction of an IH or CIH who has special training, experience, certifications and licenses required for the industrial hygiene work assigned. Some states require that an industrial hygienist technician conducting asbestos abatement clearance inspection and clearance air sampling be licensed as an asbestos project monitor.

Intact - The ACM has not crumbled, been pulverized, or otherwise deteriorated so that the asbestos is no longer likely to be bound with its matrix.

Lockdown - Applying encapsulant, after a final visual inspection, on all abated surfaces at the conclusion of ACM removal prior to removal of critical barriers.

National Emission Standards for Hazardous Air Pollutants (NESHAP) - EPA's rule to control emissions of asbestos to the environment (40 CFR Part 61, Subpart M).

Negative initial exposure assessment - A demonstration by the employer which complies with the criteria in 29 CFR 1926.1101 (f)(2)(iii), that employee exposure during an operation is expected to be consistently below the PEL.

Negative pressure - Air pressure which is lower than the surrounding area, created by exhausting air from a sealed regulated area through HEPA

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

09-15

equipped filtration units. OSHA requires maintaining -0.02" water column gauge inside the negative pressure enclosure.

Negative pressure respirator - A respirator in which the air pressure inside the facepiece is negative during inhalation relative to the air pressure outside the respirator facepiece.

Non-friable ACM - Material that contains more than 1 percent asbestos but cannot be crumbled, pulverized, or reduced to powder by hand pressure.

Organic vapor cartridge - The type of cartridge used on air purifying respirators to remove organic vapor hazardous air contaminants.

Outside air - The air outside buildings and structures, including, but not limited to, the air under a bridge or in an open ferry dock.

Owner/operator - Any person who owns, leases, operates, controls, or supervises the facility being demolished or renovated or any person who owns, leases, operates, controls, or supervises the demolition or renovation operation, or both.

Penetrating encapsulant - Encapsulant that is absorbed into the ACM matrix without leaving a surface layer.

Personal protective equipment (PPE) - equipment designed to protect user from injury and/or specific job hazard. Such equipment may include protective clothing, hard hats, safety glasses, and respirators.

Personal sampling/monitoring - Representative air samples obtained in the breathing zone for one or more workers within the regulated area using a filter cassette and a calibrated air sampling pump to determine asbestos exposure.

Permissible exposure limit (PEL) - The level of exposure OSHA allows for an 8 hour time weighted average. For asbestos fibers, the eight (8) hour time weighted average PEL is 0.1 fibers per cubic centimeter (0.1 f/cc) of air and the 30-minute Excursion Limit is 1.0 fibers per cubic centimeter (1 f/cc).

Pipe tunnel - An area, typically located adjacent to mechanical spaces or boiler rooms in which the pipes servicing the heating system in the building are routed to allow the pipes to access heating elements. These areas may contain asbestos pipe insulation, asbestos fittings, or asbestos-contaminated soil.

Polarized light microscopy (PLM) - Light microscopy using dispersion staining techniques and refractive indices to identify and quantify the type(s) of asbestos present in a bulk sample.

Polyethylene sheeting - Strong plastic barrier material 4 to 6 mils thick, semi-transparent, flame retardant per NFPA 241.

Positive/negative fit check - A method of verifying the seal of a facepiece respirator by temporarily occluding the filters and breathing in (inhaling) and then temporarily occluding the exhalation valve and breathing out (exhaling) while checking for inward or outward leakage of the respirator respectively.

Presumed ACM (PACM) - Thermal system insulation, surfacing, and flooring material installed in buildings prior to 1981. If the building owner has actual knowledge, or should have known through the exercise of due diligence that other materials are ACM, they too must be treated as PACM. The designation of PACM may be rebutted pursuant to 29 CFR 1926.1101 (b).

Professional IH - An IH who meets the definition requirements of AIHA; meets the definition requirements of OSHA as a "Competent Person" at 29

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

09-15

CFR 1926.1101 (b); has completed two specialized EPA approved courses on management and supervision of asbestos abatement projects; has formal training in respiratory protection and waste disposal; and has a minimum of four projects of similar complexity with this project of which at least three projects serving as the supervisory IH. The PIH may be either the VA's PIH (VPIH) of Contractor's PIH (CPIH/CIH).

Project designer - A person who has successfully completed the training requirements for an asbestos abatement project designer as required by 40 CFR 763 Appendix C, Part I; (B) (5).

Assigned Protection factor - A value assigned by OSHA/NIOSH to indicate the expected protection provided by each respirator class, when the respirator is properly selected and worn correctly. The number indicates the reduction of exposure level from outside to inside the respirator facepiece.

Qualitative fit test (QLFT) - A fit test using a challenge material that can be sensed by the wearer if leakage in the respirator occurs.

Quantitative fit test (QNFT) - A fit test using a challenge material which is quantified outside and inside the respirator thus allowing the determination of the actual fit factor.

Regulated area - An area established by the employer to demarcate where Class I, II, III asbestos work is conducted, and any adjoining area where debris and waste from such asbestos work may accumulate; and a work area within which airborne concentrations of asbestos exceed, or there is a reasonable possibility they may exceed the PEL.

Regulated ACM (RACM) - Friable ACM; Category I non-friable ACM that has become friable; Category I non-friable ACM that will be or has been subjected to sanding, grinding, cutting, or abrading or; Category II non-friable ACM that has a high probability of becoming or has become crumbled, pulverized, or reduced to powder by the forces expected to act on the material in the course of the demolition or renovation operation.

Removal - All operations where ACM, PACM and/or RACM is taken out or stripped from structures or substrates, including demolition operations.

Renovation - Altering a facility or one or more facility components in any way, including the stripping or removal of asbestos from a facility component which does not involve demolition activity.

Repair - Overhauling, rebuilding, reconstructing, or reconditioning of structures or substrates, including encapsulation or other repair of ACM or PACM attached to structures or substrates.

Shower room - The portion of the PDF where personnel shower before leaving the regulated area.

Supplied air respirator (SAR) - A respiratory protection system that supplies minimum Grade D respirable air per ANSI/Compressed Gas Association Commodity Specification for Air, G-7.1-1989.

Surfacing ACM - A material containing more than 1 percent asbestos that is sprayed, troweled on or otherwise applied to surfaces for acoustical, fireproofing and other purposes.

Surfactant - A chemical added to water to decrease water's surface tension thus making it more penetrating into ACM.

Thermal system ACM - A material containing more than 1 percent asbestos applied to pipes, fittings, boilers, breeching, tanks, ducts, or other structural components to prevent heat loss or gain.

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

09-15

Transmission electron microscopy (TEM) - A microscopy method that can identify and count asbestos fibers.

VA Professional Industrial Hygienist (VPIH/CIH) - The Department of Veterans Affairs Professional Industrial Hygienist must meet the qualifications of a PIH, and may be a Certified Industrial Hygienist (CIH).

VA Representative - The VA official responsible for on-going project work.

Visible emissions - Any emissions, which are visually detectable without the aid of instruments, coming from ACM/PACM/RACM/ACS or ACM waste material.

Waste/Equipment decontamination facility (W/EDF) - The area in which equipment is decontaminated before removal from the regulated area.

Waste generator - Any owner or operator whose act or process produces asbestos-containing waste material.

Waste shipment record - The shipping document, required to be originated and signed by the waste generator, used to track and substantiate the disposition of asbestos-containing waste material.

Wet cleaning - The process of thoroughly eliminating, by wet methods, any asbestos contamination from surfaces or objects.

1.4.3 REFERENCED STANDARDS ORGANIZATIONS

The following acronyms or abbreviations as referenced in contract/specification documents are defined to mean the associated names. Names and addresses may be subject to change.

- A. VA Department of Veterans Affairs
810 Vermont Avenue, NW
Washington, DC 20420
- B. AIHA American Industrial Hygiene Association
2700 Prosperity Avenue, Suite 250
Fairfax, VA 22031
703-849-8888
- C. ANSI American National Standards Institute
1430 Broadway
New York, NY 10018
212-354-3300
- D. ASTM American Society for Testing and Materials
1916 Race St.
Philadelphia, PA 19103
215-299-5400
- E. CFR Code of Federal Regulations
Government Printing Office
Washington, DC 20420

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

09-15

- F. CGA Compressed Gas Association
1235 Jefferson Davis Highway
Arlington, VA 22202
703-979-0900
- G. CS Commercial Standard of the National Institute of Standards and Technology (NIST)
U. S. Department of Commerce
Government Printing Office
Washington, DC 20420
- H. EPA Environmental Protection Agency
401 M St., SW
Washington, DC 20460
202-382-3949
- I. MIL-STD Military Standards/Standardization Division
Office of the Assistant Secretary of Defense
Washington, DC 20420
- J. NIST National Institute for Standards and Technology
U. S. Department of Commerce
Gaithersburg, MD 20234
301-921-1000
- K. NEC National Electrical Code (by NFPA)
- L. NEMA National Electrical Manufacturer's Association
2101 L Street, NW
Washington, DC 20037
- M. NFPA National Fire Protection Association
1 Batterymarch Park
P.O. Box 9101
Quincy, MA 02269-9101
800-344-3555
- N. NIOSH National Institutes for Occupational Safety and Health
4676 Columbia Parkway
Cincinnati, OH 45226
513-533-8236
- O. OSHA Occupational Safety and Health Administration
U.S. Department of Labor
Government Printing Office
Washington, DC 20402
- P. UL Underwriters Laboratory
333 Pfingsten Rd.
Northbrook, IL 60062
312-272-8800

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

09-15

1.5 APPLICABLE CODES AND REGULATIONS

1.5.1 GENERAL APPLICABILITY OF CODES, REGULATIONS, AND STANDARDS

- A. All work under this contract shall be done in strict accordance with all applicable Federal, State, and local regulations, standards and codes governing asbestos abatement, and any other trade work done in conjunction with the abatement. All applicable codes, regulations and standards are adopted into this specification and will have the same force and effect as this specification.
- B. The most recent edition of any relevant regulation, standard, document or code shall be in effect. Where conflict among the requirements or with these specification exists, the most stringent requirement(s) shall be utilized.
- C. Copies of all standards, regulations, codes and other applicable documents, including this specification and those listed in Section 1.5 shall be available at the worksite in the clean change area of the worker decontamination system.

1.5.2 ASBESTOS ABATEMENT CONTRACTOR RESPONSIBILITY

The Asbestos Abatement Contractor (Contractor) shall assume full responsibility and liability for compliance with all applicable Federal, State and Local regulations related to any and all aspects of the asbestos abatement project. The Contractor is responsible for providing and maintaining training, accreditations, medical exams, medical records, personal protective equipment (PPE) including respiratory protection including respirator fit testing, as required by applicable Federal, State and Local regulations. The Contractor shall hold the VA and VPIH/CIH consultants harmless for any Contractor's failure to comply with any applicable work, packaging, transporting, disposal, safety, health, or environmental requirement on the part of himself, his employees, or his subcontractors. The Contractor will incur all costs of the CPIH/CIH, including all sampling/analytical costs to assure compliance with OSHA/EPA/State requirements related to failure to comply with the regulations applicable to the work.

1.5.3 FEDERAL REQUIREMENTS

Federal requirements which govern some aspect of asbestos abatement include, but are not limited to, the following regulations.

- A. Occupational Safety and Health Administration (**OSHA**)
 - 1. Title 29 CFR 1926.1101 - Construction Standard for Asbestos
 - 2. Title 29 CFR 1910 Subpart I - Personal Protective Equipment
 - 3. Title 29 CFR 1910.134 - Respiratory Protection
 - 4. Title 29 CFR 1926 - Construction Industry Standards
 - 5. Title 29 CFR 1910.1020 - Access to Employee Exposure and Medical Records
 - 6. Title 29 CFR 1910.1200 - Hazard Communication
 - 7. Title 29 CFR 1910 Subpart K - Medical and First Aid
- B. Environmental Protection Agency (**EPA**)

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

09-15

1. 40 CFR 61 Subpart A and M (Revised Subpart B) - National Emission Standard for Hazardous Air Pollutants - Asbestos.
 2. 40 CFR 763.80 - Asbestos Hazard Emergency Response Act (AHERA)
- C. Department of Transportation (**DOT**)
Title 49 CFR 100 - 185 - Transportation

1.5.4 STATE REQUIREMENTS:

State requirements that apply to the asbestos abatement work, disposal, clearance, etc., include, but are not limited to, the following:

Minnesota Pollution Control Agency (MPCA):

1. The MPCA has been delegated the authority by the EPA to enforce NESHAP regulations. They may also review projects for compliance with MDH Asbestos Abatement Rules.
2. Guidance Regarding Proper Containment, Shipping and Final Disposal of Asbestos Residual Materials at MPCA-Permitted Landfills (*Minnesota Rules 7035.1700*).

Minnesota Department of Labor and Industry:

1. Maintenance and Repair of Buildings and Equipment-Asbestos (*Minnesota Rules 5205.0660*).
2. Demolition, Restoration, Remodeling Survey (*Minnesota Rules 5207.0035*).

Minnesota Department of Health:

1. Asbestos Abatement Rules (*Minnesota Rules 4620.3000 to 4620.3724 and Minnesota Statute Sections 326.70 to 326.81*).

1.5.5 LOCAL REQUIREMENTS (NOT USED)

1.5.6 STANDARDS

- A. Standards which govern asbestos abatement activities include, but are not limited to, the following:
1. American National Standards Institute (ANSI) Z9.2-79 - Fundamentals Governing the Design and Operation of Local Exhaust Systems and ANSI Z88.2 - Practices for Respiratory Protection.
 2. Underwriters Laboratories (UL) 586-90 - UL Standard for Safety of HEPA filter Units, 7th Edition.
- B. Standards which govern encapsulation work include, but are not limited to, the following:
1. American Society for Testing and Materials (ASTM)
- C. Standards which govern the fire and safety concerns in abatement work include, but are not limited to, the following:

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

09-15

1. National Fire Protection Association (NFPA) 241 - Standard for Safeguarding Construction, Alteration, and Demolition Operations.
2. NFPA 701 - Standard Methods for Fire Tests for Flame Resistant Textiles and Film.
3. NFPA 101 - Life Safety Code

1.5.7 EPA GUIDANCE DOCUMENTS

- A. EPA guidance documents which discuss asbestos abatement work activities are listed below. These documents are made part of this section by reference. EPA publications can be ordered from (800) 424-9065.
- B. Guidance for Controlling ACM in Buildings (Purple Book) EPA 560/5-85-024
- C. Asbestos Waste Management Guidance EPA 530-SW-85-007.
- D. A Guide to Respiratory Protection for the Asbestos Abatement Industry EPA-560-OPTS-86-001
- E. Guide to Managing Asbestos in Place (Green Book) TS 799 20T July 1990

1.5.8 NOTICES

- A. State and Local agencies: Send written notification as required by state and local regulations including the local fire department prior to beginning any work on ACM as follows:
- B. Copies of notifications shall be submitted to the VA for the facility's records in the same time frame notification are given to EPA, State, and Local authorities.
- C. At least ten (10) working days prior to commencement of work, submit "Notification of Asbestos Related Work" to:

Minnesota Pollution Control Agency
Industrial Division-Asbestos Program
520 Lafayette Road
St. Paul, MN 55155-4194

1.5.9 PERMITS

The contractor shall apply for and have all required permits and licenses to perform asbestos abatement work as required by Federal, State, and Local regulations.

Local regulations.

At least five (5) calendar days prior to commencement of work, submit "Notification of Asbestos Related Work" with a copy of a signed contract or other written evidence of the total cost of the abatement project and a check in the amount of one per cent of the total cost of the abatement project, made payable to "Minnesota Department of Health", to:

Minnesota Department of Health
Asbestos/Lead Compliance Unit
P.O. Box 64497
St. Paul, MN 55164-0975

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

09-15

651-201-4610/4620

The Contractor shall list the CPIH as the AIR MONITORING CONTRACTOR on the above referenced notification.

1.5.10 POSTING AND FILING OF REGULATIONS

Maintain two (2) copies of applicable federal, state, and local regulations. Post one copy of each at the regulated area where workers will have daily access to the regulations and keep another copy in the Contractor's office.

1.5.11 VA RESPONSIBILITIES

Prior to commencement of work:

- A. Notify occupants adjacent to regulated areas of project dates and requirements for relocation, if needed. Arrangements must be made prior to starting work for relocation of desks, files, equipment, and personal possessions to avoid unauthorized access into the regulated area. **Note: Notification of adjacent personnel is required by OSHA in 29 CFR 1926.1101 (k) to prevent unnecessary or unauthorized access to the regulated area.**

1.5.12 EMERGENCY ACTION PLAN AND ARRANGEMENTS

- A. An Emergency Action Plan shall be developed by prior to commencing abatement activities and shall be agreed to by the Contractor and the VA. The Plan shall meet the requirements of 29 CFR 1910.38 (a); (b).
- B. Emergency procedures shall be in written form and prominently posted in the clean room and equipment room of the decontamination unit. Everyone, prior to entering the regulated area, must read and sign these procedures to acknowledge understanding of the regulated area layout, location of emergency exits and emergency procedures.
- C. Emergency planning shall include written notification of police, fire, and emergency medical personnel of planned abatement activities; work schedule; layout of regulated area; and access to the regulated area, particularly barriers that may affect response capabilities.
- D. Emergency planning shall include consideration of fire, explosion, hazardous atmospheres, electrical hazards, slips/trips and falls, confined spaces, and heat stress illness. Written procedures for response to emergency situations shall be developed and employee training in procedures shall be provided.
- E. Employees shall be trained in regulated area/site evacuation procedures in the event of workplace emergencies.
 1. For non life-threatening situations - employees injured or otherwise incapacitated shall decontaminate following normal procedures with assistance from fellow workers, if necessary, before exiting the regulated area to obtain proper medical treatment.
 2. For life-threatening injury or illness, worker decontamination shall take least priority after measures to stabilize the injured worker, remove them from the regulated area, and secure proper medical treatment.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

09-15

- F. Telephone numbers of any/all emergency response personnel shall be prominently posted in the clean room, along with the location of the nearest telephone.
- G. The Contractor shall provide verification of first aid/CPR training for personnel responsible for providing first aid/CPR. OSHA requires medical assistance within 3-4 minutes of a life-threatening injury/illness. Bloodborne Pathogen training shall also be verified for those personnel required to provide first aid/CPR.
- H. The Emergency Action Plan shall provide for a Contingency Plan in the event that an incident occurs that may require the modification of the Asbestos Hazard Abatement Plans during abatement. Such incidents include, but are not limited to, fire; accident; power failure; negative pressure failure; and supplied air system failure. The Contractor shall detail procedures to be followed in the event of an incident assuring that asbestos abatement work is stopped and wetting is continued until correction of the problem.

1.5.14 PRE-CONSTRUCTION MEETING

Prior to commencing the work, the Contractor shall meet with the VPCIH to present and review, as appropriate, the items following this paragraph. The Contractor's Competent Person(s) who will be on-site shall participate in the pre-start meeting. The pre-start meeting is to discuss and determine procedures to be used during the project. At this meeting, the Contractor shall provide:

- A. Proof of Contractor licensing.
- B. Proof the Competent Person is trained and accredited and approved for working in this State. Verification of the experience of the Competent Person shall also be presented.
- C. A list of all workers who will participate in the project, including experience and verification of training and accreditation.
- D. A list of and verification of training for all personnel who have current first-aid/CPR training. A minimum of one person per shift must have adequate training.
- E. Current medical written opinions for all personnel working on-site meeting the requirements of 29 CFR 1926.1101 (m).
- F. Current fit-tests for all personnel wearing respirators on-site meeting the requirements of 29 CFR 1926.1101 (h) and Appendix C.
- G. A copy of the Contractor's Asbestos Hazard Abatement Plan. In these procedures, the following information must be detailed, specific for this project. A copy of the Contractor's Asbestos Hazard Abatement Plan (AHAP) for Class I Glovebag Asbestos Abatement. In these procedures, the following information must be detailed, specific for this project.
 - 1. Regulated area preparation procedures;
 - 2. Notification requirements procedure of Contractor as required in 29 CFR 1926.1101 (d);
 - 3. If required, decontamination area set-up/layout and decontamination procedures for employees;
 - 4. Glovebag abatement methods/procedures and equipment to be used; and
 - 5. Personal protective equipment to be used.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

09-15

- H. At this meeting the Contractor shall provide all submittals as required.
- I. Procedures for handling, packaging and disposal of asbestos waste.
- J. Emergency Action Plan and Contingency Plan Procedures.

1.6 PROJECT COORDINATION

The following are the minimum administrative and supervisory personnel necessary for coordination of the work.

1.6.1 PERSONNEL

- A. Administrative and supervisory personnel shall consist of a qualified Competent Person(s) as defined by OSHA in the Construction Standards and the Asbestos Construction Standard; Contractor Professional Industrial Hygienist and Industrial Hygiene Technicians. These employees are the Contractor's representatives responsible for compliance with these specifications and all other applicable requirements.
- B. Non-supervisory personnel shall consist of an adequate number of qualified personnel to meet the schedule requirements of the project. Personnel shall meet required qualifications. Personnel utilized on-site shall be pre-approved by the VA representative. A request for approval shall be submitted for any person to be employed during the project giving the person's name; social security number; qualifications; accreditation card with color picture; Certificate of Worker's Acknowledgment; and Affidavit of Medical Surveillance and Respiratory Protection and current Respirator Fit Test.
- C. Minimum qualifications for Contractor and assigned personnel are:
 - 1. The Contractor has conducted within the last three (3) years, three (3) projects of similar complexity and dollar value as this project; has not been cited and penalized for serious violations of federal (and state as applicable) EPA and OSHA asbestos regulations in the past three (3) years; has adequate liability/occurrence insurance for asbestos work as required by the state; is licensed in applicable states; has adequate and qualified personnel available to complete the work; has comprehensive Asbestos Hazard Abatement Plans (AHAPs) for asbestos work; and has adequate materials, equipment and supplies to perform the work.
 - 2. The Competent Person has four (4) years of abatement experience of which two (2) years were as the Competent Person on the project; meets the OSHA definition of a Competent Person; has been the Competent Person on two (2) projects of similar size and complexity as this project within the past three (3) years; has completed EPA AHERA/OSHA/State/Local training requirements/accreditation(s) and refreshers; and has all required OSHA documentation related to medical and respiratory protection.
 - 3. The Contractor Professional Industrial Hygienist/CIH (CPIH/CIH) shall have five (5) years of monitoring experience and supervision of asbestos abatement projects; has participated as senior IH on five (5) abatement projects, three (3) of which are similar in size and complexity as this project; has developed at least one complete Asbestos Hazard Abatement Plan for asbestos abatement; has trained abatement personnel for three (3) years; has specialized EPA AHERA/OSHA

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

09-15

training in asbestos abatement management, respiratory protection, waste disposal and asbestos inspection; has completed the NIOSH 582 Course or equivalent, Contractor/Supervisor course; and has appropriate medical/respiratory protection records/documentation.

4. The Abatement Personnel shall have completed the EPA AHERA/OSHA abatement worker course; have training on the Asbestos Hazard Abatement Plans of the Contractor; has one year of asbestos abatement experience within the past three (3) years of similar size and complexity; has applicable medical and respiratory protection documentation; has certificate of training/current refresher and State accreditation/license.

All personnel should be in compliance with OSHA construction safety training as applicable and submit certification.

1.7 RESPIRATORY PROTECTION

1.7.1 GENERAL - RESPIRATORY PROTECTION PROGRAM

The Contractor shall develop and implement a written Respiratory Protection Program (RPP) which is in compliance with the January 8, 1998 OSHA requirements found at 29 CFR 1926.1101 and 29 CFR 1910 Subpart I;134. ANSI Standard Z88.2-1992 provides excellent guidance for developing a respiratory protection program. All respirators used must be NIOSH approved for asbestos abatement activities. The written RPP shall, at a minimum, contain the basic requirements found at 29 CFR 1910.134 (c) (1) (i - ix) - Respiratory Protection Program.

1.7.2 RESPIRATORY PROTECTION PROGRAM COORDINATOR

The Respiratory Protection Program Coordinator (RPPC) must be identified and shall have two (2) years experience coordinating RPP of similar size and complexity. The RPPC must submit a signed statement attesting to the fact that the program meets the above requirements.

1.7.3 SELECTION AND USE OF RESPIRATORS

The procedure for the selection and use of respirators must be submitted to the VA as part of the Contractor's qualifications. The procedure must be written clearly enough for workers to understand. A copy of the Respiratory Protection Program must be available in the clean room of the decontamination unit for reference by employees or authorized visitors.

1.7.4 MINIMUM RESPIRATORY PROTECTION

Minimum respiratory protection shall be a full face powered air purifying respirator when fiber levels are maintained consistently at or below 0.5 f/cc. A higher level of respiratory protection may be provided or required, depending on fiber levels. Respirator selection shall meet the requirements of 29 CFR 1926.1101 (h); Table 1, except as indicated in this paragraph. Abatement personnel must have a respirator for their exclusive use.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

09-15

1.7.5 MEDICAL WRITTEN OPINION

No employee shall be allowed to wear a respirator unless a physician or other licensed health care professional has provided a written determination they are medically qualified to wear the class of respirator to be used on the project while wearing whole body impermeable garments and subjected to heat or cold stress.

1.7.6 RESPIRATOR FIT TEST

All personnel wearing respirators shall have a current quantitative fit test which was conducted in accordance with 29 CFR 1910.134 (f) and Appendix A. Fit tests shall be done for PAPR's which have been put into a failure mode.

1.7.7 RESPIRATOR FIT CHECK

The Competent Person shall assure that the positive/negative pressure user seal check is done each time the respirator is donned by an employee. Head coverings must cover respirator head straps. Any situation that prevents an effective facepiece to face seal as evidenced by failure of a user seal check shall preclude that person from wearing a respirator inside the regulated area until resolution of the problem.

1.7.8 MAINTENANCE AND CARE OF RESPIRATORS

The Respiratory Protection Program Coordinator shall submit evidence and documentation showing compliance with 29 CFR 1910.134 (h) maintenance and care of respirators.

1.8 WORKER PROTECTION

1.8.1 TRAINING OF ABATEMENT PERSONNEL

Prior to beginning any abatement activity, all personnel shall be trained in accordance with OSHA 29 CFR 1926.1101 (k)(9) and any additional State/Local requirements. Training must include, at a minimum, the elements listed at 29 CFR 1926.1101 (k)(9)(viii). Training shall have been conducted by a third party, EPA/State approved trainer meeting the requirements of EPA 40 CFR 763 Appendix C (AHERA MAP). Initial training certificates and current refresher and accreditation proof must be submitted for each person working at the site.

1.8.2 MEDICAL EXAMINATIONS

Medical examinations meeting the requirements of 29 CFR 1926.1101 (m) shall be provided for all personnel working in the regulated area, regardless of exposure levels. A current physician's written opinion as required by 29 CFR 1926.1101 (m)(4) shall be provided for each person and shall include in the medical opinion the person has been evaluated for working in a heat and cold stress environment while wearing personal protective equipment (PPE) and is able to perform the work without risk of material health impairment.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

09-15

1.8.3 PERSONAL PROTECTIVE EQUIPMENT

Provide whole body clothing, head coverings, foot coverings and any other personal protective equipment as determined by conducting the hazard assessment required by OSHA at 29 CFR 1910.132 (d). The Competent Person shall ensure the integrity of personal protective equipment worn for the duration of the project. Duct tape shall be used to secure all suit sleeves to wrists and to secure foot coverings at the ankle.

1.8.4 REGULATED AREA ENTRY PROCEDURE

The Competent Person shall ensure that each time workers enter the regulated area; they remove ALL street clothes in the clean room of the decontamination unit and put on new disposable coveralls, head coverings, a clean respirator, and then proceed through the shower room to the equipment room where they put on non-disposable required personal protective equipment.

1.8.5 DECONTAMINATION PROCEDURE

The Competent Person shall require all personnel to adhere to following decontamination procedures whenever they leave the regulated area.

- A. When exiting the regulated area, remove disposable coveralls, and ALL other clothes, disposable head coverings, and foot coverings or boots in the equipment room.
- B. Still wearing the respirator and completely naked, proceed to the shower. Showering is MANDATORY. Care must be taken to follow reasonable procedures in removing the respirator to avoid inhaling asbestos fibers while showering. The following procedure is required as a minimum:
 1. Thoroughly wet body including hair and face. If using a PAPR hold blower above head to keep filters dry.
 2. With respirator still in place, thoroughly decontaminate body, hair, respirator face piece, and all other parts of the respirator except the blower and battery pack on a PAPR. Pay particular attention to cleaning the seal between the face and respirator facepiece and under the respirator straps.
 3. Take a deep breath, hold it and/or exhale slowly, completely wetting hair, face, and respirator. While still holding breath, remove the respirator and hold it away from the face before starting to breathe.
- C. Carefully decontaminate the facepiece of the respirator inside and out. If using a PAPR, shut down using the following sequence: a) first cap inlets to filters; b) turn blower off to keep debris collected on the inlet side of the filter from dislodging and contaminating the outside of the unit; c) thoroughly decontaminate blower and hoses; d) carefully decontaminate battery pack with a wet rag being cautious of getting water in the battery pack thus preventing destruction. **(THIS PROCEDURE IS NOT A SUBSTITUTE FOR RESPIRATOR CLEANING!)**
- D. Shower and wash body completely with soap and water. Rinse thoroughly.
- E. Rinse shower room walls and floor to drain prior to exiting.
- F. Proceed from shower to clean room; dry off and change into street clothes or into new disposable work clothing.

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

09-15

1.8.6 REGULATED AREA REQUIREMENTS

The Competent Person shall meet all requirements of 29 CFR 1926.1101 (o) and assure that all requirements for Class I glovebag regulated areas at 29 CFR 1926.1101 (e) are met. All personnel in the regulated area shall not be allowed to eat, drink, smoke, chew tobacco or gum, apply cosmetics, or in any way interfere with the fit of their respirator.

1.9 DECONTAMINATION FACILITIES

1.9.1 DESCRIPTION

Provide each regulated area with separate personnel decontamination facilities (PDF) and waste/equipment decontamination facilities (W/EDF). Ensure that the PDF are the only means of ingress and egress to the regulated area and that all equipment, bagged waste, and other material exit the regulated area only through the W/EDF.

1.9.2 GENERAL REQUIREMENTS

All personnel entering or exiting a regulated area must go through the PDF and shall follow the requirements at 29 CFR 1926.1101 (j) (1) and these specifications. All waste, equipment and contaminated materials must exit the regulated area through the W/EDF and be decontaminated in accordance with these specifications. Walls and ceilings of the PDF and W/EDF must be constructed of a minimum of 3 layers of 6 mil opaque fire retardant polyethylene sheeting and be securely attached to existing building components and/or an adequate temporary framework. A minimum of 3 layers of 6 mil poly shall also be used to cover the floor under the PDF and W/EDF units. Construct doors so that they overlap and secure to adjacent surfaces. Weight inner doorway sheets with layers of duct tape so that they close quickly after release. Put arrows on sheets so they show direction of travel and overlap. If the building adjacent area is occupied, construct a solid barrier on the occupied side(s) to protect the sheeting and reduce potential for non-authorized personnel entering the regulated area.

1.9.3 TEMPORARY FACILITIES TO THE PDF AND W/EDF

The Competent Person shall provide temporary water service connections to the PDF and W/EDF. Backflow prevention must be provided at the point of connection to the VA system. Water supply must be of adequate pressure and meet requirements of 29 CFR 1910.141(d) (3). Provide adequate temporary overhead electric power with ground fault circuit interruption (GFCI) protection. Provide a sub-panel equipped with GFCI protection for all temporary power in the clean room. Provide adequate lighting to provide a minimum of 50 foot candles in the PDF and W/EDF. Provide temporary heat, if needed, to maintain 70°F throughout the PDF and W/EDF.

1.9.4 PERSONNEL DECONTAMINATION FACILITY (PDF)

The Competent Person shall provide a PDF consisting of shower room which is contiguous to a clean room and equipment room. The PDF must be sized to accommodate the number of personnel scheduled for the project. The

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

09-15

shower room, located in the center of the PDF, shall be fitted with as many portable showers as necessary to insure all employees can complete the entire decontamination procedure within 15 minutes. The PDF shall be constructed of opaque poly for privacy. The PDF shall be constructed to eliminate any parallel routes of egress without showering.

1. Clean Room: The clean room must be physically and visually separated from the rest of the building to protect the privacy of personnel changing clothes. The clean room shall be constructed of at least 3 layers of 6 mil opaque fire retardant poly to provide an air tight room. Provide a minimum of 2 - 900 mm (3 foot) wide 6 mil poly opaque fire retardant doorways. One doorway shall be the entry from outside the PDF and the second doorway shall be to the shower room of the PDF. The floor of the clean room shall be maintained in a clean, dry condition. Shower overflow shall not be allowed into the clean room. Provide 1 storage locker per person. A portable fire extinguisher, minimum 10 pounds capacity, Type ABC, shall be provided in accordance with OSHA and NFPA Standard 10. All persons entering the regulated area shall remove all street clothing in the clean room and dress in disposable protective clothing and respiratory protection. Any person entering the clean room does so either from the outside with street clothing on or is coming from the shower room completely naked and thoroughly washed. Females required to enter the regulated area shall be ensured of their privacy throughout the entry/exit process by posting guards at both entry points to the PDF so no male can enter or exit the PDF during her stay in the PDF.
2. Shower Room: The Competent Person shall assure that the shower room is a completely water tight compartment to be used for the movement of all personnel from the clean room to the equipment room and for the showering of all personnel going from the equipment room to the clean room. Each shower shall be constructed so water runs down the walls of the shower and into a drip pan. Install a freely draining smooth floor on top of the shower pan. The shower room shall be separated from the rest of the building and from the clean room and equipment room using air tight walls made from at least 3 layers of 6 mil opaque fire retardant poly. The shower shall be equipped with a shower head and controls, hot and cold water, drainage, soap dish and continuous supply of soap, and shall be maintained in a sanitary condition throughout its use. The controls shall be arranged so an individual can shower without assistance. Provide a flexible hose shower head, hose bibs and all other items shown on Shower Schematic. Waste water will be pumped to a drain after being filtered through a minimum of a 100 micron sock in the shower drain; a 20 micron filter; and a final 5 micron filter. Filters will be changed a minimum of once per day or more often as needed. Filter changes must be done in the shower to prevent loss of contaminated water. Hose down all shower surfaces after each shift and clean any debris from the shower pan. Residue is to be disposed of as asbestos waste.
3. Equipment Room: The Competent Person shall provide an equipment room which shall be an air tight compartment for the storage of work equipment/tools, reusable personal protective equipment, except for a respirator and for use as a gross decontamination area for personnel

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System


St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

09-15

exiting the regulated area. The equipment room shall be separated from the regulated area by a minimum 3 foot wide door made with 2 layers of 6 mil opaque fire retardant poly. The equipment room shall be separated from the regulated area, the shower room and the rest of the building by air tight walls and ceiling constructed of a minimum of 3 layers of 6 mil opaque fire retardant poly. Damp wipe all surfaces of the equipment room after each shift change. Provide an additional loose layer of 6 mil fire retardant poly per shift change and remove this layer after each shift. If needed, provide a temporary electrical sub-panel equipped with GFCI in the equipment room to accommodate any equipment required in the regulated area.

4. The PDF shall be as follows: Clean room at the entrance followed by a shower room followed by an equipment room leading to the regulated area. Each doorway in the PDF shall be a minimum of 2 layers of 6 mil opaque fire retardant poly.

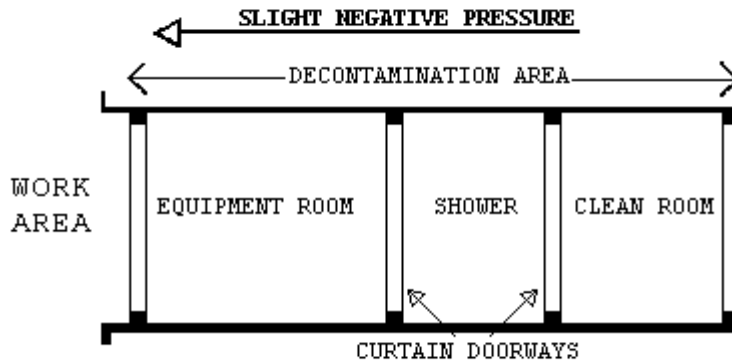

1.9.5 WASTE/EQUIPMENT DECONTAMINATION FACILITY (W/EDF) (NOT USED)

1.9.6 WASTE/EQUIPMENT DECONTAMINATION PROCEDURES (NOT USED)

PART 2 - PRODUCTS, MATERIALS AND EQUIPMENT

2.1 MATERIALS AND EQUIPMENT

2.1.1 GENERAL REQUIREMENTS (ALL ABATEMENT PROJECTS)

Prior to the start of work, the contractor shall provide and maintain a sufficient quantity of materials and equipment to assure continuous and efficient work throughout the duration of the project. Work shall not start unless the following items have been delivered to the site and the CPIH/CIH has submitted verification to the VA's representative.

- A. All materials shall be delivered in their original package, container or bundle bearing the name of the manufacturer and the brand name (where applicable).

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

09-15

- B. Store all materials subject to damage off the ground, away from wet or damp surfaces and under cover sufficient enough to prevent damage or contamination. Flammable and combustible materials cannot be stored inside buildings. Replacement materials shall be stored outside of the regulated area until abatement is completed.
- C. The Contractor shall not block or hinder use of buildings by patients, staff, and visitors to the VA in partially occupied buildings by placing materials/equipment in any unauthorized location.
- D. The Competent Person shall inspect for damaged, deteriorating or previously used materials. Such materials shall not be used and shall be removed from the worksite and disposed of properly.
- E. Polyethylene sheeting for walls in the regulated area shall be a minimum of 4-mils. For floors and all other uses, sheeting of at least 6-mils shall be used in widths selected to minimize the frequency of joints. Fire retardant poly shall be used throughout.
- F. The method of attaching polyethylene sheeting shall be agreed upon in advance by the Contractor and the VA and selected to minimize damage to equipment and surfaces. Method of attachment may include any combination of moisture resistant duct tape furring strips, spray glue, staples, nails, screws, lumber and plywood for enclosures or other effective procedures capable of sealing polyethylene to dissimilar finished or unfinished surfaces under both wet and dry conditions.
- G. Polyethylene sheeting utilized for the PDF shall be opaque white or black in color, 6 mil fire retardant poly.
- H. Installation and plumbing hardware, showers, hoses, drain pans, sump pumps and waste water filtration system shall be provided by the Contractor.
- I. An adequate number of HEPA vacuums, scrapers, sprayers, nylon brushes, brooms, disposable mops, rags, sponges, staple guns, shovels, ladders and scaffolding of suitable height and length as well as meeting OSHA requirements, fall protection devices, water hose to reach all areas in the regulated area, airless spray equipment, and any other tools, materials or equipment required to conduct the abatement project. All electrically operated hand tools, equipment, electric cords shall be connected to GFCI protection.
- J. Special protection for objects in the regulated area shall be detailed (e.g., plywood over carpeting or hardwood floors to prevent damage from scaffolds, water and falling material).
- K. Disposal bags - 2 layers of 6 mil poly for asbestos waste shall be pre-printed with labels, markings and address as required by OSHA, EPA and DOT regulations.
- L. The VA shall be provided an advance copy of the MSDS as required for all hazardous chemicals under OSHA 29 CFR 1910.1200 - Hazard Communication in the pre-project submittal. Chlorinated compounds shall not be used with any spray adhesive, mastic remover or other product. Appropriate encapsulant(s) shall be provided.
- M. OSHA DANGER demarcation signs, as many and as required by OSHA 29 CFR 1926.1101(k) (7) shall be provided and placed by the Competent Person. All other posters and notices required by Federal and State regulations shall be posted in the Clean Room.
- N. Adequate and appropriate PPE for the project and number of personnel/shifts shall be provided. All personal protective equipment

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

09-15

issued must be based on a written hazard assessment conducted under 29 CFR 1910.132(d).

2.2 CONTAINMENT BARRIERS AND COVERINGS IN THE REGULATED AREA

2.2.1 GENERAL

Using critical barriers, seal off the perimeter to the regulated area to completely isolate the regulated area from adjacent spaces.

2.2.2 PREPARATION PRIOR TO SEALING THE REGULATED AREA

- A. Place all tools, scaffolding, materials and equipment needed for working in the regulated area prior to erecting any plastic sheeting. Remove all uncontaminated removable furniture, equipment and/or supplies from the regulated area before commencing work, or completely cover with 2 layers of 6-mil fire retardant poly sheeting and secure with duct tape. Lock out and tag out any HVAC systems in the regulated area.

2.2.3 CONTROLLING ACCESS TO THE REGULATED AREA

- A. Access to the regulated area is allowed only through the personnel decontamination facility (PDF), if required. All other means of access shall be eliminated and OSHA Danger demarcation signs posted as required by OSHA. If the regulated area is adjacent to or within view of an occupied area, provide a visual barrier of 6 mil opaque fire retardant poly sheeting to prevent building occupant observation. If the adjacent area is accessible to the public, the barrier must be solid.

2.2.4 CRITICAL BARRIERS

- A. Completely separate any openings into the regulated area from adjacent areas using fire retardant poly at least 6 mils thick and duct tape. Individually seal with 2 layers of 6 mil poly and duct tape all HVAC openings into the regulated area. Individually seal all lighting fixtures, clocks, doors, windows, convectors, speakers, or any other objects in the regulated area. Heat must be shut off any objects covered with poly.

2.2.5 SECONDARY BARRIERS-NOT USED

2.2.6 EXTENSION OF THE REGULATED AREA-NOT USED

2.2.7 FIRESTOPPING (NOT USED)

2.3 MONITORING, INSPECTION AND TESTING

2.3.1 GENERAL

- A. Perform throughout abatement work monitoring, inspection and testing inside and around the regulated area in accordance with the OSHA requirements and these specifications. OSHA and MDH requires that the Employee exposure to asbestos must not exceed 0.1 fibers per cubic

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

09-15

centimeter (f/cc) of air, averaged over an 8-hour work shift. The CPIH/CIH is responsible for and shall inspect and oversee the performance of the Contractor IH Technician. The IH Technician shall continuously inspect and monitor conditions inside the regulated area to ensure compliance with these specifications. In addition, the CPIH/CIH shall personally manage air sample collection, analysis, and evaluation for personnel, regulated area, and adjacent area samples to satisfy OSHA and MDH requirements. Additional inspection and testing requirements are also indicated in other parts of this specification.

- B. The VA will employ an independent industrial hygienist (VPIH/CIH) consultant and/or use its own IH to perform various services on behalf of the VA. Performance of services provided by the VPIH/CIH shall not supersede nor eliminate the Contractor's responsibilities as required under MDH Asbestos Abatement Rules. The VPIH/CIH will perform the necessary monitoring, inspection, testing, and other support services to ensure that VA patients, employees, and visitors will not be adversely affected by the abatement work, and that the abatement work proceeds in accordance with these specifications, that the abated areas or abated buildings have been successfully decontaminated. The work of the VPIH/CIH consultant in no way relieves the Contractor from their responsibility to perform the work in accordance with contract/specification requirements, to perform continuous inspection, duration/clearance air monitoring and testing for the safety of their employees and building occupants, and to perform other such services as specified. The cost of the VPIH/CIH and their services will be borne by the VA except for any repeat of final inspection and testing that may be required due to unsatisfactory initial results. Any repeated final inspections and/or testing, if required, will be paid for by the Contractor.
- C. If fibers counted by the VPIH/CIH during abatement work, either inside or outside the regulated area, utilizing the NIOSH 7400 air monitoring method, exceed the specified respective limits, the Contractor shall stop work. The Contractor may request confirmation of the results by analysis of the samples by TEM. Request must be in writing and submitted to the VA's representative. Cost for the confirmation of results will be borne by the Contractor for both the collection and analysis of samples and for the time delay that may/does result for this confirmation. Confirmation sampling and analysis will be the responsibility of the CPIH/CIH with review and approval of the VPIH/CIH. An agreement between the CPIH/CIH and the VPIH/CIH shall be reached on the exact details of the confirmation effort, in writing, including such things as the number of samples, location, collection, quality control on-site, analytical laboratory, interpretation of results and any follow-up actions. This written agreement shall be co-signed by the IH's and delivered to the VA's representative.

2.3.2 SCOPE OF SERVICES OF THE VPIH/CIH CONSULTANT

- A. The purpose of the work of the VPIH/CIH is to: Assure quality; resolve problems; and prevent the spread of contamination beyond the regulated area. In addition, their work includes performing the final inspection and testing to determine whether the regulated area or building has been

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

09-15

adequately decontaminated. All air monitoring is to be done utilizing PCM/TEM. The VPIH/CIH will perform the following tasks:

1. Task 1: Perform continuous air monitoring, inspection, and testing outside the regulated area during actual abatement work to detect any faults in the regulated area isolation and any adverse impact on the surroundings from regulated area activities.
 2. Task 2: Perform unannounced visits to spot check overall compliance of work with contract/specifications. These visits may include any inspection, air monitoring, and testing inside and outside the regulated area and all aspects of the operation except personnel monitoring.
 3. Task 3: Provide support to the VA representative such as evaluation of submittals from the Contractor, resolution of unforeseen developments, etc.
 4. Task 4: Perform, in the presence of the VA representative, final inspection and testing of a decontaminated regulated area or building at the conclusion of the abatement and clean-up work to certify compliance with all regulations and the VA requirements/specifications.
 5. Task 5: Issue certificate of decontamination for each regulated area or building and project report.
- B. All data, inspection results and testing results generated by the VPIH/CIH will be available to the Contractor for information and consideration. The Contractor shall cooperate with and support the VPIH/CIH for efficient and smooth performance of their work.
- C. The monitoring and inspection results of the VPIH/CIH will be used by the VA to issue any Stop Removal orders to the Contractor during abatement work and to accept or reject a regulated area or building as decontaminated.

2.3.3 MONITORING, INSPECTION AND TESTING BY ABATEMENT CONTRACTOR CPIH/CIH

The Contractor's CPIH/CIH is responsible for performing all duration/clearance air sampling and on-site analysis, monitoring, inspections, and testing required by these specifications, as well as any and all regulatory requirements adopted by these specifications. The CPIH/CIH is responsible for the continuous monitoring of all subsystems and procedures which could affect the health and safety of the Contractor's personnel and building occupants. Safety and health conditions and the provision of those conditions inside the regulated area for all persons entering the regulated area is the exclusive responsibility of the Contractor/Competent Person. The person performing the personnel and area air monitoring outside and inside the regulated area shall be an IH Technician, who shall be trained and shall have specialized field experience in sampling and analysis. The IH Technician shall have successfully completed a NIOSH 582 Course or equivalent, a Minnesota Air Sampling course and provide documentation. The IH Technician shall participate in the AIHA Asbestos Analysis Registry or participate in the Proficiency Analytic Testing program of AIHA for fiber counting

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

02 82 13.13 - 27

10-28-2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

09-15

quality control assurance. The IH Technician shall also be an accredited EPA AHERA/State Contractor/Supervisor (or Abatement Worker) and Building Inspector. The IH Technician shall have participated in five abatement projects collecting personal and area samples as well as responsibility for documentation on substantially similar projects in size and scope. The analytic laboratory used by the Contractor to analyze the samples shall be AIHA accredited for asbestos PAT and approved by the VA prior to start of the project. A daily log shall be maintained by the CPIH/CIH or IH Technician, documenting all OSHA requirements for air personal monitoring for asbestos in 29 CFR 1926.1101(f), (g) and Appendix A. This log shall be made available to the VA representative and the VPIH/CIH upon request. The log will contain, at a minimum, information on personnel or area samples, other persons represented by the sample, the date of sample collection, start and stop times for sampling, sample volume, flow rate, and fibers/cc. The CPIH/CIH shall collect and analyze samples for each representative job being done in the regulated area, i.e., removal, wetting, clean-up, and load-out. No fewer than two personal samples per shift shall be collected and one area sample per 1,000 square feet of regulated area where abatement is taking place and one sample per shift in the clean room area shall be collected. In addition to the continuous monitoring required, the CPIH/CIH will perform inspection and testing at the final stages of abatement for each regulated area as specified in the CPIH/CIH responsibilities. Additionally, the CPIH/CIH will monitor and record pressure readings within the containment daily with a minimum of two readings at the beginning and at the end of a shift, and submit the data in the daily report.

2.4 ASBESTOS HAZARD ABATEMENT PLAN

The Contractor shall have established Asbestos Hazard Abatement Plan (AHAP) in printed form and loose leaf folder consisting of simplified text, diagrams, sketches, and pictures that establish and explain clearly the ways and procedures to be followed during all phases of the work by the Contractor's personnel. The AHAP must be modified as needed to address specific requirements of the project. The AHAP shall be submitted for review and approval prior to the start of any abatement work. The minimum topics and areas to be covered by the AHAP(s) are:

- A. Minimum Personnel Qualifications
- B. Contingency Plans and Arrangements
- C. Security and Safety Procedures
- D. Respiratory Protection/Personal Protective Equipment Program and Training
- E. Medical Surveillance Program and Recordkeeping
- F. Regulated Area Requirements for Glovebag Abatement
- G. Decontamination Facilities and Entry/Exit Procedures (PDF and W/EDF)
- H. Monitoring, Inspections, and Testing
- I. Removal Procedures for Piping ACM Using the Glovebag Method
- J. Disposal of ACM waste
- K. Regulated Area Decontamination/Clean-up
- L. Regulated Area Visual and Air Clearance
- M. Project Completion/Closeout

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

09-15

2.5 SUBMITTALS

2.5.1 PRE-START MEETING SUBMITTALS

Submit to the VA a minimum of 14 days prior to the pre-start meeting the following for review and approval. Meeting this requirement is a prerequisite for the pre-start meeting for this project:

- A. Submit a detailed work schedule for the entire project reflecting contract documents and the phasing/schedule requirements from the CPM chart.
- B. Submit a staff organization chart showing all personnel who will be working on the project and their capacity/function. Provide their qualifications, training, accreditations, and licenses, as appropriate. Provide a copy of the "Certificate of Worker's Acknowledgment" and the "Affidavit of Medical Surveillance and Respiratory Protection" for each person.
- C. Submit Asbestos Hazard Abatement Plan developed specifically for this project, incorporating the requirements of the specifications, prepared, signed and dated by the CPIH/CIH.
- D. Submit the specifics of the materials and equipment to be used for this project with manufacturer names, model numbers, performance characteristics, pictures/diagrams, and number available for the following:
 1. Supplied air system, negative air machines, HEPA vacuums, air monitoring pumps, calibration devices, pressure differential monitoring device and emergency power generating system.
 2. Waste water filtration system, shower system, containment barriers.
 3. Encapsulants, surfactants, hand held sprayers, airless sprayers, glovebags, and fire extinguishers.
 4. Respirators, protective clothing, personal protective equipment.
 5. Fire safety equipment to be used in the regulated area.
- E. Submit the name, location, and phone number of the approved landfill; proof/verification the landfill is approved for ACM disposal; the landfill's requirements for ACM waste; the type of vehicle to be used for transportation; and name, address, and phone number of subcontractor, if used. Proof of asbestos training for transportation personnel shall be provided.
- F. Submit required notifications and arrangements made with regulatory agencies having regulatory jurisdiction and the specific contingency/emergency arrangements made with local health, fire, ambulance, hospital authorities and any other notifications/arrangements.
- G. Submit the name, location and verification of the laboratory and/or personnel to be used for analysis of air and/or bulk samples. Personal air monitoring must be done in accordance with OSHA 29 CFR 1926.1101(f) and Appendix A. And area or clearance air monitoring in accordance with EPA AHERA protocols.
- H. Submit qualifications verification: Submit the following evidence of qualifications. Make sure that all references are current and verifiable by providing current phone numbers and documentation.
 1. Asbestos Abatement Company: Project experience within the past 3 years; listing projects first most similar to this project: Project Name; Type of Abatement; Duration; Cost; Reference Name/Phone Number; Final Clearance; and Completion Date

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

09-15

2. List of project(s) halted by owner, A/E, IH, regulatory agency in the last 3 years: Project Name; Reason; Date; Reference Name/Number; and Resolution.
 3. List asbestos regulatory citations (e.g., OSHA), notices of violations (e.g., Federal and state EPA), penalties, and legal actions taken against the company including and of the company's officers (including damages paid) in the last 3 years. Provide copies and all information needed for verification.
- I. Submit information on personnel: Provide a resume; address each item completely; copies of certificates, accreditations, and licenses. Submit an affidavit signed by the CPIH/CIH stating that all personnel submitted below have medical records in accordance with OSHA 29 CFR 1926.1101(m) and 29 CFR 1910.20 and that the company has implemented a medical surveillance program and written respiratory protection program, and maintains recordkeeping in accordance with the above regulations. Submit the phone number and doctor/clinic/hospital used for medical evaluations.
1. CPIH/CIH and IH Technician: Name; years of abatement experience; list of projects similar to this one; certificates, licenses, accreditations for proof of AHERA/OSHA specialized asbestos training; professional affiliations; number of workers trained; samples of training materials; samples of AHAP(s) developed; medical opinion; and current respirator fit test.
 2. Competent Person(s)/Supervisor(s): Number; names; social security numbers; years of abatement experience as Competent Person/Supervisor; list of similar projects in size/complexity as Competent Person/Supervisor; as a worker; certificates, licenses, accreditations; proof of AHERA/OSHA specialized asbestos training; maximum number of personnel supervised on a project; medical opinion (asbestos surveillance and respirator use); and current respirator fit test.
 3. Workers: Numbers; names; social security numbers; years of abatement experience; certificates, licenses, accreditations; training courses in asbestos abatement and respiratory protection; medical opinion (asbestos surveillance and respirator use); and current respirator fit test.
- J. Submit copies of State license for asbestos abatement; copy of insurance policy, including exclusions with a letter from agent stating in plain language the coverage provided and the fact that asbestos abatement activities are covered by the policy; copy of AHAP(s) incorporating the requirements of this specification; information on who provides your training, how often; who provides medical surveillance, how often; who performs and how is personal air monitoring of abatement workers conducted; a list of references of independent laboratories/IH's familiar with your air monitoring and Asbestos Hazard Abatement Plans; copies of monitoring results of the five referenced projects listed and analytical method(s) used.
- K. Rented equipment must be decontaminated prior to returning to the rental agency.
- L. Submit, before the start of work, the manufacturer's technical data for all types of encapsulants, all MSDS, and application instructions.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

09-15

2.5.2 SUBMITTALS DURING ABATEMENT

- A. The Competent Person shall maintain and submit a daily log at the regulated area documenting the dates and times of the following: purpose, attendees and summary of meetings; all personnel entering/exiting the regulated area; document and discuss the resolution of unusual events such as barrier breeching, equipment failures, emergencies, and any cause for stopping work; representative air monitoring and results/TWAs/ELs. Submit this information daily to the VPIH/CIH.
- B. The CPIH/CIH shall document and maintain the inspection and approval of the regulated area preparation prior to start of work and daily during work.
 - 1. Removal of any poly barriers.
 - 2. Visual inspection/testing by the CPIH/CIH or IH Technician prior to application of lockdown encapsulant.
 - 3. Packaging and removal of ACM waste from regulated area.
 - 4. Disposal of ACM waste materials; copies of Waste Shipment Records/landfill receipts to the VA's representative on a weekly basis.

2.5.3 SUBMITTALS AT COMPLETION OF ABATEMENT

The CPIH/CIH shall submit a project report consisting of the daily log book requirements and documentation of events during the abatement project including Waste Shipment Records signed by the landfill's agent. It will also include information on the containment and transportation of waste from the containment with applicable Chain of Custody forms. The report shall include a certificate of completion, signed and dated by the CPIH/CIH, in accordance with Attachment #1. All clearance and perimeter area samples must be submitted. The VA Representative will retain the abatement report after completion of the project and provide copies of the abatement report to VAMC Office of Engineer and the Safety Office.

2.6 ENCAPSULANTS

2.6.1 TYPES OF ENCAPSULANTS

- A. The following four types of encapsulants must comply with performance requirements as stated in paragraph 2.6.2:
 - 1. Removal encapsulant - used as a wetting agent to remove ACM.
 - 2. Bridging encapsulant - provides a tough, durable coating on ACM.
 - 3. Penetrating encapsulant - penetrates/encapsulates ACM at least 13 mm (1/2").
 - 4. Lockdown encapsulant - seals microscopic fibers on surfaces after ACM removal.

2.6.2 PERFORMANCE REQUIREMENTS

Encapsulants shall meet the latest requirements of EPA; shall not contain toxic or hazardous substances; or solvents; and shall comply with the following performance requirements:

- A. General Requirements for all Encapsulants:
 - 1. ASTM E84: Flame spread of 25; smoke emission of 50.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

09-15

2. University of Pittsburgh Protocol: Combustion Toxicity; zero mortality.
 3. ASTM C732: Accelerated Aging Test; Life Expectancy - 20 years.
 4. ASTM E96: Permeability - minimum of 0.4 perms.
- B. Bridging/Penetrating Encapsulants:
1. ASTM E736: Cohesion/Adhesion Test - 24 kPa (50 lbs/ft²).
 2. ASTM E119: Fire Resistance - 3 hours (Classified by UL for use on fibrous/cementitious fireproofing).
 3. ASTM D2794: Gardner Impact Test; Impact Resistance - minimum 11.5 kg-mm (43 in/lb).
 4. ASTM D522: Mandrel Bend Test; Flexibility - no rupture or cracking.
- C. Lockdown Encapsulants:
1. ASTM E119: Fire resistance - 3 hours (tested with fireproofing over encapsulant applied directly to steel member).
 2. ASTM E736: Bond Strength - 48 kPa (100 lbs/ft²) (test compatibility with cementitious and fibrous fireproofing).
 3. In certain situations, encapsulants may have to be applied to hot pipes/equipment. The encapsulant must be able to withstand high temperatures without cracking or off-gassing any noxious vapors during application.

2.7 CERTIFICATES OF COMPLIANCE

The Contractor shall submit to the VA representative certification from the manufacturer indicating compliance with performance requirements for encapsulants when applied according to manufacturer recommendations.

2.8 RECYCLABLE PROTECTIVE CLOTHING

If recyclable clothing is provided, all requirements of EPA, DOT and OSHA shall be met.

PART 3 - EXECUTION

3.1 REGULATED AREA PREPARATIONS

3.1.1 SITE SECURITY

- A. Regulated area access is to be restricted only to authorized, trained/accredited and protected personnel. These may include the Contractor's employees, employees of Subcontractors, VA employees and representatives, State and local inspectors, and any other designated individuals. A list of authorized personnel shall be established prior to commencing the project and be posted in the clean room of the decontamination unit.
- B. Entry into the regulated area by unauthorized individuals shall be reported immediately to the Competent Person by anyone observing the entry. The Competent Person shall immediately require any unauthorized person to leave the regulated area and then notify the VA Contracting Officer or VA Representative using the most expeditious means.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

09-15

- C. A log book shall be maintained in the clean room of the decontamination unit. Anyone who enters the regulated area must record their name, affiliation, time in, and time out for each entry.
- D. The Contractor's Competent Person shall control site security during abatement operations in order to isolate work in progress and protect adjacent personnel. A 24 hour security system shall be provided at the entrance to the regulated area to assure that all entrants are logged in/out and that only authorized personnel are allowed entrance.
- E. The Contractor will have the VA's assistance in notifying adjacent personnel of the presence, location and quantity of ACM in the regulated area and enforcement of restricted access by the VA's employees.
- F. The regulated area shall be locked during non-working hours and secured by VA Representative or Competent Person. The VA Police should be informed of asbestos abatement regulated areas to provide security checks during facility rounds and emergency response.

3.1.2 OSHA DANGER SIGNS

Post OSHA DANGER signs meeting the specifications of OSHA 29 CFR 1926.1101 at any location and approaches to the regulated area where airborne concentrations of asbestos may exceed ambient background levels. Signs shall be posted at a distance sufficiently far enough away from the regulated area to permit any personnel to read the sign and take the necessary measures to avoid exposure. Additional signs will be posted following construction of the regulated area enclosure.

3.1.3.1 SHUT DOWN - LOCK OUT ELECTRICAL

Shut down and lock out/tag out electric power to the regulated area. Provide temporary power and lighting. Insure safe installation including GFCI of temporary power sources and equipment by compliance with all applicable electrical code requirements and OSHA requirements for temporary electrical systems. Electricity shall be provided by the VA.

3.1.3.2 SHUT DOWN - LOCK OUT HVAC

Shut down and lock out/tag out heating, cooling, and air conditioning system (HVAC) components that are in, supply or pass through the regulated area. Investigate the regulated area and agree on pre-abatement condition with the VA's representative. Seal all intake and exhaust vents in the regulated area with duct tape and 2 layers of 6-mil poly. Also, seal any seams in system components that pass through the regulated area. Remove all contaminated HVAC system filters and place in labeled 6-mil poly disposal bags for disposal as asbestos waste.

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

09-15

3.1.4 CONTAINMENT BARRIERS AND COVERINGS FOR THE REGULATED AREA

3.1.4.1 GENERAL

Seal off any openings at the perimeter of the regulated area with critical barriers to completely isolate the regulated area and to contain all airborne asbestos contamination created by the abatement activities. Should the adjacent area past the regulated area become contaminated due to improper work activities, the Contractor shall suspend work inside the regulated area, continue wetting, and clean the adjacent areas in accordance with procedures described in these specifications. Any and all costs associated with the adjacent area cleanup shall not be borne by the VA.

3.1.4.2 PREPARATION PRIOR TO SEALING OFF

Place all materials, equipment and supplies necessary to isolate the regulated area inside the regulated area. Remove all movable material/equipment as described above and secure all unmovable material/equipment as described above. Properly secured material/equipment shall be considered to be outside the regulated area.

3.1.4.3 CONTROLLING ACCESS TO THE REGULATED AREA

Access to the regulated area is allowed only through the personnel decontamination facility (PDF). All other means of access shall be eliminated and OSHA DANGER demarcation signs posted as required by OSHA. If the regulated area is adjacent to, or within view of an occupied area, provide a visual barrier of 6 mil opaque fire retardant poly to prevent building occupant observation. If the adjacent area is accessible to the public, the barrier must be solid and capable of withstanding the negative pressure.

3.1.4.4 CRITICAL BARRIERS

The regulated area must be completely separated from the adjacent area(s) and the outside by at least 2 layers of 6 mil fire retardant poly and duct tape/spray adhesive. Individually seal all supply and exhaust ventilation openings, lighting fixtures, clocks, doorways, windows, convectors, speakers, and other openings into the regulated area with 2 layers of 6 mil fire retardant poly, and taped securely in place with duct tape/spray adhesive. Critical barriers must remain in place until all work and clearances have been completed. Light fixtures shall not be operational during abatement. Auxiliary lighting shall be provided. If needed, provide plywood squares 6" x 6" x 3/8" held in place with one 6d smooth masonry/galvanized nail driven through the center of the plywood square and duct tape on the poly so as to clamp the poly to the wall/surface. Locate plywood squares at each end, corner, and 4' maximum on centers.

3.1.4.5 EXTENSION OF THE REGULATED AREA

If the regulated area barrier is breached in any manner that could allow the passage of asbestos fibers or debris, the Competent Person shall

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

09-15

immediately stop work, continue wetting, and proceed to extend the regulated area to enclose the affected area as per procedures described in this specification. If the affected area cannot be enclosed, decontamination measures and cleanup shall start immediately. All personnel shall be isolated from the affected area until decontamination/cleanup is completed as verified by visual inspection and air monitoring. Air monitoring at completion must indicate background levels.

3.1.4.6 FLOOR BARRIERS:

All floors within 10' of glovebag work shall be covered with 2 layers of 6 mil fire retardant poly.

3.1.5 SANITARY FACILITIES

The Contractor shall provide sanitary facilities for abatement personnel and maintain them in a clean and sanitary condition throughout the abatement project.

3.1.6 PRE-CLEANING

3.1.6.1 PRE-CLEANING MOVABLE OBJECTS

The VA will provide water for abatement purposes. The Contractor shall connect to the existing VA system. The service to the shower(s) shall be supplied with backflow prevention.

Pre-cleaning of ACM contaminated items shall be performed after the enclosure has been erected and negative pressure has been established in the work area. PPE must be donned by all workers performing pre-cleaning activities. After items have been pre-cleaned and decontaminated, they may be removed from the work area for storage until the completion of abatement in the work area.

Pre-clean all movable objects within the regulated area using a HEPA filtered vacuum and/or wet cleaning methods as appropriate. After cleaning, these objects shall be removed from the regulated area and carefully stored in an uncontaminated location.

3.1.6.2 PRE-CLEANING FIXED OBJECTS

Pre-cleaning of ACM contaminated items shall be performed after the enclosure has been erected and negative pressure has been established in the work area.

Pre-clean all fixed objects in the regulated area using HEPA filtered vacuums and/or wet cleaning techniques as appropriate. Careful attention must be paid to machinery behind grills or gratings where access may be difficult but contamination may be significant. Also, pay particular attention to wall, floor and ceiling penetration behind fixed items. After pre-cleaning, enclose fixed objects with 2 layers of 6-mil poly and seal securely in place with duct tape. Objects (e.g., permanent fixtures,

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

09-15

shelves, electronic equipment, laboratory tables, sprinklers, alarm systems, closed circuit TV equipment and computer cables) which must remain in the regulated area and that require special ventilation or enclosure requirements should be designated here along with specified means of protection. Contact the manufacturer for special protection requirements.

3.1.6.3 PRE-CLEANING SURFACES IN THE REGULATED AREA

Pre-cleaning of ACM contaminated items shall be performed after the enclosure has been erected and negative pressure has been established in the work area.

Pre-clean all surfaces in the regulated area using HEPA filtered vacuums and/or wet cleaning methods as appropriate. Do not use any methods that would raise dust such as dry sweeping or vacuuming with equipment not equipped with HEPA filters. Do not disturb asbestos-containing materials during this pre-cleaning phase.

3.1.7 PRE-ABATEMENT ACTIVITIES

3.1.7.1 PRE-ABATEMENT MEETING

The VA representative, upon receipt, review, and substantial approval of all pre-abatement submittals and verification by the CPIH/CIH that all materials and equipment required for the project are on the site, will arrange for a pre-abatement meeting between the Contractor, the CPIH/CIH, Competent Person(s), the VA representative(s), and the VPIH/CIH. The purpose of the meeting is to discuss any aspect of the submittals needing clarification or amplification and to discuss any aspect of the project execution and the sequence of the operation. The Contractor shall be prepared to provide any supplemental information/documentation to the VA's representative regarding any submittals, documentation, materials or equipment. Upon satisfactory resolution of any outstanding issues, the VA's representative will issue a written order to proceed to the Contractor. No abatement work of any kind described in the following provisions shall be initiated prior to the VA written order to proceed.

3.1.7.2 PRE-ABATEMENT INSPECTIONS AND PREPARATIONS

Before any work begins on the construction of the regulated area, the Contractor will:

- A. Conduct a space-by-space inspection with an authorized VA representative and prepare a written inventory of all existing damage in those spaces where asbestos abatement will occur. Still or video photography may be used to supplement the written damage inventory. Document will be signed and certified as accurate by both parties.
- B. A NESHAPS (destructive) ACM inspection should be conducted on all building structures that will be demolished. Ensure the following areas are inspected on the project: Lay-in ceilings concealing ACM; ACM behind walls/windows from previous renovations; inside utility chases/walls; transite piping/ductwork/sheets; behind

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

09-15

radiators; lab fume hoods; transite lab countertops; roofing materials; below window sills; water/sewer lines; electrical conduit coverings; crawl spaces(previous abatement contamination); flooring/mastic covered by carpeting/new flooring; exterior insulated wall panels; on underground fuel tanks; and steam line trench coverings.

3.1.7.3 PRE-ABATEMENT CONSTRUCTION AND OPERATIONS

- A. Perform all preparatory work for the first regulated area in accordance with the approved work schedule and with this specification.
- B. Upon completion of all preparatory work, the CPIH/CIH will inspect the work and systems and will notify the VA's representative when the work is completed in accordance with this specification. The VA's representative may inspect the regulated area and the systems with the VPIH/CIH and may require that upon satisfactory inspection, the Contractor's employees perform all major aspects of the approved AHAP(s), especially worker protection, respiratory systems, contingency plans, decontamination procedures, and monitoring to demonstrate satisfactory operation.
- C. The CPIH/CIH shall document the pre-abatement activities described above and deliver a copy to the VA's representative.
- D. Upon satisfactory inspection of the installation of and operation of systems the VA's representative will notify the Contractor in writing to proceed with the asbestos abatement work in accordance with this specification.

3.2 REMOVAL OF PIPING ACM

3.2.1 WETTING MATERIALS

- A. Use amended water for the wetting of ACM prior to removal. The Competent Person shall assure the wetting of ACM meets the definition of "adequately wet" in the EPA NESHAP's regulation and OSHA's "wet methods" for the duration of the project. A removal encapsulant may be used instead of amended water with written approval of the VA's representative.
- B. Amended Water: Provide water to which a surfactant has been added shall be used to wet the ACM and reduce the potential for fiber release during disturbance of ACM. The mixture must be equal to or greater than the wetting provided by water amended by a surfactant consisting one ounce of 50% polyoxyethylene ester and 50% polyoxyethylene ether mixed with 5 gallons (19L) of water.
- C. Removal Encapsulant: Provide a penetrating encapsulant designed specifically for the removal of ACM. The material must, when used, result in adequate wetting of the ACM and retard fiber release during disturbance equal to or greater than the amended water described above in B.

3.2.2 SECONDARY BARRIER AND WALKWAYS

- A. Install as a drop cloth a 6 mil poly sheet at the beginning of each work shift where removal is to be done during that shift. Completely cover floors and any walls within 10 feet (3 meters) of the area where work is to be done. Secure the secondary barrier with duct tape to prevent it from

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

09-15

moving or debris from getting behind it. Remove the secondary barrier at the end of the shift or as work in the area is completed. Keep residue on the secondary barrier wetted. When removing, fold inward to prevent spillage and place in a disposal bag.

- B. Install walkways using 6 mil black poly between the regulated area and the decontamination facilities (PDF and W/EDF) to protect the primary layers from contamination and damage. Install the walkways at the beginning of each shift and remove at the end of each shift.

3.2.3 WET REMOVAL OF ACM

- A. Using acceptable glovebag procedures, adequately and thoroughly wet the ACM to be removed prior to removal with amended water or when authorized by VA, removal encapsulant to reduce/prevent fiber release to the air. Adequate time (at a minimum two hours) must be allowed for the amended water or removal encapsulant to saturate the ACM. Abatement personnel must not disturb dry ACM. Use a fine spray of amended water or removal encapsulant. Saturate the material sufficiently to wet to the substrate without causing excessive dripping. The material must be sprayed repeatedly/continuously during the removal process in order to maintain adequately wet conditions. Removal encapsulants must be applied in accordance with the manufacturer's written instructions. Perforate or carefully separate, using wet methods, an outer covering that is painted or jacketed in order to allow penetration and wetting of the material. Where necessary, carefully remove covering while wetting to minimize fiber release. **In no event shall dry removal occur except when authorized in writing by the VPIH/CIH and VA when a greater safety hazard (e.g., electricity) is present**

3.3 GLOVEBAG REMOVAL PROCEDURES

3.3.1 GENERAL

All applicable OSHA requirements and glovebag manufacturer's recommendations shall be met during glove bagging operations. In cases where live steam lines are present, the lines must be shut down prior to any work being performed on the system. **No abatement work shall be conducted on live, pressurized steam lines.** The Contractor may choose to use a High Temperature Glovebag in which a temperature rating ranges from 300°F to 700°F on steam lines that have recently been shut down and remain at high temperature for some time. In the case where a glovebag is not feasible, the Contractor will need to build a full negative pressure containment of sufficient size and follow all regulations as it pertains to removal.

1. Mix the surfactant with water in the garden sprayer, following the manufacturer's directions.
2. Have each employee put on a HEPA filtered respirator approved for asbestos and check the fit using the positive/negative fit check.
3. Have each employee put on a disposable full-body suit. Remember, the hood goes over the respirator straps.

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

09-15

4. Check closely the integrity of the glove bag to be used. Check all seams, gloves, sleeves, and glove openings. OSHA requires the bottom of the bag to be seamless.
5. Check the pipe where the work will be performed. If it is damaged (broken lagging, hanging, etc.), wrap the entire length of the pipe in poly sheeting and "candy stripe" it with duct tape.
6. Attach glovebag with required tools per manufacturer's instructions.
7. Using the smoke tube and aspirator bulb, test 10% of glovebags by placing the tube into the water porthole (two-inch opening to glove bag), and fill the bag with smoke and squeeze it. If leaks are found, they should be taped closed using duct tape and the bag should be retested with smoke.
8. Insert the wand from the water sprayer through the water porthole.
9. Insert the hose end from a HEPA vacuum into the upper portion of the glove bag.
10. Wet and remove the pipe insulation.
11. If the section of pipe is covered with an aluminum jacket, remove it first using the wire cutters to cut any bands and the tin snips to remove the aluminum. It is important to fold the sharp edges in to prevent cutting the bag when placing it in the bottom.
12. When the work is complete, spray the upper portion of the bag and clean-push all residue into the bottom of the bag with the other waste material. Be very thorough. Use adequate water.
13. Put all tools, after washing them off in the bag, in one of the sleeves of glove bag and turn it inside out, drawing it outside of the bag. Twist the sleeve tightly several times to seal it and tape it several tight turns with duct tape. Cut through the middle of the duct tape and remove the sleeve. Put the sleeve in the next glove bag or put it in a bucket of water to decontaminate the tools after cutting the sleeve open.
14. Turn on the HEPA vacuum and collapse the bag completely. Remove the vacuum nozzle, seal the hole with duct tape, twist the bag tightly several times in the middle, and tape it to keep the material in the bottom during removal of the glove bag from the pipe.
15. Slip a disposal bag over the glove bag (still attached to the pipe). Remove the tape securing the ends, and slit open the top of the glove bag and carefully fold it down into the disposal bag. Double bag and gooseneck waste materials.

3.3.2 NEGATIVE PRESSURE GLOVEBAG PROCEDURE

The HEPA vacuum shall be attached and operated as needed to prevent collapse of the glovebag during the removal process.

3.4 LOCKDOWN ENCAPSULATION

3.4.1 GENERAL

Lockdown encapsulation is an integral part of the ACM removal. At the conclusion of ACM removal and before removal of the primary barriers, all piping surfaces shall be encapsulated with a bridging encapsulant.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

09-15

3.4.2 SEALING EXPOSED EDGES

Seal edges of ACM exposed by removal work with two coats of encapsulant. Prior to sealing, permit the exposed edges to dry completely to permit penetration of the encapsulant.

3.5 DISPOSAL OF ACM WASTE MATERIALS

3.5.1 GENERAL

Dispose of waste ACM and debris which is packaged in accordance with these specifications, OSHA, EPA and DOT. The landfill requirements for packaging must also be met. Transport will be in compliance with 49 CFR 100-185 regulations. Disposal shall be done at an approved landfill. Disposal of non-friable ACM shall be done in accordance with applicable regulations.

3.5.2 PROCEDURES

- A. The VA must be notified at least 24 hours in advance of any waste removed from the containment
- B. Asbestos waste shall be packaged and moved through the W/EDF into a covered transport container in accordance with procedures in this specification. Waste shall be double-bagged and wetted with amended water prior to disposal. Wetted waste can be very heavy. Bags shall not be overfilled. Bags shall be securely sealed to prevent accidental opening and/or leakage. The top shall be tightly twisted and goose necked prior to tightly sealing with at least three wraps of duct tape. Ensure that unauthorized persons do not have access to the waste material once it is outside the regulated area. All transport containers must be covered at all times when not in use. NESHAP's signs must be on containers during loading and unloading. Material shall not be transported in open vehicles. If drums are used for packaging, the drums shall be labeled properly and shall not be re-used.
- C. Waste Load Out: Waste load out shall be done in accordance with the procedures in W/EDF Decontamination Procedures. Sealed waste bags shall be decontaminated on exterior surfaces by wet cleaning and/or HEPA vacuuming before being placed in the second waste bag and sealed, which then must also be wet wiped or HEPA vacuumed..
- D. Asbestos waste with sharp edged components, i.e., nails, screws, lath, strapping, tin sheeting, jacketing, metal mesh, etc., which might tear poly bags shall be wrapped securely in burlap before packaging and, if needed, use a poly lined fiber drum as the second container, prior to disposal.

3.6 PROJECT DECONTAMINATION

3.6.1 GENERAL

- A. The entire work related to project decontamination shall be performed under the close supervision and monitoring of the CPIH/CIH.
- B. If the asbestos abatement work is in an area which was contaminated prior to the start of abatement, the decontamination will be done by cleaning the primary barrier poly prior to its removal and cleanings of the surfaces of the regulated area after the primary barrier removal.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

09-15

- C. If the asbestos abatement work is in an area which was uncontaminated prior to the start of abatement, the decontamination will be done by cleaning the primary barrier poly prior to its removal, thus preventing contamination of the building when the regulated area critical barriers are removed.

3.6.2 REGULATED AREA CLEARANCE

Air testing and other requirements which must be met before release of the Contractor and re-occupancy of the regulated area space are specified in Final Testing Procedures.

3.6.3 WORK DESCRIPTION

Decontamination includes the duration/clearance air testing in the regulated area and the decontamination and removal of the enclosures/facilities installed prior to the abatement work including primary/critical barriers, PDF and W/EDF facilities, and negative pressure systems.

3.6.4 PRE-DECONTAMINATION CONDITIONS

- A. Before decontamination starts, all ACM waste from the regulated area shall be removed, all waste collected and removed, and the secondary barrier of poly removed and disposed of along with any gross debris generated by the work.
- B. At the start of decontamination, the following shall be in place:
1. Critical barriers over all openings consisting of two layers of 6 mil poly which is the sole barrier between the regulated area and the rest of the building or outside.
 2. Decontamination facilities, if required for personnel and equipment in operating condition.

3.6.5 FIRST CLEANING

Carry out a first cleaning of all surfaces of the regulated area including items of remaining poly sheeting, tools, scaffolding, ladders/staging by wet methods and/or HEPA vacuuming. Do not use dry dusting/sweeping/air blowing methods. Use each surface of a wetted cleaning cloth one time only and then dispose of as contaminated waste. Continue this cleaning until there is no visible residue from abated surfaces or poly or other surfaces. Remove all filters in the air handling system and dispose of as ACM waste in accordance with these specifications. The negative pressure system shall remain in operation during this time. Additional cleaning(s) may be needed as determined by the CPIH/VPIH/CIH.

3.6.6 PRE-CLEARANCE INSPECTION AND TESTING

The CPIH/CIH and VPIH/CIH will perform a thorough and detailed visual inspection at the end of the cleaning to determine whether there is any visible residue in the regulated area. If the visual inspection is acceptable, the CPIH/CIH will perform pre-clearance sampling using aggressive clearance as detailed in 40 CFR 763 Subpart E (AHERA) Appendix

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

09-15

A (III) (B) (7) (d). If the sampling results show values below 0.01 f/cc, then the Contractor shall notify the VA's representative of the results with a brief report from the CPIH/CIH documenting the inspection and sampling results and a statement verifying that the regulated area is ready for lockdown encapsulation. The VA reserves the right to utilize their own VPIH/CIH to perform a pre-clearance inspection and testing for verification.

3.6.7 LOCKDOWN ENCAPSULATION OF ABATED SURFACES

With the express written permission of the VA's representative, perform lockdown encapsulation of all surfaces from which asbestos was abated in accordance with the procedures in this specification.

3.7 FINAL VISUAL INSPECTIONS AND AIR CLEARANCE TESTING

3.7.1 GENERAL

Notify the VA representative 24 hours in advance for the performance of the final visual inspection and testing. The final visual inspection and testing will be performed by the VPIH/CIH after the final cleaning.

3.7.2 FINAL VISUAL INSPECTION

Final visual inspection will include the entire regulated area, the PDF, all poly sheeting, seals over HVAC openings, doorways, windows, and any other openings. If any debris, residue, dust or any other suspect material is detected, the final cleaning shall be repeated at no cost to the VA. Dust/material samples may be collected and analyzed at no cost to the VA at the discretion of the VPIH/CIH to confirm visual findings. When the regulated area is visually clean the final testing can be done.

3.7.3 DURATION/FINAL AIR CLEARANCE TESTING

- A. After an acceptable final visual inspection by the VPIH/CIH and VA Representative, the VPIH/CIH and CPIH/CIH will perform the final clearance testing. Air samples will be collected and analyzed in accordance with procedures for MDH in this specification. If the release criteria are not met, the Contractor shall repeat the final cleaning and continue decontamination procedures until clearance is achieved. All additional inspection and testing costs will be borne by the Contractor.
- B. If release criteria are met, proceed to perform the abatement closeout and to issue the certificate of completion in accordance with these specifications.

3.7.4 DURATION/FINAL AIR CLEARANCE PROCEDURES

- A. Contractor's Release Criteria: Work in a regulated area is complete when the regulated area is visually clean and airborne fiber levels have been reduced to or below 0.01 f/cc as measured by the AHERA PCM protocol.
- B. Air Monitoring and Final Clearance Sampling: To determine if the elevated airborne fiber counts encountered during abatement operations have been reduced to the specified level, the VPIH/CIH and CPIH/CIH will secure samples and analyze them according to the following procedures:

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

09-15

1. Fibers Counted: "Fibers" referred to in this section shall be either all fibers regardless of composition as counted in the NIOSH 7400 PCM method.
2. Sampling Samples will be collected on 0.8 μ MCE filters for PCM analysis. A minimum of 2000 Liters of using calibrated pumps shall be collected for clearance samples. Air samples will be collected within ten (10) feet of the glovebag operation

3.7.5 CLEARANCE SAMPLING USING PCM

- A. The VPIH/CIH and CPIH/CIH will perform clearance samples as indicated by the specification.
- B. The NIOSH 7400 PCM method will be used for clearance sampling. A minimum of 2 PCM clearance samples shall be collected. All samples must be equal to or less than 0.01 f/cc to clear the regulated area.

3.7.6 CLEARANCE SAMPLING USING TEM (NOT USED)

3.7.7 LABORATORY TESTING OF PCM SAMPLES

The services of an AIHA accredited laboratory will be employed by the VA and the Asbestos Contractor to perform analysis for the PCM air samples. The accredited laboratory shall be successfully participating in the AIHA Proficiency Analytical Testing (PAT) program. Samples will be analyzed daily by the VPIH/CIH and CPIH/CIH so that verbal/faxed reports can be received within 24 hours. A complete record, certified by the laboratory, of all air monitoring tests and results will be furnished to the VA's representative and the Contractor.

3.7.8 LABORATORY TESTING OF TEM SAMPLES (NOT USED)

3.8 ABATEMENT CLOSEOUT AND CERTIFICATE OF COMPLIANCE

3.8.1 COMPLETION OF ABATEMENT WORK

After thorough decontamination, seal negative air machines with 2 layers of 6 mil poly and duct tape to form a tight seal at the intake/outlet ends before removal from the regulated area. Complete asbestos abatement work upon meeting the regulated area visual and air clearance criteria and fulfilling the following:

- A. Remove all equipment, materials, and debris from the project area.
- B. Package and dispose of all asbestos waste as required. Dispose of waste ACM and debris which is packaged in accordance with these specifications, OSHA, EPA and DOT. The landfill requirements for packaging must also be met. Transport will be in compliance with 49 CFR 100-185 regulations.
- C. Repair or replace all interior finishes damaged during the abatement work.
- D. The VA will be notified of any waste removed from the containment prior to 24 hours.
- E. Fulfill other project closeout requirements as specified elsewhere in this specification.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

09-15

3.8.2 CERTIFICATE OF COMPLETION BY CONTRACTOR

The CPIH/CIH shall complete and sign the "Certificate of Completion" in accordance with Attachment 1 at the completion of the abatement and decontamination of the regulated area.

3.8.3 WORK SHIFTS

All work shall be done during administrative hours (8:00 AM to 4:30 PM) Monday - Friday excluding Federal Holidays. Any change in the work schedule must be approved in writing by the VA Representative.

3.8.4 RE-INSULATION (NOT USED)

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

09-15

ATTACHMENT #1

CERTIFICATE OF COMPLETION

DATE: _____ VA Project #: _____

PROJECT NAME: _____ Abatement Contractor: _____

VAMC/ADDRESS: _____

1. I certify that I have personally inspected, monitored and supervised the abatement work of (specify regulated area or Building):
which took place from / / to / /
2. That throughout the work all applicable requirements/regulations and the VA's specifications were met.
3. That any person who entered the regulated area was protected with the appropriate personal protective equipment and respirator and that they followed the proper entry and exit procedures and the proper operating procedures for the duration of the work.
4. That all employees of the Abatement Contractor engaged in this work were trained in respiratory protection, were experienced with abatement work, had proper medical surveillance documentation, were fit-tested for their respirator, and were not exposed at any time during the work to asbestos without the benefit of appropriate respiratory protection.
5. That I performed and supervised all inspection and testing specified and required by applicable regulations and VA specifications.
6. That the conditions inside the regulated area were always maintained in a safe and healthy condition and the maximum fiber count never exceeded 0.5 f/cc, except as described below.
7. That all glovebag work was done in accordance with OSHA requirements and the manufacturer's recommendations.

CPIH/CIH Signature/Date: _____

CPIH/CIH Print Name: _____

Abatement	Contractor	Signature/Date:

Abatement Contractor Print Name: _____

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

09-15

ATTACHMENT #2

CERTIFICATE OF WORKER'S ACKNOWLEDGMENT

PROJECT NAME: _____ DATE: _____

PROJECT ADDRESS: _____

ABATEMENT CONTRACTOR'S NAME: _____

WORKING WITH ASBESTOS CAN BE HAZARDOUS TO YOUR HEALTH. INHALING ASBESTOS HAS BEEN LINKED WITH VARIOUS TYPES OF CANCERS. IF YOU SMOKE AND INHALE ASBESTOS FIBERS, YOUR CHANCES OF DEVELOPING LUNG CANCER IS GREATER THAN THAT OF THE NON-SMOKING PUBLIC.

Your employer's contract with the owner for the above project requires that: You must be supplied with the proper personal protective equipment including an adequate respirator and be trained in its use. You must be trained in safe and healthy work practices and in the use of the equipment found at an asbestos abatement project. You must receive/have a current medical examination for working with asbestos. These things shall be provided at no cost to you. By signing this certificate you are indicating to the owner that your employer has met these obligations.

RESPIRATORY PROTECTION: I have been trained in the proper use of respirators and have been informed of the type of respirator to be used on the above indicated project. I have a copy of the written Respiratory Protection Program issued by my employer. I have been provided for my exclusive use, at no cost, with a respirator to be used on the above indicated project.

TRAINING COURSE: I have been trained by a third party, State/EPA accredited trainer in the requirements for an AHERA/OSHA Asbestos Abatement Worker training course, 32 hours minimum duration. I currently have a valid State accreditation certificate. The topics covered in the course include, as a minimum, the following:

- Physical Characteristics and Background Information on Asbestos
- Potential Health Effects Related to Exposure to Asbestos
- Employee Personal Protective Equipment
- Establishment of a Respiratory Protection Program
- State of the Art Work Practices
- Personal Hygiene
- Additional Safety Hazards
- Medical Monitoring
- Air Monitoring
- Relevant Federal, State and Local Regulatory Requirements, Procedures, and Standards
- Asbestos Waste Disposal

MEDICAL EXAMINATION: I have had a medical examination within the past 12 months which was paid for by my employer. This examination included: health history, occupational history, pulmonary function test, and may have included a chest x-ray evaluation. The physician issued a positive written opinion after the examination.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

09-15

Signature: _____

Printed Name: _____

Social Security Number: _____

Witness: _____

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

02 82 13.13 - 47

10-28-2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

09-15

ATTACHMENT #3

AFFIDAVIT OF MEDICAL SURVEILLANCE, RESPIRATORY PROTECTION AND TRAINING/ACCREDITATION

VA PROJECT NAME AND NUMBER: _____

VA MEDICAL FACILITY: _____

ABATEMENT CONTRACTOR'S NAME AND ADDRESS: _____

1. I verify that the following individual

Name: _____ Social Security Number: _____

who is proposed to be employed in asbestos abatement work associated with the above project by the named Abatement Contractor, is included in a medical surveillance program in accordance with 29 CFR 1926.1101(m), and that complete records of the medical surveillance program as required by 29 CFR 1926.1101(m)(n) and 29 CFR 1910.20 are kept at the offices of the Abatement Contractor at the following address.

Address: _____

2. I verify that this individual has been trained, fit-tested and instructed in the use of all appropriate respiratory protection systems and that the person is capable of working in safe and healthy manner as expected and required in the expected work environment of this project.

3. I verify that this individual has been trained as required by 29 CFR 1926.1101(k). This individual has also obtained a valid State accreditation certificate. Documentation will be kept on-site.

4. I verify that I meet the minimum qualifications criteria of the VA specifications for a CPIH.

Signature of CPIH/CIH: _____ Date: _____

Printed Name of CPIH/CIH: _____

Signature of Contractor: _____ Date: _____

Printed Name of Contractor: _____

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

09-15

ATTACHMENT #4

ABATEMENT CONTRACTOR/COMPETENT PERSON(S) REVIEW AND ACCEPTANCE OF THE VA'S ASBESTOS SPECIFICATIONS

VA Project Location: _____

VA Project #: _____

VA Project Description: _____

This form shall be signed by the Asbestos Abatement Contractor Owner and the Asbestos Abatement Contractor's Competent Person(s) prior to any start of work at the VA related to this Specification. If the Asbestos Abatement Contractor's/Competent Person(s) has not signed this form, they shall not be allowed to work on-site.

I, the undersigned, have read VA's Asbestos Specification regarding the asbestos abatement requirements. I understand the requirements of the VA's Asbestos Specification and agree to follow these requirements as well as all required rules and regulations of OSHA/EPA/DOT and State/Local requirements. I have been given ample opportunity to read the VA's Asbestos Specification and have been given an opportunity to ask any questions regarding the content and have received a response related to those questions. I do not have any further questions regarding the content, intent and requirements of the VA's Asbestos Specification.

At the conclusion of the asbestos abatement, I will certify that all asbestos abatement work was done in accordance with the VA's Asbestos Specification and all ACM was removed properly and no fibrous residue remains on any abated surfaces.

Abatement Contractor Owner's Signature _____ Date _____

Abatement Contractor Competent Person(s) _____ Date _____

- - END- - - -

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

09-15

**SECTION 02 82 13.19
ASBESTOS FLOOR TILE AND MASTIC ABATEMENT**

TABLE OF CONTENTS

PART 1 - GENERAL..... 1

1.1 SUMMARY OF THE WORK..... 1

1.1.1 CONTRACT DOCUMENTS AND RELATED REQUIREMENTS..... 1

1.1.2 EXTENT OF WORK..... 1

1.1.3 RELATED WORK..... 1

1.1.4 TASKS..... 2

1.1.5 ABATEMENT CONTRACTOR USE OF PREMISES..... 2

1.2 VARIATIONS IN QUANTITY..... 2

1.3 STOP ASBESTOS REMOVAL..... 2

1.4 DEFINITIONS..... 3

1.4.1 GENERAL..... 3

1.4.2 GLOSSARY..... 3

1.4.3 REFERENCED STANDARDS ORGANIZATIONS..... 10

1.5 APPLICABLE CODES AND REGULATIONS..... 11

1.5.1 GENERAL APPLICABILITY OF CODES, REGULATIONS, AND STANDARDS..... 11

1.5.2 CONTRACTOR RESPONSIBILITY..... 12

1.5.3 FEDERAL REQUIREMENTS..... 12

1.5.4 STATE REQUIREMENTS..... 12

1.5.5 LOCAL REQUIREMENTS (NOT USED)..... 13

1.5.6 STANDARDS..... 13

1.5.7 EPA GUIDANCE DOCUMENTS..... 13

1.5.8 NOTICES..... 14

1.5.9 PERMITS..... 14

1.5.10 POSTING AND FILING OF REGULATIONS..... 14

1.5.11 VA RESPONSIBILITIES..... 15

1.5.12 SITE SECURITY..... 15

1.5.13 EMERGENCY ACTION PLAN AND ARRANGEMENTS..... 15

1.5.14 PRE-CONSTRUCTION MEETING..... 16

1.6 PROJECT COORDINATION..... 17

1.6.1 PERSONNEL..... 17

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

09-15

1.7 RESPIRATORY PROTECTION..... 18

1.7.1 GENERAL - RESPIRATORY PROTECTION PROGRAM..... 18

1.7.2 RESPIRATORY PROTECTION PROGRAM COORDINATOR..... 19

1.7.3 SELECTION AND USE OF RESPIRATORS..... 19

1.7.4 MINIMUM RESPIRATORY PROTECTION..... 19

1.7.5 MEDICAL WRITTEN OPINION..... 19

1.7.6 RESPIRATOR FIT TEST..... 19

1.7.7 RESPIRATOR FIT CHECK..... 19

1.7.8 MAINTENANCE AND CARE OF RESPIRATORS..... 19

1.8 WORKER PROTECTION..... 20

1.8.1 TRAINING OF ABATEMENT PERSONNEL..... 20

1.8.2 MEDICAL EXAMINATIONS..... 20

1.8.3 PERSONAL PROTECTIVE EQUIPMENT..... 20

1.8.4 REGULATED AREA ENTRY PROCEDURE..... 20

1.8.5 DECONTAMINATION PROCEDURE..... 21

1.8.6 REGULATED AREA REQUIREMENTS..... 21

1.9 DECONTAMINATION FACILITIES..... 21

1.9.1 DESCRIPTION..... 21

1.9.2 GENERAL REQUIREMENTS..... 22

1.9.3 TEMPORARY FACILITIES TO THE PDF AND W/EDF..... 22

1.9.4 PERSONNEL DECONTAMINATION FACILITY (PDF)..... 22

1.9.5 WASTE/EQUIPMENT DECONTAMINATION FACILITY (W/EDF)..... 24

1.9.6 WASTE/EQUIPMENT DECONTAMINATION PROCEDURES..... 25

PART 2 - PRODUCTS, MATERIALS AND EQUIPMENT..... 25

2.1 MATERIALS AND EQUIPMENT..... 25

2.1.1 GENERAL REQUIREMENTS (ALL ABATEMENT PROJECTS)..... 25

2.1.2 NEGATIVE PRESSURE FILTRATION SYSTEM..... 27

2.1.3 DESIGN AND LAYOUT..... 27

2.1.4 NEGATIVE AIR MACHINES (HEPA UNITS)..... 27

2.1.5 PRESSURE DIFFERENTIAL..... 28

2.1.6 Monitoring..... 29

2.2 CONTAINMENT BARRIERS AND COVERINGS IN THE REGULATED AREA..... 29

2.2.1 GENERAL..... 29

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

09-15

2.2.3 CONTROLLING ACCESS TO THE REGULATED AREA..... 29

2.2.4 CRITICAL BARRIERS..... 29

2.2.5 SECONDARY BARRIERS (NOT USED)..... 30

2.2.6 EXTENSION OF THE REGULATED AREA..... 30

2.2.7 FIRESTOPPING (NOT USED)..... 30

2.3 MONITORING, INSPECTION AND TESTING..... 30

2.3.1 GENERAL..... 30

2.3.2 SCOPE OF SERVICES OF THE VPIH/CIH CONSULTANT..... 31

2.3.3 MONITORING, INSPECTION AND TESTING BY CONTRACTOR CPIH/CIH..... 32

2.4 ASBESTOS HAZARD ABATEMENT PLAN..... 33

2.5 SUBMITTALS..... 33

2.5.1 PRE-START MEETING SUBMITTALS..... 33

2.5.2 SUBMITTALS DURING ABATEMENT..... 35

2.5.3 SUBMITTALS AT COMPLETION OF ABATEMENT..... 36

PART 3 - EXECUTION..... 36

3.1 PRE-ABATEMENT ACTIVITIES..... 36

3.1.1 PRE-ABATEMENT MEETING..... 36

3.1.2 PRE-ABATEMENT INSPECTIONS AND PREPARATIONS..... 36

3.1.3 PRE-ABATEMENT CONSTRUCTION AND OPERATIONS..... 37

3.2 REGULATED AREA PREPARATIONS..... 37

3.2.1 OSHA DANGER SIGNS..... 37

3.2.2 CONTROLLING ACCESS TO THE REGULATED AREA..... 38

3.2.3 SHUT DOWN - LOCK OUT ELECTRICAL..... 38

3.2.4 SHUT DOWN - LOCK OUT HVAC..... 38

3.2.5 SANITARY FACILITIES..... 38

3.2.7 PREPARATION PRIOR TO SEALING OFF..... 38

3.2.8 CRITICAL BARRIERS..... 39

3.2.10 PRE-CLEANING MOVABLE OBJECTS..... 39

3.2.11 PRE-CLEANING FIXED OBJECTS..... 39

3.2.12 PRE-CLEANING SURFACES IN THE REGULATED AREA..... 40

3.2.13 EXTENSION OF THE REGULATED AREA..... 40

3.3 REMOVAL OF CLASS II FLOORING..... 40

3.3.1 GENERAL..... 40

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

09-15

3.3.2 REMOVAL OF FLOORING MATERIALS..... 40

3.3.3 REMOVAL OF MASTIC..... 41

3.4 DISPOSAL OF CLASS II WASTE MATERIAL..... 41

3.4.1 GENERAL..... 41

3.5 PROJECT DECONTAMINATION..... 41

3.5.1 GENERAL..... 41

3.5.2 REGULATED AREA CLEARANCE..... 41

3.5.3 WORK DESCRIPTION..... 41

3.5.4 PRE-DECONTAMINATION CONDITIONS..... 42

3.5.5 CLEANING..... 42

3.6 VISUAL INSPECTION AND AIR CLEARANCE TESTING..... 42

3.6.1 GENERAL..... 42

3.6.2 VISUAL INSPECTION..... 42

3.6.3 AIR CLEARANCE TESTING..... 42

3.6.4 FINAL AIR CLEARANCE PROCEDURES..... 43

3.6.5 CLEARANCE SAMPLING USING PCM.....43

3.6.6 LABORATORY TESTING OF PCM CLEARANCE SAMPLES.....43

3.7 ABATEMENT CLOSEOUT AND CERTIFICATE OF COMPLIANCE..... 44

3.7.1 COMPLETION OF ABATEMENT WORK..... 44

3.7.2 CERTIFICATE OF COMPLETION BY CONTRACTOR..... 44

3.7.3 WORK SHIFTS..... 44

ATTACHMENT #1..... 45

ATTACHMENT #2..... 46

ATTACHMENT #3..... 47

ATTACHMENT #4..... 48

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

09-15

PART 1 - GENERAL

1.1 SUMMARY OF THE WORK

1.1.1 CONTRACT DOCUMENTS AND RELATED REQUIREMENTS

Drawings, general provisions of the contract, including general and supplementary conditions and other Division 01 specifications, shall apply to the work of this section. The contract documents show the work to be done under the contract and related requirements and conditions impacting the project. Related requirements and conditions include applicable codes and regulations, notices and permits, existing site conditions and restrictions on use of the site, requirements for partial owner occupancy during the work, coordination with other work and the phasing of the work. In the event the Asbestos Abatement Contractor discovers a conflict in the contract documents and/or requirements or codes, the conflict must be brought to the immediate attention of the Contracting Officer for resolution. Whenever there is a conflict or overlap in the requirements, the most stringent shall apply. Any actions taken by the Contractor without obtaining guidance from the Contracting Officer shall become the sole risk and responsibility of the Asbestos Abatement Contractor. All costs incurred due to such action are also the responsibility of the Asbestos Abatement Contractor.

1.1.2 EXTENT OF WORK

- A. Below is a brief description of the estimated quantities of asbestos flooring materials to be abated. These quantities are for informational purposes only and are based on the best information available at the time of the specification preparation. The Contractor shall satisfy himself as the actual quantities to be abated. Nothing in this section may be interpreted as limiting the extent of work otherwise required by this contract and related documents.
- B. Removal, clean-up and disposal of ACM flooring in an appropriate regulated area in the following approximate quantities:
 - (2,470) square feet of flooring and mastic below carpeting
 - (270) square feet of flooring and mastic
- C. Removal of floor tile and mastic will occur after any and all walls within the regulated areas have been demolished, assuring any pre-existing ACM which may be present below the walls has been exposed.

1.1.3 RELATED WORK

- A. Section 02 41 00, DEMOLITION.
- B. Section 02 82 11, TRADITIONAL ASBESTOS ABATEMENT
- C. Section 02 82 13.13, GLOVEBAG ASBESTOS ABATEMENT.
- D. Section 02 83 33.13, LEAD-BASED PAINT REMOVAL AND DISPOSAL.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

09-15

1.1.4 TASKS

The work tasks are summarized briefly as follows:

- A. Pre-abatement activities including pre-abatement meeting(s), inspection(s), notifications, permits, submittal approvals, regulated area preparations, emergency procedures arrangements, and Asbestos Hazard Abatement Plans for asbestos abatement work.
- B. Abatement activities including removal, encapsulation, clean-up and disposal of ACM waste, recordkeeping, security, air monitoring, and inspections.
- C. Cleaning and decontamination activities including final visual inspection, clearance air monitoring and certification of decontamination.

1.1.5 ABATEMENT CONTRACTOR USE OF PREMISES

- A. The Contractor and Contractor's personnel shall cooperate fully with the VA representative/consultant to facilitate efficient use of buildings and areas within buildings. The Contractor shall perform the work in accordance with the VA specifications, drawings, phasing plan and in compliance with any/all applicable Federal, State and Local regulations and requirements.
- B. The Contractor shall use the existing facilities in the building strictly within the limits indicated in contract documents as well as the approved VA Design Construction Procedure. Any variation from the arrangements shown on drawings shall be secured in writing from the VA representative through the pre-abatement plan of action.

1.2 VARIATIONS IN QUANTITY

The quantities and locations of ACM as indicated on the drawings and the extent of work included in this section are estimated which are limited by the physical constraints imposed by occupancy of the buildings and accessibility to ACM. Accordingly, minor variations (+/- 5%) in quantities of ACM within the regulated area are considered as having no impact on contract price and time requirements of this contract. Where additional work is required beyond the above variation, the contractor shall provide unit prices for newly discovered ACM and those prices shall be used for additional work required under the contractor.

1.3 STOP ASBESTOS REMOVAL

If the Contracting Officer; their field representative; (the facility Safety Officer/Manager or their designee, or the VA Professional Industrial Hygienist/Certified Industrial Hygienist (VPIH/CIH) presents a verbal **Stop Asbestos Removal Order**, the Contractor/Personnel shall immediately stop all asbestos removal and maintain HEPA filtered negative pressure air flow in the containment and adequately wet any exposed ACM. If a verbal Stop Asbestos Removal Order is issued, the VA shall follow-up with a written order to the Contractor as soon as it is practicable. The Contractor shall not resume any asbestos removal activity until authorized to do so in writing by the VA Contracting Officer. A stop asbestos removal order may be issued at any time the VA Contracting

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

09-15

Officer determines abatement conditions/activities are not within VA specification, regulatory requirements or that an imminent hazard exists to human health or the environment. Work stoppage will continue until conditions have been corrected to the satisfaction of the VA. Standby time and costs for corrective actions will be borne by the Contractor, including the VPIH/CIH time. The occurrence of any of the following events shall be reported immediately by the Contractor's competent person to the VA Contracting Office or field representative using the most expeditious means (e.g., verbal or telephonic), followed up with written notification to the Contracting Officer as soon as practical. The Contractor shall immediately stop asbestos removal/disturbance activities and initiate fiber reduction activities:

- A. Airborne PCM analysis results equal to or greater than 0.01 f/cc outside a regulated area;
- B. breach or break in regulated area containment barrier(s);
- C. less than -0.02" WCG pressure in the regulated area;
- D. serious injury/death at the site;
- E. fire/safety emergency at the site;
- F. respiratory protection system failure;
- G. power failure or loss of wetting agent; or
- H. any visible emissions observed outside the regulated area.

1.4 DEFINITIONS

1.4.1 GENERAL

Definitions and explanations here are neither complete nor exclusive of all terms used in the contract documents, but are general for the work to the extent they are not stated more explicitly in another element of the contract documents. Drawings must be recognized as diagrammatic in nature and not completely descriptive of the requirements indicated therein.

1.4.2 GLOSSARY

Abatement - Procedures to control fiber release from asbestos-containing materials. Includes removal, encapsulation, enclosure, demolition, and renovation activities related to asbestos containing materials (ACM).

Aerosol - Solid or liquid particulate suspended in air.

Adequately wet - Sufficiently mixed or penetrated with liquid to prevent the release of particulates. If visible emissions are observed coming from the ACM, then that material has not been adequately wetted.

Aggressive method - Removal or disturbance of building material by sanding, abrading, grinding, or other method that breaks, crumbles, or disintegrates intact ACM.

Aggressive sampling - EPA AHERA defined clearance sampling method using air moving equipment such as fans and leaf blowers to aggressively disturb and maintain in the air residual fibers after abatement.

AHERA - Asbestos Hazard Emergency Response Act. Asbestos regulations for schools issued in 1987.

Aircell - Pipe or duct insulation made of corrugated cardboard which contains asbestos.

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

09-15

Air monitoring - The process of measuring the fiber content of a known volume of air collected over a specified period of time. The NIOSH 7400 Method, Issue 2 is used to determine the fiber levels in air. For personal samples and clearance air testing using Phase Contrast Microscopy (PCM) analysis. NIOSH Method 7402 can be used when it is necessary to confirm fibers counted by PCM as being asbestos. The AHERA TEM analysis may be used for background, area samples and clearance samples when required by this specification, or at the discretion of the VPIH/CIH as appropriate.

Air sample filter - The filter used to collect fibers which are then counted. The filter is made of mixed cellulose ester membrane for PCM (Phase Contrast Microscopy) and polycarbonate for TEM (Transmission Electron Microscopy)

Amended water - Water to which a surfactant (wetting agent) has been added to increase the penetrating ability of the liquid.

Asbestos - Includes chrysotile, amosite, crocidolite, tremolite asbestos, anthophyllite asbestos, actinolite asbestos, and any of these minerals that have been chemically treated or altered. Asbestos also includes PACM, as defined below.

Asbestos Hazard Abatement Plan (AHAP) - Asbestos work procedures required to be submitted by the contractor before work begins.

Asbestos-containing material (ACM) - Any material containing more than one percent of asbestos.

Asbestos contaminated elements (ACE) - Building elements such as ceilings, walls, lights, or ductwork that are contaminated with asbestos.

Asbestos-contaminated soil (ACS) - Soil found in the work area or in adjacent areas such as crawlspaces or pipe tunnels which is contaminated with asbestos-containing material debris and cannot be easily separated from the material.

Asbestos-containing waste (ACW) material - Asbestos-containing material or asbestos contaminated objects requiring disposal.

Asbestos Project Monitor - Some states require that any person conducting asbestos abatement clearance inspections and clearance air sampling be licensed as an asbestos project monitor.

Asbestos waste decontamination facility - A system consisting of drum/bag washing facilities and a temporary storage area for cleaned containers of asbestos waste. Used as the exit for waste and equipment leaving the regulated area. In an emergency, it may be used to evacuate personnel.

Authorized person - Any person authorized by the VA, the Contractor, or government agency and required by work duties to be present in regulated areas.

Authorized visitor - Any person approved by the VA; the contractor; or any government agency representative having jurisdiction over the regulated area (e.g., OSHA, Federal and State EPA).

Barrier - Any surface that isolates the regulated area and inhibits fiber migration from the regulated area.

Containment Barrier - An airtight barrier consisting of walls, floors, and/or ceilings of sealed plastic sheeting which surrounds and seals the outer perimeter of the regulated area.

Critical Barrier - The barrier responsible for isolating the regulated area from adjacent spaces, typically constructed of plastic sheeting

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

09-15

secured in place at openings such as doors, windows, or any other opening into the regulated area.

Primary Barrier - Plastic barriers placed over critical barriers and exposed directly to abatement work.

Secondary Barrier - Any additional plastic barriers used to isolate and provide protection from debris during abatement work.

Breathing zone - The hemisphere forward of the shoulders with a radius of about 150 - 225 mm (6 - 9 inches) from the worker's nose.

Bridging encapsulant - An encapsulant that forms a layer on the surface of the ACM.

Building/facility owner - The legal entity, including a lessee, which exercises control over management and recordkeeping functions relating to a building and/or facility in which asbestos activities take place.

Bulk testing - The collection and analysis of suspect asbestos containing materials.

Certified Industrial Hygienist (CIH) - A person certified in the comprehensive practice of industrial hygiene by the American Board of Industrial Hygiene.

Class I asbestos work - Activities involving the removal of Thermal System Insulation (TSI) and surfacing ACM and Presumed Asbestos Containing Material (PACM).

Class II asbestos work - Activities involving the removal of ACM which is not thermal system insulation or surfacing material. This includes, but is not limited to, the removal of asbestos-containing wallboard, floor tile and sheeting, roofing and siding shingles, and construction mastic.

Clean room/Changing room - An uncontaminated room having facilities for the storage of employee's street clothing and uncontaminated materials and equipment.

Clearance sample - The final air sample taken after all asbestos work has been done and visually inspected. Performed by the VA's professional industrial hygiene consultant/Certified Industrial Hygienist (VPIH/CIH).

Closely resemble - The major workplace conditions which have contributed to the levels of historic asbestos exposure, are no more protective than conditions of the current workplace.

Competent person - In addition to the definition in 29 CFR 1926.32(f), one who is capable of identifying existing asbestos hazards in the workplace and selecting the appropriate control strategy for asbestos exposure, who has the authority to take prompt corrective measures to eliminate them, as specified in 29 CFR 1926.32(f); in addition, for Class I and II work who is specially trained in a training course which meets the criteria of EPA's Model Accreditation Plan (40 CFR 763) for supervisor.

Contractor's Professional Industrial Hygienist (CPIH/CIH) - The asbestos abatement contractor's industrial hygienist. The industrial hygienist must meet the qualification requirements of a PIH and may be a certified industrial hygienist (CIH).

Count - Refers to the fiber count or the average number of fibers greater than five microns in length with a length-to-width (aspect) ratio of at least 3 to 1, per cubic centimeter of air.

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

09-15

Crawlspace - An area which can be found either in or adjacent to the work area. This area has limited access and egress and may contain asbestos materials and/or asbestos contaminated soil.

Decontamination area/unit - An enclosed area adjacent to and connected to the regulated area and consisting of an equipment room, shower room, and clean room, which is used for the decontamination of workers, materials, and equipment that are contaminated with asbestos.

Demolition - The wrecking or taking out of any load-supporting structural member and any related razing, removing, or stripping of asbestos products.

VA Total - means a building or substantial part of the building is completely removed, torn or knocked down, bulldozed, flattened, or razed, including removal of building debris.

Disposal bag - Typically 6 mil thick sift-proof, dustproof, leak-tight container used to package and transport asbestos waste from regulated areas to the approved landfill. Each bag/container must be labeled/marked in accordance with EPA, OSHA and DOT requirements.

Disturbance - Activities that disrupt the matrix of ACM or PACM, crumble or pulverize ACM or PACM, or generate visible debris from ACM or PACM. Disturbance includes cutting away small amounts of ACM or PACM, no greater than the amount that can be contained in one standard sized glove bag or waste bag in order to access a building component. In no event shall the amount of ACM or PACM so disturbed exceed that which can be contained in one glove bag or disposal bag which shall not exceed 60 inches in length or width.

Drum - A rigid, impermeable container made of cardboard fiber, plastic, or metal which can be sealed in order to be sift-proof, dustproof, and leak-tight.

Employee exposure - The exposure to airborne asbestos that would occur if the employee were not wearing respiratory protection equipment.

Encapsulant - A material that surrounds or embeds asbestos fibers in an adhesive matrix and prevents the release of fibers.

Encapsulation - Treating ACM with an encapsulant.

Enclosure - The construction of an air tight, impermeable, permanent barrier around ACM to control the release of asbestos fibers from the material and also eliminate access to the material.

Equipment room - A contaminated room located within the decontamination area that is supplied with impermeable bags or containers for the disposal of contaminated protective clothing and equipment.

Fiber - A particulate form of asbestos, 5 microns or longer, with a length to width (aspect) ratio of at least 3 to 1.

Fibers per cubic centimeter (f/cc) - Abbreviation for fibers per cubic centimeter, used to describe the level of asbestos fibers in air.

Filter - Media used in respirators, vacuums, or other machines to remove particulate from air.

Firestopping - Material used to close the open parts of a structure in order to prevent a fire from spreading.

Friable asbestos containing material - Any material containing more than one (1) percent or asbestos as determined using the method specified in appendix A, Subpart F, 40 CFR 763, section 1, Polarized Light Microscopy,

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

09-15

that, when dry, can be crumbled, pulverized, or reduced to powder by hand pressure.

Glovebag - Not more than a 60 x 60 inch impervious plastic bag-like enclosure affixed around an asbestos-containing material, with glove-like appendages through which materials and tools may be handled.

High efficiency particulate air (HEPA) filter - An ASHRAE MERV 17 filter capable of trapping and retaining at least 99.97 percent of all mono-dispersed particles of 0.3 micrometers in diameter.

HEPA vacuum - Vacuum collection equipment equipped with a HEPA filter system capable of collecting and retaining asbestos fibers.

Homogeneous area - An area of surfacing, thermal system insulation or miscellaneous ACM that is uniform in color, texture and date of application.

HVAC - Heating, Ventilation and Air Conditioning

Industrial hygienist (IH) - A professional qualified by education, training, and experience to anticipate, recognize, evaluate and develop controls for occupational health hazards. Meets definition requirements of the American Industrial Hygiene Association (AIHA).

Industrial hygienist technician (IH Technician) - A person working under the direction of an IH or CIH who has special training, experience, certifications and licenses required for the industrial hygiene work assigned. Some states require that an industrial hygienist technician conducting asbestos abatement clearance inspection and clearance air sampling be licensed as an asbestos project monitor.

Intact - The ACM has not crumbled, been pulverized, or otherwise deteriorated so that the asbestos is no longer likely to be bound with its matrix.

Lockdown - Applying encapsulant, after a final visual inspection, on all abated surfaces at the conclusion of ACM removal prior to removal of critical barriers.

National Emission Standards for Hazardous Air Pollutants (NESHAPE) - EPA's rule to control emissions of asbestos to the environment (40 CFR Part 61, Subpart M).

Negative initial exposure assessment - A demonstration by the employer which complies with the criteria in 29 CFR 1926.1101 (f)(2)(iii), that employee exposure during an operation is expected to be consistently below the PELs.

Negative pressure - Air pressure which is lower than the surrounding area, created by exhausting air from a sealed regulated area through HEPA equipped filtration units. OSHA requires maintaining -0.02" water column gauge inside the negative pressure enclosure.

Negative pressure respirator - A respirator in which the air pressure inside the facepiece is negative during inhalation relative to the air pressure outside the respirator facepiece.

Non-friable ACM - Material that contains more than 1 percent asbestos but cannot be crumbled, pulverized, or reduced to powder by hand pressure.

Organic vapor cartridge - The type of cartridge used on air purifying respirators to remove organic vapor hazardous air contaminants.

Outside air - The air outside buildings and structures, including, but not limited to, the air under a bridge or in an open ferry dock.

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

09-15

Owner/operator - Any person who owns, leases, operates, controls, or supervises the facility being demolished or renovated or any person who owns, leases, operates, controls, or supervises the demolition or renovation operation, or both.

Penetrating encapsulant - Encapsulant that is absorbed into the ACM matrix without leaving a surface layer.

Personal protective equipment (PPE) - equipment designed to protect user from injury and/or specific job hazard. Such equipment may include protective clothing, hard hats, safety glasses, and respirators.

Personal sampling/monitoring - Representative air samples obtained in the breathing zone for one or workers within the regulated area using a filter cassette and a calibrated air sampling pump to determine asbestos exposure.

Permissible exposure limit (PEL) - The level of exposure OSHA allows for an 8 hour time weighted average. For asbestos fibers, the eight (8) hour time weighted average PEL is 0.1 fibers per cubic centimeter (0.1 f/cc) of air and the 30-minute Excursion Limit is 1.0 fibers per cubic centimeter (1 f/cc).

Pipe Tunnel - An area, typically located adjacent to mechanical spaces or boiler rooms in which the pipes servicing the heating system in the building are routed to allow the pipes to access heating elements. These areas may contain asbestos pipe insulation, asbestos fittings, or asbestos-contaminated soil.

Polarized light microscopy (PLM) - Light microscopy using dispersion staining techniques and refractive indices to identify and quantify the type(s) of asbestos present in a bulk sample.

Polyethylene sheeting - Strong plastic barrier material 4 to 6 mils thick, semi-transparent, flame retardant per NFPA 241.

Positive/negative fit check - A method of verifying the seal of a facepiece respirator by temporarily occluding the filters and breathing in (inhaling) and then temporarily occluding the exhalation valve and breathing out (exhaling) while checking for inward or outward leakage of the respirator respectively.

Presumed ACM (PACM) - Thermal system insulation, surfacing, and flooring material installed in buildings prior to 1981. If the building owner has actual knowledge, or should have known through the exercise of due diligence that other materials are ACM, they too must be treated as PACM. The designation of PACM may be rebutted pursuant to 29 CFR 1926.1101 (b).

Professional IH - An IH who meets the definition requirements of AIHA; meets the definition requirements of OSHA as a "Competent Person" at 29 CFR 1926.1101 (b); has completed two specialized EPA approved courses on management and supervision of asbestos abatement projects; has formal training in respiratory protection and waste disposal; and has a minimum of four projects of similar complexity with this project of which at least three projects serving as the supervisory IH. The PIH may be either the VA's PIH (VPIH) or Contractor's PIH (CPIH/CIH).

Project designer - A person who has successfully completed the training requirements for an asbestos abatement project designer as required by 40 CFR 763 Appendix C, Part I; (B) (5).

Assigned Protection factor - A value assigned by OSHA/NIOSH to indicate the expected protection provided by each respirator class, when the

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

09-15

respirator is properly selected and worn correctly. The number indicates the reduction of exposure level from outside to inside the respirator facepiece.

Qualitative fit test (QLFT) - A fit test using a challenge material that can be sensed by the wearer if leakage in the respirator occurs.

Quantitative fit test (QNFT) - A fit test using a challenge material which is quantified outside and inside the respirator thus allowing the determination of the actual fit factor.

Regulated area - An area established by the employer to demarcate where Class I, II, and III asbestos work is conducted, and any adjoining area where debris and waste from such asbestos work may accumulate; and a work area within which airborne concentrations of asbestos exceed, or there is a reasonable possibility they may exceed the PEL.

Regulated ACM (RACM) - Friable ACM; Category I non-friable ACM that has become friable; Category I non-friable ACM that will be or has been subjected to sanding, grinding, cutting, or abrading or; Category II non-friable ACM that has a high probability of becoming or has become crumbled, pulverized, or reduced to powder by the forces expected to act on the material in the course of the demolition or renovation operation.

Removal - All operations where ACM, PACM and/or RACM is taken out or stripped from structures or substrates, including demolition operations.

Renovation - Altering a facility or one or more facility components in any way, including the stripping or removal of asbestos from a facility component which does not involve demolition activity.

Repair - Overhauling, rebuilding, reconstructing, or reconditioning of structures or substrates, including encapsulation or other repair of ACM or PACM attached to structures or substrates.

Shower room - The portion of the PDF where personnel shower before leaving the regulated area.

Supplied air respirator (SAR) - A respiratory protection system that supplies minimum Grade D respirable air per ANSI/Compressed Gas Association Commodity Specification for Air, G-7.1-1989.

Surfacing ACM - A material containing more than 1 percent asbestos that is sprayed, troweled on or otherwise applied to surfaces for acoustical, fireproofing and other purposes.

Surfactant - A chemical added to water to decrease water's surface tension thus making it more penetrating into ACM.

Thermal system ACM - A material containing more than 1 percent asbestos applied to pipes, fittings, boilers, breeching, tanks, ducts, or other structural components to prevent heat loss or gain.

Transmission electron microscopy (TEM) - A microscopy method that can identify and count asbestos fibers.

VA Professional Industrial Hygienist (VPIH/CIH) - The Department of Veterans Affairs Professional Industrial Hygienist must meet the qualifications of a PIH, and may be a Certified Industrial Hygienist (CIH).

VA Representative - The VA official responsible for on-going project work.

Visible emissions - Any emissions, which are visually detectable without the aid of instruments, coming from ACM/PACM/RACM/ACS or ACM waste material.

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

09-15

Waste/Equipment decontamination facility (W/EDF) - The area in which equipment is decontaminated before removal from the regulated area.

Waste generator - Any owner or operator whose act or process produces asbestos-containing waste material.

Waste shipment record - The shipping document, required to be originated and signed by the waste generator, used to track and substantiate the disposition of asbestos-containing waste material.

Wet cleaning - The process of thoroughly eliminating, by wet methods, any asbestos contamination from surfaces or objects.

1.4.3 REFERENCED STANDARDS ORGANIZATIONS

The following acronyms or abbreviations as referenced in contract/specification documents are defined to mean the associated names. Names and addresses may be subject to change.

- A. VA Department of Veterans Affairs
810 Vermont Avenue, NW
Washington, DC 20420
- B. AIHA American Industrial Hygiene Association
2700 Prosperity Avenue, Suite 250
Fairfax, VA 22031
703-849-8888
- C. ANSI American National Standards Institute
1430 Broadway
New York, NY 10018
212-354-3300
- D. ASTM American Society for Testing and Materials
1916 Race St.
Philadelphia, PA 19103
215-299-5400
- E. CFR Code of Federal Regulations
Government Printing Office
Washington, DC 20420
- F. CGA Compressed Gas Association
1235 Jefferson Davis Highway
Arlington, VA 22202
703-979-0900
- G. CS Commercial Standard of the National Institute of Standards and Technology (NIST)
U. S. Department of Commerce
Government Printing Office
Washington, DC 20420

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

09-15

- H. EPA Environmental Protection Agency
401 M St., SW
Washington, DC 20460
202-382-3949
- I. MIL-STD Military Standards/Standardization Division
Office of the Assistant Secretary of Defense
Washington, DC 20420
- I. NEC National Electrical Code (by NFPA)
- J. NEMA National Electrical Manufacturer's Association
2101 L Street, NW
Washington, DC 20037
- K. NFPA National Fire Protection Association
1 Batterymarch Park
P.O. Box 9101
Quincy, MA 02269-9101
800-344-3555
- L. NIOSH National Institutes for Occupational Safety and Health
4676 Columbia Parkway
Cincinnati, OH 45226
513-533-8236
- M. OSHA Occupational Safety and Health Administration
U.S. Department of Labor
Government Printing Office
Washington, DC 20402
- N. UL Underwriters Laboratory
333 Pfingsten Rd.
Northbrook, IL 60062
312-272-8800

1.5 APPLICABLE CODES AND REGULATIONS

1.5.1 GENERAL APPLICABILITY OF CODES, REGULATIONS, AND STANDARDS

- A. All work under this contract shall be done in strict accordance with all applicable Federal, State, and local regulations, standards and codes governing asbestos abatement, and any other trade work done in conjunction with the abatement. All applicable codes, regulations and standards are adopted into this specification and will have the same force and effect as this specification.
- B. The most recent edition of any relevant regulation, standard, document or code shall be in effect. Where conflict among the requirements or with these specifications exists, the most stringent requirement(s) shall be utilized.
- C. Copies of all standards, regulations, codes and other applicable documents, including this specification and those listed in Section 1.5

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

09-15

shall be available at the worksite in the clean change area of the worker decontamination system.

1.5.2 CONTRACTOR RESPONSIBILITY

The Asbestos Abatement Contractor (Contractor) shall assume full responsibility and liability for compliance with all applicable Federal, State and Local regulations related to any and all aspects of the asbestos abatement project. The Contractor is responsible for providing and maintaining training, accreditations, medical exams, medical records, personal protective equipment (PPE) including respiratory protection including respirator fit testing, as required by applicable Federal, State and Local regulations. The Contractor shall hold the VA and VPIH/CIH consultants harmless for any Contractor's failure to comply with any applicable work, packaging, transporting, disposal, safety, health, or environmental requirement on the part of himself, his employees, or his subcontractors. The Contractor will incur all costs of the CPIH/CIH, including all sampling/analytical costs to assure compliance with OSHA/EPA/State requirements related to failure to comply with the regulations applicable to the work.

1.5.3 FEDERAL REQUIREMENTS

Federal requirements which govern some aspect of asbestos abatement include, but are not limited to, the following regulations.

- A. Occupational Safety and Health Administration (**OSHA**)
 - 1. Title 29 CFR 1926.1101 - Construction Standard for Asbestos
 - 2. Title 29 CFR 1910.132 - Personal Protective Equipment
 - 3. Title 29 CFR 1910.134 - Respiratory Protection
 - 4. Title 29 CFR 1926 - Construction Industry Standards
 - 5. Title 29 CFR 1910.20 - Access to Employee Exposure and Medical Records
 - 6. Title 29 CFR 1910.1200 - Hazard Communication
 - 7. Title 29 CFR 1910.151 - Medical and First Aid
- B. Environmental Protection Agency (EPA)
 - 1. 40 CFR 61 Subpart A and M (Revised Subpart B) - National Emission Standard for Hazardous Air Pollutants - Asbestos.
 - 2. 40 CFR 763.80 - Asbestos Hazard Emergency Response Act (AHERA)
- C. Department of Transportation (DOT)
 - Title 49 CFR 100 - 185 - Transportation

1.5.4 STATE REQUIREMENTS

State requirements that apply to the asbestos abatement work, disposal, clearance, etc., include, but are not limited to, the following:

Minnesota Pollution Control Agency (MPCA):

- 1. The MPCA has been delegated the authority by the EPA to enforce NESHAP regulations. They may also review projects for compliance with MDH Asbestos Abatement Rules.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

02 82 13.19 - 12

10-28-2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

09-15

2. Guidance Regarding Proper Containment, Shipping and Final Disposal of Asbestos Residual Materials at MPCA-Permitted Landfills (*Minnesota Rules 7035.1700*).

Minnesota Department of Labor and Industry:

1. Maintenance and Repair of Buildings and Equipment-Asbestos (*Minnesota Rules 5205.0660*).
2. Demolition, Restoration, Remodeling Survey (*Minnesota Rules 5207.0035*).

Minnesota Department of Health:

1. Asbestos Abatement Rules (*Minnesota Rules 4620.3000 to 4620.3724 and Minnesota Statute Sections 326.70 to 326.81*).

1.5.5 LOCAL REQUIREMENTS (NOT USED)

1.5.6 STANDARDS

- A. Standards which govern asbestos abatement activities include, but are not limited to, the following:
 1. American National Standards Institute (ANSI) Z9.2-79 - Fundamentals Governing the Design and Operation of Local Exhaust Systems Z88.2 - Practices for Respiratory Protection.
 2. Underwriters Laboratories (UL) 586-90 - UL Standard for Safety of HEPA filter Units, 7th Edition.
- B. Standards which govern encapsulation work include, but are not limited to, the following:
 1. American Society for Testing and Materials (ASTM)
- C. Standards which govern the fire and safety concerns in abatement work include, but are not limited to, the following:
 1. National Fire Protection Association (NFPA) 241 - Standard for Safeguarding Construction, Alteration, and Demolition Operations.
 2. NFPA 701 - Standard Methods for Fire Tests for Flame Resistant Textiles and Film.
 3. NFPA 101 - Life Safety Code

1.5.7 EPA GUIDANCE DOCUMENTS

- A. EPA guidance documents which discuss asbestos abatement work activities are listed below. These documents are made part of this section by reference. EPA publications can be ordered from (800) 424-9065.
- B. Guidance for Controlling ACM in Buildings (Purple Book) EPA 560/5-85-024
- C. Asbestos Waste Management Guidance EPA 530-SW-85-007
- D. A Guide to Respiratory Protection for the Asbestos Abatement Industry EPA-560-OPTS-86-001
- E. Guide to Managing Asbestos in Place (Green Book) TS 799 20T July 1990

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

09-15

1.5.8 NOTICES

- A. State and Local agencies: Send written notification as required by state and local regulations including the local fire department prior to beginning any work on ACM as follows:
- B. Copies of notifications shall be submitted to the VA for the facility's records in the same time frame notification are given to EPA, State, and Local authorities.
- C. At least ten (10) working days prior to commencement of work, submit "Notification of Asbestos Related Work" to:

Minnesota Pollution Control Agency
Industrial Division-Asbestos Program
520 Lafayette Road
St. Paul, MN 55155-4194

1.5.9 PERMITS

- A. The contractor shall apply for and have all required permits and licenses to perform asbestos abatement work as required by Federal, State, and Local regulations.

At least five (5) calendar days prior to commencement of work, submit "Notification of Intent to Perform an Asbestos Abatement Project" with a copy of a signed contract or other written evidence of the total cost of the abatement project and a check in the amount of one percent of the total cost of the abatement project, made payable to "Minnesota Department of Health", to:

Minnesota Department of Health
Division of Environmental Health
Asbestos/Lead Compliance Unit
P.O. Box 64497
St. Paul, MN 55164-0497
651-201-4610/4620

The Contractor shall list the CPIH as the AIR MONITORING CONTRACTOR on the above referenced notification.

1.5.10 POSTING AND FILING OF REGULATIONS

- A. Maintain two (2) copies of applicable federal, state, and local regulations. Post one copy of each at the regulated area where workers will have daily access to the regulations and keep another copy in the Contractor's office.

1.5.11 VA RESPONSIBILITIES

Prior to commencement of work:

- A. Notify occupants adjacent to regulated areas of project dates and requirements for relocation, if needed. Arrangements must be made prior

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

09-15

to starting work for relocation of desks, files, equipments and personal possessions to avoid unauthorized access into the regulated area. **Note: Notification of adjacent personnel is required by OSHA in 29 CFR 1926.1101 (k) to prevent unnecessary or unauthorized access to the regulated area.**

1.5.12 SITE SECURITY

- A. Regulated area access is to be restricted only to authorized, trained/accredited and protected personnel. These may include the Contractor's employees, employees of Subcontractors, VA employees and representatives, State and local inspectors, and any other designated individuals. A list of authorized personnel shall be established prior to commencing the project and be posted in the clean room of the decontamination unit.
- B. Entry into the regulated area by unauthorized individuals shall be reported immediately to the Competent Person by anyone observing the entry. The Competent person shall immediately require any unauthorized person to leave the regulated area and then notify the VA Contracting Officer or VA Representative using the most expeditious means.
- C. A log book shall be maintained in the clean room of the decontamination unit. Anyone who enters the regulated area must record their name, affiliation, time in, and time out for each entry.
- D. Access to the regulated area shall be through a single decontamination unit or a critical barrier doorway. All other access (doors, windows, hallways, etc.) shall be sealed or locked to prevent entry to or exit from the regulated area. The only exceptions for this requirement are the waste/equipment load-out area which shall be sealed except during the removal of containerized asbestos waste from the regulated area, and emergency exits. Emergency exits shall not be locked from the inside; however, they shall be sealed with poly sheeting and taped until needed.
- E. The Contractor's Competent Person shall control site security during abatement operations in order to isolate work in progress and protect adjacent personnel. A 24 hour security system shall be provided at the entrance to the regulated area to assure that all entrants are logged in/out and that only authorized personnel are allowed entrance.
- F. The Contractor will have the VA's assistance in notifying adjacent personnel of the presence, location and quantity of ACM in the regulated area and enforcement of restricted access by the VA's employees.
- G. The regulated area shall be locked during non-working hours and secured by VA security guards.

1.5.13 EMERGENCY ACTION PLAN AND ARRANGEMENTS

- A. An Emergency Action Plan shall be developed prior to commencing abatement activities and shall be agreed to by the Contractor and the VA. The Plan shall meet the requirements of 29 CFR 1910.38 (a);(b).
- B. Emergency procedures shall be in written form and prominently posted in the clean room and equipment room of the decontamination unit. Everyone, prior to entering the regulated area, must read and sign these procedures to acknowledge understanding of the regulated area layout, location of emergency exits and emergency procedures.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

09-15

- C. Emergency planning shall include written notification of police, fire, and emergency medical personnel of planned abatement activities; work schedule; layout of regulated area; and access to the regulated area, particularly barriers that may affect response capabilities.
- D. Emergency planning shall include consideration of fire, explosion, hazardous atmospheres, electrical hazards, slips/trips and falls, confined spaces, and heat stress illness. Written procedures for response to emergency situations shall be developed and employee training in procedures shall be provided.
- E. Employees shall be trained in regulated area/site evacuation procedures in the event of workplace emergencies.
 - 1. For non life-threatening situations - employees injured or otherwise incapacitated shall decontaminate following normal procedures with assistance from fellow workers, if necessary, before exiting the regulated area to obtain proper medical treatment.
 - 2. For life-threatening injury or illness, worker decontamination shall take least priority after measures to stabilize the injured worker, remove them from the regulated area, and secure proper medical treatment.
- F. Telephone numbers of any/all emergency response personnel shall be prominently posted in the clean room, along with the location of the nearest telephone.
- G. The Contractor shall provide verification of first aid/CPR training for personnel responsible for providing first aid/CPR. OSHA requires medical assistance within 3-4 minutes of a life-threatening injury/illness. Bloodborne Pathogen training shall also be verified for those personnel required to provide first aid/CPR.
- H. The Emergency Action Plan shall provide for a Contingency Plan in the event that an incident occurs that may require the modification of the Asbestos Hazard Abatement Plans during abatement. Such incidents include, but are not limited to, fire; accident; power failure; negative pressure failure; and supplied air system failure. The Contractor shall detail procedures to be followed in the event of an incident assuring that asbestos abatement work is stopped and wetting is continued until correction of the problem.

1.5.14 PRE-CONSTRUCTION MEETING

Prior to commencing the work, the Contractor shall meet with the VA Certified Industrial Hygienist (VPCIH) to present and review, as appropriate, the items following this paragraph. The Contractor's Competent Person(s) who will be on-site shall participate in the pre-start meeting. The pre-start meeting is to discuss and determine procedures to be used during the project. At this meeting, the Contractor shall provide:

- A. Proof of Contractor licensing.
- B. Proof the Competent Person(s) is trained and accredited and approved for working in this State. Verification of the experience of the Competent Person(s) shall also be presented.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

09-15

- C. A list of all workers who will participate in the project, including experience and verification of training and accreditation.
- D. A list of and verification of training for all personnel who have current first-aid/CPR training. A minimum of one person per shift must have adequate training.
- E. Current medical written opinions for all personnel working on-site meeting the requirements of 29 CFR 1926.1101 (m).
- F. Current fit-tests for all personnel wearing respirators on-site meeting the requirements of 29 CFR 1926.1101 (h) and Appendix C.
- G. A copy of the Asbestos Hazard Abatement Plan. In these procedures, the following information must be detailed, specific for this project.
 - 1. Regulated area preparation procedures;
 - 2. Notification requirements procedure of Contractor as required in 29 CFR 1926.1101 (d);
 - 3. Decontamination area set-up/layout and decontamination procedures for employees;
 - 4. Abatement methods/procedures and equipment to be used;
 - 5. Personal protective equipment to be used;
- H. At this meeting the Contractor shall provide all submittals as required.
- I. Procedures for handling, packaging and disposal of asbestos waste.
- J. Emergency Action Plan and Contingency Plan Procedures.

1.6 PROJECT COORDINATION

The following are the minimum administrative and supervisory personnel necessary for coordination of the work.

1.6.1 PERSONNEL

- A. Administrative and supervisory personnel shall consist of a qualified Competent Person(s) as defined by OSHA in the Construction Standards and the Asbestos Construction Standard; Contractor Professional Industrial Hygienist and Industrial Hygiene Technicians. These employees are the Contractor's representatives responsible for compliance with these specifications and all other applicable requirements.
- B. Non-supervisory personnel shall consist of an adequate number of qualified personnel to meet the schedule requirements of the project. Personnel shall meet required qualifications. Personnel utilized on-site shall be pre-approved by the VA representative. A request for approval shall be submitted for any person to be employed during the project giving the person's name; social security number; qualifications; accreditation card with color picture; Certificate of Worker's Acknowledgment; and Affidavit of Medical Surveillance and Respiratory Protection and current Respirator Fit Test.
- C. Minimum qualifications for Contractor and assigned personnel are:
 - 1. The Contractor has conducted within the last three (3) years, three (3) projects of similar complexity and dollar value as this project; has not been cited and penalized for serious violations of federal (and state as applicable) EPA and OSHA asbestos regulations in the past three (3) years; has adequate liability/occurrence insurance for asbestos work as required by the state; is licensed in applicable states; has adequate and qualified personnel available to complete the

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

09-15

- work; has comprehensive Asbestos Hazard Abatement Plans for asbestos work; and has adequate materials, equipment and supplies to perform the work.
2. The Competent Person has four (4) years of abatement experience of which two (2) years were as the Competent Person on the project; meets the OSHA definition of a Competent Person; has been the Competent Person on two (2) projects of similar size and complexity as this project within the past three (3) years; has completed EPA AHERA/OSHA/State/Local training requirements/accreditation(s) and refreshers; and has all required OSHA documentation related to medical and respiratory protection.
 3. The Contractor Professional Industrial Hygienist/CIH (CPIH/CIH) shall have five (5) years of monitoring experience and supervision of asbestos abatement projects; has participated as senior IH on five (5) abatement projects, three (3) of which are similar in size and complexity as this project; has developed at least one complete Asbestos Hazard Abatement Plan for asbestos abatement; has trained abatement personnel for three (3) years; has specialized EPA AHERA/OSHA training in asbestos abatement management, respiratory protection, waste disposal and asbestos inspection; has completed the NIOSH 582 Course or equivalent, Contractor/Supervisor course; and has appropriate medical/respiratory protection records/documentation.
 4. The Abatement Personnel shall have completed the EPA AHERA/OSHA abatement worker course; have training on the Asbestos Hazard Abatement Plans of the Contractor; has one year of asbestos abatement experience within the past three (3) years of similar size and complexity; has applicable medical and respiratory protection documentation; and has certificate of training/current refresher and State accreditation/license.

All personnel should be in compliance with OSHA construction safety training as applicable and submit certification.

1.7 RESPIRATORY PROTECTION

1.7.1 GENERAL - RESPIRATORY PROTECTION PROGRAM

The Contractor shall develop and implement a written Respiratory Protection Program (RPP) which is in compliance with the January 8, 1998 OSHA requirements found at 29 CFR 1926.1101 and 29 CFR 1910.Subpart I;134. ANSI Standard Z88.2-1992 provides excellent guidance for developing a respiratory protection program. All respirators used must be NIOSH approved for asbestos abatement activities. The written RPP shall, at a minimum, contain the basic requirements found at 29 CFR 1910.134 (c) (1) (i - ix) - Respiratory Protection Program.

1.7.2 RESPIRATORY PROTECTION PROGRAM COORDINATOR

The Respiratory Protection Program Coordinator (RPPC) must be identified and shall have two (2) years experience coordinating RPP of similar size and complexity. The RPPC must submit a signed statement attesting to the fact that the program meets the above requirements.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

09-15

1.7.3 SELECTION AND USE OF RESPIRATORS

The procedure for the selection and use of respirators must be submitted to the VA as part of the Contractor's qualifications. The procedure must be written clearly enough for workers to understand. A copy of the Respiratory Protection Program must be available in the clean room of the decontamination unit for reference by employees or authorized visitors.

1.7.4 MINIMUM RESPIRATORY PROTECTION

Minimum respiratory protection shall be a half face, HEPA filtered, air purifying respirator when fiber levels are maintained consistently at or below 0.1 f/cc. A higher level of respiratory protection may be provided or required, depending on fiber levels. Respirator selection shall meet the requirements of 29 CFR 1926.1101 (h); Table 1, except as indicated in this paragraph. Abatement personnel must have a respirator for their exclusive use.

1.7.5 MEDICAL WRITTEN OPINION

No employee shall be allowed to wear a respirator unless a physician or other licensed health care professional has provided a written determination they are medically qualified to wear the class of respirator to be used on the project while wearing whole body impermeable garments and subjected to heat or cold stress.

1.7.6 RESPIRATOR FIT TEST

All personnel wearing respirators shall have a current qualitative/quantitative fit test which was conducted in accordance with 29 CFR 1910.134 (f) and Appendix A. Quantitative fit tests shall be done for PAPRs which have been put into a motor/blower failure mode.

1.7.7 RESPIRATOR FIT CHECK

The Competent Person shall assure that the positive/negative pressure user seal check is done each time the respirator is donned by an employee. Head coverings must cover respirator head straps. Any situation that prevents an effective facepiece to face seal as evidenced by failure of a user seal check shall preclude that person from wearing a respirator inside the regulated area until resolution of the problem.

1.7.8 MAINTENANCE AND CARE OF RESPIRATORS

The Respiratory Protection Program Coordinator shall submit evidence and documentation showing compliance with 29 CFR 1910.134 (h) Maintenance and Care of Respirators.

1.7.9 SUPPLIED AIR SYSTEMS

If a supplied air system is used, the system shall meet all requirements of 29 CFR 1910.134 and the ANSI/Compressed Gas Association (CGA) Commodity Specification for Air current requirements for Type 1 - Grade D breathing air. Low pressure systems are not allowed to be used on asbestos abatement projects. Supplied Air respirator use shall be in

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

09-15

accordance with EPA/NIOSH publication EPA-560-OPTS-86-001 "A Guide to Respiratory Protection for the Asbestos Abatement Industry". The competent person on site will be responsible for the supplied air system to ensure the safety of the worker.

1.8 WORKER PROTECTION

1.8.1 TRAINING OF ABATEMENT PERSONNEL

Prior to beginning any abatement activity, all personnel shall be trained in accordance with OSHA 29 CFR 1926.1101 (k)(9) and any additional State/Local requirements. Training must include, at a minimum, the elements listed at 29 CFR 1926.1101 (k)(9)(viii). Training shall have been conducted by a third party, EPA/State approved trainer meeting the requirements of EPA 40 CFR 763 Appendix C (AHERA MAP). Initial training certificates and current refresher and accreditation proof must be submitted for each person working at the site.

1.8.2 MEDICAL EXAMINATIONS

Medical examinations meeting the requirements of 29 CFR 1926.1101 (m) shall be provided for all personnel working in the regulated area, regardless of exposure levels. A current physician's written opinion as required by 29 CFR 1926.1101 (m)(4) shall be provided for each person and shall include in the medical opinion the person has been evaluated for working in a heat and cold stress environment while wearing personal protective equipment (PPE) and is able to perform the work without risk of material health impairment.

1.8.3 PERSONAL PROTECTIVE EQUIPMENT

Provide whole body clothing, head coverings, foot coverings and any other personal protective equipment as determined by conducting the hazard assessment required by OSHA at 29 CFR 1910.132 (d). The Competent Person shall ensure the integrity of personal protective equipment worn for the duration of the project. Duct tape shall be used to secure all suit sleeves to wrists and to secure foot coverings at the ankle. Worker protection shall meet the most stringent requirements.

1.8.4 REGULATED AREA ENTRY PROCEDURE

The Competent Person shall ensure that each time workers enter the regulated area they remove ALL street clothes in the clean room of the decontamination unit and put on new disposable coveralls, head coverings, a clean respirator, and then proceed through the shower room to the equipment room where they put on non-disposable required personal protective equipment.

1.8.5 DECONTAMINATION PROCEDURE

The Competent Person shall require all personnel to adhere to following decontamination procedures whenever they leave the regulated area.

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

09-15

- A. When exiting the regulated area, remove disposable coveralls, and ALL other clothes, disposable head coverings, and foot coverings or boots in the equipment room.
- B. Still wearing the respirator and completely naked, proceed to the shower. Showering is MANDATORY. Care must be taken to follow reasonable procedures in removing the respirator to avoid inhaling asbestos fibers while showering. The following procedure is required as a minimum:
 - 1. Thoroughly wet body including hair and face. If using a PAPR hold blower above head to keep filters dry.
 - 2. With respirator still in place, thoroughly decontaminate body, hair, respirator face piece, and all other parts of the respirator except the blower and battery pack on a PAPR. Pay particular attention to cleaning the seal between the face and respirator facepiece and under the respirator straps.
 - 3. Take a deep breath, hold it and/or exhale slowly, completely wetting hair, face, and respirator. While still holding breath, remove the respirator and hold it away from the face before starting to breathe.
- C. Carefully decontaminate the facepiece of the respirator inside and out. If using a PAPR, shut down using the following sequence: a) first cap inlets to filters; b) turn blower off to keep debris collected on the inlet side of the filter from dislodging and contaminating the outside of the unit; c) thoroughly decontaminate blower and hoses; d) carefully decontaminate battery pack with a wet rag being cautious of getting water in the battery pack thus preventing destruction. **(THIS PROCEDURE IS NOT A SUBSTITUTE FOR RESPIRATOR CLEANING!)**
- D. Shower and wash body completely with soap and water. Rinse thoroughly.
- E. Rinse shower room walls and floor to drain prior to exiting.
- F. Proceed from shower to clean room; dry off and change into street clothes or into new disposable work clothing.

1.8.6 REGULATED AREA REQUIREMENTS

The Competent Person shall meet all requirements of 29 CFR 1926.1101 (o) and assure that all requirements for Class I regulated areas at 29 CFR 1926.1101 (e) are met applicable to Class II work. All personnel in the regulated area shall not be allowed to eat, drink, smoke, chew tobacco or gum, apply cosmetics, or in any way interfere with the fit of their respirator.

1.9 DECONTAMINATION FACILITIES

1.9.1 DESCRIPTION

Provide each regulated area with separate personnel decontamination facilities (PDF) and waste/equipment decontamination facilities (W/EDF). Ensure that the PDF are the only means of ingress and egress to the regulated area and that all equipment, bagged waste, and other material exit the regulated area only through the W/EDF.

1.9.2 GENERAL REQUIREMENTS

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

09-15

All personnel entering or exiting a regulated area must go through the PDF and shall follow the requirements at 29 CFR 1926.1101 (j) (1) and these specifications. All waste, equipment and contaminated materials must exit the regulated area through the W/EDF and be decontaminated in accordance with these specifications. Walls and ceilings of the PDF and W/EDF must be constructed of a minimum of 3 layers of 6 mil opaque fire retardant polyethylene sheeting and be securely attached to existing building components and/or an adequate temporary framework. A minimum of 3 layers of 6 mil poly shall also be used to cover the floor under the PDF and W/EDF units. Construct doors so that they overlap and secure to adjacent surfaces. Weight inner doorway sheets with layers of duct tape so that they close quickly after release. Put arrows on sheets so they show direction of travel and overlap. If the building adjacent area is occupied, construct a solid barrier on the occupied side(s) to protect the sheeting and reduce potential for non-authorized personnel entering the regulated area.

1.9.3 TEMPORARY FACILITIES TO THE PDF AND W/EDF

The Competent Person shall provide temporary water service connections to the PDF and W/EDF. Backflow prevention must be provided at the point of connection to the VA system. Water supply must be of adequate pressure and meet requirements of 29 CFR 1910.141 (d)(3). Provide adequate temporary overhead electric power with ground fault circuit interruption (GFCI) protection. Provide a sub-panel equipped with GFCI protection for all temporary power in the clean room. Provide adequate lighting to provide a minimum of 50 foot candles in the PDF and W/EDF. Provide temporary heat, if needed, to maintain 70°F throughout the PDF and W/EDF.

1.9.4 PERSONNEL DECONTAMINATION FACILITY (PDF)

1. Clean Room: The clean room must be physically and visually separated from the rest of the building to protect the privacy of personnel changing clothes. The clean room shall be constructed of at least 3 layers of 6 mil opaque fire retardant poly to provide an air tight room. Provide a minimum of 2 - 900 mm (3 foot) wide 6 mil poly opaque fire retardant doorways. One doorway shall be the entry from outside the PDF and the second doorway shall be to the airlock prior to the shower room of the PDF. The floor of the clean room shall be maintained in a clean, dry condition. Shower overflow shall not be allowed into the clean room. Provide 1 storage locker per person. A portable fire extinguisher, minimum 10 pounds capacity, Type ABC, shall be provided in accordance with OSHA and NFPA Standard 10. All persons entering the regulated area shall remove all street clothing in the clean room and dress in disposable protective clothing and respiratory protection. Any person entering the clean room does so either from the outside with street clothing on or is coming from the shower room completely naked and thoroughly washed. Females required to enter the regulated area shall be ensured of their privacy throughout the entry/exit process by posting guards at both entry points to the PDF so no male can enter or exit the PDF during her stay in the PDF.

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

09-15

2. Shower Room: The Competent Person shall assure that the shower room is a completely water tight compartment to be used for the movement of all personnel from the clean room to the equipment room and for the showering of all personnel going from the equipment room to the clean room. Each shower shall be constructed so water runs down the walls of the shower and into a drip pan. Install a freely draining smooth floor on top of the shower pan. The shower room shall be separated from the rest of the building and from the clean room and equipment room using air tight walls made from at least 3 layers of 6 mil opaque fire retardant poly. The shower shall be equipped with a shower head and controls, hot and cold water, drainage, soap dish and continuous supply of soap, and shall be maintained in a sanitary condition throughout its use. The controls shall be arranged so an individual can shower without assistance. Provide a flexible hose shower head, hose bibs and all other items shown on Shower Schematic. Waste water will be pumped to a drain after being filtered through a minimum of a 100 micron sock in the shower drain; a 20 micron filter; and a final 5 micron filter. Filters will be changed a minimum of daily or more often as needed. Filter changes must be done in the shower to prevent loss of contaminated water. Hose down all shower surfaces after each shift and clean any debris from the shower pan. Residue is to be disposed of as asbestos waste.
3. Equipment Room: The Competent Person shall provide an equipment room which shall be an air tight compartment for the storage of work equipment/tools, reusable personal protective equipment, except for a respirator and for use as a gross decontamination area for personnel exiting the regulated area. The equipment room shall be separated from the regulated area by a minimum 3 foot wide door made with 2 layers of 6 mil opaque fire retardant poly. The equipment room shall be separated from the regulated area, the shower room airlock and the rest of the building by air tight walls and ceiling constructed of a minimum of 3 layers of 6 mil opaque fire retardant poly. Damp wipe all surfaces of the equipment room after each shift change. Provide an additional loose layer of 6 mil fire retardant poly per shift change and remove this layer after each shift. If needed, provide a temporary electrical sub-panel equipped with GFCI in the equipment room to accommodate any equipment required in the regulated area.
4. The PDF shall be as follows: Clean room at the entrance followed by an airlock followed by a shower room followed by an airlock followed by an equipment room leading to the regulated area. Each doorway in the PDF shall be a minimum of 2 layers of 6 mil opaque fire retardant poly.


CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

09-15

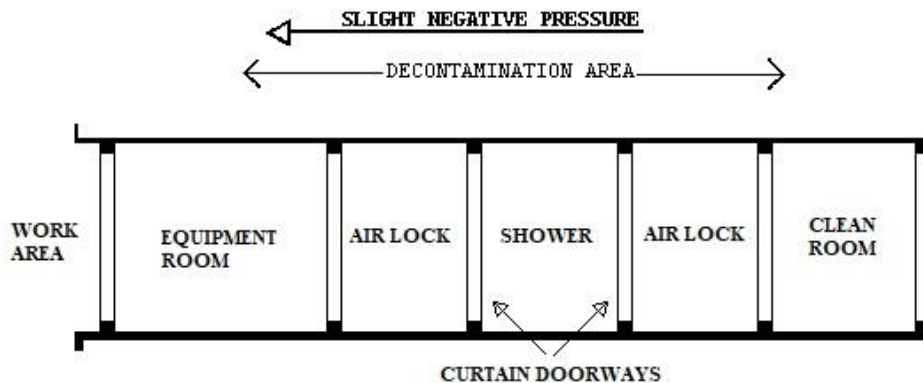

1.9.5 WASTE/EQUIPMENT DECONTAMINATION FACILITY (W/EDF)

The Competent Person shall provide an W/EDF consisting of a wash room, holding room, and clean room for removal of waste, equipment and contaminated material from the regulated area. Personnel shall not enter or exit the W/EDF except in the event of an emergency. Clean debris and residue in the W/EDF daily. All surfaces in the W/EDF shall be wiped/hosed down after each shift and all debris shall be cleaned from the shower pan. The W/EDF shall consist of the following:

1. Wash Down Station: Provide an enclosed shower unit in the regulated area just outside the Wash Room as an equipment bag and container cleaning station.
2. Wash Room: Provide a wash room for cleaning of bagged or containerized asbestos containing waste materials passed from the regulated area. Construct the wash room using 50 x 100 mm (2" x 4") wood framing and 3 layers of 6 mil fire retardant poly. Locate the wash room so that packaged materials, after being wiped clean, can be passed to the Holding Room. Doorways in the wash room shall be constructed of 2 layers of 6 mil fire retardant poly.
3. Holding Room: Provide a holding room as a drop location for bagged materials passed from the wash room. Construct the holding room using 50 x 100 mm (2" x 4") wood framing and 3 layers of 6 mil fire retardant poly. The holding room shall be located so that bagged material cannot be passed from the wash room to the clean room unless it goes through the holding room. Doorways in the holding room shall be constructed of 2 layers of 6 mil fire retardant poly.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

02 82 13.19 - 24

10-28-2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR


St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

09-15

4. Clean Room: Provide a clean room to isolate the holding room from the exterior of the regulated area. Construct the clean room using 2 x 4 wood framing and 2 layers of 6 mil fire retardant poly. The clean room shall be located so as to provide access to the holding room from the building exterior. Doorways to the clean room shall be constructed of 2 layers of 6 mil fire retardant poly. When a negative pressure differential system is used, a rigid enclosure separation between the W/EDF clean room and the adjacent areas shall be provided.
5. The W/EDF shall be as follows: Wash Room leading to a Holding Room followed by a Clean Room leading to outside the regulated area. See diagram.

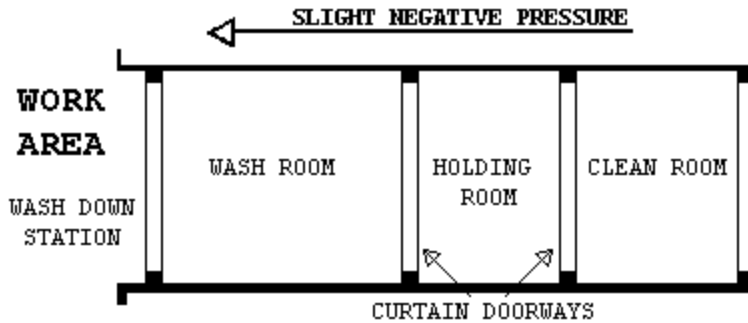

1.9.6 WASTE/EQUIPMENT DECONTAMINATION PROCEDURES

At the washdown station in the regulated area, thoroughly wet clean contaminated equipment and/or sealed polyethylene bags and pass into Wash Room after visual inspection. When passing anything into the Wash Room, close all doorways of the W/EDF, other than the doorway between the washdown station and the Wash Room. Keep all outside personnel clear of the W/EDF. Once inside the Wash Room, wet clean the equipment and/or bags. After cleaning and inspection, pass items into the Holding Room. Close all doorways except the doorway between the Holding Room and the Clean Room. Workers from the Clean Room/Exterior shall enter the Holding Room and remove the decontaminated/cleaned equipment/bags for removal and disposal. These personnel will not be required to wear PPE. At no time shall personnel from the clean side be allowed to enter the Wash Room.

PART 2 - PRODUCTS, MATERIALS AND EQUIPMENT

2.1 MATERIALS AND EQUIPMENT

2.1.1 GENERAL REQUIREMENTS (ALL ABATEMENT PROJECTS)

Prior to the start of work, the contractor shall provide and maintain a sufficient quantity of materials and equipment to assure continuous and efficient work throughout the duration of the project. Work shall not

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

09-15

start unless the following items have been delivered to the site and the CPIH/CIH has submitted verification to the VA's representative.

- A. All materials shall be delivered in their original package, container or bundle bearing the name of the manufacturer and the brand name (where applicable).
- B. Store all materials subject to damage off the ground, away from wet or damp surfaces and under cover sufficient enough to prevent damage or contamination. Flammable and combustible materials cannot be stored inside buildings. Replacement materials shall be stored outside of the regulated area until abatement is completed.
- C. The Contractor shall not block or hinder use of buildings by patients, staff, and visitors to the VA in partially occupied buildings by placing materials/equipment in any unauthorized location.
- D. The Competent Person shall inspect for damaged, deteriorating or previously used materials. Such materials shall not be used and shall be removed from the worksite and disposed of properly.
- E. Polyethylene sheeting for walls in the regulated area shall be a minimum of 4-mils. For floors and all other uses, sheeting of at least 6-mil shall be used in widths selected to minimize the frequency of joints. Fire retardant poly shall be used throughout.
- F. The method of attaching polyethylene sheeting shall be agreed upon in advance by the Contractor and the VA and selected to minimize damage to equipment and surfaces. Method of attachment may include any combination of moisture resistant duct tape furring strips, spray glue, staples, nails, screws, lumber and plywood for enclosures or other effective procedures capable of sealing polyethylene to dissimilar finished or unfinished surfaces under both wet and dry conditions.
- G. Polyethylene sheeting utilized for the PDF shall be opaque white or black in color, 6 mil fire retardant poly.
- H. Installation and plumbing hardware, showers, hoses, drain pans, sump pumps and waste water filtration system shall be provided by the Contractor.
- I. An adequate number of HEPA vacuums, scrapers, sprayers, nylon brushes, brooms, disposable mops, rags, sponges, staple guns, shovels, ladders and scaffolding of suitable height and length as well as meeting OSHA requirements, fall protection devices, water hose to reach all areas in the regulated area, airless spray equipment, and any other tools, materials or equipment required to conduct the abatement project. All electrically operated hand tools, equipment, electric cords shall be connected to GFCI protection.
- J. Special protection for objects in the regulated area shall be detailed (e.g., plywood over carpeting or hardwood floors to prevent damage from scaffolds, water and falling material).
- K. Disposal bags - 2 layers of 6 mil poly for asbestos waste shall be pre-printed with labels, markings and address as required by OSHA, EPA and DOT regulations.
- L. The VA shall be provided an advance copy of the MSDS as required for all hazardous chemicals under OSHA 29 CFR 1910.1200 - Hazard Communication in the pre-project submittal. Chlorinated compounds shall not be used with any spray adhesive, mastic remover or other product. Appropriate encapsulant(s) shall be provided.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

02 82 13.19 - 26

10-28-2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

09-15

- M. OSHA DANGER demarcation signs, as many and as required by OSHA 29 CFR 1926.1101(k) (7) shall be provided and placed by the Competent Person. All other posters and notices required by Federal and State regulations shall be posted in the Clean Room.
- N. Adequate and appropriate PPE for the project and number of personnel/shifts shall be provided. All personal protective equipment issued must be based on a written hazard assessment conducted under 29 CFR 1910.132(d).

2.1.2 NEGATIVE PRESSURE FILTRATION SYSTEM

The Contractor shall provide enough HEPA negative air machines to continuously maintain a pressure differential of -0.02" water column gauge (WCG). The Competent Person shall determine the number of units needed for the regulated area by dividing the cubic feet in the regulated area by 15 and then dividing that result by the cubic feet per minute (CFM) for each unit to determine the number of units needed to continuously maintain a pressure differential of -0.02" WCG. Provide a standby unit in the event of machine failure and/or emergency in an adjacent area.

2.1.3 DESIGN AND LAYOUT

- A. Before start of work submit the design and layout of the regulated area and the negative air machines. The submittal shall indicate the number of, location of and size of negative air machines. The point(s) of exhaust, air flow within the regulated area, anticipated negative pressure differential, and supporting calculations for sizing shall be provided. In addition, submit the following:
 - 1. Method of supplying power to the units and designation/location of the panels.
 - 2. Description of testing method(s) for correct air volume and pressure differential.
 - 3. If auxiliary power supply is to be provided for the negative air machines, provide a schematic diagram of the power supply and manufacturer's data on the generator and switch.

2.1.4 NEGATIVE AIR MACHINES (HEPA UNITS)

- A. Negative Air Machine Cabinet: The cabinet shall be constructed of steel or other durable material capable of withstanding potential damage from rough handling and transportation. The width of the cabinet shall be less than 30" in order to fit in standard doorways. The cabinet must be factory sealed to prevent asbestos fibers from being released during use, transport, or maintenance. Any access to and replacement of filters shall be from the inlet end. The unit must be on casters or wheels.
- B. Negative Air Machine Fan: The rating capacity of the fan must indicate the CFM under actual operating conditions. Manufacturer's typically use "free-air" (no resistance) conditions when rating fans. The fan must be a centrifugal type fan.
- C. Negative Air Machine Final Filter: The final filter shall be a HEPA filter. The filter media must be completely sealed on all edges within a

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

09-15

structurally rigid frame. The filter shall align with a continuous flexible gasket material in the negative air machine housing to form an air tight seal. Each HEPA filter shall be certified by the manufacturer to have an efficiency of not less than 99.97%. Testing shall have been done in accordance with Military Standard MIL-STD-282 and Army Instruction Manual 136-300-175A. Each filter must bear a UL586 label to indicate ability to perform under specified conditions. Each filter shall be marked with the name of the manufacturer, serial number, air flow rating, efficiency and resistance, and the direction of test air flow.

- D. Negative Air Machine Pre-filters: The pre-filters, which protect the final HEPA filter by removing larger particles, are required to prolong the operating life of the HEPA filter. Two stages of pre-filtration are required. A first stage pre-filter shall be a low efficiency type for particles 10 micron or larger. A second stage pre-filter shall have a medium efficiency effective for particles down to 5 micron or larger. Pre-filters shall be installed either on or in the intake opening of the NAM and the second stage filter must be held in place with a special housing or clamps.
- E. Negative Air Machine Instrumentation: Each unit must be equipped with a gauge to measure the pressure drop across the filters and to indicate when filters have become loaded and need to be changed. A table indicating the cfm for various pressure readings on the gauge shall be affixed near the gauge for reference or the reading shall indicate at what point the filters shall be changed, noting cfm delivery. The unit must have an elapsed time meter to show total hours of operation.
- F. Negative Air Machine Safety and Warning Devices: An electrical/ mechanical lockout must be provided to prevent the fan from being operated without a HEPA filter. Units must be equipped with an automatic shutdown device to stop the fan in the event of a rupture in the HEPA filter or blockage in the discharge of the fan. Warning lights are required to indicate normal operation; too high a pressure drop across filters; or too low of a pressure drop across filters.
- G. Negative Air Machine Electrical: All electrical components shall be approved by the National Electrical Manufacturer's Association (NEMA) and Underwriters Laboratories (UL). Each unit must be provided with overload protection and the motor, fan, fan housing, and cabinet must be grounded.
- H. It is essential that replacement HEPA filters be tested using an "in-line" testing method, to ensure the seal around the periphery was not damaged during replacement. Damage to the outer HEPA filter seal could allow contaminated air to bypass the HEPA filter and be discharged to an inappropriate location. Contractor will provide written documentation of test results for negative air machine units with HEPA filters changed by the contractor or documentation when changed and tested by the contractor filters.

2.1.5 PRESSURE DIFFERENTIAL

The fully operational negative air system within the regulated area shall continuously maintain a pressure differential of -0.02" water column gauge. Before any disturbance of any asbestos material, this shall be demonstrated to the VA by use of a pressure differential meter/manometer

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

09-15

as required by OSHA 29 CFR 1926.1101(e) (5) (i). The Competent Person shall be responsible for providing, maintaining, and documenting the negative pressure and air changes as required by OSHA and this specification.

2.1.6 MONITORING

The pressure differential shall be continuously monitored and recorded between the regulated area and the area outside the regulated area with a monitoring device that incorporates a strip chart recorder. The strip chart recorder shall become part of the project log and shall indicate at least -0.02" water column gauge for the duration of the project.

2.2 CONTAINMENT BARRIERS AND COVERINGS IN THE REGULATED AREA

2.2.1 GENERAL

- A. Using critical barriers, seal off the perimeter to the regulated area to completely isolate the regulated area from adjacent spaces. All surfaces in the regulated area must be covered to prevent contamination and to facilitate clean-up. Should adjacent areas become contaminated as a result of the work, shall immediately stop work and clean up the contamination at no additional cost to the VA. Provide firestopping and identify all fire barrier penetrations due to abatement work as specified in Section 3.1.4.8; FIRESTOPPING.
- B. Place all tools, scaffolding, materials and equipment needed for working in the regulated area prior to erecting any plastic sheeting. All uncontaminated removable furniture, equipment and/or supplies shall be removed by the VA from the regulated area before commencing work. Any objects remaining in the regulated area shall be completely covered with 2 layers of 6-mil fire retardant poly sheeting and secured with duct tape. Lock out and tag out any HVAC/electrical systems in the regulated area.

2.2.3 CONTROLLING ACCESS TO THE REGULATED AREA

Access to the regulated area is allowed only through the personnel decontamination facility (PDF). All other means of access shall be eliminated and OSHA DANGER demarcation signs posted as required by OSHA. If the regulated area is adjacent to, or within view of an occupied area, provide a visual barrier of 6 mil opaque fire retardant poly to prevent building occupant observation. If the adjacent area is accessible to the public, the barrier must be solid and capable of withstanding the negative pressure.

2.2.4 CRITICAL BARRIERS

Completely separate any operations in the regulated area from adjacent areas using 2 layers of 6 mil fire retardant poly and duct tape. Individually seal with 2 layers of 6 mil poly and duct tape all HVAC openings into the regulated area. Individually seal all lighting fixtures, clocks, doors, windows, convectors, speakers, or any other

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

09-15

objects/openings in the regulated area. Heat must be shut off any objects covered with poly.

2.2.5 SECONDARY BARRIERS (NOT USED)

2.2.6 EXTENSION OF THE REGULATED AREA

If the enclosure of the regulated area is breached in any way that could allow contamination to occur, the affected area shall be included in the regulated area and constructed as per this section. Decontamination measures must be started immediately and continue until air monitoring indicates background levels are met.

2.2.7 FIRESTOPPING (NOT USED)

2.3 MONITORING, INSPECTION AND TESTING

2.3.1 GENERAL

- A. Perform throughout abatement work air monitoring, inspection and testing inside and around the regulated area in accordance with the OSHA and MDH requirements and these specifications. OSHA requires that the Employee exposure to asbestos must not exceed 0.1 fibers per cubic centimeter (f/cc) of air, averaged over an 8-hour work shift. The CPIH/CIH is responsible for and shall inspect and oversee the performance of the Contractor IH Technician. The IH Technician shall continuously inspect and monitor conditions inside the regulated area to ensure compliance with these specifications. In addition, the CPIH/CIH shall personally manage air sample collection, analysis, and evaluation for personnel, regulated area, and adjacent area samples to satisfy OSHA and MDH requirements. Additional inspection and testing requirements are also indicated in other parts of this specification.
- B. The VA will employ an independent industrial hygienist (VPIH/CIH) consultant and/or use its own IH to perform various services on behalf of the VA. Performance of services provided by the VPIH/CIH shall not supersede nor eliminate the Contractor's responsibilities as required under MDH Asbestos Abatement Rules. The VPIH/CIH will perform the necessary air monitoring, inspection, testing, and other support services to ensure that VA patients, employees, and visitors will not be adversely affected by the abatement work, and that the abatement work proceeds in accordance with these specifications, that the abated areas or abated buildings have been successfully decontaminated. The work of the VPIH/CIH consultant in no way relieves the Contractor from their responsibility to perform the work in accordance with contract/specification requirements, to perform continuous inspection, air monitoring and testing for the safety of their employees and building occupants, and to perform other such services as specified. The cost of the VPIH/CIH and their services will be borne by the VA except for any repeat of final inspection and testing that may be required due to unsatisfactory initial results. Any repeated final inspections and/or testing, if required, will be paid for by the Contractor.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

09-15

- C. If fibers counted by the VPIH/CIH and/or CPIH/CIH during abatement work, either inside or outside the regulated area, utilizing the NIOSH 7400 air monitoring method, exceed the specified respective limits, the Contractor shall stop work. The Contractor may request confirmation of the results by analysis of the samples by TEM. Request must be in writing and submitted to the VA's representative. Cost for the confirmation of results will be borne by the Contractor for both the collection and analysis of samples and for the time delay that may/does result for this confirmation. Confirmation sampling and analysis will be the responsibility of the CPIH/CIH with review and approval of the VPIH/CIH. An agreement between the CPIH/CIH and the VPIH/CIH shall be reached on the exact details of the confirmation effort, in writing, including such things as the number of samples, location, collection, quality control on-site, analytical laboratory, interpretation of results and any follow-up actions. This written agreement shall be co-signed by the IH's and delivered to the VA's representative.

2.3.2 SCOPE OF SERVICES OF THE VPIH/CIH CONSULTANT

- A. The purpose of the work of the VPIH/CIH is to: assure quality; adherence to the specification; resolve problems; prevent the spread of contamination beyond the regulated area; and assure clearance at the end of the project. In addition, their work includes performing the final inspection and testing to determine whether the regulated area or building has been adequately decontaminated. All air monitoring is to be done utilizing PCM/TEM. The VPIH/CIH will perform the following tasks:
1. Task 1: Perform continuous air monitoring, inspection, and testing outside the regulated area during actual abatement work to detect any faults in the regulated area isolation and any adverse impact on the surroundings from regulated area activities.
 2. Task 2: Perform unannounced visits to spot check overall compliance of work with contract/specifications. These visits may include any inspection, air monitoring, and testing inside and outside the regulated area and all aspects of the operation except personnel monitoring.
 3. Task 3: Provide support to the VA representative such as evaluation of submittals from the Contractor, resolution of conflicts, interpret data, etc.
 4. Task 4: Perform, in the presence of the VA representative, final inspection and testing of a decontaminated regulated area at the conclusion of the abatement to certify compliance with all regulations and VA requirements/specifications.
 5. Task 5: Issue certificate of decontamination for each regulated area and project report.
- B. All documentation, inspection results and testing results generated by the VPIH/CIH will be available to the Contractor for information and consideration. The Contractor shall cooperate with and support the VPIH/CIH for efficient and smooth performance of their work.
- C. The air monitoring and inspection results of the VPIH/CIH will be used by the VA to issue any Stop Removal orders to the Contractor during abatement

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

09-15

work and to accept or reject a regulated area or building as decontaminated.

2.3.3 MONITORING, INSPECTION AND TESTING BY CONTRACTOR CPIH/CIH

The Contractor's CPIH/CIH is responsible for performing all duration and clearance air sampling and on-site analysis and inspections required by these specifications, as well as any and all regulatory requirements adopted by these specifications. The CPIH/CIH is responsible for the continuous monitoring of all subsystems and procedures which could affect the health and safety of the Contractor's personnel and building occupants. Safety and health conditions and the provision of those conditions inside the regulated area for all persons entering the regulated area is the exclusive responsibility of the Contractor/Competent Person. The person performing the personnel and area air monitoring outside and inside the regulated area shall be an IH Technician, who shall be trained and shall have specialized field experience in sampling and analysis. The IH Technician shall have successfully completed a NIOSH 582 Course or equivalent, a Minnesota Air Sampling Course and provide documentation. The IH Technician shall participate in the AIHA Asbestos Analysis Registry or participate in the Proficiency Analytic Testing program of AIHA for fiber counting quality control assurance. The IH Technician shall also be an accredited EPA AHERA/State Contractor/Supervisor (or Abatement Worker) and Building Inspector. The IH Technician shall have participated in five abatement projects collecting personal and area samples as well as responsibility for documentation on substantially similar projects in size and scope. The analytic laboratory used by the Contractor to analyze the samples shall be AIHA accredited for asbestos PAT and approved by the VA prior to start of the project. A daily log shall be maintained by the CPIH/CIH or IH Technician, documenting all OSHA requirements for air personal monitoring for asbestos in 29 CFR 1926.1101 (f), (g) and Appendix A. This log shall be made available to the VA representative and the VPIH/CIH upon request. The log will contain, at a minimum, information on personnel or area samples, other persons represented by the sample, the date of sample collection, start and stop times for sampling, sample volume, flow rate, and fibers/cc. The CPIH/CIH shall collect and analyze samples for each representative job being done in the regulated area, i.e., removal, wetting, clean-up, and load-out. No fewer than two personal samples per shift shall be collected and one area sample per 1,000 square feet of regulated area where abatement is taking place and one sample per shift in the clean room area shall be collected. In addition to the continuous monitoring required, the CPIH/CIH will perform inspection and testing at the final stages of abatement for each regulated area as specified in the CPIH/CIH responsibilities. Additionally, the CPIH/CIH will monitor and record pressure readings within the containment daily with a minimum of two readings at the beginning and at the end of a shift, and submit the data in the daily report.

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

09-15

2.4 ASBESTOS HAZARD ABATEMENT PLAN

The Contractor shall have established Asbestos Hazard Abatement Plan (AHAP) in printed form and loose leaf folder consisting of simplified text, diagrams, sketches, and pictures that establish and explain clearly the procedures to be followed during all phases of the work by the Contractor's personnel. The AHAP must be modified as needed to address specific requirements of this project and the specifications. The AHAP(s) shall be submitted for review and approval to the VA prior to the start of any abatement work. The minimum topics and areas to be covered by the AHAP(s) are:

- A. Minimum Personnel Qualifications
- B. Emergency Action Plan/Contingency Plans and Arrangements
- C. Security and Safety Procedures
- D. Respiratory Protection/Personal Protective Equipment Program and Training
- E. Medical Surveillance Program and Recordkeeping
- F. Regulated Area Requirements - Containment Barriers/Isolation of Regulated Area
- G. Decontamination Facilities and Entry/Exit Procedures (PDF and W/EDF)
- H. Negative Pressure Systems Requirements
- I. Monitoring, Inspections, and Testing
- J. Removal Procedures for ACM
- K. Removal of Contaminated Soil (if applicable)
- L. Encapsulation Procedures for ACM
- M. Disposal of ACM waste/equipment
- N. Regulated Area Decontamination/Clean-up
- O. Regulated Area Visual and Air Clearance
- P. Project Completion/Closeout

2.5 SUBMITTALS

2.5.1 PRE-START MEETING SUBMITTALS

Submit to the VA a minimum of 14 days prior to the pre-start meeting the following for review and approval. Meeting this requirement is a prerequisite for the pre-start meeting for this project:

- A. Submit a detailed work schedule for the entire project reflecting contract documents and the phasing/schedule requirements from the CPM chart.
- B. Submit a staff organization chart showing all personnel who will be working on the project and their capacity/function. Provide their qualifications, training, accreditations, and licenses, as appropriate. Provide a copy of the "Certificate of Worker's Acknowledgment" and the "Affidavit of Medical Surveillance and Respiratory Protection" for each person.
- C. Submit Asbestos Hazard Abatement Plan developed specifically for this project, incorporating the requirements of the specifications, prepared, signed and dated by the CPIH/CIH.
- D. Submit the specifics of the materials and equipment to be used for this project with manufacturer names, model numbers, performance characteristics, pictures/diagrams, and number available for the following:

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

09-15

1. Supplied air system, negative air machines, HEPA vacuums, air monitoring pumps, calibration devices, pressure differential monitoring device and emergency power generating system.
2. Waste water filtration system, shower system, containment barriers.
3. Encapsulants, surfactants, hand held sprayers, airless sprayers, and fire extinguishers.
4. Respirators, protective clothing, personal protective equipment.
5. Fire safety equipment to be used in the regulated area.
- E. Submit the name, location, and phone number of the approved landfill; proof/verification the landfill is approved for ACM disposal; the landfill's requirements for ACM waste; the type of vehicle to be used for transportation; and name, address, and phone number of subcontractor, if used. Proof of asbestos training for transportation personnel shall be provided.
- F. Submit required notifications, permits and arrangements made with regulatory agencies having regulatory jurisdiction and the specific contingency/emergency arrangements made with local health, fire, ambulance, hospital authorities and any other notifications/arrangements.
- G. Submit the name, location and verification of the laboratory and/or personnel to be used for analysis of air and/or bulk samples. Personal air monitoring must be done in accordance with OSHA 29 CFR 1926.1101(f) and Appendix A. And area or clearance air monitoring in accordance with EPA AHERA protocols.
- H. Submit qualifications verification: Submit the following evidence of qualifications. Make sure that all references are current and verifiable by providing current phone numbers and documentation.
 1. Asbestos Abatement Company: Project experience within the past 3 years; listing projects first most similar to this project: Project Name; Type of Abatement; Duration; Cost; Reference Name/Phone Number; Final Clearance; and Completion Date
 2. List of project(s) halted by owner, A/E, IH, regulatory agency in the last 3 years: Project Name; Reason; Date; Reference Name/Number; Resolution
 3. List asbestos regulatory citations (e.g., OSHA), notices of violations (e.g., Federal and state EPA), penalties, and legal actions taken against the company including and of the company's officers (including damages paid) in the last 3 years. Provide copies and all information needed for verification.
- I. Submit information on personnel: Provide a resume; address each item completely; copies of certificates, accreditations, and licenses. Submit an affidavit signed by the CPIH/CIH stating that all personnel submitted below have medical records in accordance with OSHA 29 CFR 1926.1101(m) and 29 CFR 1910.20 and that the company has implemented a medical surveillance program and written respiratory protection program, and maintains recordkeeping in accordance with the above regulations. Submit the phone number and doctor/clinic/hospital used for medical evaluations.
 1. CPIH/CIH and IH Technician: Name; years of abatement experience; list of projects similar to this one; certificates, licenses, accreditations for proof of AHERA/OSHA specialized asbestos training; professional affiliations; number of workers trained; samples of

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

09-15

- training materials; samples of AHAP(s) developed; medical opinion; and current respirator fit test.
2. Competent Person(s)/Supervisor(s): Number; names; social security numbers; years of abatement experience as Competent Person/Supervisor; list of similar projects in size/complexity as Competent Person/Supervisor; as a worker; certificates, licenses, accreditations; proof of AHERA/OSHA specialized asbestos training; maximum number of personnel supervised on a project; medical opinion (asbestos surveillance and respirator use); and current respirator fit test.
 3. Workers: Numbers; names; social security numbers; years of abatement experience; certificates, licenses, accreditations; training courses in asbestos abatement and respiratory protection; medical opinion (asbestos surveillance and respirator use); and current respirator fit test.
- J. Submit copies of State license for asbestos abatement; copy of insurance policy, including exclusions with a letter from agent stating in plain language the coverage provided and the fact that asbestos abatement activities are covered by the policy; copy of the AHAP incorporating the requirements of this specification; information on who provides your training, how often; who provides medical surveillance, how often; who performs and how is personal air monitoring of abatement workers conducted; a list of references of independent laboratories/IH's familiar with your air monitoring and Asbestos Hazard Abatement Plans; copies of monitoring results of the five referenced projects listed and analytical method(s) used.
- K. Rented equipment must be decontaminated prior to returning to the rental agency.
- L. Submit, before the start of work, the manufacturer's technical data for all types of encapsulants, all MSDS, and application instructions.

2.5.2 SUBMITTALS DURING ABATEMENT

- A. The Competent Person shall maintain and submit a daily log at the regulated area documenting the dates and times of the following: purpose, attendees and summary of meetings; all personnel entering/exiting the regulated area; document and discuss the resolution of unusual events such as barrier breeching, equipment failures, emergencies, and any cause for stopping work; representative air monitoring and results/TWAs/ELs. Submit this information daily to the VPIH/CIH.
- B. The CPIH/CIH shall document and maintain the inspection and approval of the regulated area preparation prior to start of work and daily during work.
 1. Removal of any poly barriers.
 2. Visual inspection/testing by the CPIH/CIH or IH Technician prior to application of lockdown encapsulant.
 3. Packaging and removal of ACM waste from regulated area.
 4. Disposal of ACM waste materials; copies of Waste Shipment Records/landfill receipts to the VA's representative on a weekly basis.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

09-15

2.5.3 SUBMITTALS AT COMPLETION OF ABATEMENT

The CPIH/CIH shall submit a project report consisting of the daily log book requirements and documentation of events during the abatement project including Waste Shipment Records signed by the landfill's agent. It will also include information on the containment and transportation of waste from the containment with applicable Chain of Custody forms. The report shall include a certificate of completion, signed and dated by the CPIH/CIH, in accordance with Attachment #1. All clearance and perimeter area samples must be submitted. The VA Representative will retain the abatement report after completion of the project and provide copies of the abatement report to VAMC Office of Engineer and the Safety Office.

PART 3 - EXECUTION

3.1 PRE-ABATEMENT ACTIVITIES

3.1.1 PRE-ABATEMENT MEETING

The VA representative, upon receipt, review, and substantial approval of all pre-abatement submittals and verification by the CPIH/CIH that all materials and equipment required for the project are on the site, will arrange for a pre-abatement meeting between the Contractor, the CPIH/CIH, Competent Person(s), the VA representative(s), and the VPIH/CIH. The purpose of the meeting is to discuss any aspect of the submittals needing clarification or amplification and to discuss any aspect of the project execution and the sequence of the operation. The Contractor shall be prepared to provide any supplemental information/documentation to the VA's representative regarding any submittals, documentation, materials or equipment. Upon satisfactory resolution of any outstanding issues, the VA's representative will issue a written order to proceed to the Contractor. No abatement work of any kind described in the following provisions shall be initiated prior to the VA written order to proceed.

3.1.2 PRE-ABATEMENT INSPECTIONS AND PREPARATIONS

Before any work begins on the construction of the regulated area, the Contractor will:

- A. Conduct a space-by-space inspection with an authorized VA representative and prepare a written inventory of all existing damage in those spaces where asbestos abatement will occur. Still or video photography may be used to supplement the written damage inventory. Document will be signed and certified as accurate by both parties.
- B. The VA Representative, the Contractor, and the VPIH/CIH must be aware of AEQA 10-95 indicating the failure to identify asbestos in the areas listed as well as common issues when preparing specifications and contract documents. This is especially critical when demolition is planned, because AHERA surveys are non-destructive, and ACM may remain undetected. A NESHAPS (destructive) ACM inspection should be conducted on all building structures that will be demolished. Ensure the following areas are inspected on the project: Lay-in ceilings concealing ACM; ACM behind walls/windows from previous renovations; inside utility

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

09-15

chases/walls; transite piping/ductwork/sheets; behind radiators; lab fume hoods; transite lab countertops; roofing materials; below window sills; water/sewer lines; electrical conduit coverings; crawl spaces (previous abatement contamination); flooring/mastic covered by carpeting/new flooring; exterior insulated wall panels; on underground fuel tanks; and steam line trench coverings.

- C. Ensure that all furniture, machinery, equipment, curtains, drapes, blinds, and other movable objects required to be removed from the regulated area have been cleaned and removed or properly protected from contamination.
- D. If present and required, remove and dispose of carpeting from floors in the regulated area. If ACM floor tile is attached to the carpet while the Contractor is removing the carpet that section of the carpet will be disposed of as asbestos waste.

3.1.3 PRE-ABATEMENT CONSTRUCTION AND OPERATIONS

- A. Perform all preparatory work for the first regulated area in accordance with the approved work schedule and with this specification.
- B. Upon completion of all preparatory work, the CPIH/CIH will inspect the work and systems and will notify the VA's representative when the work is completed in accordance with this specification. The VA's representative may inspect the regulated area and the systems with the VPIH/CIH and may require that upon satisfactory inspection, the Contractor's employees perform all major aspects of the approved AHAP, especially worker protection, respiratory systems, contingency plans, decontamination procedures, and monitoring to demonstrate satisfactory operation. The operational systems for respiratory protection and the negative pressure system shall be demonstrated for proper performance.
- C. The CPIH/CIH shall document the pre-abatement activities described above and deliver a copy to the VA's representative.
- D. Upon satisfactory inspection of the installation of and operation of systems the VA's representative will notify the Contractor in writing to proceed with the asbestos abatement work in accordance with this specification and all applicable regulations.

3.2 REGULATED AREA PREPARATIONS

3.2.1 OSHA DANGER SIGNS

Post OSHA DANGER signs meeting the specifications of OSHA 29 CFR 1926.1101 at any location and approaches to the regulated area where airborne concentrations of asbestos may exceed the PEL. Signs shall be posted at a distance sufficiently far enough away from the regulated area to permit any personnel to read the sign and take the necessary measures to avoid exposure. Additional signs will be posted following construction of the regulated area enclosure.

3.2.2 CONTROLLING ACCESS TO THE REGULATED AREA

Access to the regulated area is allowed only through the personnel decontamination facility (PDF), if required. All other means of access

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

09-15

shall be eliminated and OSHA Danger demarcation signs posted as required by OSHA. If the regulated area is adjacent to or within view of an occupied area, provide a visual barrier of 6 mil opaque fire retardant poly sheeting to prevent building occupant observation. If the adjacent area is accessible to the public, the barrier must be solid.

3.2.3 SHUT DOWN - LOCK OUT ELECTRICAL

Shut down and lock out/tag out electric power to the regulated area. Provide temporary power and lighting. Insure safe installation including GFCI of temporary power sources and equipment by compliance with all applicable electrical code requirements and OSHA requirements for temporary electrical systems. Electricity shall be provided by the VA.

3.2.4 SHUT DOWN - LOCK OUT HVAC

Shut down and lock out/tag out heating, cooling, and air conditioning system (**HVAC**) components that are in, supply or pass through the regulated area.

Investigate the regulated area and agree on pre-abatement condition with the VA's representative. Seal all intake and exhaust vents in the regulated area with duct tape and 2 layers of 6-mil poly. Also, seal any seams in system components that pass through the regulated area. Remove all contaminated HVAC system filters and place in labeled 6-mil poly disposal bags for disposal as asbestos waste.

3.2.5 SANITARY FACILITIES

The Contractor shall provide sanitary facilities for abatement personnel and maintain them in a clean and sanitary condition throughout the abatement project.

3.2.6 WATER FOR ABATEMENT

The VA will provide water for abatement purposes. The Contractor shall connect to the existing VA system. The service to the shower(s) shall be supplied with backflow prevention.

3.2.7 PREPARATION PRIOR TO SEALING OFF

Place all tools, materials and equipment needed for working in the regulated area prior to erecting any plastic sheeting. Remove all uncontaminated removable furniture, equipment and/or supplies from the regulated area before commencing work, or completely cover with 2 layers of 6-mil fire retardant poly sheeting and secure with duct tape. Lock out and tag out any HVAC systems in the regulated area.

3.2.8 CRITICAL BARRIERS

Completely separate any openings into the regulated area from adjacent areas using fire retardant poly at least 6 mils thick and duct tape. Individually seal with 2 layers of 6 mil poly and duct tape all HVAC openings into the regulated area. Individually seal all lighting fixtures,

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

09-15

clocks, doors, windows, convectors, speakers, or any other objects in the regulated area. Heat must be shut off any objects covered with poly

3.2.9 FLOOR BARRIERS

If floor removal is not being done, all floors in the regulated area shall be covered with 2 layers of 6 mil fire retardant poly and brought up the wall 12 inches

3.2.10 PRE-CLEANING MOVABLE OBJECTS

Pre-cleaning of ACM contaminated items shall be performed after the enclosure has been erected and negative pressure has been established in the work area. After items have been pre-cleaned and decontaminated, they may be removed from the work area for storage until the completion of abatement in the work area.

Pre-clean all movable objects within the regulated area using a HEPA filtered vacuum and/or wet cleaning methods as appropriate. After cleaning, these objects shall be removed from the regulated area and carefully stored in an uncontaminated location.

3.2.11 PRE-CLEANING FIXED OBJECTS

Pre-cleaning of ACM contaminated items shall be performed after the enclosure has been erected and negative pressure has been established in the work area

Pre-clean all fixed objects in the regulated area using HEPA filtered vacuums and/or wet cleaning techniques as appropriate. Careful attention must be paid to machinery behind grills or gratings where access may be difficult but contamination may be significant. Also, pay particular attention to wall, floor and ceiling penetration behind fixed items. After pre-cleaning, enclose fixed objects with 2 layers of 6-mil poly and seal securely in place with duct tape. Objects (e.g., permanent fixtures, shelves, electronic equipment, laboratory tables, sprinklers, alarm systems, closed circuit TV equipment and computer cables) which must remain in the regulated area and that require special ventilation or enclosure requirements should be designated here along with specified means of protection. Contact the manufacturer for special protection requirements.

3.2.12 PRE-CLEANING SURFACES IN THE REGULATED AREA

Pre-cleaning of ACM contaminated items shall be performed after the enclosure has been erected and negative pressure has been established in the work area

Pre-clean all surfaces in the regulated area using HEPA filtered vacuums and/or wet cleaning methods as appropriate. Do not use any methods that would raise dust such as dry sweeping or vacuuming with equipment not

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

09-15

equipped with HEPA filters. Do not disturb asbestos-containing materials during this pre-cleaning phase.

3.2.13 EXTENSION OF THE REGULATED AREA

If the regulated area barrier is breached in any manner that could allow the passage of asbestos fibers or debris, the Competent Person shall immediately stop work, continue wetting, and proceed to extend the regulated area to enclose the affected area as per procedures described in this specification. If the affected area cannot be enclosed, decontamination measures and cleanup shall start immediately. All personnel shall be isolated from the affected area until decontamination/cleanup is completed as verified by visual inspection and air monitoring. Air monitoring at completion must indicate background levels.

3.3 REMOVAL OF CLASS II FLOORING

3.3.1 GENERAL

All applicable requirements of OSHA, EPA, and DOT shall be followed during Class II work. Keep materials intact; do not disturb; wet while working with it; wrap as soon as possible with 2 layers of 6 mil plastic for disposal.

3.3.2 REMOVAL OF FLOORING MATERIALS

- A. All requirements of OSHA Flooring agreement provisions shall be followed:
 1. Flooring shall be removed intact, as much as possible. Do not rip or tear flooring.
 2. Mechanical chipping or sanding is not allowed.
Carpeting shall be removed and disposed of as asbestos-containing material.
 3. Wet clean and HEPA vacuum the floor before and after removal of flooring.
 4. Place a 6 mil poly layer 4' by 10' adjacent to the regulated area for use as a decontaminated area. All waste must be contained in the regulated area.
 5. Package all waste in 6 mil poly lined fiberboard drums and/or boxes.

3.3.3 REMOVAL OF MASTIC

- A. All chemical mastic removers must be low in volatile organic compound (VOC) content, have a flash point greater than 200° Fahrenheit, contain no chlorinated solvents, and comply with California Air Resources Board (CARB) thresholds for VOCs (effective January 1, 2010).
- B. A negative air machine as required under flooring removal shall be provided.
- C. Follow all manufacturers' instructions in the use of the mastic removal material.
- D. Package all waste in 6 mil poly lined fiberboard drums and/or boxes.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

09-15

- E. Prior to application of any liquid material, check the floor for penetrations and seal before removing mastic.

3.4 DISPOSAL OF CLASS II WASTE MATERIAL

3.4.1 GENERAL

Dispose of waste ACM and debris which is packaged in accordance with these specifications, OSHA, EPA and DOT. The landfill requirements for packaging must also be met. Transport will be in compliance with 49 CFR 100-185 regulations. Disposal shall be done at an approved landfill. Disposal of non-friable ACM shall be done in accordance with applicable regulations.

3.5 PROJECT DECONTAMINATION

3.5.1 GENERAL

- A. The entire work related to project decontamination shall be performed under the close supervision and monitoring of the CPIH/CIH.
- B. If the asbestos abatement work is in an area which was contaminated prior to the start of abatement, the decontamination will be done by cleaning the primary barrier poly prior to its removal and cleanings of the surfaces of the regulated area after the primary barrier removal.
- C. If the asbestos abatement work is in an area which was uncontaminated prior to the start of abatement, the decontamination will be done by cleaning the primary barrier poly prior to its removal, thus preventing contamination of the building when the regulated area critical barriers are removed.

3.5.2 REGULATED AREA CLEARANCE

Air testing and other requirements which must be met before release of the Contractor and re-occupancy of the regulated area space are specified in Final Testing Procedures.

3.5.3 WORK DESCRIPTION

Decontamination includes the clearance air testing in the regulated area and the decontamination and removal of the enclosures/facilities installed prior to the abatement work including primary/critical barriers, PDF and W/EDF facilities, and negative pressure systems.

3.5.4 PRE-DECONTAMINATION CONDITIONS

- A. Before decontamination starts, all ACM waste from the regulated area shall be removed, all waste collected and removed, and the secondary barrier of poly removed and disposed of along with any gross debris generated by the work.
- B. At the start of decontamination, the following shall be in place:
 - 1. Primary barriers consisting of 2 layers of 6 mil poly on the floor and 1 layer of 4 mil poly on the walls.
 - 2. Critical barriers over all openings consisting of two layers of 6 mil poly which is the sole barrier between the regulated area and the rest of the building or outside.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

09-15

3. Decontamination facilities, if required for personnel and equipment in operating condition.

3.5.5 CLEANING

Carry out a first cleaning of all surfaces of the regulated area including items of remaining poly sheeting, tools, scaffolding, ladders/staging by wet methods and/or HEPA vacuuming. Do not use dry dusting/sweeping/air blowing methods. Use each surface of a wetted cleaning cloth one time only and then dispose of as contaminated waste. Continue this cleaning until there is no visible residue from abated surfaces or poly or other surfaces. Remove all filters in the air handling system and dispose of as ACM waste in accordance with these specifications. The negative pressure system shall remain in operation during this time. Additional cleaning(s) may be needed as determined by the CPIH/VPIH/CIH.

3.6 VISUAL INSPECTION AND AIR CLEARANCE TESTING

3.6.1 GENERAL

Notify the VA representative 24 hours in advance for the performance of the final visual inspection and testing. The final visual inspection and testing will be performed by the VPIH/CIH after the final cleaning.

3.6.2 VISUAL INSPECTION

Final visual inspection will include the entire regulated area, the PDF, all poly sheeting, seals over HVAC openings, doorways, windows, and any other openings. If any debris, residue, dust or any other suspect material is detected, the final cleaning shall be repeated at no cost to the VA. Dust/material samples may be collected and analyzed at no cost to the VA at the discretion of the VPIH/CIH to confirm visual findings. When the regulated area is visually clean the final testing can be done.

3.6.3 AIR CLEARANCE TESTING

- A. After an acceptable final visual inspection by the VPIH/CIH and CPIH/CIH the VPIH/CIH and CPIH/CIH will perform the final clearance testing. Air samples will be collected and analyzed in accordance with procedures for AHERA in this specification. 5 PCM samples shall be collected for clearance and a minimum of two field blanks. If the release criteria are not met, the Contractor shall repeat the final cleaning and continue decontamination procedures until clearance is achieved. **All additional inspection and testing costs will be borne by the Contractor.**
- B. If release criteria are met, proceed to perform the abatement closeout and to issue the certificate of completion in accordance with these specifications.

3.6.4 FINAL AIR CLEARANCE PROCEDURES

- A. Contractor's Release Criteria: Work in a regulated area is complete when the regulated area is visually clean and airborne fiber levels have been reduced to or below 0.01 f/cc as measured by the MDH PCM protocol.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

09-15

- B. Air Monitoring and Final Clearance Sampling: To determine if the elevated airborne fiber counts encountered during abatement operations have been reduced to the specified level, the VPIH/CIH will secure samples and analyze them according to the following procedures:
1. Fibers Counted: "Fibers" referred to in this section shall be either all fibers regardless of composition as counted in the NIOSH 7400 PCM method.
 2. Aggressive Sampling: All final air testing samples shall be collected using aggressive sampling techniques except where soil is not encapsulated or enclosed. Samples will be collected on 0.8 μ MCE filters for PCM analysis. A minimum of 2000 Liters of using calibrated pumps shall be collected for clearance samples. Before pumps are started, initiate aggressive air mixing sampling as detailed in 40 CFR 763 Subpart E (AHERA) Appendix A (III)(B)(7)(d) and MDHAAR Part 4620.3594(subp.2)(F)(1)&(2). Air samples will be collected in areas subject to normal air circulation away from corners, obstructed locations, and locations near windows, doors, or vents. After air sampling pumps have been shut off, circulating fans shall be shut off. The negative pressure system shall continue to operate.

3.6.5 CLEARANCE SAMPLING USING PCM

- A. The VPIH/CIH and CPIH/CIH will perform clearance samples as indicated by the specification.
- B. The NIOSH 7400 PCM method will be used for clearance sampling with a minimum collection volume of 2000 Liters of air. A minimum of 5 PCM clearance samples shall be collected. All samples must be equal to or less than 0.01 f/cc to clear the regulated area.

3.6.6 LABORATORY TESTING OF PCM CLEARANCE SAMPLES

The services of an AIHA accredited laboratory will be employed by the VA and the Asbestos Contractor to perform analysis for the PCM air samples. The accredited laboratory shall be successfully participating in the AIHA Proficiency Analytical Testing (PAT) program. Samples will be analyzed daily by the VPIH/CIH and CPIH/CIH so that verbal/faxed reports can be received within 24 hours. A complete record, certified by the laboratory, of all air monitoring tests and results will be furnished to the VA's representative and the Contractor.

3.7 ABATEMENT CLOSEOUT AND CERTIFICATE OF COMPLIANCE

3.7.1 COMPLETION OF ABATEMENT WORK

- A. After thorough decontamination, complete asbestos abatement work upon meeting the regulated area clearance criteria and fulfilling the following:
 1. Remove all equipment, materials, and debris from the project area.
 2. Package and dispose of all asbestos waste as required.
 3. Repair or replace all interior finishes damaged during the abatement work.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

09-15

4. Fulfill other project closeout requirements as specified elsewhere in this specification.

3.7.2 CERTIFICATE OF COMPLETION BY CONTRACTOR

The CPIH shall complete and sign the "Certificate of Completion" in accordance with Attachment 1 at the completion of the abatement and decontamination of the regulated area.

3.7.3 WORK SHIFTS

All work shall be done during administrative hours (8:00 AM to 4:30 PM) Monday - Friday excluding Federal Holidays. Any change in the work schedule must be approved in writing by the VA Representative.

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

09-15

ATTACHMENT #1

CERTIFICATE OF COMPLETION

DATE: _____ VA Project #: _____

PROJECT NAME: _____ Abatement Contractor: _____

VAMC/ADDRESS: _____

1. I certify that I have personally inspected, monitored and supervised the abatement work of (specify regulated area or Building):
which took place from / / to / /
2. That throughout the work all applicable requirements/regulations and the VA's specifications were met.
3. That any person who entered the regulated area was protected with the appropriate personal protective equipment and respirator and that they followed the proper entry and exit procedures and the proper operating procedures for the duration of the work.
4. That all employees of the Abatement Contractor engaged in this work were trained in respiratory protection, were experienced with abatement work, had proper medical surveillance documentation, were fit-tested for their respirator, and were not exposed at any time during the work to asbestos without the benefit of appropriate respiratory protection.
5. That I performed and supervised all inspection and testing specified and required by applicable regulations and VA specifications.
6. That the conditions inside the regulated area were always maintained in a safe and healthy condition and the maximum fiber count never exceeded 0.5 f/cc, except as described below.
7. That all abatement work was done in accordance with OSHA requirements and the manufacturer's recommendations.

CPIH/CIH Signature/Date: _____

CPIH/CIH Print Name: _____

Abatement Contractor Signature/Date: _____

Abatement Contractor Print Name: _____

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

09-15

ATTACHMENT #2

CERTIFICATE OF WORKER'S ACKNOWLEDGMENT

PROJECT NAME: _____ DATE: _____

PROJECT ADDRESS: _____

ABATEMENT CONTRACTOR'S NAME: _____

WORKING WITH ASBESTOS CAN BE HAZARDOUS TO YOUR HEALTH. INHALING ASBESTOS HAS BEEN LINKED WITH VARIOUS TYPES OF CANCERS. IF YOU SMOKE AND INHALE ASBESTOS FIBERS, YOUR CHANCES OF DEVELOPING LUNG CANCER IS GREATER THAN THAT OF THE NON-SMOKING PUBLIC.

Your employer's contract with the owner for the above project requires that: You must be supplied with the proper personal protective equipment including an adequate respirator and be trained in its use. You must be trained in safe and healthy work practices and in the use of the equipment found at an asbestos abatement project. You must receive/have a current medical examination for working with asbestos. These things shall be provided at no cost to you. By signing this certificate you are indicating to the owner that your employer has met these obligations.

RESPIRATORY PROTECTION: I have been trained in the proper use of respirators and have been informed of the type of respirator to be used on the above indicated project. I have a copy of the written Respiratory Protection Program issued by my employer. I have been provided for my exclusive use, at no cost, with a respirator to be used on the above indicated project.

TRAINING COURSE: I have been trained by a third party, State/EPA accredited trainer in the requirements for an AHERA/OSHA Asbestos Abatement Worker training course, 32 hours minimum duration. I currently have a valid State accreditation certificate. The topics covered in the course include, as a minimum, the following:

- Physical Characteristics and Background Information on Asbestos
- Potential Health Effects Related to Exposure to Asbestos
- Employee Personal Protective Equipment
- Establishment of a Respiratory Protection Program
- State of the Art Work Practices
- Personal Hygiene
- Additional Safety Hazards
- Medical Monitoring
- Air Monitoring
- Relevant Federal, State and Local Regulatory Requirements, Procedures, and Standards
- Asbestos Waste Disposal

MEDICAL EXAMINATION: I have had a medical examination within the past 12 months which was paid for by my employer. This examination included: health history, occupational history, pulmonary function test, and may have included a chest x-ray evaluation. The physician issued a positive written opinion after the examination.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

09-15

Signature: _____

Printed Name: _____

Social Security Number: _____

Witness: _____

ATTACHMENT #3

AFFIDAVIT OF MEDICAL SURVEILLANCE, RESPIRATORY PROTECTION AND TRAINING/ACCREDITATION

VA PROJECT NAME AND NUMBER: _____

VA MEDICAL FACILITY: _____

ABATEMENT CONTRACTOR'S NAME AND ADDRESS: _____

1. I verify that the following individual

Name: _____ Social Security Number: _____

who is proposed to be employed in asbestos abatement work associated with the above project by the named Abatement Contractor, is included in a medical surveillance program in accordance with 29 CFR 1926.1101(m), and that complete records of the medical surveillance program as required by 29 CFR 1926.1101(m) (n) and 29 CFR 1910.20 are kept at the offices of the Abatement Contractor at the following address.

Address: _____

2. I verify that this individual has been trained, fit-tested and instructed in the use of all appropriate respiratory protection systems and that the person is capable of working in safe and healthy manner as expected and required in the expected work environment of this project.

3. I verify that this individual has been trained as required by 29 CFR 1926.1101(k). This individual has also obtained a valid State accreditation certificate. Documentation will be kept on-site.

4. I verify that I meet the minimum qualifications criteria of the VA specifications for a CPIH.

Signature of CPIH/CIH: _____ Date: _____

Printed Name of CPIH/CIH: _____

Signature of Contractor: _____ Date: _____

Printed Name of Contractor: _____

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

09-15

ATTACHMENT #4

ABATEMENT CONTRACTOR/COMPETENT PERSON(S) REVIEW AND ACCEPTANCE OF THE VA'S ASBESTOS SPECIFICATIONS

VA Project Location: _____

VA Project #: _____

VA Project Description: _____

This form shall be signed by the Asbestos Abatement Contractor Owner and the Asbestos Abatement Contractor's Competent Person(s) prior to any start of work at the VA related to this Specification. If the Asbestos Abatement Contractor's/Competent Person(s) has not signed this form, they shall not be allowed to work on-site.

I, the undersigned, have read VA's Asbestos Specification regarding the asbestos abatement requirements. I understand the requirements of the VA's Asbestos Specification and agree to follow these requirements as well as all required rules and regulations of OSHA/EPA/DOT and State/Local requirements. I have been given ample opportunity to read the VA's Asbestos Specification and have been given an opportunity to ask any questions regarding the content and have received a response related to those questions. I do not have any further questions regarding the content, intent and requirements of the VA's Asbestos Specification.

At the conclusion of the asbestos abatement, I will certify that all asbestos abatement work was done in accordance with the VA's Asbestos Specification and all ACM was removed properly and no fibrous residue remains on any abated surfaces.

Abatement Contractor Owner's Signature _____ Date _____

Abatement Contractor Competent Person(s) _____ Date _____

- - END- - -

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

05-12-2022

SECTION 02 83 33.13
LEAD-BASED PAINT REMOVAL AND DISPOSAL

PART 1 - GENERAL

1.1 SUMMARY

A. This Section Includes:

1. Removing and disposal of lead-based paint at interior and exterior locations as identified in the drawings via intact components removal procedures of four (4) doors, twenty-nine (29) windows and 260 square feet of duct work and the demolition of 600 square feet of lead glazed block wall demolition debris with controls needed to limit occupational and environmental exposure to lead hazards.

1.2 RELATED REQUIREMENTS

- A. Demolition: Section 02 41 00, DEMOLITION.
- B. Hazardous Material Abatement: Section 02 82 11, TRADITIONAL ASBESTOS ABATEMENT.
- C. Hazardous Material Abatement: Section 02 82 13.13, GLOVEBAG ASBESTOS ABATEMENT.
- D. Hazardous Material Abatement: Section 02 82 13.19, ASBESTOS FLOOR TILE AND MASTIC ABATEMENT.

1.3 DEFINITIONS

- A. Action Level: Employee exposure, without regard to use of respirator, to lead airborne concentration of 30 micrograms per cubic meter (0.03 parts per million) of air averaged over 8-hour period. As used in this section, "30 micrograms per cubic meter of air (0.03 parts per million)" refers to action level.
- B. Area Monitoring: Sampling of lead concentrations within lead control area and inside physical boundaries which are representative of airborne lead concentrations which may reach breathing zone of personnel potentially exposed to lead.
- C. Breathing Zone: Area within hemisphere, forward of shoulders, with 150 mm to 225 mm (6 to 9 inches) radius and center at nose or mouth of employee.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

05-12-2022

- D. Certified Industrial Hygienist (CIH): As used in this section, refers to an Industrial Hygienist employed by Contractor.
- E. Certified Lead Firm. "Certified Lead Firm" means a person that employs individuals to perform regulated lead work, with the exception of renovation, and is certified by the commissioner under Minnesota Statutes section 144.9505.
- F. Change Rooms and Shower Facilities: Rooms within designated physical boundary around lead control area equipped with separate storage facilities for clean protective work clothing and equipment and for street clothes which prevent cross- contamination.
- G. Competent Person: Person capable of identifying lead hazards in work area and authorized by contractor to take corrective action.
- H. Decontamination Room: Room for removal of contaminated personal protective equipment (PPE).
- I. Eight-Hour Time Weighted Average (TWA): Airborne concentration of lead averaged over 8-hour workday to which an employee is exposed.
- J. High Efficiency Particulate Air (HEPA) Filter Equipment: HEPA filtered vacuuming equipment with UL 586 filter system capable of collecting and retaining lead-contaminated paint dust. HEPA filter means 99.97 percent efficient against 0.3 micron (0.012 mil) size particles.
- K. Lead: Metallic lead, inorganic lead compounds, and organic lead soaps. Excluded from this definition are other organic lead compounds.
- L. Lead Control Area: Enclosed area or structure with full containment to prevent spreading lead dust, paint chips, and debris from lead-based paint removal operations. Lead control area is isolated by physical boundaries to prevent unauthorized entry of personnel.
- M. Lead Permissible Exposure Limit (PEL): Fifty micrograms per cubic meter (0.05 parts per million) of air as 8-hour time weighted average as determined by 29 CFR Part 1910.1025. When employee is exposed for more than 8 hours per work day, determine PEL by following formula. PEL micrograms/cubic meter (parts per million) of air = 400/No. of hrs. worked per day.
- N. Personnel Monitoring: Sampling of lead concentrations within employee breathing zone to determine 8-hour time weighted average concentration

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

05-12-2022

according to 29 CFR Part 1910.1025. Take samples representative of employee's work tasks.

- O. Physical Boundary: Area physically roped or partitioned off around enclosed lead control area to limit unauthorized entry of personnel. As used in this section, "inside boundary" shall mean same as "outside lead control area."

1.4 APPLICABLE PUBLICATIONS

- A. Comply with references to extent specified in this section.
- B. American National Standards Institute (ANSI):
1. Z9.2-12 - Fundamentals Governing the Design & Operation of Local Exhaust Ventilation Systems.
 2. Z88.6-2006 Respiratory Protection
- C. Code of Federal Regulations (CFR):
1. 29 CFR Part 1910 - Occupational Safety and Health Standards.
 2. 29 CFR Part 1926 - Safety and Health Regulations for Construction.
 3. 40 CFR Part 260 - Hazardous Waste Management System: General.
 4. 40 CFR Part 261 - Identification and Listing of Hazardous Waste.
 5. 40 CFR Part 262 - Standards Applicable to Generators of Hazardous Waste.
 6. 40 CFR Part 263 - Standards Applicable to Transporters of Hazardous Waste.
 7. 40 CFR Part 264 - Standards for Owners and Operations of Hazardous Waste Treatment, Storage, and Disposal Facilities.
 8. 40 CFR Part 265 - Interim Status Standards for Owners and Operators of Hazardous Waste Treatment, Storage, and Disposal Facilities.
 9. 40 CFR Part 268 - Land Disposal Restrictions.
 10. 49 CFR Part 172 - Hazardous Material Table, Special Provisions, Hazardous Material Communications, Emergency Response Information, and Training Requirements, and Security Plans.
 11. 49 CFR Part 178 - Specifications for Packagings.
- D. National Institute for Occupational Safety And Health(NIOSH):
1. NIOSH Pocket Guide to Chemical Hazards, Lead.
- E. Occupation Safety And Health Administration (OSHA):
1. OSHA Booklet 3142, Lead in Construction
- F. Underwriters Laboratories (UL):

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

05-12-2022

1. 586-09 - High-Efficiency, Particulate, Air Filter Units.

1.5 PRE-REMOVAL MEETINGS

- A. Conduct pre-removal meeting at project site before beginning Work of this section.
 1. Required Participants:
 - a. Contracting Officer's Representative (COR).
 - b. Certified Industrial Hygienist.
 - c. Certified Lead Firm's Competent Person(s) who will be on-site.
 2. Meeting Agenda: Distribute agenda to participants minimum 3 days before meeting.
 - a. Respiratory protection program.
 - b. Hazard communication program.
 - c. Hazardous waste management plan.
 - d. Safety and health regulation compliance.
 - e. Employee training.
 - f. Removal schedule.
 - g. Removal sequence.
 - h. Preparatory work.
 - i. Protection before, during, and after removal.
 - j. Removal.
 - k. Inspecting and testing.
 - l. Other items affecting successful completion.
 3. Document and distribute meeting minutes to participants to record decisions affecting installation.

1.6 SUBMITTALS

- A. Submittal Procedures: Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Manufacturer's Literature and Data:
 1. Description of each product.
 - a. Paint removal, cleaning and stabilization products.
 - b. Vacuum filters.
 - c. Respirators.
 2. Safety data sheet for each paint removal product.
 3. Installation instructions.
 - a. Paint removal, cleaning and stabilization products.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

05-12-2022

- C. Test Reports: Submit testing laboratory reports.
 - 1. Submit air monitoring results within three working days, signed by testing laboratory employee performing laboratory analysis of the samples, with a chain of custody containing the signatures of the CIH or employee performing the air monitoring.
- D. Certificates: Certify completed training.
 - 1. Submit certificate for each employee signed and dated by CIH and employee stating employee was trained.
- E. Qualifications: Substantiate qualifications comply with specifications.
 - 1. Certified Lead Firm.
 - 2. Testing laboratory.
 - a. Name, address, and telephone number.
 - b. Copy of current AIHA accreditation certificate.
 - 3. Industrial hygienist.
 - a. Name, address, and telephone number.
 - b. Resume showing previous experience.
 - c. Copy of current ABIH CIH certification.
 - 4. Paint disposal facility.
 - a. Name, address, and telephone number.
 - b. Current license or authorization to receive and dispose lead contaminated waste.
- F. Record Documents:
 - 1. Completed and signed waste manifest from waste transporter.
 - 2. Paint disposal facility receipts, manifest, and disposition reports.
 - 3. Certification of medical examinations.
 - 4. Employee training certification.

1.7 QUALITY ASSURANCE

- A. Safety and Health Regulation Compliance:
 - 1. Comply with laws, ordinances, rules, and regulations of federal, state, and local authorities having jurisdiction regarding removing, handling, storing, transporting, and disposing lead waste materials.
 - a. Comply with applicable requirements of 29 CFR Part 1910.1025.
 - b. Notify the COR and request resolution of conflicts between regulations and specified requirements before starting work.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

05-12-2022

2. Comply with the following local laws, ordinances, criteria, rules and regulations regarding removing, handling, storing, transporting, and disposing lead-contaminated materials:
 - a. Minnesota Statutes 144.9501-144.9512.
 - b. Minnesota Administrative Rules 4761.2000-4761.2700.
- B. Certified Lead Firm:: Experienced Contractor, registered or licensed by applicable state agency regulating lead-based paint removal.
- C. Testing Laboratory: State certified independent testing laboratory experienced in airborne lead analysis and reporting.
 1. Accredited by American Industrial Hygiene Association (AIHA).
- D. Certified Industrial Hygienist: Certified as CIH by American Board of Industrial Hygiene in comprehensive practice and responsible for:
 1. Certify Training.
 2. Review and approve lead-based paint removal plan for conformance to applicable referenced standards.
 3. Inspect lead-based paint removal work for conformance with approved plan.
 4. Direct monitoring.
 5. Ensure work is performed according to specifications.
 6. Ensure personnel and environment hazardous exposures are adequately controlled.
- E. Paint Disposal Facility: State certified disposal facility qualified to receive and dispose of lead-based paint or lead contaminated demolition debris.
- F. Lead-based Paint Removal Plan:
 1. Submit detailed, site-specific plan describing lead-based paint removal procedures.
 2. Include sketch showing location, size, and details of lead control areas, decontamination rooms, change rooms, shower facilities, and mechanical ventilation system.
 3. Include eating, drinking, and restroom procedures, interface of trades, work sequencing, collected wastewater and paint debris disposal plan, air sampling plan, respirators, protective equipment, and detailed description of containment methods ensuring airborne lead concentrations do not exceed action level outside lead control area.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

05-12-2022

- a. Eating, drinking, and smoking are not acceptable within lead control area.
- 4. Include air sampling, training and strategy, sampling methodology, frequency, duration, and qualifications of air monitoring personnel.
- G. Respiratory Protection Program: Establish and implement program required by 29 CFR Part 1910.134, 29 CFR Part 1910.1025, and 29 CFR Part 1926.62.
 - 1. Provide each employee negative pressure or other appropriate respirator.
 - a. Test fit each employee's respirator at initial fitting and maximum 6 month intervals, as required by 29 CFR Part 1926.62.
- H. Hazard Communication Program: Establish and implement program required by 29 CFR Part 1910.1200.
- I. Hazardous Waste Management Plan: Establish and implement plan according to applicable requirements of Federal, State, and local hazardous waste regulations including the following:
 - 1. Identification of hazardous wastes associated with work.
 - 2. Estimated quantities of generated and disposed waste.
 - 3. Names and qualifications of each contractor transporting, storing, treating, and disposing wastes. Include facility location and 24-hour point of contact.
 - 4. Names and qualifications (experience and training) of personnel working on-site with hazardous wastes.
 - 5. List of required waste handling equipment including cleaning, volume reduction, and transport equipment.
 - 6. Spill prevention, containment, and cleanup contingency implementation measures.
 - 7. Work plan and schedule for waste containment, removal, and disposal with daily waste cleaned up and containerization.
 - 8. Hazardous waste disposal cost.

1.8 WARRANTY

- A. Construction Warranty: FAR clause 52.246-21, "Warranty of Construction."

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

05-12-2022

PART 2 - PRODUCTS

2.1 PAINT REMOVAL PRODUCTS

- A. Chemical strippers are not to be utilized for paint removal activities.

2.2 ACCESSORIES

- A. Waste Collection Drums: 49 CFR Part 178; Type 1A2, steel, removable head, 200 L (55 gal.) capacity, capable of containing waste without loss.
- B. Vacuum Cleaner: HEPA filtered type.
- C. Scrapers:
 - 1. Metal type for use on metal, concrete, and masonry surfaces.
 - 2. Plastic type for use on wood, plaster, gypsum board, and other surfaces.
- D. Rinse Water: Potable.
- E. Cleaning Cloths: Cotton.

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Before exposure to lead-contaminated dust, provide workers with comprehensive medical examination required by 29 CFR Part 1926.62 (I) (1) (i) and (ii).
 - 1. Exemption: Examination is not required when employee medical records show last examination required by 29 CFR Part 1926.62(I) was completed within previous 12 months.
- B. Maintain complete and accurate employee medical records according to 29 CFR Part 1910.20.
- C. Train each employee performing paint removal, disposal, and air sampling operations according to 29 CFR Part 1926.62.
 - 1. Certify training is completed before employee is permitted to work on project and enter lead control area.

3.2 PREPARATION

- A. Protect existing work indicated to remain.
 - 1. Perform paint removal work without damaging and contaminating adjacent work.
 - 2. Restore damage and contamination to original condition.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

05-12-2022

- B. Notify Contracting Officer 20 days before starting paint removal work.
- C. Lead Control Area Requirements:
1. Establish lead control area by completely enclosing lead-based paint component removal work areas by roping off the work area and laying down 6-mil plastic sheet drop cloths.
 2. Contain glazed block demolition and removal operations using negative pressure full containment system with minimum one change room and HEPA filtered exhaust.
- D. Boundary Requirements: Provide physical boundaries around lead control areas by roping off the areas, designated on drawings, or providing curtains, portable partitions or other enclosures to ensure that airborne lead concentrations do not meet or exceed action level outside of lead control area.
- E. Heating, Ventilating and Air Conditioning (HVAC) Systems: Shut down, lock out, and isolate HVAC systems supplying exhausting, and passing through lead control areas. Seal HVAC inlets and outlet within lead control area with 6-mil plastic sheet and tape. Tape seal seams in HVAC components passing through lead control area.
- F. Change Room and Shower Facilities: Provide clean change rooms and shower facilities within physical boundary around lead control area according to 29 CFR Part 1926.62.
- G. Mechanical Ventilation System:
1. Provide ventilation system to control personnel exposure to lead according to 29 CFR Part 1926.57.
 2. Design, construct, install, and maintain HEPA filtered fixed local exhaust ventilation system according to ANSI Z9.2 and approved by CIH.
 3. Exhaust ventilation air to exterior wherever possible.
 4. When exhaust ventilation air must be recirculated into work area, provide HEPA filter with reliable back-up filter and controls to monitor lead concentration in return air and to bypass recirculation system automatically when system fails.
- H. Personnel Protection: Provide and use required protective clothing and equipment within lead control area.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

05-12-2022

- I. Warning Signs: Provide warning signs complying with 29 CFR Part 1926.62 at lead control area approaches. Locate signs so personnel read signs and take necessary precautions before entering lead control area.

3.3 WORK PROCEDURES

- A. Remove lead-based paint according to approved lead-based paint removal plan.
1. Remove lead-based glazed blocks within a negative pressure full containment system.
 2. Remove lead-based paint doors and duct systems via intact component removal procedures.
 3. Remove lead-based paint windows via intact component removal procedures in conjunction with asbestos abatement.
 4. Perform work only in presence of CIH or Industrial Hygienist (IH) Technician under direction of CIH ensuring continuous inspection of work in progress and direction of air monitoring activities.
 5. Handle, store, transport, and dispose lead or and lead contaminated waste according to 40 CFR Part 260, 40 CFR Part 261, 40 CFR Part 262, 40 CFR Part 263, 40 CFR Part 264, and 40 CFR Part 265. Comply with land disposal restriction notification requirements as required by 40 CFR Part 268.
- B. Use procedures and equipment required to limit occupational and environmental lead exposure when lead-based paint is removed according to 29 CFR Part 1926.62.
- C. Dispose lead-based paint containing items, lead contaminated debris, removed paint and waste according to Environmental Protection Agency (EPA), federal, state, and local requirements.
- D. Personnel Exiting Procedures:
1. When personnel exit lead control area, comply with the following procedures:
 - a. Vacuum exposed clothing surfaces.
 - b. Remove protective clothing and equipment in decontamination room. Place clothing in approved impermeable disposal bag.
 - c. Shower.
 - d. Dress in clean clothes before leaving lead control area.
- E. Monitoring - General:

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

05-12-2022

1. Monitor airborne lead concentrations according to 29 CFR Part 1910.1025 by testing laboratory as directed by CIH.
2. Take personal air monitoring samples on employees anticipated to have greatest exposure risk as determined by CIH. Additionally, take air monitoring samples on minimum 25 percent of work crew or minimum of two employees, whichever is greater, during each work shift.
3. Submit results of air monitoring samples, signed by CIH, within 24 hours after taking air samples. Notify the COR immediately of lead exposure at or exceeding action level outside of lead control area.

F. Monitoring During Paint Removal:

1. Perform personal and area monitoring during entire paint removal operation.
2. Conduct area monitoring at physical boundary daily for each work shift to ensure unprotected personnel are not exposed above action level anytime.
3. Stop work when outside boundary lead levels meet or exceed action level. Notify the COR immediately.
4. Correct conditions causing increased lead concentration as directed by CIH.
5. Review sampling data collected during work stoppage to determine if conditions require additional work method modifications as determined by CIH.
6. Resume paint removal when approved by CIH.

3.4 LEAD-BASED PAINT REMOVAL

- A. Remove paint within areas indicated on drawings completely exposing or removing the substrate.
- B. Comply with paint removal processes described in the lead paint removal plan.
- C. Lead-Based Paint Removal: Select processes for each application to minimize work area lead contamination and waste.

3.5 FIELD QUALITY CONTROL

- A. Field Tests: Performed by the CIH.
- B. Perform sampling and testing for:
 1. Lead in Air monitoring per OSHA requirements.
 2. Lead dust wipe clearance sampling.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

05-12-2022

3.6 CLEANING AND DISPOSAL

A. Cleaning:

1. Maintain lead control area surfaces free of accumulating paint chips and dust. Confine dust, debris, and waste to work area.
2. Clean the work area of visible lead paint contamination by vacuuming with a HEPA filtered vacuum cleaner and wet mopping or wet wiping the work area. Do not dry sweep or use compressed air to clean up the work area.
3. HEPA Vacuum clean work area daily, at end of each shift, and when paint removal operation is complete.

B. CIH Certification: Certify in writing that inside and outside lead control area air monitoring samples are less than action level, employee respiratory protection was adequate, the work was performed according to 29 CFR Part 1926.62, and no visible accumulations of lead-based paint and dust remain on worksite and lead clearance wipes pass the clearance testing criteria.

1. The CIH shall collect one (1) lead dust wipe sample for every 2,000 square feet of floor space within the work area and one (1) lead dust wipe sample from the common entry/exit route of the work area, but outside of the work area.
 - a. A floor sealant may be applied upon completion of cleaning activities and prior to the collection of clearance dust wipes.
 - b. Clearance dust levels must meet the Environmental Protection Agency (EPA) clearance level of ten (10) micrograms per square foot ($\mu\text{g}/\text{ft}^2$) on floors.
2. Do not remove lead control area or roped-off boundary and warning signs before the COR's receipt of CIH's certification.
3. Reclean areas showing dust or residual paint chips.

C. Testing: Where indicated and when directed by the COR, test segregated lead-based paint waste stream and used abrasive according to 40 CFR Part 261 for hazardous waste.

D. Waste Collection:

1. Collect lead-contaminated materials including waste, scrap, debris, bags, containers, equipment, and clothing, which may produce airborne lead contamination.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

05-12-2022

2. Place lead contaminated materials in waste disposal drums. Label each drum identifying waste type according to 49 CFR Part 172 and date waste materials were first put into drum. Obtain and complete the Uniform Hazardous Waste Manifest forms. Comply with land disposal restriction notification requirements required by 40 CFR Part 268.
 3. Lead-containing window systems removed in conjunction with asbestos abatement will be disposed of as asbestos waste per Section 02 82 11, TRADITIONAL ASBESTOS ABATEMENT.
 4. The CIH shall collect Toxicity Characteristic Leaching Procedure (TCLP) samples of waste, not including the demolition debris and the testing shall be performed by a laboratory accredited by either the American Industrial Hygiene Association (AIHA) or the American Association of Laboratory Accreditation (AALA).
 - a. Waste tested which results in a lead content in the leachate of greater than or equal to five parts per million is to be considered hazardous, handled and disposed of according to local, city, state, and federal regulations.
 5. Coordinate temporary storage location on project site with the COR.
- E. Waste Disposal:
1. Do not store hazardous waste drums in temporary storage location longer than 90 calendar days from drum label date.
 2. Remove, transport, and deliver drums to paint disposal facility.
 - a. Obtain signed receipt including date, time, quantity, and description of materials received according to 40 CFR Part 262.
 - b. Obtain final report of materials disposition after disposal completion.

- - - E N D - - -

DIVISION 03

CONCRETE

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

07-01-19

**SECTION 03 30 00
CAST-IN-PLACE CONCRETE**

PART 1 - GENERAL

1.1 DESCRIPTION:

This section specifies cast-in-place structural concrete and materials and mixes for other concrete.

1.2 RELATED WORK:

- A. Materials testing and inspection during construction: Section 01 45 29, TESTING LABORATORY SERVICES.
- B. Concrete roads, walks, and similar exterior site work: Section 32 05 23, CEMENT AND CONCRETE FOR EXTERIOR IMPROVEMENTS.

1.3 TESTING AGENCY FOR CONCRETE MIX DESIGN:

- A. Testing agency for the trial concrete mix design retained and reimbursed by the Contractor and approved by Resident Engineer. For all other testing, refer to Section 01 45 29 Testing Laboratory Services.
- B. Testing agency maintaining active participation in Program of Cement and Concrete Reference Laboratory (CCRL) of National Institute of Standards and Technology. Accompany request for approval of testing agency with a copy of Report of Latest Inspection of Laboratory Facilities by CCRL
- C. Testing agency shall furnish equipment and qualified technicians to establish proportions of ingredients for concrete mixes.

1.4 TOLERANCES:

- A. Formwork: ACI 117, except the elevation tolerance of formed surfaces before removal of shores is +0 mm (+0 inch) and -20 mm (-3/4 inch).
- B. Reinforcement Fabricating and Placing: ACI 117, except that fabrication tolerance for bar sizes Nos. 10, 13, and 16 (Nos. 3, 4, and 5) (Tolerance Symbol 1 in Fig. 2.1(a), ACI, 117) used as column ties or stirrups is +0 mm (+0 inch) and -13 mm (-1/2 inch) where gross bar

Contract No. 36C26319D0022

Station Project No. 656-400

Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

12-01-15

length is less than 3600 mm (12 feet), or +0 mm (+0 inch) and -20 mm (-3/4 inch) where gross bar length is 3600 mm (12 feet) or more.

C. Cross-Sectional Dimension: ACI 117, except tolerance for thickness of slabs 12 inches or less is +20 mm (+3/4 inch) and - 6 mm (-1/4 inch). Tolerance of thickness of beams more than 300 mm (12 inch) but less than 900 mm (3 feet) is +20 mm (+3/4 inch) and -10 mm (-3/8 inch).

D. Slab Finishes: ACI 117, Section 4.5.6, F-number method in accordance with ASTM E1155, except as follows:

1. Test entire slab surface, including those areas within 600 mm (2 feet) of construction joints and vertical elements that project through slab surface.
2. Maximum elevation change which may occur within 600 mm (2 feet) of any column or wall element is 6 mm (0.25 inches).
3. Allow sample measurement lines that are perpendicular to construction joints to extend past joint into previous placement no further than 1500 mm (5 feet).

1.5 REGULATORY REQUIREMENTS:

- A. ACI SP-66 - ACI Detailing Manual.
- B. ACI 318 - Building Code Requirements for Reinforced Concrete.
- C. ACI 301 - Standard Specifications for Structural Concrete.

1.6 SUBMITTALS:

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, and SAMPLES.
- B. Shop Drawings: Reinforcing steel: Complete shop drawings
- C. Mill Test Reports:
 1. Reinforcing Steel.
 2. Cement.
- D. Manufacturer's Certificates:
 1. .
 2. Lightweight aggregate for structural concrete.
 3. Air-entraining admixture.

Contract No. 36C26319D0022

Station Project No. 656-400

Bancroft-AE No. 18-116

03 30 00 - 2

10/28/2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

12-01-15

4. Chemical admixtures, including chloride ion content.
 5. Waterproof paper for curing concrete.
 6. Liquid membrane-forming compounds for curing concrete.
 7. Non-shrinking grout.
 8. Liquid hardener.
 9. Waterstops.
 10. Expansion joint filler.
 11. Adhesive binder.
- E. Testing Agency for Concrete Mix Design: Approval request including qualifications of principals and technicians and evidence of active participation in program of Cement and Concrete Reference Laboratory (CCRL) of National Institute of Standards and Technology and copy of report of latest CCRL, Inspection of Laboratory.
- F. Test Report for Concrete Mix Designs: Trial mixes including water-cement fly ash ratio curves, concrete mix ingredients, and admixtures.
- G. Shoring and Reshoring Sequence: Submit for approval a shoring and reshoring sequence for flat slab/flat plate portions, prepared by a registered Professional Engineer. As a minimum, include timing of form stripping, reshoring, number of floors to be re-shored and timing of re-shore removal to serve as an initial outline of procedures subject to modification as construction progresses. Submit revisions to sequence, whether initiated by Resident Engineer (see FORMWORK) or Contractor.

1.7 DELIVERY, STORAGE, AND HANDLING:

- A. Conform to ACI 304. Store aggregate separately for each kind or grade, to prevent segregation of sizes and avoid inclusion of dirt and other materials.
- B. Deliver cement in original sealed containers bearing name of brand and manufacturer, and marked with net weight of contents. Store in suitable watertight building in which floor is raised at least 300 mm (1 foot)

Contract No. 36C26319D0022

Station Project No. 656-400

Bancroft-AE No. 18-116

03 30 00 - 3

10/28/2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

12-01-15

above ground. Store bulk cement and fly ash in separate suitable bins.

- C. Deliver other packaged materials for use in concrete in original sealed containers, plainly marked with manufacturer's name and brand, and protect from damage until used.

1.8 PRE-CONCRETE CONFERENCE:

- A. General: At least 15 days prior to submittal of design mixes, conduct a meeting to review proposed methods of concrete construction to achieve the required results.
- B. Agenda: Includes but is not limited to:
 - 1. Submittals.
 - 2. Coordination of work.
 - 3. Availability of material.
 - 4. Concrete mix design including admixtures.
 - 5. Methods of placing, finishing, and curing.
 - 6. Finish criteria required to obtain required flatness and levelness.
 - 7. Timing of floor finish measurements.
 - 8. Material inspection and testing.
- C. Attendees: Include but not limited to representatives of Contractor; subcontractors involved in supplying, conveying, placing, finishing, and curing concrete; lightweight aggregate manufacturer; admixture manufacturers; Resident Engineer; Consulting Engineer; Department of Veterans Affairs retained testing laboratories for concrete testing and finish (F-number) verification.
- D. Minutes of the meeting: Contractor shall take minutes and type and distribute the minutes to attendees within five days of the meeting.

Contract No. 36C26319D0022

Station Project No. 656-400

Bancroft-AE No. 18-116

03 30 00 - 4

10/28/2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

12-01-15

1.9

1.10 APPLICABLE PUBLICATIONS:

A. Publications listed below form a part of this specification to extent referenced. Publications are referenced in text by basic designation only.

B. American Concrete Institute (ACI):

117-10.....Specifications for Tolerances for Concrete
Construction and Materials and Commentary

211.1-91 (R2009).....Standard Practice for Selecting Proportions for
Normal, Heavyweight, and Mass Concrete

211.2-98 (R2004).....Standard Practice for Selecting Proportions for
Structural Lightweight Concrete

214R-11.....Guide to Evaluation of Strength Test Results of
Concrete

301-10.....Standard Practice for Structural Concrete

304R-00 (R2009).....Guide for Measuring, Mixing, Transporting, and
Placing Concrete

305.1-06.....Specification for Hot Weather Concreting

306.1-90 (R2002).....Standard Specification for Cold Weather
Concreting

308.1-11.....Specification for Curing Concrete

309R-05.....Guide for Consolidation of Concrete

318-11.....Building Code Requirements for Structural
Concrete and Commentary

347-04.....Guide to Formwork for Concrete

SP-66-04.....ACI Detailing Manual

C. American National Standards Institute and American Hardboard
Association (ANSI/AHA):

A135.4-2004.....Basic Hardboard

D. American Society for Testing and Materials (ASTM):

Contract No. 36C26319D0022

Station Project No. 656-400

Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

12-01-15

- A82/A82M-07.....Standard Specification for Steel Wire, Plain,
for Concrete Reinforcement
- A185/185M-07.....Standard Specification for Steel Welded Wire
Reinforcement, Plain, for Concrete
- A615/A615M-09.....Standard Specification for Deformed and Plain
Carbon Steel Bars for Concrete Reinforcement
- A653/A653M-11.....Standard Specification for Steel Sheet, Zinc
Coated (Galvanized) or Zinc Iron Alloy Coated
(Galvannealed) by the Hot Dip Process
- A706/A706M-09.....Standard Specification for Low Alloy Steel
Deformed and Plain Bars for Concrete
Reinforcement
- A767/A767M-09.....Standard Specification for Zinc Coated
(Galvanized) Steel Bars for Concrete
Reinforcement
- A775/A775M-07.....Standard Specification for Epoxy Coated
Reinforcing Steel Bars
- A820-11.....Standard Specification for Steel Fibers for
Fiber Reinforced Concrete
- A996/A996M-09.....Standard Specification for Rail Steel and Axle
Steel Deformed Bars for Concrete Reinforcement
- C31/C31M-10.....Standard Practice for Making and Curing
Concrete Test Specimens in the field
- C33/C33M-11A.....Standard Specification for Concrete Aggregates
- C39/C39M-12.....Standard Test Method for Compressive Strength
of Cylindrical Concrete Specimens
- C94/C94M-12.....Standard Specification for Ready Mixed Concrete
- C143/C143M-10.....Standard Test Method for Slump of Hydraulic
Cement Concrete
- C150-11.....Standard Specification for Portland Cement

Contract No. 36C26319D0022

Station Project No. 656-400

Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

12-01-15

- C171-07.....Standard Specification for Sheet Materials for
Curing Concrete
- C172-10.....Standard Practice for Sampling Freshly Mixed
Concrete
- C173-10.....Standard Test Method for Air Content of Freshly
Mixed Concrete by the Volumetric Method
- C192/C192M-07.....Standard Practice for Making and Curing
Concrete Test Specimens in the Laboratory
- C231-10.....Standard Test Method for Air Content of Freshly
Mixed Concrete by the Pressure Method
- C260-10.....Standard Specification for Air Entraining
Admixtures for Concrete
- C309-11.....Standard Specification for Liquid Membrane
Forming Compounds for Curing Concrete
- C330-09.....Standard Specification for Lightweight
Aggregates for Structural Concrete
- C494/C494M-11.....Standard Specification for Chemical Admixtures
for Concrete
- C618-12.....Standard Specification for Coal Fly Ash and Raw
or Calcined Natural Pozzolan for Use in
Concrete
- C666/C666M-03 (R2008)....Standard Test Method for Resistance of Concrete
to Rapid Freezing and Thawing
- C881/C881M-10.....Standard Specification for Epoxy Resin Base
Bonding Systems for Concrete
- C1107/1107M-11.....Standard Specification for Packaged Dry,
Hydraulic-Cement Grout (Non-shrink)
- C1315-11.....Standard Specification for Liquid Membrane
Forming Compounds Having Special Properties for
Curing and Sealing Concrete

Contract No. 36C26319D0022

Station Project No. 656-400

Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

12-01-15

- D6-95 (R2011).....Standard Test Method for Loss on Heating of Oil and Asphaltic Compounds
- D297-93 (R2006).....Standard Methods for Rubber Products Chemical Analysis
- D412-06AE2.....Standard Test Methods for Vulcanized Rubber and Thermoplastic Elastomers - Tension
- D1751-04 (R2008).....Standard Specification for Preformed Expansion Joint Filler for Concrete Paving and Structural Construction (Non-extruding and Resilient Bituminous Types)
- D4263-83 (2012).....Standard Test Method for Indicating Moisture in Concrete by the Plastic Sheet Method.
- E1155-96 (R2008).....Standard Test Method for Determining F_F Floor Flatness and F_L Floor Levelness Numbers
- F1249-13.....Standard Test Method for Water Vapor Transmission Rate Through Plastic Film and Sheeting Using a Modulated Infrared Sensor

- F1869-11.....Standard Test Method for Measuring Moisture Vapor Emission Rate of Concrete Subfloor Using Anhydrous Calcium Chloride.

E. American Welding Society (AWS):

D1.4/D1.4M-11.....Structural Welding Code - Reinforcing Steel

F. Concrete Reinforcing Steel Institute (CRSI):

Handbook 2008

G. National Cooperative Highway Research Program (NCHRP):

Report On.....Concrete Sealers for the Protection of Bridge Structures

H. U. S. Department of Commerce Product Standard (PS):

PS 1.....Construction and Industrial Plywood

Contract No. 36C26319D0022

Station Project No. 656-400

Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

12-01-15

PS 20.....American Softwood Lumber

I. U. S. Army Corps of Engineers Handbook for Concrete and Cement:

CRD C513.....Rubber Waterstops

CRD C572.....Polyvinyl Chloride Waterstops

PART 2 - PRODUCTS:

2.1 FORMS:

A. Wood: PS 20 free from loose knots and suitable to facilitate finishing concrete surface specified; tongue and grooved.

B. Plywood: PS-1 Exterior Grade B-B (concrete-form) 16 mm (5/8 inch), or 20 mm (3/4 inch) thick for unlined contact form. B-B High Density Concrete Form Overlay optional.

C. .

D.

E. .

F. Form Lining:

1. Hardboard: ANSI/AHA A135.4, Class 2 with one (S1S) smooth side)

2. Plywood: Grade B-B Exterior (concrete-form) not less than 6 mm (1/4 inch) thick.

3. Plastic, fiberglass, or elastomeric capable of reproducing the desired pattern or texture.

G. Concrete products shall comply with following standards for biobased materials:

Material Type	Percent by Weight
Concrete Penetrating Liquid	79 percent biobased material
Concrete form Release Agent	87 percent biobased material
Concrete Sealer	11 percent biobased material

The minimum-content standards are based on the weight (not the volume) of the material.

Contract No. 36C26319D0022

Station Project No. 656-400

Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

12-01-15

H. Form Ties: Develop a minimum working strength of 13.35 kN (3000 pounds) when fully assembled. Ties shall be adjustable in length to permit tightening of forms and not have any lugs, cones, washers to act as spreader within form, nor leave a hole larger than 20 mm (3/4 inch) diameter, or a depression in exposed concrete surface, or leave metal closer than 40 mm (1 1/2 inches) to concrete surface. Wire ties not permitted. Cutting ties back from concrete face not permitted.

2.2 MATERIALS:

- A. Portland Cement: ASTM C150 Type I or II.
- B. Fly Ash: ASTM C618, Class C or F including supplementary optional requirements relating to reactive aggregates and alkalis, and loss on ignition (LOI) not to exceed 5 percent.
- C. Coarse Aggregate: ASTM C33.
 - 1. Size 67 or Size 467 may be used for footings and walls over 300 mm (12 inches) thick.
 - 2. Coarse aggregate for applied topping, encasement of steel columns, and metal pan stair fill shall be Size 7.
 - 3. Maximum size of coarse aggregates not more than one-fifth of narrowest dimension between sides of forms, one-third of depth of slabs, nor three-fourth of minimum clear spacing between reinforcing bars.
- D. Lightweight Aggregates for Structural Concrete: ASTM C330, Table 1. Maximum size of aggregate not larger than one-fifth of narrowest dimension between forms, nor three-fourth of minimum clear distance between reinforcing bars. Contractor to furnish certified report to verify that aggregate is sound and durable, and has a durability factor of not less than 80 based on 300 cycles of freezing and thawing when tested in accordance with ASTM C666.
- E. Fine Aggregate: ASTM C33. Fine aggregate for applied concrete floor topping shall pass a 4.75 mm (No. 4) sieve, 10 percent maximum shall pass a 150 µm (No. 100) sieve.

Contract No. 36C26319D0022

Station Project No. 656-400

Bancroft-AE No. 18-116

03 30 00 - 10

10/28/2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

12-01-15

F. Mixing Water: Fresh, clean, and potable.

G. Admixtures:

1. Water Reducing Admixture: ASTM C494, Type A and not contain more chloride ions than are present in municipal drinking water.
2. Water Reducing, Retarding Admixture: ASTM C494, Type D and not contain more chloride ions than are present in municipal drinking water.
3. High-Range Water-Reducing Admixture (Superplasticizer): ASTM C494, Type F or G, and not contain more chloride ions than are present in municipal drinking water.
4. Non-Corrosive, Non-Chloride Accelerator: ASTM C494, Type C or E, and not contain more chloride ions than are present in municipal drinking water. Admixture manufacturer must have long-term non-corrosive test data from an independent testing laboratory of at least one year duration using an acceptable accelerated corrosion test method such as that using electrical potential measures.
5. Air Entraining Admixture: ASTM C260.
7. Calcium Nitrite corrosion inhibitor: ASTM C494 Type C.
8. Prohibited Admixtures: Calcium chloride, thiocyanate or admixtures containing more than 0.05 percent chloride ions are not permitted.
9. Certification: Written conformance to the requirements above and the chloride ion content of the admixture prior to mix design review.

H. Vapor Barrier: ASTM F1249, 0.38 mm (15 mil) WVT 0.007 ft./hr..

I. Reinforcing Steel: ASTM A615, or ASTM A996, deformed, grade as shown.

J. Welded Wire Fabric: ASTM A185.

K. Reinforcing Bars to be Welded: ASTM A706.

L.

Contract No. 36C26319D0022

Station Project No. 656-400

Bancroft-AE No. 18-116

03 30 00 - 11

10/28/2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

12-01-15

- P. Reinforcement for Metal Pan Stair Fill: 50 mm (2 inch) wire mesh, either hexagonal mesh at .8Kg/m² (1.5 pounds per square yard), or square mesh at .6Kg/m² (1.17 pounds per square yard).
- Q. Supports, Spacers, and Chairs: Types which will hold reinforcement in position shown in accordance with requirements of ACI 318 except as specified.
- R. Expansion Joint Filler: ASTM D1751.
- S. Sheet Materials for Curing Concrete: ASTM C171.
- T. Liquid Membrane-forming Compounds for Curing Concrete: ASTM C309, Type I, with fugitive dye, and shall meet the requirements of ASTM C1315. Compound shall be compatible with scheduled surface treatment, such as paint and resilient tile, and shall not discolor concrete surface.
- U.
- W. Moisture Vapor Emissions & Alkalinity Control Sealer: 100% active colorless aqueous silicate solution concrete surface.
1. ASTM C1315 Type 1 Class A, and ASTM C309 Type 1 Class A, penetrating product to have no less than 34% solid content, leaving no sheen, volatile organic compound (VOC) content rating as required to suite regulatory requirements. The product shall have at least a five (5) year documented history in controlling moisture vapor emission from damaging floor covering, compatible with all finish materials.
 2. MVE 15-Year Warranty:
 - a. When a floor covering is installed on a below grade, on grade, or above grade concrete slab treated with Moisture Vapor Emissions & Alkalinity Control Sealer according to manufacturer's instruction, sealer manufacturer shall warrant the floor covering system against failure due to moisture vapor migration or moisture-born contaminants for a period of fifteen (15) years from the date of original installation. The warranty shall cover all labor and materials needed to replace all floor covering that

Contract No. 36C26319D0022

Station Project No. 656-400

Bancroft-AE No. 18-116

03 30 00 - 12

10/28/2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

12-01-15

fails due to moisture vapor emission & moisture born
contaminates.

- X. Penetrating Sealer: For use on parking garage ramps and decks. High penetration silane sealer providing minimum 95 percent screening per National Cooperative Highway Research Program (NCHRP) No. 244 standards for chloride ion penetration resistance. Requires moist (non-membrane) curing of slab.
- Y. Non-Shrink Grout:
1. ASTM C1107, pre-mixed, produce a compressive strength of at least 18 MPa at three days and 35 MPa (5000 psi) at 28 days. Furnish test data from an independent laboratory indicating that the grout when placed at a fluid consistency shall achieve 95 percent bearing under a 1200 mm x 1200 mm (4 foot by 4 foot) base plate.
 2. Where high fluidity or increased placing time is required, furnish test data from an independent laboratory indicating that the grout when placed at a fluid consistency shall achieve 95 percent under an 450 mm x 900 mm (18 inch by 36 inch) base plate.
- Z. Adhesive Binder: ASTM C881.
- AA. Waterstops:
1. Polyvinyl Chloride Waterstop: CRD C572.
 - 2.
- BB. Porous Backfill: Crushed stone or gravel graded from 25 mm to 20 mm (1 inch to 3/4 inch).
- CC.
- DD. Epoxy Joint Filler: Two component, 100 percent solids compound, with a minimum shore D hardness of 50.
- EE. Bonding Admixture: Non-rewettable, polymer modified, bonding compound.
- FF. Architectural Concrete: For areas designated as architectural concrete on the Contract Documents, use colored cements and specially selected

Contract No. 36C26319D0022

Station Project No. 656-400

Bancroft-AE No. 18-116

03 30 00 - 13

10/28/2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

12-01-15

aggregates as necessary to produce a concrete of a color and finish which exactly matches the designated sample panel.

2.3 CONCRETE MIXES:

- A. Mix Designs: Proportioned in accordance with Section 5.3, "Proportioning on the Basis of Field Experience and/or Trial Mixtures" of ACI 318.
1. If trial mixes are used, make a set of at least 6 cylinders in accordance with ASTM C192 for test purposes from each trial mix; test three for compressive strength at 7 days and three at 28 days.
 2. Submit a report of results of each test series, include a detailed listing of the proportions of trial mix or mixes, including cement, fly ash, admixtures, weight of fine and coarse aggregate per m³ (cubic yard) measured dry rodded and damp loose, specific gravity, fineness modulus, percentage of moisture, air content, water-cement -fly ash ratio, and consistency of each cylinder in terms of slump. include dry unit weight of lightweight structural concrete.
 3. Prepare a curve showing relationship between water-cement -fly ash ratio at 7-day and 28-day compressive strengths. Plot each curve using at least three specimens.
 4. If the field experience method is used, submit complete standard deviation analysis.
- B. Fly Ash Testing: Submit certificate verifying conformance with ASTM 618 initially with mix design and for each truck load of fly ash delivered from source. Submit test results performed within 6 months of submittal date. Notify Resident Engineer immediately when change in source is anticipated.

Contract No. 36C26319D0022

Station Project No. 656-400

Bancroft-AE No. 18-116

03 30 00 - 14

10/28/2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

12-01-15

1. Testing Laboratory used for fly ash certification/testing shall participate in the Cement and Concrete Reference Laboratory (CCRL) program. Submit most recent CCRL inspection report.
- C. After approval of mixes no substitution in material or change in proportions of approval mixes may be made without additional tests and approval of Resident Engineer or as specified. Making and testing of preliminary test cylinders may be carried on pending approval of cement and fly ash, providing Contractor and manufacturer certify that ingredients used in making test cylinders are the same. Resident Engineer may allow Contractor to proceed with depositing concrete for certain portions of work, pending final approval of cement and fly ash and approval of design mix.
- D. Cement Factor: Maintain minimum cement factors in Table I regardless of compressive strength developed above minimums. Use Fly Ash as an admixture with 20% replacement by weight in all structural work. Increase this replacement to 40% for mass concrete, and reduce it to 10% for drilled piers and caissons. Fly ash shall not be used in high-early mix design.

Contract No. 36C26319D0022

Station Project No. 656-400

Bancroft-AE No. 18-116

03 30 00 - 15

10/28/2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

12-01-15

TABLE I - CEMENT AND WATER FACTORS FOR CONCRETE

Concrete Strength		Non-Air-Entrained	Air-Entrained	
Min. 28 Day Comp. Str. MPa (psi)	Min. Cement kg/m ³ (lbs/c. yd)	Max. Water Cement Ratio	Min. Cement kg/m ³ (lbs/c. yd)	Max. Water Cement Ratio
30 (4000) ^{1,3}	325 (550)	0.45	340 (570)	0.45

1. If trial mixes are used, the proposed mix design shall achieve a compressive strength 8.3 MPa (1200 psi) in excess of f'c. For concrete strengths above 35 Mpa (5000 psi), the proposed mix design shall achieve a compressive strength 9.7 MPa (1400 psi) in excess of f'c.
 2. Lightweight Structural Concrete. Pump mixes may require higher cement values.
 3. For concrete exposed to high sulfate content soils maximum water cement ratio is 0.44.
 4. Determined by Laboratory in accordance with ACI 211.1 for normal concrete or ACI 211.2 for lightweight structural concrete.
- E. Maximum Slump: Maximum slump, as determined by ASTM C143 with tolerances as established by ASTM C94, for concrete to be vibrated shall be as shown in Table II.

TABLE II - MAXIMUM SLUMP, MM (INCHES) *

Type of Construction	Normal Weight	Lightweight Structural
----------------------	---------------	------------------------

Contract No. 36C26319D0022

Station Project No. 656-400

Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

12-01-15

	Concrete	Concrete
Reinforced Footings and Substructure Walls	75mm (3 inches)	75 mm (3 inches)
Slabs, Beams, Reinforced Walls, and Building Columns	100 mm (4 inches)	100 mm (4 inches)

F. Slump may be increased by the use of the approved high-range water-reducing admixture (superplasticizer). Tolerances as established by ASTM C94. Concrete containing the high-range-water-reducing admixture may have a maximum slump of 225 mm (9 inches). The concrete shall arrive at the job site at a slump of 50 mm to 75 mm (2 inches to 3 inches), and 75 mm to 100 mm (3 inches to 4 inches) for lightweight concrete. This should be verified, and then the high-range-water-reducing admixture added to increase the slump to the approved level.

G. Air-Entrainment: Air-entrainment of normal weight concrete shall conform with Table III. Air-entrainment of lightweight structural concrete shall conform with Table IV. Determine air content by either ASTM C173 or ASTM C231.

**TABLE III - TOTAL AIR CONTENT
FOR VARIOUS SIZES OF COARSE AGGREGATES (NORMAL CONCRETE)**

Nominal Maximum Size of Total Air Content	Coarse Aggregate, mm (Inches) Percentage by Volume
10 mm (3/8 in).6 to 10	13 mm (1/2 in).5 to 9
20 mm (3/4 in).4 to 8	25 mm (1 in).3-1/2 to 6-1/2
40 mm (1 1/2 in).3 to 6	

Contract No. 36C26319D0022

Station Project No. 656-400

Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

12-01-15

**TABLE IV
AIR CONTENT OF LIGHTWEIGHT STRUCTURAL CONCRETE**

Nominal Maximum size of Total Air Content	Coarse Aggregate, mm's (Inches) Percentage by Volume
Greater than 10 mm (3/8 in) 4 to 8	10 mm (3/8 in) or less 5 to 9

- H. High early strength concrete, made with Type III cement or Type I cement plus non-corrosive accelerator, shall have a 7-day compressive strength equal to specified minimum 28-day compressive strength for concrete type specified made with standard Portland cement.
- I. Lightweight structural concrete shall not weigh more than air-dry unit weight shown. Air-dry unit weight determined on 150 mm by 300 mm (6 inch by 12 inch) test cylinders after seven days standard moist curing followed by 21 days drying at 23 degrees C \pm 1.7 degrees C (73.4 \pm 3 degrees Fahrenheit), and 50 (plus or minus 7) percent relative humidity. Use wet unit weight of fresh concrete as basis of control in field.
- J. Concrete slabs placed at air temperatures below 10 degrees C (50 degrees Fahrenheit) use non-corrosive, non-chloride accelerator. Concrete required to be air entrained use approved air entraining admixture. Pumped concrete, synthetic fiber concrete, architectural concrete, concrete required to be watertight, and concrete with a water/cement ratio below 0.50 use high-range water-reducing admixture (superplasticizer).
- K. Durability: Use air entrainment for exterior exposed concrete subjected to freezing and thawing and other concrete shown or specified. For air content requirements see Table III or Table IV.
- L. Enforcing Strength Requirements: Test as specified in Section 01 45 29, TESTING LABORATORY SERVICES, during the progress of the work. Seven-day tests may be used as indicators of 28-day strength. Average of any

Contract No. 36C26319D0022

Station Project No. 656-400

Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

12-01-15

three 28-day consecutive strength tests of laboratory-cured specimens representing each type of concrete shall be equal to or greater than specified strength. No single test shall be more than 3.5 MPa (500 psi) below specified strength. Interpret field test results in accordance with ACI 214. Should strengths shown by test specimens fall below required values, Resident Engineer may require any one or any combination of the following corrective actions, at no additional cost to the Government:

1. Require changes in mix proportions by selecting one of the other appropriate trial mixes or changing proportions, including cement content, of approved trial mix.
2. Require additional curing and protection.
3. If five consecutive tests fall below 95 percent of minimum values given in Table I or if test results are so low as to raise a question as to the safety of the structure, Resident Engineer may direct Contractor to take cores from portions of the structure. Use results from cores tested by the Contractor retained testing agency to analyze structure.
4. If strength of core drilled specimens falls below 85 percent of minimum value given in Table I, Resident Engineer may order load tests, made by Contractor retained testing agency, on portions of building so affected. Load tests in accordance with ACI 318 and criteria of acceptability of concrete under test as given therein.
5. Concrete work, judged inadequate by structural analysis, by results of load test, or for any reason, shall be reinforced with additional construction or replaced, if directed by the Resident Engineer.

2.4 BATCHING AND MIXING:

- A. General: Concrete shall be "Ready-Mixed" and comply with ACI 318 and ASTM C94, except as specified. Batch mixing at the site is permitted. Mixing process and equipment must be approved by Resident Engineer.

With each batch of concrete, furnish certified delivery tickets listing

Contract No. 36C26319D0022

Station Project No. 656-400

Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

12-01-15

information in Paragraph 16.1 and 16.2 of ASTM C94. Maximum delivery temperature of concrete is 38°C (100 degrees Fahrenheit). Minimum delivery temperature as follows:

Atmospheric Temperature	Minimum Concrete Temperature
-1. degrees to 4.4 degrees C (30 degrees to 40 degrees F)	15.6 degrees C (60 degrees F.)
-17 degrees C to -1.1 degrees C (0 degrees to 30 degrees F.)	21 degrees C (70 degrees F.)

1. Services of aggregate manufacturer's representative shall be furnished during the design of trial mixes and as requested by the Resident Engineer for consultation during batching, mixing, and placing operations of lightweight structural concrete. Services will be required until field controls indicate that concrete of required quality is being furnished. Representative shall be thoroughly familiar with the structural lightweight aggregate, adjustment and control of mixes to produce concrete of required quality. Representative shall assist and advise Resident Engineer.

PART 3 - EXECUTION

3.1 FORMWORK:

- A. General: Design in accordance with ACI 347 is the responsibility of the Contractor. The Contractor shall retain a registered Professional Engineer to design the formwork, shores, and reshores.
 1. Form boards and plywood forms may be reused for contact surfaces of exposed concrete only if thoroughly cleaned, patched, and repaired and Resident Engineer approves their reuse.
 2. Provide forms for concrete footings unless Resident Engineer determines forms are not necessary.
 - 3.

Contract No. 36C26319D0022

Station Project No. 656-400

Bancroft-AE No. 18-116

03 30 00 - 20

10/28/2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

12-01-15

- B. Treating and Wetting: Treat or wet contact forms as follows:
1. Coat plywood and board forms with non-staining form sealer. In hot weather, cool forms by wetting with cool water just before concrete is placed.
 2. Clean and coat removable metal forms with light form oil before reinforcement is placed. In hot weather, cool metal forms by thoroughly wetting with water just before placing concrete.
 3. Use sealer on reused plywood forms as specified for new material.
- C. Size and Spacing of Studs: Size and space studs, wales and other framing members for wall forms so as not to exceed safe working stress of kind of lumber used nor to develop deflection greater than $1/270$ of free span of member.
- D. Unlined Forms: Use plywood forms to obtain a smooth finish for concrete surfaces. Tightly butt edges of sheets to prevent leakage. Back up all vertical joints solidly and nail edges of adjacent sheets to same stud with 6d box nails spaced not over 150 mm (6 inches) apart.
- E. Lined Forms: May be used in lieu of unlined plywood forms. Back up form lining solidly with square edge board lumber securely nailed to studs with all edges in close contact to prevent bulging of lining. No joints in lining and backing may coincide. Nail abutted edges of sheets to same backing board. Nail lining at not over 200 mm (8 inches) on center along edges and with at least one nail to each square foot of surface area; nails to be 3d blued shingle or similar nails with thin flatheads.
- F. Architectural Liner: Attach liner as recommended by the manufacturer with tight joints to prevent leakage.
- G. Wall Form Ties: Locate wall form ties in symmetrically level horizontal rows at each line of wales and in plumb vertical tiers. Space ties to maintain true, plumb surfaces. Provide one row of ties within 150 mm (6 inches) above each construction joint. Space through-ties adjacent to

Contract No. 36C26319D0022

Station Project No. 656-400

Bancroft-AE No. 18-116

03 30 00 - 21

10/28/2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

12-01-15

horizontal and vertical construction joints not over 450 mm (18 inches) on center.

1. Tighten row of ties at bottom of form just before placing concrete and, if necessary, during placing of concrete to prevent seepage of concrete and to obtain a clean line. Ties to be entirely removed shall be loosened 24 hours after concrete is placed and shall be pulled from least important face when removed.
 2. Coat surfaces of all metal that is to be removed with paraffin, cup grease or a suitable compound to facilitate removal.
- H. Inserts, Sleeves, and Similar Items: Flashing reglets, steel strips, masonry ties, anchors, wood blocks, nailing strips, grounds, inserts, wire hangers, sleeves, drains, guard angles, forms for floor hinge boxes, inserts or bond blocks for elevator guide rails and supports, and other items specified as furnished under this and other sections of specifications and required to be in their final position at time concrete is placed shall be properly located, accurately positioned, and built into construction, and maintained securely in place.
1. Locate inserts or hanger wires for furred and suspended ceilings only in bottom of concrete joists, or similar concrete member of overhead concrete joist construction.
 2. Install sleeves, inserts and similar items for mechanical services in accordance with drawings prepared specially for mechanical services. Contractor is responsible for accuracy and completeness of drawings and shall coordinate requirements for mechanical services and equipment.
 3. Do not install sleeves in beams, joists or columns except where shown or permitted by Resident Engineer. Install sleeves in beams, joists, or columns that are not shown, but are permitted by the Resident Engineer, and require no structural changes, at no additional cost to the Government.

Contract No. 36C26319D0022

Station Project No. 656-400

Bancroft-AE No. 18-116

03 30 00 - 22

10/28/2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

12-01-15

4. Minimum clear distance of embedded items such as conduit and pipe is at least three times diameter of conduit or pipe, except at stub-ups and other similar locations.
5. Provide recesses and blockouts in floor slabs for door closers and other hardware as necessary in accordance with manufacturer's instructions.

I. Construction Tolerances:

1. Set and maintain concrete formwork to assure erection of completed work within tolerances specified and to accommodate installation of other rough and finish materials. Accomplish remedial work necessary for correcting excessive tolerances. Erected work that exceeds specified tolerance limits shall be remedied or removed and replaced, at no additional cost to the Government.
2. Permissible surface irregularities for various classes of materials are defined as "finishes" in specification sections covering individual materials. They are to be distinguished from tolerances specified which are applicable to surface irregularities of structural elements.

3.2 PLACING REINFORCEMENT:

- A. General: Details of concrete reinforcement in accordance with ACI 318 unless otherwise shown.
- B. Placing: Place reinforcement conforming to CRSI DA4, unless otherwise shown.
 1. Place reinforcing bars accurately and tie securely at intersections and splices with 1.6 mm (16 gauge) black annealed wire. Secure reinforcing bars against displacement during the placing of concrete by spacers, chairs, or other similar supports. Portions of supports, spacers, and chairs in contact with formwork shall be made of plastic in areas that will be exposed when building is occupied. Type, number, and spacing of supports conform to ACI 318. Where concrete slabs are placed on ground, use concrete blocks or other

Contract No. 36C26319D0022

Station Project No. 656-400

Bancroft-AE No. 18-116

03 30 00 - 23

10/28/2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

12-01-15

- non-corrodible material of proper height, for support of reinforcement. Use of brick or stone supports will not be permitted.
2. Lap welded wire fabric at least 1 1/2 mesh panels plus end extension of wires not less than 300 mm (12 inches) in structural slabs. Lap welded wire fabric at least 1/2 mesh panels plus end extension of wires not less than 150 mm (6 inches) in slabs on grade.
 3. Splice column steel at no points other than at footings and floor levels unless otherwise shown.
- C. Spacing: Minimum clear distances between parallel bars, except in columns and multiple layers of bars in beams shall be equal to nominal diameter of bars. Minimum clear spacing is 25 mm (1 inch) or 1-1/3 times maximum size of coarse aggregate.
- D. Splicing: Splices of reinforcement made only as required or shown or specified. Accomplish splicing as follows:
1. Lap splices: Do not use lap splices for bars larger than Number 36 (Number 11). Minimum lengths of lap as shown.
 2. Welded splices: Splicing by butt-welding of reinforcement permitted providing the weld develops in tension at least 125 percent of the yield strength (fy) for the bars. Welding conform to the requirements of AWS D1.4. Welded reinforcing steel conform to the chemical analysis requirements of AWS D1.4.
 - a. Submit test reports indicating the chemical analysis to establish weldability of reinforcing steel.
 - b. Submit a field quality control procedure to insure proper inspection, materials and welding procedure for welded splices.
 - c. Department of Veterans Affairs retained testing agency shall test a minimum of three splices, for compliance, locations selected by Resident Engineer.
 3. Mechanical Splices: Develop in tension and compression at least 125 percent of the yield strength (fy) of the bars. Stresses of transition splices between two reinforcing bar sizes based on area

Contract No. 36C26319D0022

Station Project No. 656-400

Bancroft-AE No. 18-116

03 30 00 - 24

10/28/2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

12-01-15

of smaller bar. Provide mechanical splices at locations indicated. Use approved exothermic, tapered threaded coupling, or swaged and threaded sleeve. Exposed threads and swaging in the field not permitted.

- a. Initial qualification: In the presence of Resident Engineer, make three test mechanical splices of each bar size proposed to be spliced. Department of Veterans Affairs retained testing laboratory will perform load test.
- b. During installation: Furnish, at no additional cost to the Government, one companion (sister) splice for every 50 splices for load testing. Department of Veterans Affairs retained testing laboratory will perform the load test.

E. Bending: Bend bars cold, unless otherwise approved. Do not field bend bars partially embedded in concrete, except when approved by Resident Engineer.

F. Cleaning: Metal reinforcement, at time concrete is placed, shall be free from loose flaky rust, mud, oil, or similar coatings that will reduce bond.

G. Future Bonding: Protect exposed reinforcement bars intended for bonding with future work by wrapping with felt and coating felt with a bituminous compound unless otherwise shown.

3.3 VAPOR BARRIER:

A. Except where membrane waterproofing is required, interior concrete slab on grade shall be placed on a continuous vapor barrier.

1. Place 100 mm (4 inches) of fine granular fill over the vapor barrier to act as a blotter for concrete slab.
2. Vapor barrier joints lapped 150 mm (6 inches) and sealed with compatible waterproof pressure-sensitive tape.
3. Patch punctures and tears.

Contract No. 36C26319D0022

Station Project No. 656-400

Bancroft-AE No. 18-116

03 30 00 - 25

10/28/2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

12-01-15

3.4 SLABS RECEIVING RESILIENT COVERING

- A. Slab shall be allowed to cure for 6 weeks minimum prior to placing resilient covering. After curing, slab shall be tested by the Contractor for moisture in accordance with ASTM D4263 or ASTM F1869. Moisture content shall be less than 3 pounds per 1000 sf prior to placing covering.
- B. In lieu of curing for 6 weeks, Contractor has the option, at his own cost, to utilize the Moisture Vapor Emissions & Alkalinity Control Sealer as follows:
 - 1. Sealer is applied on the day of the concrete pour or as soon as harsh weather permits, prior to any other chemical treatments for concrete slabs either on grade, below grade or above grade receiving resilient flooring, such as, sheet vinyl, vinyl composition tile, rubber, wood flooring, epoxy coatings and overlays.
 - 2. Manufacturer's representative will be on the site the day of concrete pour to install or train its application and document. He shall return on every application thereafter to verify that proper procedures are followed.
 - a. Apply Sealer to concrete slabs as soon as final finishing operations are complete and the concrete has hardened sufficiently to sustain floor traffic without damage.
 - b. Spray apply Sealer at the rate of 20 m² (200 square feet) per gallon. Lightly broom product evenly over the substrate and product has completely penetrated the surface.
 - c. If within two (2) hours after initial application areas are subjected to heavy rainfall and puddling occurs, reapply Sealer product to these areas as soon as weather condition permits.

3.5 CONSTRUCTION JOINTS:

- A. Unless otherwise shown, location of construction joints to limit individual placement shall not exceed 24,000 mm (80 feet) in any horizontal direction, except slabs on grade which shall have

Contract No. 36C26319D0022

Station Project No. 656-400

Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

12-01-15

construction joints shown. Allow 48 hours to elapse between pouring adjacent sections unless this requirement is waived by Resident Engineer.

- B. Locate construction joints in suspended floors near the quarter-point of spans for slabs, beams or girders, unless a beam intersects a girder at center, in which case joint in girder shall be offset a distance equal to twice width of beam. Provide keys and inclined dowels as shown. Provide longitudinal keys as shown.
- C. Place concrete for columns slowly and in one operation between joints. Install joints in concrete columns at underside of deepest beam or girder framing into column.
- D. Allow 2 hours to elapse after column is cast before concrete of supported beam, girder or slab is placed. Place girders, beams, grade beams, column capitals, brackets, and haunches at the same time as slab unless otherwise shown.
- E. Install polyvinyl chloride or rubber water seals, as shown in accordance with manufacturer's instructions, to form continuous watertight seal.

3.6 EXPANSION JOINTS AND CONTRACTION JOINTS:

- A. Clean expansion joint surfaces before installing premolded filler and placing adjacent concrete.
- B. Install polyvinyl chloride or rubber water seals, as shown in accordance with manufacturer's instructions, to form continuous watertight seal.
- C. Provide contraction (control) joints in floor slabs as indicated on the contract drawings. Joints shall be either formed or saw cut, to the indicated depth after the surface has been finished. Complete saw joints within 4 to 12 hours after concrete placement. Protect joints from intrusion of foreign matter.

3.7 PLACING CONCRETE:

- A. Preparation:

Contract No. 36C26319D0022

Station Project No. 656-400

Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

12-01-15

1. Remove hardened concrete, wood chips, shavings and other debris from forms.
 2. Remove hardened concrete and foreign materials from interior surfaces of mixing and conveying equipment.
 3. Have forms and reinforcement inspected and approved by Resident Engineer before depositing concrete.
 4. Provide runways for wheeling equipment to convey concrete to point of deposit. Keep equipment on runways which are not supported by or bear on reinforcement. Provide similar runways for protection of vapor barrier on coarse fill.
- B. Bonding: Before depositing new concrete on or against concrete which has been set, thoroughly roughen and clean existing surfaces of laitance, foreign matter, and loose particles.
1. Preparing surface for applied topping:
 - a. Remove laitance, mortar, oil, grease, paint, or other foreign material by sand blasting. Clean with vacuum type equipment to remove sand and other loose material.
 - b. Broom clean and keep base slab wet for at least four hours before topping is applied.
 - c. Use a thin coat of one part Portland cement, 1.5 parts fine sand, bonding admixture; and water at a 50: 50 ratio and mix to achieve the consistency of thick paint. Apply to a damp base slab by scrubbing with a stiff fiber brush. New concrete shall be placed while the bonding grout is still tacky.
- C. Conveying Concrete: Convey concrete from mixer to final place of deposit by a method which will prevent segregation. Method of conveying concrete is subject to approval of Resident Engineer.
- D. Placing: For special requirements see Paragraphs, HOT WEATHER and COLD WEATHER.
1. Do not place concrete when weather conditions prevent proper placement and consolidation, or when concrete has attained its

Contract No. 36C26319D0022

Station Project No. 656-400

Bancroft-AE No. 18-116

03 30 00 - 28

10/28/2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

12-01-15

initial set, or has contained its water or cement content more than 1 1/2 hours.

2. Deposit concrete in forms as near as practicable in its final position. Prevent splashing of forms or reinforcement with concrete in advance of placing concrete.
3. Do not drop concrete freely more than 3000 mm (10 feet) for concrete containing the high-range water-reducing admixture (superplasticizer) or 1500 mm (5 feet) for conventional concrete. Where greater drops are required, use a tremie or flexible spout (canvas elephant trunk), attached to a suitable hopper.
4. Discharge contents of tremies or flexible spouts in horizontal layers not exceeding 500 mm (20 inches) in thickness, and space tremies such as to provide a minimum of lateral movement of concrete.
5. Continuously place concrete until an entire unit between construction joints is placed. Rate and method of placing concrete shall be such that no concrete between construction joints will be deposited upon or against partly set concrete, after its initial set has taken place, or after 45 minutes of elapsed time during concrete placement.
6. On bottom of members with severe congestion of reinforcement, deposit 25 mm (1 inch) layer of flowing concrete containing the specified high-range water-reducing admixture (superplasticizer). Successive concrete lifts may be a continuation of this concrete or concrete with a conventional slump.

7.

- E. Consolidation: Conform to ACI 309. Immediately after depositing, spade concrete next to forms, work around reinforcement and into angles of forms, tamp lightly by hand, and compact with mechanical vibrator applied directly into concrete at approximately 450 mm (18 inch) intervals. Mechanical vibrator shall be power driven, hand operated

Contract No. 36C26319D0022

Station Project No. 656-400

Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

12-01-15

type with minimum frequency of 5000 cycles per minute having an intensity sufficient to cause flow or settlement of concrete into place. Vibrate concrete to produce thorough compaction, complete embedment of reinforcement and concrete of uniform and maximum density without segregation of mix. Do not transport concrete in forms by vibration.

1. Use of form vibration shall be approved only when concrete sections are too thin or too inaccessible for use of internal vibration.
2. Carry on vibration continuously with placing of concrete. Do not insert vibrator into concrete that has begun to set.

3.8 HOT WEATHER:

Follow the recommendations of ACI 305 or as specified to prevent problems in the manufacturing, placing, and curing of concrete that can adversely affect the properties and serviceability of the hardened concrete. Methods proposed for cooling materials and arrangements for protecting concrete shall be made in advance of concrete placement and approved by Resident Engineer.

3.9 COLD WEATHER:

Follow the recommendations of ACI 306 or as specified to prevent freezing of concrete and to permit concrete to gain strength properly. Use only the specified non-corrosive, non-chloride accelerator. Do not use calcium chloride, thiocyanates or admixtures containing more than 0.05 percent chloride ions. Methods proposed for heating materials and arrangements for protecting concrete shall be made in advance of concrete placement and approved by Resident Engineer.

3.10 PROTECTION AND CURING:

- A. Conform to ACI 308: Initial curing shall immediately follow the finishing operation. Protect exposed surfaces of concrete from premature drying, wash by rain and running water, wind, mechanical injury, and excessively hot or cold temperatures. Keep concrete not covered with membrane or other curing material continuously wet for at

Contract No. 36C26319D0022

Station Project No. 656-400

Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

12-01-15

least 7 days after placing, except wet curing period for high-early-strength concrete shall be not less than 3 days. Keep wood forms continuously wet to prevent moisture loss until forms are removed. Cure exposed concrete surfaces as described below. Other curing methods may be used if approved by Resident Engineer.

1. Liquid curing and sealing compounds: Apply by power-driven spray or roller in accordance with the manufacturer's instructions. Apply immediately after finishing. Maximum coverage 10m²/L (400 square feet per gallon) on steel troweled surfaces and 7.5m²/L (300 square feet per gallon) on floated or broomed surfaces for the curing/sealing compound.
2. Plastic sheets: Apply as soon as concrete has hardened sufficiently to prevent surface damage. Utilize widest practical width sheet and overlap adjacent sheets 50 mm (2 inches). Tightly seal joints with tape.
3. Paper: Utilize widest practical width paper and overlap adjacent sheets 50 mm (2 inches). Tightly seal joints with sand, wood planks, pressure-sensitive tape, mastic or glue.

3.11 REMOVAL OF FORMS:

- A. Remove in a manner to assure complete safety of structure after the following conditions have been met.
 1. Where structure as a whole is supported on shores, forms for beams and girder sides, columns, and similar vertical structural members may be removed after 24 hours, provided concrete has hardened sufficiently to prevent surface damage and curing is continued without any lapse in time as specified for exposed surfaces.
 2. Take particular care in removing forms of architectural exposed concrete to insure surfaces are not marred or gouged, and that corners and arises are true, sharp and unbroken.
- B. Control Test: Use to determine if the concrete has attained sufficient strength and curing to permit removal of supporting forms. Cylinders

Contract No. 36C26319D0022

Station Project No. 656-400

Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

12-01-15

required for control tests taken in accordance with ASTM C172, molded in accordance with ASTM C31, and tested in accordance with ASTM C39. Control cylinders cured and protected in the same manner as the structure they represent. Supporting forms or shoring not removed until strength of control test cylinders have attained at least 70 percent of minimum 28-day compressive strength specified. Exercise care to assure that newly unsupported portions of structure are not subjected to heavy construction or material loading.

- C. Reshoring: Reshoring is required if superimposed load plus dead load of the floor exceeds the capacity of the floor at the time of loading. In addition, for flat slab/plate, reshoring is required immediately after stripping operations are complete and not later than the end of the same day. Reshoring accomplished in accordance with ACI 347 at no additional cost to the Government.

3.12 CONCRETE SURFACE PREPARATION:

- A. Metal Removal: Unnecessary metal items cut back flush with face of concrete members.
- B. Patching: Maintain curing and start patching as soon as forms are removed. Do not apply curing compounds to concrete surfaces requiring patching until patching is completed. Use cement mortar for patching of same composition as that used in concrete. Use white or gray Portland cement as necessary to obtain finish color matching surrounding concrete. Thoroughly clean areas to be patched. Cut out honeycombed or otherwise defective areas to solid concrete to a depth of not less than 25 mm (1 inch). Cut edge perpendicular to surface of concrete. Saturate with water area to be patched, and at least 150 mm (6 inches) surrounding before placing patching mortar. Give area to be patched a brush coat of cement grout followed immediately by patching mortar. Cement grout composed of one part Portland cement, 1.5 parts fine sand, bonding admixture, and water at a 50:50 ratio, mix to achieve consistency of thick paint. Mix patching mortar approximately 1 hour

Contract No. 36C26319D0022

Station Project No. 656-400

Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

12-01-15

before placing and remix occasionally during this period without addition of water. Compact mortar into place and screed slightly higher than surrounding surface. After initial shrinkage has occurred, finish to match color and texture of adjoining surfaces. Cure patches as specified for other concrete. Fill form tie holes which extend entirely through walls from unexposed face by means of a pressure gun or other suitable device to force mortar through wall. Wipe excess mortar off exposed face with a cloth.

- C. Upon removal of forms, clean vertical concrete surface that is to receive bonded applied cementitious application with wire brushes or by sand blasting to remove unset material, laitance, and loose particles to expose aggregates to provide a clean, firm, granular surface for bond of applied finish.

3.13 CONCRETE FINISHES:

A. Vertical and Overhead Surface Finishes:

- 1. Unfinished areas: Vertical and overhead concrete surfaces exposed in pipe basements, elevator and dumbwaiter shafts, pipe spaces, pipe trenches, above suspended ceilings, manholes, and other unfinished areas will not require additional finishing.
- 2. Interior and exterior exposed areas to be painted: Remove fins, burrs and similar projections on surfaces flush, and smooth by mechanical means approved by Resident Engineer, and by rubbing lightly with a fine abrasive stone or hone. Use ample water during rubbing without working up a lather of mortar or changing texture of concrete.
- 3. Interior and exterior exposed areas finished: Give a grout finish of uniform color and smooth finish treated as follows:
 - a. After concrete has hardened and laitance, fins and burrs removed, scrub concrete with wire brushes. Clean stained concrete surfaces by use of a hone stone.

Contract No. 36C26319D0022

Station Project No. 656-400

Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

12-01-15

- b. Apply grout composed of one part of Portland cement, one part fine sand, smaller than a 600 μm (No. 30) sieve. Work grout into surface of concrete with cork floats or fiber brushes until all pits, and honeycombs are filled.
 - c. After grout has hardened slightly, but while still plastic, scrape grout off with a sponge rubber float and, about 1 hour later, rub concrete vigorously with burlap to remove any excess grout remaining on surfaces.
 - d. In hot, dry weather use a fog spray to keep grout wet during setting period. Complete finish of area in same day. Make limits of finished areas at natural breaks in wall surface. Leave no grout on concrete surface overnight.
4. Textured: Finish as specified. Maximum quantity of patched area 0.2 m^2 (2 square feet) in each 93 m^2 (1000 square feet) of textured surface.

B. Slab Finishes:

1. Monitoring and Adjustment: Provide continuous cycle of placement, measurement, evaluation and adjustment of procedures to produce slabs within specified tolerances. Monitor elevations of structural steel in key locations before and after concrete placement to establish typical deflection patterns for the structural steel. Determine elevations of cast-in-place slab soffits prior to removal of shores. Provide information to Resident Engineer and floor consultant for evaluation and recommendations for subsequent placements.
2. Set perimeter forms to serve as screed using either optical or laser instruments. For slabs on grade, wet screeds may be used to establish initial grade during strike-off, unless Resident Engineer determines that the method is proving insufficient to meet required finish tolerances and directs use of rigid screed guides. Where wet

Contract No. 36C26319D0022

Station Project No. 656-400

Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

12-01-15

- screeds are allowed, they shall be placed using grade stakes set by optical or laser instruments. Use rigid screed guides, as opposed to wet screeds, to control strike-off elevation for all types of elevated (non slab-on-grade) slabs. Divide bays into halves or thirds by hard screeds. Adjust as necessary where monitoring of previous placements indicates unshored structural steel deflections to other than a level profile.
3. Place slabs monolithically. Once slab placement commences, complete finishing operations within same day. Slope finished slab to floor drains where they occur, whether shown or not.
 4. Use straightedges specifically made for screeding, such as hollow magnesium straightedges or power strike-offs. Do not use pieces of dimensioned lumber. Strike off and screed slab to a true surface at required elevations. Use optical or laser instruments to check concrete finished surface grade after strike-off. Repeat strike-off as necessary. Complete screeding before any excess moisture or bleeding water is present on surface. Do not sprinkle dry cement on the surface.
 5. Immediately following screeding, and before any bleed water appears, use a 3000 mm (10 foot) wide highway straightedge in a cutting and filling operation to achieve surface flatness. Do not use bull floats or darbys, except that darbying may be allowed for narrow slabs and restricted spaces.
 6. Wait until water sheen disappears and surface stiffens before proceeding further. Do not perform subsequent operations until concrete will sustain foot pressure with maximum of 6 mm (1/4 inch) indentation.
 7. Scratch Finish: Finish base slab to receive a bonded applied cementitious application as indicated above, except that bull floats and darbys may be used. Thoroughly coarse wire broom within two

Contract No. 36C26319D0022

Station Project No. 656-400

Bancroft-AE No. 18-116

03 30 00 - 35

10/28/2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

12-01-15

- hours after placing to roughen slab surface to insure a permanent bond between base slab and applied materials.
8. Float Finish: Slabs to receive unbonded toppings, steel trowel finish, fill, mortar setting beds, or a built-up roof, and ramps, stair treads, platforms (interior and exterior), and equipment pads shall be floated to a smooth, dense uniform, sandy textured finish. During floating, while surface is still soft, check surface for flatness using a 3000 mm (10 foot) highway straightedge. Correct high spots by cutting down and correct low spots by filling in with material of same composition as floor finish. Remove any surface projections and re-float to a uniform texture.
 9. Steel Trowel Finish: Concrete surfaces to receive resilient floor covering or carpet, monolithic floor slabs to be exposed to view in finished work, future floor roof slabs, applied toppings, and other interior surfaces for which no other finish is indicated. Steel trowel immediately following floating. During final troweling, tilt steel trowel at a slight angle and exert heavy pressure to compact cement paste and form a dense, smooth surface. Finished surface shall be smooth, free of trowel marks, and uniform in texture and appearance.
 10. Broom Finish: Finish exterior slabs, ramps, and stair treads with a bristle brush moistened with clear water after surfaces have been floated. Brush in a direction transverse to main traffic. Match texture approved by Resident Engineer from sample panel.
 11. Finished slab flatness (FF) and levelness (FL) values comply with the following minimum requirements:
 - a. Areas covered with carpeting, or not specified otherwise in b. below:
 - 1) Slab on Grade:
 - a) Specified overall value F_F 25/F_L 20
 - b) Minimum local value F_F 17/F_L 15

Contract No. 36C26319D0022

Station Project No. 656-400

Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

12-01-15

- 2) Level suspended slabs (shored until after testing) and topping slabs:
 - a) Specified overall value FF 25/FL 20
 - b) Minimum local value FF 17/FL 15
 - 3) Unshored suspended slabs:
 - a) Specified overall value FF 25
 - b) Minimum local value FF 17
 - 4) Level tolerance such that 80 percent of all points fall within a 20 mm (3/4 inch) envelope +10 mm, -10 mm (+3/8 inch, -3/8 inch) from the design elevation.
- b. Areas that will be exposed, receive thin-set tile or resilient flooring, or roof areas designed as future floors:
- 1) Slab on grade:
 - a) Specified overall value FF 36/FL 20
 - b) Minimum local value FF 24/FL 15
 - 2) Level suspended slabs (shored until after testing) and topping slabs
 - a) Specified overall value FF 30/FL 20
 - b) Minimum local value FF 24/FL 15
 - 3) Unshored suspended slabs:
 - a) Specified overall value FF 30
 - b) Minimum local value FF 24
 - 4) Level tolerance such that 80 percent of all points fall within a 20 mm (3/4 inch) envelope +10 mm, -10 mm (+3/8 inch, -3/8 inch) from the design elevation.
- c. "Specified overall value" is based on the composite of all measured values in a placement derived in accordance with ASTM E1155.
- d. "Minimum local value" (MLV) describes the flatness or levelness below which repair or replacement is required. MLV is based on the results of an individual placement and applies to a minimum

Contract No. 36C26319D0022

Station Project No. 656-400

Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

12-01-15

local area. Minimum local area boundaries may not cross a construction joint or expansion joint. A minimum local area will be bounded by construction and/or control joints, or by column lines and/or half-column lines, whichever is smaller.

12. Measurements

- a. Department of Veterans Affairs retained testing laboratory will take measurements as directed by Resident Engineer, to verify compliance with FF, FL, and other finish requirements. Measurements will occur within 72 hours after completion of concrete placement (weekends and holidays excluded). Make measurements before shores or forms are removed to insure the "as-built" levelness is accurately assessed. Profile data for above characteristics may be collected using a laser level or any Type II apparatus (ASTM E1155, "profileograph" or "dipstick"). Contractor's surveyor shall establish reference elevations to be used by Department of Veterans Affairs retained testing laboratory.
- b. Contractor not experienced in using FF and FL criteria is encouraged to retain the services of a floor consultant to assist with recommendations concerning adjustments to slab thicknesses, finishing techniques, and procedures on measurements of the finish as it progresses in order to achieve the specific flatness and levelness numbers.

13. Acceptance/ Rejection:

- a. If individual slab section measures less than either of specified minimum local F_F/F_L numbers, that section shall be rejected and remedial measures shall be required. Sectional boundaries may be set at construction and contraction (control) joints, and not smaller than one-half bay.
- b. If composite value of entire slab installation, combination of all local results, measures less than either of specified overall

Contract No. 36C26319D0022

Station Project No. 656-400

Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

12-01-15

F_F/F_L numbers, then whole slab shall be rejected and remedial measures shall be required.

14. Remedial Measures for Rejected Slabs: Correct rejected slab areas by grinding, planing, surface repair with underlayment compound or repair topping, retopping, or removal and replacement of entire rejected slab areas, as directed by Resident Engineer, until a slab finish constructed within specified tolerances is accepted.

3.14 SURFACE TREATMENTS:

- A. Use on exposed concrete floors and concrete floors to receive carpeting except those specified to receive non-slip finish.
- B. Liquid Densifier/Sealer: Apply in accordance with manufacturer's directions just prior to completion of construction.
- C. Non-Slip Finish: Except where safety nosing and tread coverings are shown, apply non-slip abrasive aggregate to treads and platforms of concrete steps and stairs, and to surfaces of exterior concrete ramps and platforms. Broadcast aggregate uniformly over concrete surface at rate of application of 8% per 1/10th m² (7.5 percent per square foot) of area. Trowel concrete surface to smooth dense finish. After curing, rub treated surface with abrasive brick and water to slightly expose abrasive aggregate.

3.15 APPLIED TOPPING:

- A. Separate concrete topping on floor base slab of thickness and strength shown. Topping mix shall have a maximum slump of 200 mm (8 inches) for concrete containing a high-range water-reducing admixture (superplasticizer) and 100 mm (4 inches) for conventional mix. Neatly bevel or slope at door openings and at slabs adjoining spaces not receiving an applied finish.
- B. Placing: Place continuously until entire section is complete, struck off with straightedge, leveled with a highway straightedge or highway bull float, floated and troweled by machine to a hard dense finish. Slope to floor drains as required. Do not start floating until free

Contract No. 36C26319D0022

Station Project No. 656-400

Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

12-01-15

water has disappeared and no water sheen is visible. Allow drying of surface moisture naturally. Do not hasten by "dusting" with cement or sand.

3.16 RESURFACING FLOORS:

Remove existing flooring areas to receive resurfacing to expose existing structural slab and extend not less than 25 mm (1 inch) below new finished floor level. Prepare exposed structural slab surface by roughening, broom cleaning, and dampening. Apply specified bonding grout. Place topping while the bonding grout is still tacky.

- - - E N D - - -

Contract No. 36C26319D0022

Station Project No. 656-400

Bancroft-AE No. 18-116

03 30 00 - 40

10/28/2022

DIVISION 04

MASONRY

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

02-01-16

SECTION 04 01 00
MAINTENANCE OF MASONRY

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Repointing existing masonry joints where existing face brick is to be removed and re-installed.
2. Replacing existing masonry units.

1.2 RELATED REQUIREMENTS

- A. Mortars for new masonry: Section 04 05 13, MASONRY MORTARING.

1.3 APPLICABLE PUBLICATIONS

- A. Comply with references to extent specified in this section.
- B. ASTM International (ASTM):
1. C144-11 - Aggregate for Masonry Mortar.
 2. C150/C150M-15 - Portland Cement.
 3. C207-06(2011) - Hydrated Lime for Masonry Purposes.
 4. C216-15 - Facing Brick (Solid Masonry Units Made from Clay or Shale).
 5. C270-14a - Mortar for Unit Masonry.

1.4 SUBMITTALS

- A. Submittal Procedures: Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Manufacturer's Literature and Data:
1. Description of each product.
 2. Replacement units indicating manufacturer recommendation for each application.
- C. Samples:
1. Pointing Mortar: Molded, 150 mm (6 inches) long for each type, texture, and color.
- D. Test reports:
1. Preconstruction test results of existing masonry mortar and units.
 2. Recommended mortar mix and mortar materials sources.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

04 01 00-1

10/28/2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

02-01-16

1.5 QUALITY ASSURANCE

- A. Installer Qualifications:
 - 1. Documented experience in completion of work, similar in design, material, and extent specified.
- B. Preconstruction Testing:
 - 1. Existing Brick: according to ASTM C67.
 - 2. Existing Mortar: according to ASTM C295/C295M.
 - a. Recommend mortar mix compatible with existing and mortar material sources required to match existing color and texture .
- C. Mockups: Prepare mockup of approximately four feet in width by the height of the work designated in the drawings (located at an existing window), demonstrating quality and aesthetics of pointing, masonry unit replacement, and cleaning.
 - 1. If accepted, mock-up may be incorporated into the final Work.

1.6 DELIVERY

- A. Deliver products in manufacturer's original sealed packaging.
- B. Mark packaging, legibly. Indicate manufacturer's name or brand, type, color, production run number, and manufacture date.
- C. Before installation, return or dispose of products within distorted, damaged, or opened packaging.

1.7 STORAGE AND HANDLING

- A. Store materials covered, protected from weather, and elevated above grade.
 - 1. Prevent contamination of aggregates.
- B. Protect products from damage during handling and construction operations.

1.8 FIELD CONDITIONS

- A. Environment:
 - 1. Cold Weather Requirements: Maintain mortar ingredients and substrate within temperature range between 4 degrees C (40 degrees F) and 49 degrees C (120 degrees F) when outside temperature is less than 4 degrees C (40 degrees F).

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

04 01 00-2

10/28/2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

02-01-16

2. Hot Weather Requirements: Protect mortar-joint from evaporation of moisture from mortar material. When required, provide adequately shaded work area.

1.9 WARRANTY

- A. Construction Warranty: FAR clause 52.246-21, "Warranty of Construction."

PART 2 - PRODUCTS

2.1 MATERIALS

- A. Mortar Components:
 1. Hydrated Lime: ASTM C207, Type S.
 2. Aggregate: ASTM C144.
 3. Portland Cement: ASTM C150/C150M, Type I.
 4. Water: Potable, free of substances that are detrimental to grout, masonry, and metal.

2.2 PRODUCTS - GENERAL

- A. Provide each product from one manufacturer and from one production run.

2.3 REPLACEMENT MASONRY UNITS

- A. Face Brick:
 1. ASTM C216, Type FBS - matching existing .
 2. Efflorescence: Rated slight efflorescent when tested according to ASTM C67.

2.4 MIXES

- A. Pointing Mortar: ASTM C270;
 1. Type N

2.5 ACCESSORIES

- A. Cleaning Agent: Soapless, non-acidic, detergent, specially prepared for cleaning brick and concrete.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

04 01 00-3

10/28/2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

02-01-16

PART 3 - EXECUTION

3.1 PREPARATION

- A. Examine and verify substrate suitability for product installation.
- B. Protect existing construction and completed work from damage.
 - 1. Protect from mortar droppings and cleaning operations.
- C. Remove existing fixtures and fittings concealing masonry joints to permit repointing and repair.

3.2 EXISTING MORTAR JOINTS

- A. Cut out existing bed and head mortar joints, to uniform depth of 19 mm (3/4 inches), or to sound mortar without damaging edges and faces of existing masonry units to remain.
- B. Remove dust and debris from joints.
 - 1. Do not rinse when temperature is below freezing.

3.3 TUCK POINTING

- A. Dampen joints immediately before tuck pointing. Allow masonry units to absorb surface water.
- B. Tightly pack tuck pointing mortar into joints in thin layers, 6 mm (1/4 inch) thick, maximum.
- C. Allow layer to become slightly hardened before applying next layer.
- D. Pack final layer flush with surfaces of masonry units.

3.4 MASONRY UNIT REPLACEMENT

- A. Cut out mortar joints surrounding masonry units requiring replacement.
 - 1. Remove existing masonry units creating opening for replacement masonry unit installation.
 - 2. Remove mortar, dust, and debris from opening perimeter surfaces.
 - 3. Prevent debris from falling into cavity.
- B. Dampen surfaces of surrounding existing masonry before installing replacement masonry units.
 - 1. Allow existing masonry to absorb surface moisture before installing replacement units.
 - 2. Butter contact surfaces of existing masonry and replacement masonry units with mortar.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

04 01 00-4

10/28/2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

02-01-16

3. Center replacement masonry units in opening and press into position.
4. Remove excess mortar.
5. Tuck point replacement masonry units to ensure full head and bed joints.

3.5 JOINT TOOLING

- A. Tool repointed and replaced masonry joints when mortar becomes slightly hardened.
- B. Produce smooth, compacted, joint matching existing .

3.6 CLEANING

- A. Remove mortar splatter from exposed surfaces immediately.
- B. Clean exposed masonry surfaces on completion.
- C. Remove mortar droppings and other foreign substances from wall surfaces.
- D. Wet surfaces with clean water.
- E. Wash with cleaning agent.
- F. Brush masonry surfaces with stiff fiber brushes while washing.
- G. Immediately after washing, rinse with clean water.
 1. Remove traces of detergent, foreign streaks or stains.

- - E N D - -

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

10-01-17

SECTION 04 05 13
MASONRY MORTARING

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Masonry mortar installed by other masonry sections.

1.2 RELATED REQUIREMENTS

A. Mortar used in Section:

1. Section 04 01 00, MAINTENANCE OF MASONRY.
2. Section 04 05 16, MASONRY GROUTING.
3. Section 04 20 00, UNIT MASONRY.

1.3 APPLICABLE PUBLICATIONS

A. Comply with references to extent specified in this section.

B. ASTM International (ASTM):

1. C40/C40M-11 - Organic Impurities in Fine Aggregates for Concrete.
2. C91/C91M-12 - Masonry Cement.
3. C144-11 -Aggregate for Masonry Mortar.
4. C150/C150M-15 - Portland Cement.
5. C207-06(2011) - Hydrated Lime for Masonry Purposes.
6. C270-14a - Mortar of Unit Masonry.
7. C595/C595M-15e1 - Blended Hydraulic Cements.
8. C780-15 - Preconstruction and Construction Evaluation of Mortars for Plain and Reinforced Unit Masonry.
9. C1329/C1329M-15 - Mortar Cement.

1.4 SUBMITTALS

A. Submittal Procedures: Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.

B. Manufacturer's Literature and Data:

1. Description of each product.

C. Test Reports: Certify each product complies with specifications.

1. Mortar.
2. Admixtures.

D. Certificates: Certify each product complies with specifications.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

04 05 13-1

10/28/2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

10-01-17

1. Portland cement.
2. Masonry cement.
3. Mortar cement.

- E. Qualifications: Substantiate qualifications comply with specifications.
1. Testing laboratory.

1.5 QUALITY ASSURANCE

1.6 DELIVERY

- A. Deliver products in manufacturer's original sealed packaging.
- B. Mark packaging, legibly. Indicate manufacturer's name or brand, type, production run number, and manufacture date.
- C. Before installation, return or dispose of products within distorted, damaged, or opened packaging.

1.7 STORAGE AND HANDLING

- A. Store masonry materials under waterproof covers on planking clear of ground.
 1. Protect loose, bulk materials from contamination.
- B. Protect products from damage during handling and construction operations.

1.8 WARRANTY

- A. Construction Warranty: FAR clause 52.246-21, "Warranty of Construction."

PART 2 - PRODUCTS

2.1 MATERIALS

- A. Hydrated Lime: ASTM C207, Type S.
- B. Aggregate for Masonry Mortar: ASTM C144 and as follows:
 1. Light colored sand for mortar for laying face brick.
 2. Test sand for color value according to ASTM C40/C40M. Sand producing color darker than specified standard is unacceptable.
- C. Blended Hydraulic Cement: ASTM C595/C595M, Type IS, IP.
- D. Masonry Cement: ASTM C91/C91M. Type N, S, Or M.
- E. Mortar Cement: ASTM C1329/C1329M, Type N, S or M.
- F. Portland Cement: ASTM C150/C150M, Type I.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

04 05 13-2

10/28/2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

10-01-17

- G. Water: Potable, free of substances that are detrimental to mortar, masonry, and metal.

2.2 PRODUCTS - GENERAL

- A. Basis of Design: Section 09 06 00, SCHEDULE FOR FINISHES.
B. Provide each product from one manufacturer and from one production run.

2.3 MIXES

- A. Tuck Pointing Mortar for Repair Work: Tuck pointing mortar specified in Section 04 01 00, MAINTENANCE OF MASONRY.
B. Masonry Mortar: ASTM C270.
1. Admixtures:
a. Do not use mortar admixtures, and color admixtures unless approved by Contracting Officer's Representative.
b. Do not use antifreeze compounds.

PART 3 - EXECUTION

3.1 PREPARATION

- A. Examine and verify substrate suitability for product installation.
B. Protect existing construction and completed work from damage.

3.2 MIXING

- A. Measure ingredients by volume using known capacity container.
B. Mix for 3 to 5 minutes in a mechanically operated mortar mixer.
C. Mix water with dry ingredients in sufficient amount to provide a workable mixture which will adhere to vertical surfaces of masonry units.
D. Mortar Stiffened Because of Water Loss Through Evaporation:
1. Re-temper by adding water to restore to proper consistency and workability.
2. Discard mortar reaching initial set or unused within two hours of mixing.

3.3 MORTARING

- A. Type S Mortar: Use for masonry containing vertical reinforcing bars (non-engineered) and engineered reinforced unit masonry work .
B. Type N Mortar: Use for other masonry work.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

04 05 13-3

10/28/2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

10-01-17

3.4 FIELD QUALITY CONTROL

- A. Field Tests: Performed by testing laboratory specified in Section 01 45 29, TESTING LABORATORY SERVICES.
1. Take and test samples during progress of work according to ASTM C780.

- - E N D - -

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

02-01-16

SECTION 04 05 16
MASONRY GROUTING

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Grout for filling hollow concrete masonry cores.

1.2 RELATED REQUIREMENTS

Section 04 20 00, UNIT MASONRY.

Section 09 30 13, CERAMIC/PORCELAIN TILING.

1.3 APPLICABLE PUBLICATIONS

A. Comply with references to extent specified in this section.

B. American National Standards Institute (ANSI):

1. A118.6-10 - Standard Cement Grouts for Tile Installation.

C. ASTM International (ASTM):

1. C40/C40M-11 - Organic Impurities in Fine Aggregates for Concrete.
2. C150/C150M-15 - Portland Cement.
3. C207-06(2011) - Hydrated Lime for Masonry Purposes.
4. C404-11 - Aggregates for Masonry Grout.
5. C476-11 - Grout for Masonry.
6. C595/C595M-15e1 - Blended Hydraulic Cement.
7. C979/C979M-10 - Pigments for Integrally Colored Concrete.
8. C1019-14 - Sampling and Testing Grout.

1.4 SUBMITTALS

A. Submittal Procedures: Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.

B. Manufacturer's Literature and Data:

1. Description of each product.

C. Test Reports: Certify each product complies with specifications.

1. Grout, each type.
2. Cement.
3. Aggregate.

D. Certificates: Certify each product complies with specifications.

1. Blended hydraulic cement.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

04 05 16-1

10/28/2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

02-01-16

2. Portland cement.
3. Grout.
4. Hydrated lime.
5. Aggregate.

1.5 QUALITY ASSURANCE (NOT USED)

1.6 DELIVERY

- A. Deliver products in manufacturer's original sealed packaging.
- B. Mark packaging, legibly. Indicate manufacturer's name or brand, type, production run number, and manufacture date.

1.7 STORAGE AND HANDLING

- A. Store masonry materials under waterproof covers on planking clear of ground, and protect damage from handling, dirt, stain, water and wind.
- B. Protect products from damage during handling and construction operations.

1.8 WARRANTY

- A. Construction Warranty: FAR clause 52.246-21, "Warranty of Construction."

PART 2 - PRODUCTS

2.1 MATERIALS

- A. Grout Components:
 1. Hydrated Lime: ASTM C207, Type S.
 2. Aggregate For Masonry Grout: ASTM C404, Size 8.
 3. Blended Hydraulic Cement: ASTM C595, Type IS, IP.
 4. Portland Cement: ASTM C150, Type I.
 5. Water: Potable, free of substances that are detrimental to grout, masonry, and metal.

2.2 PRODUCTS - GENERAL

- A. Provide each product from one manufacturer and from one production run

2.3 MIXES

- A. Grout: ASTM C476; fine grout and coarse grout.
- B. Ready-Mixed Grout: ANSI A118.8.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

04 05 16-2

10/28/2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

02-01-16

PART 3 - EXECUTION

3.1 PREPARATION

- A. Examine and verify substrate suitability for product installation.
- B. Protect existing construction and completed work from damage.
- C. Clean mortar from masonry cells protruding more than 13 mm (1/2 inch) to permit grout flow.
- D. Remove debris from grout spaces.
- E. Verify reinforcement is correctly placed before placing grout.

3.2 MIXING

- A. Mix grout in mechanically operated mixer.
 - 1. Mix grout for five minutes, minimum.
- B. Measure ingredients by volume using container of known capacity.
- C. Mix water with grout dry ingredients.
 - 1. Slump Range: 200 to 275 mm (8 to 11 inches).

3.3 GROUTING

- A. Install grout according to Section 04 20 00, UNIT MASONRY.
- B. Use fine grout for filling wall cavities and hollow concrete masonry units where smallest cell dimension is 50 mm (2 inches) or less.
- C. Use either fine grout or coarse grout for filling wall cavities and hollow concrete masonry units where smallest cell dimension is greater than 50 mm (2 inches).
- D. Use grout for filling bond beam or lintel units.

- - E N D - -

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

08-01-17

SECTION 04 20 00
UNIT MASONRY

PART 1 - GENERAL

1.1 SUMMARY

- A. Section Includes: Concrete masonry unit (CMU) and face brick assemblies for:
 - 1. Exterior walls (face brick).
 - 2. Interior walls and partitions (CMU).

1.2 RELATED REQUIREMENTS

- A. Sealants and Sealant Installation: Section 07 92 00, JOINT SEALANTS.

1.3 APPLICABLE PUBLICATIONS

- A. Comply with references to extent specified in this section.
- B. American Concrete Institute (ACI):
 - 1. 315-99 - Details and Detailing of Concrete Reinforcement.
 - 2. 530.1/ASCE 6/TMS 602-13 - Specification for Masonry Structures.
- C. ASTM International (ASTM):
 - 1. A615/A615M-15a1 - Deformed and Plain Carbon-Steel Bars for Concrete Reinforcement.
 - 2. A951/A951M-14 - Steel Wire for Masonry Joint Reinforcement.
 - 3. A1064/A1064M-15 - Carbon-Steel Wire and Welded Wire Reinforcement, Plain and Deformed, for Concrete.
 - 4. C90-14 - Load-Bearing Concrete Masonry Units.
 - 5. C216-15 - Facing Brick (Solid Masonry Units Made From Clay or Shale).
- D. American Welding Society (AWS):
 - 1. D1.4/D1.4M-11 - Structural Welding Code - Reinforcing Steel.
- E. Brick Industry Association (BIA):
 - 1. TN 11B-88 - Guide Specifications for Brick Masonry, Part 3.
- F. Federal Specifications (Fed. Spec.):
 - 1. FF-S-107C(2) - Screws, Tapping and Drive.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

04 20 00-1

10/28/2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

08-01-17

1.4 SUBMITTALS

- A. Submittal Procedures: Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Submittal Drawings:
 - 1. Fabrication, bending, and placement of reinforcing bars. Comply with ACI 315. Show bar schedules, diagrams of bent bars, stirrup spacing, lateral ties and other arrangements and assemblies.
 - 2. Special masonry shapes, profiles, and placement.
 - 3. Masonry units for typical window and door openings, and, for special conditions as affected by structural conditions.
- C. Manufacturer's Literature and Data:
 - 1. Description of each product.
 - 2. Installation instructions.
- D. Samples:
 - 1. Face brick: Sample panel, 200 mm by 400 mm (8 inches by 16 inches,) showing full color range and texture of bricks, bond, and proposed mortar joints.
 - 2. Concrete masonry units, when exposed in finish work.
- E. Sustainable Construction Submittals:
 - 1. Recycled Content: Identify post-consumer and pre-consumer recycled content percentage by weight.
- F. Certificates: Certify products comply with specifications.
 - 1. Face brick.
 - 2. Solid and load-bearing concrete masonry units, including fire-resistant rated units.

1.5 QUALITY ASSURANCE

- A. Welders and Welding Procedures Qualifications: AWS D1.4/D1.4M.
- B. Mockups:
 - 1. Before starting masonry, build a mockup panel minimum 1800 mm by 1800 mm (6 feet by 6 feet) with 600 mm (24 inch) 90 degree return for outside corner.
 - a. Use masonry units from random cubes of units delivered on site.
 - b. Include structural backup, reinforcing, ties, and anchors.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

04 20 00-2

10/28/2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

08-01-17

2. Mockup panel approved by Contracting Officer's Representative set workmanship and aesthetic quality for masonry work.
3. Clean sample panel to test cleaning methods.
4. Remove mockup panel when directed by Contracting Officer's Representative.

1.6 DELIVERY

- A. Deliver products in manufacturer's original sealed packaging.
- B. Mark packaging, legibly. Indicate manufacturer's name or brand, type, color, production run number, and manufacture date.
- C. Before installation, return or dispose of products within distorted, damaged, or opened packaging.

1.7 STORAGE AND HANDLING

- A. Store products above grade, protected from contamination.
- B. Protect products from damage during handling and construction operations.

1.8 FIELD CONDITIONS

- A. Hot and Cold Weather Requirements: Comply with ACI 530.1/ASCE 6/TMS 602.

1.9 WARRANTY

- A. Construction Warranty: FAR clause 52.246-21, "Warranty of Construction."

PART 2 - PRODUCTS

2.1 SYSTEM PERFORMANCE (NOT USED)

2.2 PRODUCTS - GENERAL

- A. Basis of Design:
 1. Face brick: Match existing.
 2. CMU: See drawings
- B. Provide each product from one manufacturer and from one production run.
 1. Concrete Masonry Unit Recycled Content: Select products with recycled content to meet or exceed the EPA's latest recycled content recommendation.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

04 20 00-3

10/28/2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

08-01-17

2. Steel Recycled Content: 30 percent total recycled content, minimum.

2.3 UNIT MASONRY PRODUCTS

A. Brick:

1. Face Brick:

- a. ASTM C216, Grade SW, Type FBS.
- b. Brick when tested according to ASTM C67: Classified slightly efflorescent or better.
- c. Size:
 - 1) Modular.

B. Concrete Masonry Units (CMU):

1. Hollow and Solid Load-Bearing Concrete Masonry Units: ASTM C90.
 - a. Unit Weight: Normal weight
 - b. Fire rated units for fire rated partitions.
2. Sizes: Modular, 200 mm by 400 mm (8 inches by 16 inches) nominal face dimension; thickness as indicated on drawings or as required to fit within existing construction tolerances.

2.4 ANCHORS, TIES, AND REINFORCEMENT

A. Steel Reinforcing Bars: ASTM A615/A615M; Grade 60, deformed bars.

B. Joint Reinforcement:

1. Form from wire complying with ASTM A951/A951M.
2. Hot dipped galvanized after fabrication.
3. Width of joint reinforcement 40 mm (1.6 inches) less than nominal thickness of masonry wall or partition.
4. Cross wires welded to longitudinal wires.
5. Joint reinforcement minimum 3000 mm (10 feet) long, factory cut.
6. Joint reinforcement with crimp formed drip is not acceptable.
7. Maximum spacing of cross wires 400 mm (16 inch) to longitudinal wires.
8. Ladder Design:
 - a. Longitudinal wires deformed 4 mm (0.16 inch)
 - b. Cross wires 2.6 mm (0.10 inch)
9. Multiple Wythes and Cavity Wall Ties:

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

08-01-17

- a. Longitudinal wires 4 mm (0.16 inch), two in each wythe with ladder truss wires 4 mm (0.16 inch) overlay, welded to each longitudinal wire.
 - b. Longitudinal wires 4 mm (0.16 inch) with U shape 4 mm (0.16 inch) rectangular ties extending into other wythe minimum 75 mm (3 inches) spaced 400 mm on center (16 inches). Adjustable type with U shape tie designed to receive 4 mm (0.16 inch) pintle projecting into other wythe 75 mm (3 inches min.).
- C. Individual Ties:
1. Rectangular ties: Form from 5 mm (3/16 inch) diameter galvanized steel rod to rectangular shape minimum 50 mm (2 inches) wide by sufficient length for ends of ties to extend within 25 mm (1 inch) of each face of wall. Ties that are crimped to form drip are not acceptable.
 2. Adjustable Cavity Wall Ties:
 - a. Adjustable wall ties may be furnished at Contractor's option.
 - b. Two-piece type permitting up to 40 mm (1-1/2 inch) adjustment.
 - c. Form ties from 5 mm (3/16 inch) diameter galvanized steel wire.
 - d. Form one piece to rectangular shape 105 mm (4-1/8 inches) wide by length required to extend into bed joint 50 mm (2 inches).
 - e. Form other piece to 75 mm (3 inch) long by 75 mm (3 inch) wide shape, having 75 mm (3 inch) long bent section for engaging 105 mm (4-1/8 inch) wide piece to form adjustable connection.
- D. Wall Ties, (Mesh or Wire):
1. Mesh wall ties formed of ASTM A1064/A1064M, W0.5, 2 mm, (0.08 inch) galvanized steel wire 13 mm by 13 mm (1/2 inch by 1/2 inch) mesh, 75 mm (3 inches) wide by 200 mm (8 inches) long.
 2. Rectangular wire wall ties formed of W1.4, 3 mm, (0.12 inch) galvanized steel wire 50 mm (2 inches) wide by 200 mm (8 inches) long.

2.5 ACCESSORIES

A. Weeps:

1. Weep Hole: Flexible PVC louvered configuration with rectangular closure strip at top.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

04 20 00-5

10/28/2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

08-01-17

- B. Cavity Drain Material: Open mesh polyester sheets or strips to prevent mortar droppings from clogging the cavity.
- C. Preformed Compressible Joint Filler:
 - 1. Thickness and depth to fill joint.
 - 2. Closed Cell Neoprene: ASTM D1056, Type 2, Class A, Grade 1, B2F1.
 - 3. Non-Combustible Type: ASTM C612, Type 5, Max. Temp.1800 degrees F.
- D. Box Board:
 - 1. Mineral Fiber Board: ASTM C612, Type 1.
 - 2. 25 mm (1 inch) thickness.
 - 3. Other spacing material having similar characteristics is acceptable subject to Contracting Officer's Representative's approval.
- E. Masonry Cleaner:
 - 1. Detergent type cleaner selected for each type masonry.
 - 2. Acid cleaners are not acceptable.
 - 3. Use soapless type specially prepared for cleaning brick or concrete masonry as appropriate.
- F. Fasteners:
 - 1. Concrete Nails: ASTM F1667, Type I, Style 11, 19 mm (3/4 inch) minimum length.
 - 2. Masonry Nails: ASTM F1667, Type I, Style 17, 19 mm (3/4 inch) minimum length.
 - 3. Screws: FS-FF-S-107, Type A, AB, SF thread forming or cutting.
- G. Welding Materials: AWS D1.4/D1.4M, type to suit application.

PART 3 - EXECUTION

3.1 INSTALLATION - GENERAL

- A. Install products according to manufacturer's instructions and approved submittal drawings
 - 1. When manufacturer's instructions deviate from specifications, submit proposed resolution for Contracting Officer's Representative consideration.
- B. Keep finish work free from mortar smears or spatters and leave neat and clean.
- C. Wall Openings:

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

04 20 00-6

10/28/2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

08-01-17

1. Fill hollow metal frames built into masonry walls and partitions solid with mortar as laying of masonry progresses.
 2. When items are not available when walls are built, prepare openings for subsequent installation.
- D. Tooling Joints:
1. Do not tool until mortar has stiffened enough to retain thumb print when thumb is pressed against mortar.
 2. Tool while mortar is soft enough to be compressed into joints and not raked out.
 3. Finish joints in exterior face masonry work with jointing tool, and provide smooth, water-tight concave joint unless specified otherwise.
 4. Tool Exposed interior joints in finish work concave unless specified otherwise.
- E. Partition Height for new wall construction:
1. Extend partitions minimum 100 mm (4 inches) above suspended ceiling or to overhead construction where no ceiling occurs.
 2. Extend following partitions to overhead construction.
 - a. Full height partitions, and fire partitions and smoke partitions indicated on drawings.
 - b. Both walls at expansion joints.
 - c. Corridor walls.
 - d. Walls at stairway and stair halls, elevators, dumbwaiters, trash and laundry chute shafts, and other vertical shafts.
 - e. Walls at refrigerator space.
 - f. Reinforced masonry partitions.
 3. Extend finished masonry partitions minimum 100 mm (4 inches) above suspended ceiling and continue with concrete masonry units or structural clay tile to overhead construction:
- F. Lintels:
1. Lintels are not required for openings less than 1000 mm (40 inches) wide that have hollow metal frames.
 2. Openings 1025 mm (41 inches) wide to 1600 mm (63 inches) wide without structural steel lintel or frames, require lintel formed of concrete

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

04 20 00-7

10/28/2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

08-01-17

masonry lintel or bond beam units filled with grout and reinforced with one No. 16 (No. 5) rod top and bottom for each 100 mm (4 inches) of nominal thickness unless shown otherwise.

3. Use steel lintels, for openings greater than 1600 mm (63 inches) wide, brick masonry openings, and elevator openings unless shown otherwise.
4. Lintel Bearing Length: Minimum 100 mm (4 inches) at both ends.
5. Build masonry openings or arches over wood or metal centering and supports when steel lintels are not used.

G. Wall, Furring, and Partition Units:

1. Lay out field units to provide one-half running bond, unless indicated otherwise.
2. Align head joints of alternate vertical courses.
3. At sides of openings, balance head joints in each course on vertical center lines of openings.
4. Minimum Masonry Unit Length: 100 mm (4 inches).
5. On interior partitions provide 6 mm (1/4 inch) open joint for caulking between existing construction, exterior walls, concrete work, and abutting masonry partitions.
6. Use minimum 100 mm (4 inches) nominal thick masonry for free standing furring, unless indicated otherwise.

H. Before connecting new masonry with previously laid masonry, remove loosened masonry or mortar, and clean and wet work in place as specified under wetting.

I. When new masonry partitions start on existing floors, machine cut existing floor finish material down to concrete surface.

J. Structural Steel Encased in Masonry:

1. Where structural steel is encased in masonry and voids between steel and masonry are filled with mortar, provide minimum 25 mm (1 inch) mortar free expansion space between masonry and steel by applying box board material to steel before masonry is laid.
2. Do not install spacing material where steel is bearing on masonry or masonry is bearing on steel.

K. Wetting and Wetting Test:

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

04 20 00-8

10/28/2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

08-01-17

1. Test and wet brick and clay tile according to BIA TN 11B.
 2. Do not wet concrete masonry units or glazed structural facing tile before laying.
- L. Temporary Formwork: Provide formwork and shores as required for temporary support of reinforced masonry elements.
- M. Construct formwork to conform to shape, line and dimensions indicated on drawings. Make sufficiently tight to prevent mortar, grout, or concrete leakage. Brace, tie and support formwork as required to maintain position and shape during construction and curing of reinforced masonry.
- N. Do not remove forms and shores until reinforced masonry members have hardened sufficiently to carry their own weight and other reasonable temporary construction loads.
- O. Minimum Curing Times Before Removing Shores and Forms:
1. Girders and Beams: 10 days.
 2. Slabs: 7 days.
 3. Reinforced Masonry Soffits: 7 days.

3.2 INSTALLATION - ANCHORAGE

- A. Veneer to Concrete Walls:
1. Install dovetail slots in concrete vertically at 400 mm (16 inches) on centers.
 2. Locate dovetail anchors at 400 mm (16 inch) maximum vertical intervals.
 3. Anchor new masonry facing to existing concrete with adjustable cavity wall ties spaced at 400 mm, (16 inches) maximum vertical intervals, and at 400 mm (16 inches) maximum horizontal intervals. Fasten ties to concrete with power actuated fasteners or concrete nails.
- B. Masonry Facing to Backup and Cavity Wall Ties:
1. Use individual ties for new work.
 2. Stagger ties in alternate courses, and space at 400 mm (16 inches) maximum vertically, and 400 mm (16 inches) horizontally.

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

08-01-17

3. At openings, provide additional ties spaced maximum 900 mm (36 inches) apart vertically around perimeter of opening, and within 300 mm (12 inches) from edge of opening.
4. Anchor new masonry facing to existing masonry with adjustable cavity wall ties spaced at 400 mm (16 inch) maximum vertical intervals and at every second masonry unit horizontally. Fasten ties to masonry with masonry nails.
5. Option: Install joint reinforcing for multiple wythes and cavity wall ties spaced maximum 400 mm (16 inches) vertically.
6. Tie interior and exterior wythes of reinforced masonry walls together with individual ties. Provide ties at intervals maximum 400 mm (16 inches) on center horizontally, and 400 mm (16 inches) on center vertically. Lay ties in the same line vertically in order to facilitate vibrating of the grout pours.

C. Anchorage of Abutting Masonry:

1. Anchor interior 100 mm (4 inch) thick masonry partitions to exterior masonry walls with wall ties. Space ties at 600 mm (24 inches) maximum vertical intervals. Extend ties 100 mm (4 inches) minimum into masonry.
2. Anchor interior masonry bearing walls or interior masonry partitions over 100 mm (4 inches) thick to masonry walls with rigid wall anchors spaced at 400 mm (16 inch) maximum vertical intervals.
3. Anchor abutting masonry walls and partitions to concrete with dovetail anchors. Install dovetail slots vertically in concrete at centerline of abutting wall or partition. Locate dovetail anchors at 400 mm (16 inch) maximum vertical intervals. Secure anchors to existing wall with two 9 mm (3/8 inch) by 75 mm (3 inch) expansion bolts or two power-driven fasteners.
4. Anchor abutting interior masonry partitions to existing concrete and existing masonry construction, with adjustable wall ties. Extend ties minimum 100 mm (4 inches) into joints of new masonry. Fasten ties to existing concrete and masonry construction, with powder actuated drive pins, nail or other means that provides rigid

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

08-01-17

anchorage. Install anchors at 400 mm (16 inch) maximum vertical intervals.

3.3 INSTALLATION - REINFORCEMENT

A. Joint Reinforcement:

1. Install joint reinforcement in CMU wythe of combination brick and CMU, cavity walls, and single wythe concrete masonry unit walls or partitions.
2. Reinforcing is acceptable in lieu of individual ties for anchoring brick facing to CMU backup in exterior masonry walls.
3. Locate joint reinforcement in mortar joints at 400 mm (16 inch) maximum vertical intervals.
4. Additional joint reinforcement is required in mortar joints at both 200 mm (8 inches) and 400 (16 inches) above and below windows, doors, louvers and similar openings in masonry.
5. Wherever brick masonry is backed up with stacked bond masonry, install multiple wythe joint reinforcement in every two courses of CMU backup, and in corresponding joint of facing brick.

B. Steel Reinforcing Bars:

1. Install reinforcing bars in cells of hollow masonry units where required for vertical reinforcement and in bond beam units for horizontal reinforcement. Install in wall cavities of reinforced masonry walls where indicated on drawings.
2. Bond Beams:
 - a. Form Bond beams of load-bearing concrete masonry units filled with grout and reinforced with two No. 15m (No. 5) reinforcing bars unless shown otherwise. Do not cut reinforcement.
 - b. Brake bond beams only at expansion joints and at control joints, if shown.
3. Grout openings:
 - a. Leave cleanout holes in double wythe walls during construction by omitting units at base of one side of wall.
 - b. Locate 75 mm by 75 mm (3 inches. by 3 inches.) min. cleanout holes at location of vertical reinforcement.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

04 20 00-11

10/28/2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

08-01-17

- c. Keep grout space clean of mortar accumulation and debris. Clean as work progresses and immediately before grouting.

3.4 INSTALLATION - BRICK EXPANSION AND CMU CONTROL JOINTS

- A. For new construction provide brick expansion joint (EJ) and CMU control joints (CJ) at no greater than maximum spacing recommended by published industry standards.
- B. Keep joint free of mortar and other debris.
- C. Joints Occur In Masonry Walls:
 - 1. Install preformed compressible joint filler in brick wythe.
 - 2. Install cross shaped shear keys in concrete masonry unit wythe with preformed compressible joint filler on both sides of shear key.
- D. Use standard notched concrete masonry units (sash blocks) made in full and half-length units where shear keys are used to create a continuous vertical joint.
- E. Interrupt joint reinforcement at expansion and control joints.
- F. Fill opening in exposed face of expansion and control joints with sealant as specified in Section 07 92 00, JOINT SEALANTS.

3.5 INSTALLATION - BUILDING EXPANSION JOINTS

- A. Keep expansion joints open and free of mortar. Remove mortar and other debris.
- B. Install non-combustible, compressible type joint filler to fill space completely except where sealant is shown on joints in exposed finish work.
- C. Fill opening in exposed face of expansion and seismic joints with sealant as specified in Section 07 92 00, JOINT SEALANTS.

3.6 INSTALLATION - ISOLATION JOINT (NOT USED)

3.7 INSTALLATION - BRICKWORK

- A. Lay clay brick according to BIA TN 11B.
- B. Laying:
 - 1. Lay brick in bond pattern to match existing.
 - 2. Maintain bond pattern throughout.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

04 20 00-12

10/28/2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

08-01-17

3. Do not use brick smaller than half-brick at any angle, corner, break, and jamb.
4. Where length of cut brick is greater than one half length, maintain vertical joint location.
5. Lay exposed brickwork joints symmetrical about center lines of openings.
6. Do not structurally bond multi-wythe brick walls, unless indicated on drawings.
7. Before starting work, lay facing brick on foundation wall and adjust bond to openings, angles, and corners.
8. Lay brick for sills with wash and drip.
9. Build solid brickwork as required for anchorage of items.

C. Joints:

1. Exterior And Interior Joint Widths: Lay for three equal joints in 200 mm (8 inches) vertically, unless shown otherwise.
2. Rake joints for pointing with colored mortar when colored mortar is not full depth.

D. Weep Holes:

1. Install weep holes at 600 mm (24 inches) on center in bottom of vertical joints of exterior masonry veneer or cavity wall facing over foundations, bond beams, and other water stops in wall.
2. Install sand or pea gravel in cavity approximately 75 mm (3 inches) high between weepes.

E. Solid Exterior Walls:

1. Build with 100 mm (4 inches) of nominal thick facing brick, backed up with concrete masonry units 100 mm (4 inches) nominal thick face brick .
2. Construct solid brick jambs minimum 20 mm (0.81 inches) wide at exterior wall openings and at recesses, except where exposed concrete unit backup is shown.
3. Do not install full bonding headers.
4. Parging:

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

08-01-17

- a. For solid masonry walls, lay backup to height of six brick courses, parge backup with 13 mm (1/2 inch) of mortar troweled smooth; then lay exterior wythe to height of backup.
- b. Make parging continuous over backup and extend 150 mm (6 inches) onto adjacent concrete or masonry.
- c. Parge ends and backs for recesses in exterior walls to thickness of 13 mm (1/2 inch).
- d. Parge inside surface of exterior walls to produce true even surface to receive insulation.

F. Cavity Walls:

1. Keep air space clean of mortar accumulations and debris.
2. Lay the interior wythe of the masonry wall full height where dampproofing or air barrier is required on cavity face. Coordinate to install dampproofing or air barrier before laying outer wythe.
3. Insulated Cavity Type Exterior Walls:
 - a. Install insulation against cavity face of inner masonry wythe.
 - b. Place insulation between rows of ties or joint reinforcing. Adhere insulation to masonry surface with a bonding agent as recommended by insulation manufacturer.
 - c. Lay outer masonry wythe up with air space between insulation and masonry units.

3.8 INSTALLATION - CONCRETE MASONRY UNITS

A. Types and Uses:

1. Provide special concrete masonry shapes as required, including lintel and bond beam units, sash units, and corner units/. Provide solid concrete masonry units, where full units cannot be installed, or where needed for anchorage of accessories.
2. Provide solid load-bearing concrete masonry units or grout cell of hollow units at jambs of openings in walls, where structural members impose loads directly on concrete masonry, and where shown.
3. Provide rounded corner (bullnose) shapes at opening jambs in exposed work and at exterior corners.
4. Do not install brick jambs in exposed finish work.

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

08-01-17

5. Install concrete building brick only as filler in backup material where not exposed.
6. Construct fire resistance in fire rated partitions meeting fire ratings indicated on drawings.

B. Laying:

1. Lay concrete masonry units with 9 mm (3/8 inch) joints, with a bond overlap of minimum 1/4 of unit length, except where stack bond is indicated on drawings.
2. Do not wet concrete masonry units before laying.
3. Bond external corners of partitions by overlapping alternate courses.
4. Lay first course in a full mortar bed.
5. Set anchorage items as work progress.
6. Where ends of anchors, bolts, and other embedded items, project into voids of units, completely fill voids with mortar or grout.
7. Provide 6 mm (1/4 inch) open joint for sealant between existing construction, exterior walls, concrete work, and abutting masonry partitions.
8. Lay concrete masonry units with full face shell mortar beds and fill head joint beds for depth equivalent to face shell thickness.
9. Lay concrete masonry units so cores of units, that are to be filled with grout, are vertically continuous with joints of cross webs of such cores completely filled with mortar. Unobstructed core openings minimum 50 mm (2 inches) by 75 mm (3 inches).
10. Do not wedge masonry against steel reinforcing. Minimum 13 mm (1/2 inch) clear distance between reinforcing and masonry units.
11. Install deformed reinforcing bars of sizes indicated on drawings.
12. At time of placement, ensure steel reinforcement is free of loose rust, mud, oil, and other contamination capable of affecting bond.
13. Place steel reinforcement at spacing indicated on drawings before grouting.
14. Minimum clear distance between parallel bars: One bar diameter.
15. Hold vertical steel reinforcement in place vertically by centering clips, caging devices, tie wire, or other approved methods.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

04 20 00-15

10/28/2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

08-01-17

16. Support vertical bars near each end and at maximum 192 bar diameter on center.
17. Splice reinforcement or attach reinforcement to dowels by placing in contact and securing with wire ties.
18. Stagger splices in adjacent horizontal reinforcing bars. Lap reinforcing bars at splices a minimum of 40 bar diameters.
19. Grout cells of concrete masonry units, containing reinforcing bars, solid as specified.
20. Install cavity and joint reinforcement as masonry work progresses.
21. Rake joints 6 to 10 mm (1/4 to 3/8 inch) deep for pointing with colored mortar when colored mortar is not full depth.

3.9 INSTALLATION - GLAZED STRUCTURAL FACING TILE (NOT USED)

3.10 POINTING

- A. Fill joints with pointing mortar using rubber float trowel to apply mortar solidly into raked joints.
- B. Wipe off excess mortar from joints of glazed masonry units with dry cloth.
- C. Tool exposed joints to smooth concave joint.
- D. At joints with existing work, match existing joint.

3.11 GROUTING

- A. Preparation:
 1. Clean grout space of mortar droppings before placing grout.
 2. Close cleanouts.
 3. Install vertical solid masonry dams across grout space for full height of wall at intervals of maximum 9000 mm (30 feet). Do not bond dam units into wythes as masonry headers.
 4. Verify reinforcing bars are installed as indicated on drawings.
- B. Placing:
 1. Place grout in grout space in lifts as specified.
 2. Consolidate each grout lift after free water has disappeared but before plasticity is lost.
 3. Do not slush with mortar or use mortar with grout.
 4. Interruptions:

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

04 20 00-16

10/28/2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

08-01-17

- a. When grouting must be stopped for more than an hour, top off grout 40 mm (1-1/2 inches) below top of last masonry course.
 - b. Grout from dam to dam on high lift method.
 - c. Longitudinal run of masonry may be stopped off only by raking back one-half masonry unit length in each course and stopping grout 100 mm (4 inches) back of rake on low lift method.
- C. Puddling Method:
1. Consolidate by puddling with grout stick during and immediately after placing.
 2. Grout cores of concrete masonry units containing reinforcing bars solid as masonry work progresses.
- D. Low Lift Method:
1. Construct masonry to 1.5 m (5 feet) maximum height before grouting.
 2. Grout in one continuous operation and consolidate grout by mechanical vibration and reconsolidate after initial water loss and settlement has occurred.
- E. High Lift Method:
1. Do not pour grout until masonry wall has cured minimum of 4 hours.
 2. Place grout in 1.5 m (5 feet) maximum lifts.
 3. Exception:
 - a. Where following conditions are met, place grout in 3.86 m (12.67 feet) maximum lifts.
 - b. Masonry has cured minimum of 4 hours.
 - c. Grout slump is maintained between 250 and 275 mm (10 and 11 inches).
 - d. No intermediate reinforced bond beams are placed between top and bottom of grout lift.
 4. When vibrating succeeding lifts, extend vibrator 300 to 450 mm (12 to 18 inches) into preceding lift.

3.12 PLACING REINFORCEMENT

- A. General: Clean reinforcement of loose rust, mill scale, earth, ice or other materials which will reduce bond to mortar or grout. Do not use reinforcement bars with kinks or bends not shown on drawings or

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

08-01-17

approved submittal drawings, or bars with reduced cross-section due to excessive rusting or other causes.

- B. Position reinforcement accurately at spacing indicated on drawings. Support and secure vertical bars against displacement. Install horizontal reinforcement as masonry work progresses. Where vertical bars are shown in close proximity, provide clear distance between bars of minimum one bar diameter or 25 mm (1 inch), whichever is greater.
- C. Splice reinforcement bars only where indicated on drawings, unless approved by Contracting Officer's Representative. Provide lapped splices. In splicing vertical bars or attaching to dowels, lap ends, place in contact and wire tie.
- D. Provide minimum lap as indicated on approved submittal drawings, or if not indicated, minimum 48 bar diameters.
- E. Embed metal ties in mortar joints as work progresses, with minimum mortar cover of 15 mm (5/8 inch) on exterior face of walls and 13 mm (1/2 inch) at other locations.
- F. Embed prefabricated horizontal joint reinforcement as work progresses, with minimum cover of 15 mm (5/8 inch) on exterior face of walls and 13 mm (1/2 inch) at other locations. Lap joint reinforcement minimum 150 mm (6 inches) at ends. Use prefabricated "L" and "T" sections to provide continuity at corners and intersections. Cut and bend joint reinforcement for continuity at returns, offsets, column fireproofing, pipe enclosures and other special conditions.
- G. Anchoring: Anchor reinforced masonry work to supporting structure as indicated on drawings.
- H. Anchor reinforced masonry walls at intersections with non-reinforced masonry.

3.13 INSTALLATION OF REINFORCED BRICK MASONRY (NOT USED)

3.14 INSTALLATION OF REINFORCED CONCRETE UNIT MASONRY

- A. Do not wet concrete masonry units (CMU).
- B. Lay CMU units with full-face shell mortar beds. Fill vertical head joints (end joints between units) solidly with mortar from face of unit to distance behind face equal to thickness of longitudinal face shells.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

04 20 00-18

10/28/2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

08-01-17

Solidly bed cross-webs of starting courses in mortar. Maintain head and bed 9 mm (3/8 inch) joint widths.

C. Where solid CMU units are shown, lay with full mortar head and bed joints.

D. Walls:

1. Pattern Bond: Lay CMU wall units in 1/2-running bond with vertical joints in each course centered on units in courses above and below, unless otherwise indicated. Bond and interlock each course at corners and intersections. Use special-shaped units where shown, and as required for corners, jambs, sash, control joints, lintels, bond beams and other special conditions.
2. Maintain vertical continuity of core or cell cavities, which are to be reinforced and grouted, to provide minimum clear dimension indicated and to provide minimum clearance and grout coverage for vertical reinforcement bars. Keep cavities free of mortar. Solidly bed webs in mortar where adjacent to reinforced cores or cells.
3. Where horizontally reinforced beams (bond beams) are indicated on drawings, use special units or modify regular units to allow for placement of continuous horizontal reinforcement bars. Place small mesh expanded metal lath or wire screening in mortar joints under bond beam courses over cores or cells of non-reinforced vertical cells or provide units with solid bottoms.

E. Grouting:

1. Use fine grout for filling spaces less than 100 mm (4 inches) in one or both horizontal directions.
2. Use coarse grout for filling 100 mm (4 inch) spaces or larger in both horizontal directions.
3. Grouting Technique: At Contractor's option, use either low-lift or high-lift grouting techniques.

F. Low-Lift Grouting:

1. Provide minimum clear dimension of 50 mm (2 inches) and clear area of 5160 sq. mm (8 sq. inches) in vertical cores to be grouted.
2. Place vertical reinforcement before grouting of CMU. Extend above elevation of maximum pour height as required for splicing. Support

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

08-01-17

in position at vertical intervals not exceeding 192 bar diameters nor 3 m (10 feet).

3. Lay CMU to maximum pour height. Do not exceed 1.5 m (5 feet) height, or if bond beam occurs below 1.5 m (5 feet) height, stop pour 38 mm (1-1/2 inches) below top of bond beam.
4. Rod or vibrate grout during placing. Place grout continuously; do not interrupt pouring of grout for more than one hour. Terminate grout pours 38 mm (1-1/2 inches) below top course of pour.
5. Bond Beams: Stop grout in vertical cells 38 mm (1-1/2 inches) below bond beam course. Place horizontal reinforcement in bond beams; lap at corners and intersections as indicated on drawings. Place grout in bond beam course before filling vertical cores above bond beam.

G. High-Lift Grouting:

1. Do not use high-lift grouting technique for grouting of CMU unless minimum cavity dimension and area is 75 mm (3 inches) and 6450 sq. mm (10 sq. inches), respectively.
2. Provide cleanout holes in first course at vertical cells which are to be filled with grout.
3. Use units with one face shell removed and provide temporary supports for units above, or use header units with concrete brick supports, or cut openings in one face shell.
4. Construct masonry to full height of maximum grout pour before placing grout.
5. Limit grout lifts to maximum height of 1.5 m (5 feet) and grout pour to maximum height of 7.3 m (24 feet), for single wythe hollow concrete masonry walls, unless otherwise indicated.
6. Place vertical reinforcement before grouting. Place before or after laying masonry units, to suit application. Tie vertical reinforcement to dowels at base of masonry where shown and thread CMU over or around reinforcement. Support vertical reinforcement at intervals not exceeding 192 bar diameters nor 3 m (10 feet).
7. Where individual bars are placed after laying masonry, place wire loops extending into cells as masonry is laid and loosen before

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

08-01-17

mortar sets. After insertion of reinforcement bar, pull loops and bar to proper position and tie free ends.

8. Where reinforcement is prefabricated into cage units before placing, fabricate units with vertical reinforcement bars and lateral ties of the size and spacing indicated.
9. Place horizontal beam reinforcement as masonry units are laid.

3.15 CONSTRUCTION TOLERANCES

- A. Lay masonry units plumb, level and true to line within tolerances according to ACI 530.1/ASCE 6/TMS 602 and as follows:
- B. Maximum variation from plumb:
 1. In 3000 mm (10 feet) - 6 mm (1/4 inch).
 2. In 6000 mm (20 feet) - 9 mm (3/8 inch).
 3. In 12,000 mm (40 feet) or more - 13 mm (1/2 inch).
- C. Maximum variation from level:
 1. In any bay or up to 6000 mm (20 feet) - 6 mm (1/4 inch).
 2. In 12,000 mm (40 feet) or more - 13 mm (1/2 inch).
- D. Maximum variation from linear building lines:
 1. In any bay or up to 6000 mm (20 feet) - 13 mm (1/2 inch).
 2. In 12,000 mm (40 feet) or more - 19 mm (3/4 inch).
- E. Maximum variation in prepared opening dimensions:
 1. Accurate to minus 0 mm (0 inch).
 2. Plus 6 mm (1/4 inch).

3.16 CLEANING AND REPAIR

- A. General:
 1. Clean exposed masonry surfaces on completion.
 2. Protect adjoining construction materials and landscaping during cleaning operations.
 3. Cut out defective exposed new joints to depth of approximately 19 mm (3/4 inch) and repoint.
 4. Remove mortar droppings and other foreign substances from wall surfaces.
- B. Brickwork:

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

04 20 00-21

10/28/2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

08-01-17

1. First wet surfaces with clean water, then wash down with detergent solution. Do not use muriatic acid.
2. Brush with stiff fiber brushes while washing, and immediately wash with clean water.
3. Remove traces of detergent, foreign streaks, or stains of any nature.

C. Concrete Masonry Units:

1. Immediately following setting, brush exposed surfaces free of mortar or other foreign matter.
2. Allow mud to dry before brushing.

D. Glazed Structural Facing Tile or Brick Units:

1. Clean as recommended manufacturer. Protect light colored mortar joints from discoloration during cleaning.
2. Use on solid masonry walls.
3. Prepare schedule of test locations.

3.17 FIELD QUALITY CONTROL (NOT USED)

- - E N D - -

DIVISION 05

METALS

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

11-01-18

SECTION 05 12 00
STRUCTURAL STEEL FRAMING

PART 1 - GENERAL

1.1 SUMMARY

- A. Section Includes:
1. Structural steel shapes, plates, and bars.
 2. Structural pipe.
 3. Bolts, nuts, and washers.

1.2 RELATED REQUIREMENTS

- A. Materials Testing And Inspection During Construction: Section 01 45 29, TESTING LABORATORY SERVICES.

1.3 APPLICABLE PUBLICATIONS

- A. Comply with references to extent specified in this section.
- B. American Institute of Steel Construction (AISC):
1. AISC Manual - Steel Construction Manual, 14th Ed.
 2. 303-10 - Code of Structural Steel Buildings and Bridges.
 3. 360-10: Specification for Structural Steel Buildings.
- C. The American Society of Mechanical Engineers (ASME):
1. B18.22.1-09 - Washers: Helical Spring-Lock, Tooth Lock, and Plain Washers.
- D. American Welding Society (AWS):
1. D1.1/D1.1M-15 - Structural Welding Code - Steel.
- E. ASTM International (ASTM):
1. A6/A6M-14 - General Requirements for Rolled Structural Steel Bars, Plates, Shapes, and Sheet Piling.
 2. A36/A36M-14 - Carbon Structural Steel.
 3. A53/A53M-12 - Pipe, Steel, Black and Hot-Dip, Zinc-Coated, Welded and Seamless.
 4. A123/A123M-15 - Zinc (Hot-Dip Galvanized) Coatings on Iron and Steel Products.
 5. A242/A242M-13 - High-Strength Low-Alloy Structural Steel.
 6. A283/A283M-13 - Low and Intermediate Tensile Strength Carbon Steel Plates.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

11-01-18

7. A307-14 - Carbon Steel Bolts, Studs, and Threaded Rod 60,000 PSI Tensile Strength.
 8. A500/A500M-13 - Cold-Formed Welded and Seamless Carbon Steel Structural Tubing and Rounds and Shapes.
 9. A501/A501M-14 - Hot-Formed Welded and Seamless Carbon Steel Structural Tubing and Rounds and Shapes.
 10. A572/A572M-15 - High-Strength Low-Alloy Columbium-Vanadium Structural Steel.
 11. A992/A992M-15 - Structural Shapes.
 12. F2329/F2329M-15 - Zinc Coating, Hot-Dip, Requirements for Application to Carbon and Alloy steel Bolts, Screws, washers, Nuts, and Special Threaded Fasteners.
 13. F3125/F3125M-15 - Standard Specification for High Strength Structural Bolts, Steel and Alloy Steel, Heat Treated, 120 ksi (830 MPa) and 150 ksi (1040 MPa) Minimum Tensile Strength, Inch and Metric Dimensions
- F. Master Painters Institute (MPI):
1. No. 18 - Primer, Zinc Rich, Organic.
- G. Military Specifications (Mil. Spec.):
1. MIL-P-21035 - Paint, High Zinc Dust Content, Galvanizing, Repair.
- H. Occupational Safety and Health Administration (OSHA):
1. 29 CFR 1926.752(e) - Guidelines For Establishing The Components Of A Site-Specific Erection Plan.
 2. 29 CFR 1926-2001 - Safety Standards for Steel Erection.
- I. Research Council on Structural Connections (RCSC) of The Engineering Foundation:
1. Specification for Structural Joints Using ASTM F3125 Bolts.

1.4 SUBMITTALS

- A. Submittal Procedures: Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Submittal Drawings:
 1. Show size, configuration, and fabrication and installation details.
- C. Sustainable Construction Submittals:

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

05 12 00 - 2

10/28/2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

11-01-18

1. Recycled Content: Identify post-consumer and pre-consumer recycled content percentage by weight.
- D. Test Reports: Certify products comply with specifications.
 1. Welders' qualifying tests.
- E. Certificates: Certify each product complies with specifications.
 1. Structural steel.
 2. Steel connections.
 3. Welding materials.
 4. Shop coat primer paint.
- F. Qualifications: Substantiate qualifications comply with specifications.
 1. Fabricator with project experience list.
 2. Installer with project experience list.
 3. Welders and welding procedures.
- G. Delegated Design Drawings and Calculations: Signed and sealed by responsible Architect/Engineer.
 1. Connection calculations.
- H. Record Surveys: Signed and sealed by responsible surveyor or engineer.

1.5 QUALITY ASSURANCE

- A. Fabricator Qualifications: AISC Quality Certification participant designated as AISC Certified Plant, Category STD.
 1. Regularly fabricates specified products.
 2. Fabricated specified products with satisfactory service on five similar installations for minimum five years.
 - a. Project Experience List: Provide contact names and addresses for completed projects.
- B. Installer Qualifications: AISC Quality Certification Program participant designated as AISC-Certified Erector, Category ACSE.
 1. Regularly installs specified products.
 2. Installed specified products with satisfactory service on five similar installations for minimum five years.
 - a. Project Experience List: Provide contact names and addresses for completed projects.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

11-01-18

- C. Before commencement of Work, ensure steel erector provides written notification required by OSHA 29 CFR 1926.752(e). Submit a copy of the notification to Contracting Officer's Representative.
- D. Welders and Welding Procedures Qualifications: AWS D1.1/D1.1M.

1.6 WARRANTY

- A. Construction Warranty: FAR clause 52.246-21, "Warranty of Construction."

PART 2 - PRODUCTS

2.1 SYSTEM PERFORMANCE

- A. Delegated Design: Prepare submittal documents including design calculations and drawings signed and sealed by registered design professional, licensed in state where project is located.
- B. Design structural steel framing connections complying with specified performance:
 - 1. Load Capacity: Resist full capacity of supported framing member . Account for connection and member loads and eccentricities.
 - a. Request additional design criteria when necessary to complete connection design.
 - 2. Configuration: Design and detail all connections for each member size, steel grade and connection type to resist the loads and reactions indicated on the drawings or specified herein. Use details consistent with details shown on drawings, supplementing where necessary. The details shown on drawings are conceptual and do not indicate the required weld sizes or number of bolts unless specifically noted. Use rational engineering design and standard practice in detailing, accounting for all loads and eccentricities in both the connection and the members. Promptly notify the Contracting Officer Representative of any location where the connection design criteria is not clearly indicated. The design of all connections is subject to the review and acceptance of the Contracting Officer's Representative. Submit structural calculations prepared and sealed by a qualified engineer registered in the state

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

11-01-18

where the project is located. Submit calculations for review before preparation of detail drawings.

2.2 MATERIALS

- A. W-Shapes:
 - 1. ASTM A992/A992M.
 - 2.
- B. Channel and Angles:
 - 1. ASTM A36/A36M.
- C. Plates and Bars:
 - 1. ASTM A36/A36M.
 - 2.
- D. Hollow Structural Sections:
 - 1. ASTM A500/A500M.
 - 2. ASTM A501/A501M.
- E. Structural Pipe: ASTM A53/A53M, Grade B.
- F. Bolts, Nuts and Washers: plain finish for other framing
 - 1. High-strength bolts, including nuts and washers: ASTM F3125.
 - 2. Bolts and nuts, other than high-strength: ASTM A307, Grade A.
 - 3. Plain washers, other than those in contact with high-strength bolt heads and nuts: ASME B18.22.1.
- G. Welding Materials: AWS D1.1, type to suit application.

2.3 PRODUCTS - GENERAL

- A. Sustainable Construction Requirements:
 - 1. Steel Recycled Content: 30 percent total recycled content, minimum.
 - 2. Low Pollutant-Emitting Materials: Comply with VOC limits specified in Section 01 81 13, SUSTAINABLE CONSTRUCTION REQUIREMENTS for the following products:
 - a. Paints and coatings.

2.4 FABRICATION

- A. Fabricate structural steel according to Chapter M, AISC 360.
- B. Shop and Field Connections:
 - 1. Weld connections according to AWS D1.1/D1.1M. Welds shall be made only by welders and welding operators who have been previously

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

11-01-18

qualified by tests as prescribed in AWS D1.1 to perform type of work required.

2. High-Strength Bolts: High-strength bolts tightened to a bolt tension minimum 70 percent of their minimum tensile strength. Tightening done with properly calibrated wrenches, by turn-of-nut method or by use of direct tension indicators (bolts or washers). Tighten bolts in connections identified as slip-critical using Direct Tension Indicators. Twist-off torque bolts are not an acceptable alternate fastener for slip critical connections.

2.5 FINISHES

- A. Shop Priming:
 1. Prime paint structural steel according to AISC 303, Section 6.
 - a. Interstitial Space Structural Steel: Prime paint, unless indicated to receive sprayed on fireproofing.
- B. Shop Finish Painting: Apply primer and finish paint as specified in Section 09 91 00, PAINTING.
- C. Do not paint:
 1. Surfaces within 50 mm (2 inches) of field welded joints.
 2. Surfaces indicated to be encased in concrete.
 3. Surfaces receiving sprayed on fireproofing.
 4. Beam top flanges receiving shear connector studs applied.

2.6 ACCESSORIES

- A. General: Shop paint steel according to AISC 303, Section 6.
- B. Finish Paint System: Primer and finish as specified in Section 09 91 00, PAINTING.
- C. Galvanizing Repair Paint: MPI No. 18.

PART 3 - EXECUTION

3.1 ERECTION

- A. Erect structural steel according to AISC 303 and AISC 360.
- B. Set structural steel accurately at locations and elevations indicated on drawings.
- C. Maintain erection tolerances of structural steel within AISC 303 requirements.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

11-01-18

1. Pour Stop Elevation Tolerance: 6 mm (1/4 inch), maximum, before concrete placement.

D. Weld and bolt connections as specified for shop connections.

3.2 FIELD PAINTING

A. After welding, clean and prime weld areas to match adjacent finish.

B. Touch-up primer damaged by construction operations.

C. Finish Painting: As specified in Section 09 91 00, PAINTING.

3.3 FIELD QUALITY CONTROL

A. Record Survey:

1. Engage registered land surveyor or registered civil engineer as specified in Section 01 00 00, GENERAL REQUIREMENTS to perform survey.

2. Measure and record structural steel framing plumbness, level, and alignment after completing bolting and welding and before installation of work supported by structural steel.

3. Identify deviations from allowable tolerances specified in AISC Manual.

- - E N D - -

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

08-01-18

SECTION 05 50 00
METAL FABRICATIONS

PART 1 - GENERAL

1.1 DESCRIPTION

- A. This section specifies items and assemblies fabricated from structural steel shapes and other materials as shown and specified.
- B. Items specified.
 - 1. Frames, including ceiling mounted patient lift systems
 - 2. Loose Lintels
 - 3. Shelf Angles

1.2 RELATED WORK

- A. Prime and finish painting: Section 09 91 00, PAINTING.

1.3 SUBMITTALS

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Shop Drawings:
 - 1. Each item specified, showing complete detail, location in the project, material and size of components, method of joining various components and assemblies, finish, and location, size and type of anchors.
 - 2. Mark items requiring field assembly for erection identification and furnish erection drawings and instructions.
 - 3. Provide templates and rough-in measurements as required.
- C. Manufacturer's Certificates:
 - 1. Anodized finish as specified.
 - 2. Live load designs as specified.
- D. Design Calculations for specified live loads including dead loads.
- E. Furnish setting drawings and instructions for installation of anchors to be preset into concrete and masonry work, and for the positioning of items having anchors to be built into concrete or masonry construction.

1.4 QUALITY ASSURANCE

- A. Each manufactured product shall meet, as a minimum, the requirements specified, and shall be a standard commercial product of a manufacturer regularly presently manufacturing items of type specified.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

05 50 00-1

10/28/2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

08-01-18

- B. Each product type shall be the same and be made by the same manufacturer.
- C. Assembled product to the greatest extent possible before delivery to the site.
- D. Include additional features, which are not specifically prohibited by this specification, but which are a part of the manufacturer's standard commercial product.

1.5 APPLICABLE PUBLICATIONS

- A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only.
- B. American Society of Mechanical Engineers (ASME):
 - B18.6.1-97.....Wood Screws
 - B18.2.2-87(R2010).....Square and Hex Nuts
- C. American Society for Testing and Materials (ASTM):
 - A36/A36M-14.....Structural Steel
 - A47-99(R2014).....Malleable Iron Castings
 - A48-03(R2012).....Gray Iron Castings
 - A53-12.....Pipe, Steel, Black and Hot-Dipped, Zinc-Coated
Welded and Seamless
 - A123-15.....Zinc (Hot-Dip Galvanized) Coatings on Iron and
Steel Products
 - A240/A240M-15.....Standard Specification for Chromium and
Chromium-Nickel Stainless Steel Plate, Sheet
and Strip for Pressure Vessels and for General
Applications.
 - A269-15.....Seamless and Welded Austenitic Stainless Steel
Tubing for General Service
 - A307-14.....Carbon Steel Bolts and Studs, 60,000 PSI
Tensile Strength
 - A391/A391M-07(R2015)....Grade 80 Alloy Steel Chain
 - A786/A786M-15.....Rolled Steel Floor Plate
 - B221-14.....Aluminum and Aluminum-Alloy Extruded Bars,
Rods, Wire, Shapes, and Tubes

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

05 50 00-2

10/28/2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

08-01-18

- B456-11.....Electrodeposited Coatings of Copper Plus Nickel
Plus Chromium and Nickel Plus Chromium
- B632-08.....Aluminum-Alloy Rolled Tread Plate
- C1107-13.....Packaged Dry, Hydraulic-Cement Grout (Non-
shrink)
- D3656-13.....Insect Screening and Louver Cloth Woven from
Vinyl-Coated Glass Yarns
- F436-16.....Hardened Steel Washers
- F468-06(R2015).....Nonferrous Bolts, Hex Cap Screws, Socket Head
Cap Screws and Studs for General Use
- F593-13.....Stainless Steel Bolts, Hex Cap Screws, and
Studs
- F1667-15.....Driven Fasteners: Nails, Spikes and Staples
- D. American Welding Society (AWS):
 - D1.1-15.....Structural Welding Code Steel
 - D1.2-14.....Structural Welding Code Aluminum
 - D1.3-18.....Structural Welding Code Sheet Steel
- E. National Association of Architectural Metal Manufacturers (NAAMM)
 - AMP 521-01(R2012).....Pipe Railing Manual
 - AMP 500-06.....Metal Finishes Manual
 - MBG 531-09(R2017).....Metal Bar Grating Manual
 - MBG 532-09.....Heavy Duty Metal Bar Grating Manual
- F. Structural Steel Painting Council (SSPC)/Society of Protective
Coatings:
 - SP 1-15.....No. 1, Solvent Cleaning
 - SP 2-04.....No. 2, Hand Tool Cleaning
 - SP 3-04.....No. 3, Power Tool Cleaning
- G. Federal Specifications (Fed. Spec):
 - RR-T-650E.....Treads, Metallic and Nonmetallic, Nonkid

PART 2 - PRODUCTS

2.1 DESIGN CRITERIA (NOT USED)

2.2 MATERIALS

- A. Structural Steel: ASTM A36.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

08-01-18

- B. Aluminum, Extruded: ASTM B221, Alloy 6063-T5 unless otherwise specified. For structural shapes use alloy 6061-T6 and alloy 6061-T4511.
- C. Primer Paint: As specified in Section 09 91 00, PAINTING.
- D. Modular Channel Units:
 - 1. Factory fabricated, channel shaped, cold formed sheet steel shapes, complete with fittings bolts and nuts required for assembly.
 - 2. Form channel within turned pyramid shaped clamping ridges on each side.
 - 3. Provide case hardened steel nuts with serrated grooves in the top edges designed to be inserted in the channel at any point and be given a quarter turn so as to engage the channel clamping ridges. Provide each nut with a spring designed to hold the nut in place.
 - 4. Factory finish channels and parts with oven baked primer when exposed to view. Channels fabricated of ASTM A525, G90 galvanized steel may have primer omitted in concealed locations. Finish screws and nuts with zinc coating.
 - 5. Fabricate snap-in closure plates to fit and close exposed channel openings of not more than 0.3 mm (0.0125 inch) thick stainless steel.
- E. Grout: ASTM C1107, pourable type.

2.3 HARDWARE

- A. Rough Hardware:
 - 1. Furnish rough hardware with a standard plating, applied after punching, forming and assembly of parts; galvanized, cadmium plated, or zinc-coated by electro-galvanizing process. Galvanized G-90 where specified.
 - 2. Use G90 galvanized coating on ferrous metal for exterior work unless non-ferrous metal or stainless is used.
- B. Fasteners:
 - 1. Bolts with Nuts:
 - a. ASME B18.2.2.
 - b. ASTM A307 for 415 MPa (60,000 psi) tensile strength bolts.
 - c. ASTM F468 for nonferrous bolts.
 - d. ASTM F593 for stainless steel.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

05 50 00-4

10/28/2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

08-01-18

2. Screws: ASME B18.6.1.
3. Washers: ASTM F436, type to suit material and anchorage.
4. Nails: ASTM F1667, Type I, style 6 or 14 for finish work.

2.4 FABRICATION GENERAL

A. Material

1. Use material as specified. Use material of commercial quality and suitable for intended purpose for material that is not named or its standard of quality not specified.
2. Use material free of defects which could affect the appearance or service ability of the finished product.

B. Size:

1. Size and thickness of members as shown.
2. When size and thickness is not specified or shown for an individual part, use size and thickness not less than that used for the same component on similar standard commercial items or in accordance with established shop methods.

C. Connections

1. Except as otherwise specified, connections may be made by welding, riveting or bolting.
2. Field riveting will not be approved.
3. Design size, number and placement of fasteners, to develop a joint strength of not less than the design value.
4. Holes, for rivets and bolts: Accurately punched or drilled and burrs removed.
5. Size and shape welds to develop the full design strength of the parts connected by welds and to transmit imposed stresses without permanent deformation or failure when subject to service loadings.
6. Use Rivets and bolts of material selected to prevent corrosion (electrolysis) at bimetallic contacts. Plated or coated material will not be approved.
7. Use stainless steel connectors for removable members machine screws or bolts.

D. Fasteners and Anchors

1. Use methods for fastening or anchoring metal fabrications to building construction as shown or specified.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

05 50 00-5

10/28/2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

08-01-18

2. Where fasteners and anchors are not shown, design the type, size, location and spacing to resist the loads imposed without deformation of the members or causing failure of the anchor or fastener, and suit the sequence of installation.
3. Use material and finish of the fasteners compatible with the kinds of materials which are fastened together and their location in the finished work.
4. Fasteners for securing metal fabrications to new construction only, may be by use of threaded or wedge type inserts or by anchors for welding to the metal fabrication for installation before the concrete is placed or as masonry is laid.
5. Fasteners for securing metal fabrication to existing construction or new construction may be expansion bolts, toggle bolts, power actuated drive pins, welding, self-drilling and tapping screws or bolts.

E. Workmanship

1. General:

- a. Fabricate items to design shown.
- b. Furnish members in longest lengths commercially available within the limits shown and specified.
- c. Fabricate straight, true, free from warp and twist, and where applicable square and in same plane.
- d. Provide holes, sinkages and reinforcement shown and required for fasteners and anchorage items.
- e. Provide openings, cut-outs, and tapped holes for attachment and clearances required for work of other trades.
- f. Prepare members for the installation and fitting of hardware.
- h. Fabricate surfaces and edges free from sharp edges, burrs and projections which may cause injury.

2. Welding:

- a. Weld in accordance with AWS.
- b. Welds shall show good fusion, be free from cracks and porosity and accomplish secure and rigid joints in proper alignment.
- c. Where exposed in the finished work, continuous weld for the full length of the members joined and have depressed areas filled and

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

08-01-18

protruding welds finished smooth and flush with adjacent surfaces.

d. Finish welded joints to match finish of adjacent surface.

3. Joining:

a. Miter or butt members at corners.

b. Where frames members are butted at corners, cut leg of frame member perpendicular to surface, as required for clearance.

4. Anchors:

a. Where metal fabrications are shown to be preset in concrete, weld 32 x 3 mm (1-1/4 by 1/8 inch) steel strap anchors, 150 mm (6 inches) long with 25 mm (one inch) hooked end, to back of member at 600 mm (2 feet) on center, unless otherwise shown.

b. Where metal fabrications are shown to be built into masonry use 32 x 3 mm (1-1/4 by 1/8 inch) steel strap anchors, 250 mm (10 inches) long with 50 mm (2 inch) hooked end, welded to back of member at 600 mm (2 feet) on center, unless otherwise shown.

5. Cutting and Fitting:

a. Accurately cut, machine and fit joints, corners, copes, and miters.

b. Fit removable members to be easily removed.

c. Design and construct field connections in the most practical place for appearance and ease of installation.

d. Fit pieces together as required.

e. Fabricate connections for ease of assembly and disassembly without use of special tools.

f. Joints firm when assembled.

g. Conceal joining, fitting and welding on exposed work as far as practical.

h. Do not show rivets and screws prominently on the exposed face.

i. The fit of components and the alignment of holes shall eliminate the need to modify component or to use exceptional force in the assembly of item and eliminate the need to use other than common tools.

F. Finish:

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

08-01-18

1. Finish exposed surfaces in accordance with NAAMM AMP 500 Metal Finishes Manual.
 2. Aluminum: NAAMM AMP 501.
 - a. Mill finish, AA-M10, as fabricated, use unless specified otherwise.
 - b. Clear anodic coating, AA-C22A41, chemically etched medium matte, with Architectural Class 1, 0.7 mils or thicker.
 - c. Colored anodic coating, AA-C22A42, chemically etched medium matte with Architectural Class 1, 0.7 mils or thicker.
 - d. Painted: AA-C22R10.
 3. Steel and Iron: NAAMM AMP 504.
 - a. Zinc coated (Galvanized): ASTM A123, G90 unless noted otherwise.
 - b. Surfaces exposed in the finished work:
 - 1) Finish smooth rough surfaces and remove projections.
 - 2) Fill holes, dents and similar voids and depressions with epoxy type patching compound.
 - c. Shop Prime Painting:
 - 1) Surfaces of Ferrous metal:
 - a) Items not specified to have other coatings.
 - b) Galvanized surfaces specified to have prime paint.
 - c) Remove all loose mill scale, rust, and paint, by hand or power tool cleaning as defined in SSPC-SP2 and SP3.
 - d) Clean of oil, grease, soil and other detrimental matter by use of solvents or cleaning compounds as defined in SSPC-SP1.
 - e) After cleaning and finishing apply one coat of primer as specified in Section 09 91 00, PAINTING.
 - 2) Non-ferrous metals: Comply with MAAMM-500 series.
 4. Stainless Steel: NAAMM AMP-504 Finish No. 4.
- G. Protection:
1. Insulate aluminum surfaces that will come in contact with concrete, masonry, plaster, or metals other than stainless steel, zinc or white bronze by giving a coat of heavy-bodied alkali resisting bituminous paint or other approved paint in shop.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

05 50 00-8

10/28/2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

08-01-18

2. Spot prime all abraded and damaged areas of zinc coating which expose the bare metal, using zinc rich paint on hot-dip zinc coat items and zinc dust primer on all other zinc coated items.

2.5 SUPPORTS

A. General:

1. Fabricate ASTM A36 structural steel shapes as shown.
2. Use clip angles or make provisions for welding hangers and braces to overhead construction.
3. Field connections may be welded or bolted.

B. For Wall Mounted Items:

1. For items supported by metal stud partitions.
2. Steel strip or hat channel minimum of 1.5 mm (0.0598 inch) thick.
3. Steel strip minimum of 150 mm (6 inches) wide, length extending one stud space beyond end of item supported.
4. Steel hat channels where shown. Flange cut and flatted for anchorage to stud.
5. Structural steel tube or channel for grab bar at water closets floor to structure above with clip angles or end plates formed for anchors.
6. Use steel angles for thru wall counters. Drill angle for fasteners at ends and not over 100 mm (4 inches) on center between ends.

C. For Cubical Curtain Track:

1. Fabricate assembly of steel angle as shown.
2. Drill angle bent ends for anchor screws to acoustical suspension system and angle for hanger wires.
3. Provide pipe sleeve welded to angle.

2.6 FRAMES (NOT USED)

2.7 GUARDS (NOT USED)

2.8 COVERS AND FRAMES FOR PITS AND TRENCHES (NOT USED)

2.9 GRATINGS (NOT USED)

2.10 LOOSE LINTELS

- A. Furnish lintels of sizes shown. Where size of lintels is not shown, provide the sizes specified.

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

08-01-18

- B. Fabricate lintels with not less than 150 mm (6 inch) bearing at each end for nonbearing masonry walls, and 200 mm (8 inch) bearing at each end for bearing walls.
- C. Provide one angle lintel for each 100 mm (4 inches) of masonry thickness as follows except as otherwise specified or shown.
 - 1. Openings 750 mm to 1800 mm (2-1/2 feet to 6 feet) - 100 x 90 x 8 mm (4 x 3-1/2 x 5/16 inch).
 - 2. Openings 1800 mm to 3000 mm (6 feet to 10 feet) - 150 x 90 x 9 mm (6 x 3-1/2 x 3/8 inch).
- D. For 150 mm (6 inch) thick masonry openings 750 mm to 3000 mm (2-1/2 feet to 10 feet) use one angle 150 x 90 x 9 mm (6 x 3-1/2 x 3/8 inch).
- E. Provide bearing plates for lintels where shown.
- F. Weld or bolt upstanding legs of double angle lintels together with 19 mm (3/4 inch bolts) spaced at 300 mm (12 inches) on centers.
- G. Insert spreaders at bolt points to separate the angles for insertion of metal windows, louver, and other anchorage.
- H. Where shown or specified, punch upstanding legs of single lintels to suit size and spacing of anchor bolts.

2.11 SHELF ANGLES

- A. Fabricate from steel angles of size shown.
- B. Fabricate angles with horizontal slotted holes for 19 mm (3/4 inch) bolts spaced at not over 900 mm (3 feet) on centers and within 300 mm (12 inches) of ends.
- C. Provide adjustable malleable iron inserts for embedded in concrete framing.

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

08-01-18

2.12 PLATE DOOR SILL (NOT USED)

2.13 SAFETY NOSINGS (NOT USED)

2.14 LADDERS (NOT USED)

2.15 RAILINGS (NOT USED)

2.16 CATWALKS (NOT USED)

2.17 TRAP DOOR AND FRAMES WITH CEILING HATCH (NOT USED)

2.18 SIDEWALK DOOR (NOT USED)

2.19 SCREENED ACCESS DOORS AND FRAMES (NOT USED)

2.20 STEEL COUNTER OR BENCH TOP FRAME AND LEGS

- A. Fabricate channel or angle frame with mitered and welded corners as shown.
- B. Drill top of frame with 6 mm (1/4inch) holes spaced 200 mm (8 inches) on center for securing countertop.
- C. Fabricate legs of angle or pipe shapes and continuously weld to frame.
- D. Finish frame with backed on enamel prime coat.

2.21 STEEL PIPE BOLLARD (NOT USED)

PART 3 - EXECUTION

3.1 INSTALLATION, GENERAL

- A. Set work accurately, in alignment and where shown, plumb, level, free of rack and twist, and set parallel or perpendicular as required to line and plane of surface.
- B. Items set into concrete or masonry.
 - 1. Provide temporary bracing for such items until concrete or masonry is set.
 - 2. Place in accordance with setting drawings and instructions.
 - 3. Build strap anchors, into masonry as work progresses.
- C. Set frames of gratings, covers, corner guards, trap doors and similar items flush with finish floor or wall surface and, where applicable, flush with side of opening.
- D. Field weld in accordance with AWS.
 - 1. Design and finish as specified for shop welding.
 - 2. Use continuous weld unless specified otherwise.
- E. Install anchoring devices and fasteners as shown and as necessary for securing metal fabrications to building construction as specified.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

05 50 00-11

10/28/2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

08-01-18

Power actuated drive pins may be used except for removable items and where members would be deformed or substrate damaged by their use.

- F. Spot prime all abraded and damaged areas of zinc coating as specified and all abraded and damaged areas of shop prime coat with same kind of paint used for shop priming.
- G. Isolate aluminum from dissimilar metals and from contact with concrete and masonry materials as required to prevent electrolysis and corrosion.
- H. Secure escutcheon plate with set screw.

3.2 INSTALLATION OF SUPPORTS

- A. Anchorage to structure.
 - 1. Secure angles or channels and clips to overhead structural steel by continuous welding unless bolting is shown.
 - 2. Secure supports to concrete inserts by bolting or continuous welding as shown.
 - 3. Secure supports to mid height of concrete beams when inserts do not exist with expansion bolts and to slabs, with expansion bolts. unless shown otherwise.
 - 4. Secure steel plate or hat channels to studs as detailed.
- B. Supports for Wall Mounted items:
 - 1. Locate center of support at anchorage point of supported item.
 - 2. Locate support at top and bottom of wall hung cabinets.
 - 3. Locate support at top of floor cabinets and shelving installed against walls.

3.3 COVERS AND FRAMES FOR PITS AND TRENCHES (NOT USED)

3.4 FRAMES FOR LEAD LINED DOORS (NOT USED)

3.5 DOOR FRAMES (NOT USED)

3.6 OTHER FRAMES

- A. Set frame flush with surface unless shown otherwise.
- B. Anchor frames at ends and not over 450 mm (18 inches) on centers unless shown otherwise.
- C. Set in formwork before concrete is placed.

3.7 GUARDS

- A. Steel Angle Corner Guards:

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

05 50 00-12

10/28/2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

08-01-18

1. Build into masonry as the work progress.
2. Set into formwork before concrete is placed.
3. Set angles flush with edge of opening and finish floor or wall or where otherwise shown.
4. At existing construction fasten angle and filler piece to adjoining construction with 16 mm (5/8 inch) diameter by 75 mm (3 inch) long expansion bolts 450 mm (18 inches) on center.
5. Install Guard Angles at Edges of Openings in Slab or where otherwise shown.

B. Channel Guard at Top Edge of Concrete Platforms:

1. Install in formwork before concrete is placed.
2. Set channel flush with top of the platform.

C. Wheel Guards:

1. Set flanges of wheel guard at least 50 mm (2 inches) into pavement.
2. Anchor to walls as shown, expansion bolt if not shown.

3.8 GRATINGS (NOT USED)

3.9 STEEL LINTELS

- A. Use lintel sizes and combinations shown or specified.
- B. Install lintels with longest leg upstanding, except for openings in 150 mm (6 inch) masonry walls install lintels with longest leg horizontal.
- C. Install lintels to have not less than 150 mm (6 inch) bearing at each end for nonbearing walls, and 200 mm (8 inch) bearing at each end for bearing walls.

3.10 SHELF ANGLES

- A. Anchor shelf angles with 19 mm (3/4 inch) bolts unless shown otherwise in adjustable malleable iron inserts, set level at elevation shown.
- B. Provide expansion space at end of members.

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

08-01-18

3.11 PLATE DOOR SILL (NOT USED)

3.12 SAFETY NOSINGS (NOT USED)

3.13 LADDERS (NOT USED)

3.14 RAILINGS (NOT USED)

3.15 CATWALK AND PLATFORMS (NOT USED)

3.16 SIDEWALK DOOR, TRAP DOORS, AND FRAMES (NOT USED)

3.17 SCREENED ACCESS DOOR (NOT USED)

3.18 STEEL COMPONENTS FOR MILLWORK ITEMS

A. Coordinate and deliver to Millwork fabricator for assembly where millwork items are secured to metal fabrications.

3.19 INSTALLATION OF STEEL PIPE BOLLARD (NOT USED)

3.20 CLEAN AND ADJUSTING

- A. Adjust movable parts including hardware to operate as designed without binding or deformation of the members centered in the opening or frame and, where applicable, contact surfaces fit tight and even without forcing or warping the components.
- B. Clean after installation exposed prefinished and plated items and items fabricated from stainless steel, aluminum and copper alloys, as recommended by the metal manufacture and protected from damage until completion of the project.

- - - E N D - - -

DIVISION 0

WOOD, PLASTICS AND
COMPOSITES

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

10-01-17

SECTION 06 10 00
ROUGH CARPENTRY

PART 1 - GENERAL

1.1 DESCRIPTION:

- A. This section specifies wood blocking, nailers and rough hardware as part of exterior construction. Note: Except for millwork or wood doors only as shown on the drawings, use of wood for any means is not permitted for interior applications.

1.2 RELATED WORK:

- A. Sustainable design requirements: Section 01 81 13, SUSTAINABLE CONSTRUCTION REQUIREMENTS.

1.3 SUBMITTALS:

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Sustainable Design Submittals, as described below:
1. Volatile organic compounds per volume as specified in PART 2 - PRODUCTS.
- C. Shop Drawings showing connection details, fasteners, and dimensions.
- D. Manufacturer's Literature and Data:
1. Submit data for lumber, panels, hardware and adhesives.
 2. Submit data for wood-preservative treatment from chemical treatment manufacturer and certification from treating plants that treated materials comply with requirements. Indicate type of preservative used and net amount of preservative retained.
 3. Submit data for fireretardant treatment from chemical treatment manufacturer and certification by treating plant that treated materials comply with requirements. Include physical properties of treated materials based on testing by a qualified independent testing agency.
 4. For products receiving a waterborne treatment, submit statement that moisture content of treated materials was reduced to levels specified before shipment to project site.
- E. Manufacturer's certificate for unmarked lumber.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

10-01-17

1.4 PRODUCT DELIVERY, STORAGE AND HANDLING:

- A. Protect lumber and other products from dampness both during and after delivery at site.
- B. Pile lumber in stacks in such manner as to provide air circulation around surfaces of each piece.
- C. Stack plywood and other board products so as to prevent warping.
- D. Locate stacks on well drained areas, supported at least 152 mm (6 inches) above grade and cover with well-ventilated sheds having firmly constructed over hanging roof with sufficient end wall to protect lumber from driving rain.

1.5 QUALITY ASSURANCE:

- A. Installer: A firm with a minimum of three (3) years' experience in the type of work required by this section.

1.6 GRADING AND MARKINGS:

- A. Any unmarked lumber or plywood panel for its grade and species will not be allowed on VA Construction sites for lumber and material not normally grade marked, provide manufacturer's certificates (approved by an American Lumber Standards approved agency) attesting that lumber and material meet the specified the specified requirements.

1.7 APPLICABLE PUBLICATIONS:

- A. Publications listed below form a part of this specification to extent referenced. Publications are referenced in the text by basic designation only.
- B. American Forest and Paper Association (AFPA):
 - NDS-15.....National Design Specification for Wood Construction
 - WCD1-01.....Details for Conventional Wood Frame Construction
- C. American Institute of Timber Construction (AITC):
 - A190.1-07.....Structural Glued Laminated Timber
- D. American Society of Mechanical Engineers (ASME):
 - B18.2.1-12 (R2013).....Square and Hex Bolts and Screws
 - B18.2.2-10.....Square and Hex Nuts
 - B18.6.1-81 (R2008).....Wood Screws

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

10-01-17

E. American Plywood Association (APA):

E30-11.....Engineered Wood Construction Guide

F. ASTM International (ASTM):

A653/A653M-13.....Steel Sheet Zinc-Coated (Galvanized) or Zinc-Iron Alloy Coated (Galvannealed) by the Hot Dip Process

C954-11.....Steel Drill Screws for the Application of Gypsum Board or Metal Plaster Bases to Steel Studs from 0.033 inch (2.24 mm) to 0.112-inch (2.84 mm) in thickness

C1002-14.....Steel Self-Piercing Tapping Screws for the Application of Gypsum Panel Products or Metal Plaster Bases to Wood Studs or Metal Studs

D198-14.....Test Methods of Static Tests of Lumber in Structural Sizes

D2344/D2344M-13.....Test Method for Short-Beam Strength of Polymer Matrix Composite Materials and Their Laminates

D2559-12a.....Adhesives for Structural Laminated Wood Products for Use Under Exterior (Wet Use) Exposure Conditions

D3498-03 (R2011).....Adhesives for Field-Gluing Plywood to Lumber Framing for Floor Systems

D6108-13.....Test Method for Compressive Properties of Plastic Lumber and Shapes

D6109-13.....Test Methods for Flexural Properties of Unreinforced and Reinforced Plastic Lumber and Related Products

D6111-13a.....Test Method for Bulk Density and Specific Gravity of Plastic Lumber and Shapes by Displacement

D6112-13.....Test Methods for Compressive and Flexural Creep and Creep-Rupture of Plastic Lumber and Shapes

F844-07a (R2013).....Washers, Steel, Plain (Flat) Unhardened for General Use

F1667-13.....Nails, Spikes, and Staples

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

10-01-17

- G. American Wood Protection Association (AWPA):
AWPA Book of Standards
- H. Commercial Item Description (CID):
A-A-55615.....Shield, Expansion (Wood Screw and Lag Bolt Self
Threading Anchors)
- I. Forest Stewardship Council (FSC):
FSC-STD-01-001 (Ver. 4-0) FSC Principles and Criteria for Forest
Stewardship
- J. Military Specification (Mil. Spec.):
MIL-L-19140E.....Lumber and Plywood, Fire-Retardant Treated
- K. Environmental Protection Agency (EPA):
40 CFR 59 (2014).....National Volatile Organic Compound Emission
Standards for Consumer and Commercial Products
- L. Truss Plate Institute (TPI):
TPI-85.....Metal Plate Connected Wood Trusses
- M. U.S. Department of Commerce Product Standard (PS)
PS 1-95.....Construction and Industrial Plywood
PS 20-10.....American Softwood Lumber Standard
- N. ICC Evaluation Service (ICC ES):
AC09.....Quality Control of Wood Shakes and Shingles
AC174.....Deck Board Span Ratings and Guardrail Systems
(Guards and Handrails)

PART 2 - PRODUCTS

2.1 LUMBER:

- A. Unless otherwise specified, each piece of lumber must bear grade mark, stamp, or other identifying marks indicating grades of material, and rules or standards under which produced.
 - 1. Identifying marks are to be in accordance with rule or standard under which material is produced, including requirements for qualifications and authority of the inspection organization, usage of authorized identification, and information included in the identification.
 - 2. Inspection agency for lumber approved by the Board of Review, American Lumber Standards Committee, to grade species used.
- B. Non-structural Lumber:

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

10-01-17

1. Unless otherwise specified, species graded under the grading rules of an inspection agency approved by Board of Review, American Lumber Standards Committee.

2. Blocking, nailers and similar items 101 mm (4 inches) and narrower Standard Grade; and, members 152 mm (6 inches) and wider, Number 2 Grade.

C. Sizes:

1. Conforming to PS 20.

2. Size references are nominal sizes, unless otherwise specified, actual sizes within manufacturing tolerances allowed by standard under which produced.

D. Moisture Content:

1. Maximum moisture content of wood products is to be as follows at the time of delivery to site.

a. Boards and lumber 50 mm (2 inches) and less in thickness: 19 percent or less.

b. Lumber over 50 mm (2 inches) thick: 25 percent or less.

E. Fire Retardant Treatment:

1. Comply with Mil Spec. MIL-L-19140.

2. Treatment and performance inspection, by an independent and qualified testing agency that establishes performance ratings.

F. Preservative Treatment:

1. Do not treat Heart Redwood and Western Red Cedar.

2. Treat wood members exposed to weather or in contact with concrete.

3. Treat other members specified as preservative treated (PT).

4. Preservative treat by the pressure method complying with AWPA Book use category system standards U1 and T1, except any process involving the use of Chromated Copper Arsenate (CCA) or other agents classified as carcinogenic for pressure treating wood is not permitted.

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

10-01-17

2.2 PLASTIC LUMBER: (NOT USED)

2.3 PLYWOOD: (NOT USED)

2.4 STRUCTURAL-USE PANELS: (NOT USED)

2.5 ROUGH HARDWARE AND ADHESIVES:

A. Anchor Bolts:

1. ASME B18.2.1 and ASME B18.2.2 galvanized, 13 mm (1/2 inch) unless shown otherwise.
2. Extend at least 203 mm (8 inches) into masonry or concrete with ends bent 50 mm (2 inches).

B. Miscellaneous Bolts: Expansion Bolts: C1D A-A-55615; lag bolt, long enough to extend at least 65 mm (2-1/2 inches) into masonry or concrete. Provide 13 mm (1/2 inch) bolt unless shown otherwise.

C. Washers

1. ASTM F844.
2. Provide zinc or cadmium coated steel or cast iron for washers exposed to weather.

D. Screws:

1. Wood to Wood: ASME B18.6.1 or ASTM C1002.
2. Wood to Steel: ASTM C954, or ASTM C1002.

E. Nails:

1. Size and type best suited for purpose unless noted otherwise. Provide aluminum-alloy nails, plated nails, or zinc-coated nails, for nailing wood work exposed to weather and on roof blocking.
2. ASTM F1667:
 - a. Common: Type I, Style 10.
 - b. Concrete: Type I, Style 11.
 - c. Barbed: Type I, Style 26.
 - d. Underlayment: Type I, Style 25.

PART 3 - EXECUTION

3.1 INSTALLATION OF FRAMING AND MISCELLANEOUS WOOD MEMBERS:

A. Conform to applicable requirements of the following:

1. AFPA WCD1 for nailing and framing unless specified otherwise.

B. Fasteners:

1. Nails.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

10-01-17

- a. Nail in accordance with the Recommended Nailing Schedule as specified in AFPA WCD1 where detailed nailing requirements are not specified in nailing schedule. Select nail size and nail spacing sufficient to develop adequate strength for the connection without splitting the members.
 - b. Use 8d or larger nails for nailing through 25 mm (1 inch) thick lumber and for toe nailing 50 mm (2 inch) thick lumber.
 - c. Use 16d or larger nails for nailing through 50 mm (2 inch) thick lumber.
 - d. Select the size and number of nails in accordance with the Nailing Schedule except for special nails with framing anchors.
 - e. Nailing Schedule; Using Common Nails.
 - 1) Doubled studs, face nail 16d at 610 mm (24 inches) on center.
 - 2) Top plates, laps, and intersections, face nail two (2) 16d.
 - 3) Continuous header, two pieces 16d at 406 mm (16 inches) on center along each edge.
2. Bolts:
- a. Fit bolt heads and nuts bearing on wood with washers.
 - b. Countersink bolt heads flush with the surface of nailers.
 - c. Embed in concrete or provide expansion bolts. Special bolts or screws designed for anchor to concrete in drilled holes may be used.
 - d. Provide toggle bolts to sheet metal.
 - e. Provide bolts to steel over 2.84 mm (0.112 inch, 11 gage) in thickness. Secure wood nailers to vertical structural steel members with bolts, placed one at ends of nailer and 610 mm (24 inch) intervals between end bolts. Provide clips to beam flanges.
3. Drill Screws to steel less than 2.84 mm (0.112 inch) thick.
- a. ASTM C1002 for steel less than 0.84 mm (0.033 inch) thick.
 - b. ASTM C954 for steel over 0.84 mm (0.033 inch) thick.
4. Power actuated drive pins may be provided where practical to anchor to concrete or steel.
5. Do not anchor to wood plugs or nailing blocks in concrete. Provide metal plugs, inserts or similar fastening.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

10-01-17

6. Screws to Join Wood:
 - a. Where shown or option to nails.
 - b. ASTM C1002, sized to provide not less than 25 mm (1 inch) penetration into anchorage member.
 - c. Spaced same as nails.
- D. Blocking and Nailers:
 1. Install blocking and nailers where shown.
 2. Provide longest lengths practicable.
 3. Provide fire retardant treated wood blocking where shown at openings and where shown or specified.
 4. Layers of Blocking or Plates:
 - a. Stagger end joints between upper and lower pieces.
 - b. Nail at ends and not over 610 mm (24 inches) between ends.
 - c. Stagger nails from side to side of wood member over 127 mm (5 inches) in width.

- - - E N D - - -

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

08-01-16

SECTION 06 20 00

FINISH CARPENTRY

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Interior custom millwork for hospitals (where contractor elects to not use manufactured wood casework).
2. Resin Panels (Waiting 159).

1.2 RELATED REQUIREMENTS

- A. Adhesive, Paint, and Finish VOC Limits: Section 01 81 13, SUSTAINABLE CONSTRUCTION REQUIREMENTS.
- B. Fabricated Metal brackets, bench supports and countertop legs: Section 05 50 00, METAL FABRICATIONS.
- C. Blocking and nailers: Section 06 10 00, ROUGH CARPENTRY.
- D. Wood doors: Section 08 14 00, WOOD DOORS.
- E. Manufactured Casework: Section 12 32 00, MANUFACTURED WOOD CASEWORK.
- F. Solid Surface Countertops: Section 12 36 61.16, SOLID SURFACE COUNTERTOPS.
- G. Electrical light fixtures and outlets: Division 26, ELECTRICAL.

1.3 APPLICABLE PUBLICATIONS

- A. Comply with references to extent specified in this section.
- B. ASTM International:
 1. A36/A36M-14 - Carbon Structural Steel.
 2. A53/A53M-12 - Pipe, Steel, Black and Hot-Dipped Zinc Coated, Welded and Seamless.
 3. A240/A240M-15b - Chromium and Chromium-Nickel Stainless Steel Plate, Sheet, and Strip for Pressure Vessels and for General Applications.
 4. B26/B26M-14e1 - Aluminum-Alloy Sand Castings.
 5. B221-14 - Aluminum and Aluminum-Alloy Extruded Bars, Rods, Wire, Profiles, and Tubes.
 6. E84-15b - Surface Burning Characteristics of Building Materials.
- C. American Hardboard Association (AHA):
 1. A135.4-04 - Basic Hardboard.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

06 20 00-1

10/28/2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

08-01-16

- D. Architectural Woodwork Institute (AWI):
 - 1. AWI-09 - Architectural Woodwork Quality Standards and Quality Certification Program.
- E. Builders Hardware Manufacturers Association (BHMA):
 - 1. A156.9-10 - Cabinet Hardware.
 - 2. A156.11-14 - Cabinet Locks.
 - 3. A156.16-13 - Auxiliary Hardware.
- F. Federal Specifications (Fed. Spec.):
 - 1. A-A-1922A - Shield Expansion (Calking Anchors, Single Lead).
 - 2. A-A-1936A - Adhesive, Contact, Neoprene Rubber.
 - 3. FF-N-836E- Nut: Square, Hexagon, Cap, Slotted, Castle, Knurled, Welding.
 - 4. FF-S-111D(1) - Screw, Wood (Notice 1 inactive for new design).
 - 5. MM-L-736C(1) - Lumber, Hardwood.
- G. Hardwood Plywood and Veneer Association (HPVA):
 - 1. HP1-09 - Hardwood and Decorative Plywood.
- H. Military Specification (Mil. Spec):
 - 1. MIL-L-19140E - Lumber and Plywood, Fire-Retardant Treated.
- I. National Particleboard Association (NPA):
 - 1. A208.1-09 - Wood Particleboard.
- J. National Electrical Manufacturers Association (NEMA):
 - 1. LD 3-05 - High-Pressure Decorative Laminates.
- K. U.S. Department of Commerce, Product Standard (PS):
 - 1. PS1-07 - Construction and Industrial Plywood.
 - 2. PS20-10 - American Softwood Lumber Standard.

1.4 PREINSTALLATION MEETINGS

- A. Conduct preinstallation meeting at project site minimum 30 days before beginning Work of this section.
 - 1. Required Participants:
 - a. Contracting Officer's Representative.
 - b. VA Interior Designer.
 - c. Contractor.
 - d. Installer.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

06 20 00-2

10/28/2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

08-01-16

2. Meeting Agenda: Distribute agenda to participants minimum 3 days before meeting.
 - a. Installation schedule.
 - b. Installation sequence.
 - c. Preparatory work.
 - d. Protection before, during, and after installation.
 - e. Installation.
 - f. Terminations.
 - g. Transitions and connections to other work.
 - h. Other items affecting successful completion.
3. Document and distribute meeting minutes to participants to record decisions affecting installation.

1.5 SUBMITTALS

- A. Submittal Procedures: Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Submittal Drawings:
 1. Show size, configuration, and fabrication and installation details.
 2. Millwork items - Half size scale for sections and details 1:50 (1/4 inch) for elevations and plans.
- C. Manufacturer's Literature and Data:
 1. Description of each product.
 - a. Finish hardware.
 - b. Sinks with fittings.
 - c. Electrical components.
 2. List of acceptable sealers for fire retardant materials.
 3. Installation instructions.
- D. Samples:
 1. Plastic Laminate Finished Plywood and Particleboard: 150 mm by 300 mm (6 by 12 inches) long, each type and color.
 - a. Submit quantity required to show full color and texture range.
 2. Approved samples may be incorporated into work.
- E. Sustainable Construction Submittals:
 1. Recycled Content: Identify post-consumer and pre-consumer recycled content percentage by weight.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

06 20 00-3

10/28/2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

08-01-16

2. Low Pollutant-Emitting Materials:
 - a. Show volatile organic compound types and quantities.
 - b. Certify each composite wood and agrifiber product contains no added urea formaldehyde.

F. Certificates: Certify each product complies with specifications.

1. Fire retardant treatment of materials.
2. Moisture content of materials.

G. Qualifications: Substantiate qualifications comply with specifications.

1. Fabricator with project experience list.
2. Installer with project experience list.

1.6 QUALITY ASSURANCE

A. Fabricator Qualifications:

1. Regularly fabricates specified products.
2. Fabricated specified products with satisfactory service on five similar installations for minimum five years.
 - a. Project Experience List: Provide contact names and addresses for completed projects.

B. Installer Qualifications:

1. Regularly installs specified products.
2. Installed specified products with satisfactory service on five similar installations for minimum five years.
 - a. Project Experience List: Provide contact names and addresses for completed projects.

1.7 DELIVERY, STORAGE AND HANDLING

- A. Deliver products in manufacturer's original sealed packaging.
- B. Mark packaging, legibly. Indicate manufacturer's name or brand, type, color, production run number, and manufacture date.
- C. Before installation, return or dispose of products within distorted, damaged, or opened packaging.
- D. Store products indoors in dry, weathertight, conditioned facility.
- E. Protect products from damage during handling and construction operations.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

06 20 00-4

10/28/2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

08-01-16

1.8 FIELD CONDITIONS

A. Environment:

1. Product Temperature: Minimum 21 degrees C (70 degrees F) for minimum 48 hours before installation.
2. Work Area Ambient Conditions: HVAC systems are complete, operational, and maintaining facility design operating conditions continuously, beginning 48 hours before installation until Government occupancy.
3. Install products when building is permanently enclosed and when wet construction is completed, dried, and cured.
4. Do not install finish lumber or millwork in any room or space where wet process systems such as concrete, masonry, or plaster work is not complete and dry.

B. Field Measurements: Verify field conditions affecting fabrication and installation. Show field measurements on Submittal Drawings.

1. Coordinate field measurement and fabrication schedule to avoid delay.

1.9 WARRANTY

- A. Construction Warranty: FAR clause 52.246-21, "Warranty of Construction."

PART 2 - PRODUCTS

2.1 SYSTEM PERFORMANCE

A. Design acoustical panel complying with specified performance:

1. Surface Burning Characteristics: When tested according to ASTM E84.
 - a. Flame Spread Rating: 25 maximum.
 - b. Smoke Developed Rating: 450 maximum.
 - c. Any wood, including wood used for wood doors, shall be certified by Forrest Stewardship Council, FSC.

2.2 MATERIALS

- A. Grading and Marking: Factory mark with grade stamp lumber and plywood of inspection agency approved by the Board of Review, American Lumber Standard Committee.

B. Lumber:

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

06 20 00-5

10/28/2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

08-01-16

1. Sizes:
 - a. Lumber Size references, unless otherwise specified, are nominal sizes, and actual sizes within manufacturing tolerances allowed by the standard under which product is produced.
 - b. Millwork, standing and running trim, and rails: Actual size as shown or specified.
2. Hardwood: MM-L-736, species as specified for each item.
3. Softwood: PS-20, exposed to view appearance grades:
 - a. Use C select or D select, vertical grain for transparent finish including stain transparent finish.
 - b. Use Prime for painted or opaque finish.
4. Use edge grain Wood members exposed to weather.
5. Moisture Content:
 - a. 32 mm (1-1/4 inches) or less nominal thickness: 12 percent on 85 percent of the pieces and 15 percent on the remainder.
 - b. Other materials: According to standards under which the products are produced.
6. Fire Retardant Treatment: Mil. Spec. MIL-L-19140E.
 - a. Treatment and performance inspection by an independent and qualified testing agency that establishes performance ratings.
 - b. Each piece of treated material bear identification of the testing agency and indicate performance according to such rating of flame spread and smoke developed.
 - c. Treat wood for maximum flame spread of 25 and smoke developed of 25.
 - d. Fire Resistant Softwood Plywood:
 - 1) Grade A, Exterior, plywood for treatment.
 - 2) Surface Burning Characteristics: When tested according to ASTM E84.
 - a) Flame spread: 0 to 25.
 - b) Smoke developed: 100 maximum.
 - e. Fire Resistant Hardwood Plywood:
 - 1) Core: Fire retardant treated softwood plywood.
 - 2) Hardwood face and back veneers untreated.
 - 3) Factory seal panel edges.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

06 20 00-6

10/28/2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

08-01-16

C. Plywood:

1. Softwood Plywood: DOC PS1.
 - a. Plywood, 13 mm (1/2 inch) and thicker; minimum five ply construction, except 32 mm (1-1/4 inch) thick plywood minimum seven ply.
 - b. Plastic Laminate Plywood Cores:
 - 1) Exterior Type, and species group.
 - 2) Veneer Grade: A-C.
 - c. Shelving Plywood:
 - 1) Interior Type, any species group.
 - 2) Veneer Grade: A-B or B-C.
 - d. Other: As specified for item.

D. Particleboard: NPA A208.1, Type 1, Grade 1-M-3 or Type 2, Grade 2-M-2.

1. Plastic Laminate Particleboard Cores:
 - a. Type 1, Grade 1-M-3, or Type 2, Grade 2-M-2, unless otherwise specified.
 - b. Type 2, Grade 2-M-2, exterior bond, for tops with sinks.

E. Plastic Laminate: NEMA LD-3.

1. Exposed Laminate Surfaces including Countertops, and Sides of Cabinet Doors: Grade HGL.
2. Cabinet Interiors including Shelving: NEMA, CLS as a minimum, with the following:
 - a. Plastic laminate clad plywood or particle board.
 - b. Resin impregnated decorative paper thermally fused to particle board.
3. Plastic Laminate Covered Wood Tops Backing: Grade HGP.
4. Postformed Surfaces: Grade HGP.

F. Stainless Steel: ASTM A240, Type 302 or 304.

G. Cast Aluminum: ASTM B26.

H. Extruded Aluminum: ASTM B221.

I. Solid Surface.

J. Acrylic Panels.

2.3 PRODUCTS - GENERAL

- A. Basis of Design: SEE ROOM FINISH LEGEND.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

06 20 00-7

10/28/2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

08-01-16

- B. Provide each product from one manufacturer.
- C. Sustainable Construction Requirements:
 - 1. Select products with recycled content to achieve overall Project recycled content requirement.
 - 2. Low Pollutant-Emitting Materials: Comply with VOC limits specified in Section 01 81 11, SUSTAINABLE DESIGN REQUIREMENTS for the following products:
 - a. Non-flooring adhesives and sealants.
 - b. Aerosol adhesives.
 - c. Paints and coatings.
 - d. Wall base and accessories.
 - e. Composite wood and agrifiber.

2.4 RESIN PANELS

- A. 3form Chroma, Varia Ecoresin equal or better.
 - 1. Engineered acrylic resin
 - 2. Sheet Size: Maximum 4' x 10'
 - 3. Thickness: Minimum 1/2"
 - 4. Basis of Design Product: The design of Plastic Fabrications is based on Chroma and Varia Ecoresin as provided by 3form, Inc. Products from other manufacturers must be approved by the VA Contracting Officer's Representative (COR).
- B. Sheet minimum performance attributes:
 - 1. Rate of Burning (ASTM D 635). Material must attain CC2 Rating for a nominal thickness of 1.5 mm (0.060 in.) and greater.
 - 2. Self-Ignition Temperature (ASTM D 1929). Material must have a Self-ignition temperature greater than 850°F.
 - 3. Density of Smoke (ASTM D 2843). Material must have a smoke density less than 10%.
 - 4. Color infusion must use water soluble dyes and penetrate at least 150 microns into material.

2.5 FABRICATION

- A. General:
 - 1. AWI Custom Grade for interior millwork.
 - 2. Finish woodwork, free from pitch pockets.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

06 20 00-8

10/28/2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

08-01-16

3. Trim, standard stock molding and members of same species, except where special profiles are shown.
4. Plywood, minimum 13 mm (1/2 inch), unless otherwise shown on Drawings or specified.
5. Edges of members in contact with concrete or masonry having a square corner caulking rebate.
6. Fabricate members less than 4 m (14 feet) in length from one piece of lumber, back channeled and molded as shown.
7. Fabricate interior trim and items of millwork to be painted from jointed, built-up, or laminated members, unless otherwise shown on Drawings or specified.
8. Plastic Laminate Work:
 - a. Factory glued to either a plywood or a particle board core, thickness as shown on Drawings or specified.
 - b. Cover exposed edges with plastic laminate, except where aluminum, stainless steel, or plastic molded edge strips are shown on drawings or specified. Use plastic molded edge strips on 19 mm (3/4 inch) thick or thinner core material.
 - c. Provide plastic backing sheet on underside of countertops, vanity tops, thru-wall counter and sills including back splashes and end splashes of countertops.
 - d. Use backing sheet on concealed large panel surface when decorative face does not occur.

2.6 ACCESSORIES

A. Hardware:

1. Rough Hardware:

- a. Provide rough hardware with a standard plating, applied after punching, forming and assembly of parts; galvanized, cadmium plated, or zinc-coated by electric-galvanizing process. Galvanized where specified.
- b. Fasteners:
 - 1) Bolts with Nuts: FF-N-836.
 - 2) Expansion Bolts: A-A-1922A.
 - 3) Screws: Fed. Spec. FF-S-111.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

06 20 00-9

10/28/2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

08-01-16

2. Finish Hardware:

- a. Cabinet Hardware: ANSI A156.9.
 - 1) Door/Drawer Pulls: B02011. Door in seismic zones: B03182.
 - 2) Drawer Slides: B05051 for drawers over 150 mm (6 inches) deep, B05052 for drawers 75 mm to 150 mm (3 to 6 inches) deep, and B05053 for drawers less than 75 mm (3 inches) deep.
 - 3) Sliding Door Tracks: B07063.
 - 4) Adjustable Shelf Standards: B4061 with shelf rest B04083.
 - 5) Concealed Hinges: B1601, minimum 110 degree opening.
 - 6) Butt Hinges: B01361, for flush doors, B01381 for inset lipped doors, and B01521 for overlay doors.
 - 7) Cabinet Door Catch: B0371 or B03172.
 - 8) Vertical Slotted Shelf Standard: B04103 with shelf brackets B04113, sized for shelf depth.
- b. Cabinet Locks: ANSI A156.11.
 - 1) Drawers and Hinged Door: E07262.
 - 2) Sliding Door: E07162.
- c. Auxiliary Hardware: ANSI A156.16.
 - 1) Shelf Bracket: B04041, japanned or enameled finish.
 - 2) Combination Garment rod and Shelf Support: B04051 japanned or enamel finish.
 - 3) Closet Bar: L03131 chrome finish of required length.
 - 4) Handrail Brackets: L03081 or L03101.
 - a) Cast Aluminum, satin polished finish.
 - b) Cast Malleable Iron, japanned or enamel finish.
- d. Steel Channel Frame and Leg supports for Counter top. Fabricated under Section 05 50 00, METAL FABRICATIONS.
- e. Vinyl molding:
 - 1) Rubber or vinyl standard stock and in longest lengths practicable.
 - 2) Design for closures at joints with walls and adhesive anchorage.
 - 3) Adhesive as recommended by molding manufacturer.
- f. Primers: Manufacturer's standard primer for steel providing baked enamel finish.

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

08-01-16

B. Adhesive:

1. Plastic Laminate: Fed. Spec. A-A-1936.
2. Interior Millwork: Unextended urea resin, unextended melamine resin, phenol resin, or resorcinol resin. Urea-formaldehyde is not acceptable.

PART 3 - EXECUTION

3.1 PREPARATION

- A. Examine and verify substrate suitability for product installation.
- B. Protect existing construction and completed work from damage.
- C. Clean substrates. Remove contaminants capable of affecting subsequently installed product's performance.

3.2 INSTALLATION

- A. Installation:
 1. Prime millwork receiving transparent finish and back-paint concealed surfaces.
 2. Fasten trim with fine finishing nails, screws, or glue as required.
 3. Set nails for putty stopping. Provide washers under bolt heads where no other bearing plate occurs.
 4. Seal cut edges of fire retardant treated wood materials with a certified acceptable sealer.
 5. Coordinate with plumbing and electrical work for installation of fixtures and service connections in millwork items.
 6. Plumb and level items unless shown otherwise.
 7. Nail finish at each blocking, lookout, or other nailer and intermediate points; toggle or expansion bolt in place where nails are not suitable.
 8. Apply adhesive uniformly for full contact between finish and substrate.

3.3 CLEANING

- A. Remove excess adhesive before adhesive sets.
- B. Clean exposed surfaces. Remove contaminants and stains.
- C. Touch up damaged factory finishes.
 1. Repair painted surfaces with touch up primer.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

06 20 00-11

10/28/2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

08-01-16

3.4 PROTECTION

- A. Protect finish carpentry from traffic and construction operations.
- B. Cover finish carpentry with reinforced kraft paper, and plywood or hardboard.
- C. Remove protective materials immediately before acceptance.
- D. Repair damage.

- - - E N D - - -

DIVISION 07

THERMAL AND MOISTURE PROTECTION

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303
Bancroft Architects + Engineers

01-01-21

SECTION 07 01 50.19
PREPARATION FOR RE-ROOFING

PART 1 - GENERAL

1.1 SUMMARY

- A. Section Includes:
 - 1. Partial roof removal for new roof system installation.
- B. Existing Roofing System: To be verified with Station. System components include:
 - 1. Aggregate ballast.
 - 2. Roof insulation.
 - 3. Roofing membrane (Type to be verified).
 - 4. Cover board (To be verified).
 - 5. Roof insulation.
 - 6. Vapor retarder (To be verified).
 - 7. Substrate board (To be verified).

1.2 RELATED WORK

- A. Section 07 53 23, ETHYLENE-PROPYLENE-DIENE-MONOMER (EPDM) ROOFING: New Roofing System.
- B. Section 07 60 00, FLASHING AND SHEET METAL: Sheet Metal Counterflashing.

1.3 APPLICABLE PUBLICATIONS

- A. Comply with references to extent specified in this section.
- B. American National Standards Institute/Single-Ply Roofing Institute (ANSI/SPRI):
 - FX-1 (R2016).....Standard Field Test Procedure for Determining the Withdrawal Resistance of Roofing Fasteners.
- C. American Society for Nondestructive Testing (ASNT):
 - SNT-TC-1A (2019).....Personnel Qualification and Certification for Nondestructive Testing.
- D. ASTM International (ASTM):
 - C208-12(2017)e2.....Cellulosic Fiber Insulating Board.
 - C578-19.....Rigid, Cellular Polystyrene Thermal Insulation.
 - C728-17a.....Perlite Thermal Insulation Board.
 - C1177/C1177M-17.....Glass Mat Gypsum Substrate for Use as Sheathing.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

01-01-21

C1153-10(2015).....Location of Wet Insulation in Roofing Systems

Using Infrared Imaging.

C1278/C1278M-17.....Standard Specification Fiber-Reinforced Gypsum

Panel.

D4263-83(2018).....Indicating Moisture in Concrete by the Plastic

Sheet Method.

E. U.S. Department of Commerce National Institute of Standards and
Technology (NIST):

DOC PS 1-19.....Structural Plywood.

DOC PS 2-18.....Performance Standard for Wood-Based

Structural-Use Panels.

1.4 PREINSTALLATION MEETINGS

A. Conduct preinstallation meeting minimum 30 days before beginning Work
of this section.

1. Required Participants:

a. Contracting Officer's Representative.

b.

c. Contractor.

d. Installer.

e. Manufacturer's field representative.

f. Other installers responsible for adjacent and intersecting work,
including mechanical and electrical equipment installers.

2. Meeting Agenda: Distribute agenda to participants minimum 3 days
before meeting.

a. Removal and installation schedule.

b. Removal and installation sequence.

c. Preparatory work.

d. Protection before, during, and after installation.

e. Removal and installation.

f. Temporary roofing including daily terminations.

g. Transitions and connections to other work.

h. Inspecting and testing.

i. Other items affecting successful completion.

3. Document and distribute meeting minutes to participants to record
decisions affecting installation.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

01-01-21

1.5 SUBMITTALS

A. Submittal Procedures: Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.

B. Submittal Drawings:

1. Show size, configuration, and installation details.

C. Manufacturer's Literature and Data:

1. Description of each product.

2. Description of temporary roof system and components.

3. List of patching materials.

4. Recover board fastening requirements.

Temporary roofing installation instructions and removal instructions.

Preparation instructions to receive new roofing.

5. Existing roofing warrantor's instructions.

D. Photographs: Document existing conditions potentially affected by roofing operations before work begins.

E. Field Inspection Reports:

1. Certify warrantor inspected completed roofing and existing warranty remains in effect.

1.6 QUALITY ASSURANCE

A. Installer Qualifications:

1. Approved by existing roofing system warrantor when work affects existing roofing system under warranty.

1.7 FIELD CONDITIONS

A. Building Occupancy: Perform work to minimize disruption to normal building operations.

1. Verify occupants are evacuated from affected building areas when working on structurally impaired roof decking above occupied areas.

2. Provide notice minimum 72 hours before beginning activities affecting normal building operations.

B. Weather Limitations: Proceed with reroofing preparation only during dry weather conditions as specified by existing roof system published construction criteria and as required to maintain existing roof system warranty.

1. Remove only as much roofing in one day as can be made watertight in same day.

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

01-01-21

- C. Hazardous materials are not expected in existing roofing system.
 - 1. Do not disturb suspected hazardous materials. When discovered, notify Contracting Officer's Representative.

1.8 WARRANTY

- A. Construction Warranty: FAR clause 52.246-21, "Warranty of Construction."
- B. Existing Warranties: Perform work to maintain existing roofing warranty in effect.
 - 1. Notify warrantor before beginning, and upon completion of reroofing.
 - 2. Obtain warrantor's instructions for maintaining existing warranty.

PART 2 - PRODUCTS

2.1 MATERIALS

- A. Patching Materials: Match existing roofing system materials.
- B. Temporary Protection Materials:
 - 1. Expanded Polystyrene (EPS) Insulation: ASTM C578-19.
 - 2. Plywood: NIST DOC PS 1-19, Grade CD Exposure 1-18.
 - 3. Oriented Strand Board (OSB): NIST DOC PS 2-18, Exposure 1.
- C. Temporary Roofing System Materials: Contractor's option.
- D. Recover Board: One of the following:
 - 1. Insulation: See Section 07 22 00, ROOF AND DECK INSULATION.
 - 2. Glass Mat Gypsum Board: ASTM C1177/C1177M-17, water-resistant; match existing thickness.
- E. Fasteners: Type and size required by roof membrane manufacturer to resist wind uplift.

PART 3 - EXECUTION

3.1 EXAMINATION (NOT USED)

3.2 PREPARATION

- A. Examine and verify substrate suitability for product installation.
- B. Protect existing roofing system indicated to remain.
 - 1. Cover roof membrane with temporary protection materials without impeding drainage.
 - 2. Limit traffic and material storage to protected areas.
 - 3. Maintain temporary protection until replacement roofing is completed.
- C. Protect existing construction and completed work from damage.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

01-01-21

- D. Protect landscaping from damage.
- E. Maintain access to existing walkways and adjacent occupied facilities.
- F. Coordinate use of rooftop fresh air intakes with Contracting Officer's Representative to minimize effect on indoor air quality.
- G. Ensure temporary protection materials are available for immediate use in case of unexpected rain.
- H. Ensure roof drainage remains functional.
 - 1. Keep drainage systems clear of debris.
 - 2. Prevent water from entering building and existing roofing system.
- I. Coordinate rooftop utilities remaining active during roofing work with Contracting Officer's Representative.

3.3 RE-ROOFING PREPARATION - GENERAL

- A. Notify Contracting Officer's Representative of planned operations, daily.
 - 1. Identify location and extent of roofing removal.
 - 2. Request authorization to proceed.

3.4 OVERBURDEN REMOVAL

- A. Remove aggregate ballast.
 - 1. Store aggregate ballast for reuse.
- B. Remove loose aggregate from membrane surface.

3.5 COMPLETE ROOFING SYSTEM REMOVAL (NOT USED)

3.6 PARTIAL ROOFING SYSTEM REMOVAL

- A. Remove existing roofing completely, exposing structural roof deck at locations and to extent indicated on drawings.
 - 1. Remove cover board, roof insulation, vapor retarder, and substrate board.
 - 2. Remove or cut-off roofing system fasteners.

3.7 ROOFING MEMBRANE AND SELECTIVE ROOFING SYSTEM COMPONENT REMOVAL (NOT USED)

3.8 DECK PREPARATION

- A. Inspect structural roof deck after roofing system removal.
- B. Concrete Roof Decks:
 - 1. Visually confirm concrete roof deck is dry.
 - 2. Perform moisture test according to ASTM D4263-83(2018) each day for each separate roof area.
 - a. Proceed with roofing work only when moisture is not observed.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

01-01-21

3.9 TEMPORARY ROOFING

- A. Install temporary roofing to maintain building watertight.
- B. Remove temporary roofing before installing new roofing.
- C. Prepare temporary roofing to receive new roofing.

3.10 EXISTING MEMBRANE PREPARATION FOR NEW ROOFING

- A. Remove existing roofing surface projections and irregularities. Produce smooth surface to receive recover boards.
 - 1. Broom clean existing surface.

3.11 BASE FLASHING REMOVAL (NOT USED)

3.12 RECOVER BOARD INSTALLATION (NOT USED)

3.13 FIELD QUALITY CONTROL

- A. Field Tests: Performed by testing laboratory specified in Section 01 45 29, TESTING LABORATORY SERVICES.
 - 1. Fastener Pull Out Tests: ANSI/SPRI FX-1(2016).
- B. Existing Roofing System Warrantor Services:
 - 1. Inspect reroofing preparation and roofing installation to verify compliance with existing warranty conditions.
 - 2. Submit reports of field inspections, and supplemental instructions issued during inspections.

3.14 DISPOSAL

- A. Collect waste materials in containers.
- B. Remove waste materials from project site, regularly, to prevent accumulation.
- C. Legally dispose of waste materials.

- - E N D - -

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

02-01-16

SECTION 07 11 13
BITUMINOUS DAMPPROOFING

PART 1 - GENERAL

1.1 SUMMARY

- A. Section Includes:
 - 1. Bituminous dampproofing on concrete

1.2 RELATED REQUIREMENTS

- A. Concrete: Section 03 00 00, CAST-IN-PLACE CONCRETE.

1.3 APPLICABLE PUBLICATIONS

- A. Comply with references to extent specified in this section.
- B. ASTM International (ASTM):
 - 1. C578-15 - Rigid, Cellular Polystyrene Thermal insulation.
 - 2. D226/D226M-09 - Asphalt-Saturated Organic Felt Used in Roofing and Waterproofing.
 - 3. D449/D449M-03(2014)e1 - Asphalt Used in Dampproofing and Waterproofing.
 - 4. D1227-13 - Emulsified Asphalt Used as a Protective Coating for Roofing.
 - 5. D6380/D6380M-03(2013)e1 - Asphalt Roll Roofing (Organic Felt).
 - 6. D6506-01(2009) - Asphalt Based Protection Board for Below-Grade Waterproofing.

1.4 SUBMITTALS

- A. Submittal Procedures: Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Manufacturer's Literature and Data:
 - 1. Description of each product.
 - 2. Application instructions.

1.5 DELIVERY

- A. Deliver products in manufacturer's original sealed packaging.
- B. Mark packaging, legibly. Indicate manufacturer's name or brand, type, color, production run number, and manufacture date.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

07 11 13-1

10/28/2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

02-01-16

- C. Before installation, return or dispose of products within distorted, damaged, or opened packaging.

1.6 STORAGE AND HANDLING

- A. Store products indoors in dry, weathertight facility.
- B. Protect products from damage during handling and construction operations.

1.7 WARRANTY

- A. Construction Warranty: FAR clause 52.246-21, "Warranty of Construction."

PART 2 - PRODUCTS

2.1 SYSTEM PERFORMANCE

- A. Control moisture migration through concrete or masonry exterior walls where no hydrostatic head occurs or is anticipated.

2.2 PRODUCTS - GENERAL

- A. Provide each product from one manufacturer and from one production run.
- B. Hot Applied Bituminous Dampproofing:
 - 1. Asphalt: ASTM D449/D449M, Type I.
- C. Cold Applied Bituminous Dampproofing:
 - 1. Asphalt: ASTM D1227, Type III (spray grade).

2.3 ACCESSORIES

- A. Asphalt Saturated Felt: ASTM D226/D226M, Type I, 7 kg (15 pound).
- B. Protection Course: Extruded-polystyrene board insulation, unfaced, ASTM C 578, Type X, 13 mm (1/2 inch) thick.

PART 3 - EXECUTION

3.1 PREPARATION

- A. Examine and verify substrate suitability for product installation.
- B. Protect existing construction and completed work from damage.
- C. Clean substrates. Remove contaminants capable of affecting subsequently installed product's performance.
- D. Remove free water; surfaces may remain damp.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

07 11 13-2

10/28/2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

02-01-16

3.2 INSTALLATION - GENERAL

- A. Install products according to manufacturer's instructions and approved submittal drawings.
 - 1. When manufacturer's instructions deviate from specifications, submit proposed resolution for Contracting Officer's Representative consideration.

3.3 DAMPPROOFING INSTALLATION

- A. Applications:
 - 1. Apply to surfaces where indicated on drawings.
- B. Apply dampproofing at 1 L/sq. m (2-1/2 gal. per 100 sq. ft.), minimum, each coat.
 - 1. Allow 24 hours drying time between coats.
- C. Adhere protection course to conceal foundation dampproofing before backfilling.

3.4 PROTECTION

- A. Protect dampproofing and protection course from construction operations.
- B. Repair damage.

- - E N D - -

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

10-01-17

SECTION 07 21 13
THERMAL INSULATION

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Thermal insulation.
 - a. Board or block insulation at foundation perimeter.
 - b. Batt or blanket insulation at exterior furred walls.
2. Acoustical insulation.
 - a. Semi-rigid insulation at interior framed partitions.
 - b. Batt and blanket insulation at interior framed partitions

1.2 RELATED REQUIREMENTS

- A. Adhesives VOC Limits: Section 01 81 13, SUSTAINABLE CONSTRUCTION REQUIREMENTS.
- B. Insulation for Cavity Face of Masonry: Section 04 20 00, UNIT MASONRY.

1.3 APPLICABLE PUBLICATIONS

- A. Comply with references to extent specified in this section.
- B. ASTM International (ASTM):
 1. C516-08(2013)e1 - Vermiculite Loose Fill Thermal Insulation.
 2. C549-06(2012) - Perlite Loose Fill Insulation.
 3. C552-15 - Cellular Glass Thermal Insulation.
 4. C553-13 - Mineral Fiber Blanket Thermal Insulation for Commercial and Industrial Applications.
 5. C578-15 - Rigid, Cellular Polystyrene Thermal Insulation.
 6. C591-15 - Unfaced Preformed Rigid Cellular Polyisocyanurate Thermal Insulation.
 7. C612-14 - Mineral Fiber Block and Board Thermal Insulation.
 8. C665-12 - Mineral-Fiber Blanket Thermal Insulation for Light Frame Construction and Manufactured Housing.
 9. C728-15 - Perlite Thermal Insulation Board.
 10. C954-15 - Steel Drill Screws for the Application of Gypsum Panel Products or Metal Plaster Base to Steel Studs From 0.033 (0.84 mm) inch to 0.112 inch (2.84 mm) in thickness.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

07 21 13-1

10/28/2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

10-01-17

11. C1002-14 - Steel Self-Piercing Tapping Screws for Application of Gypsum Panel Products or Metal Plaster Bases to Wood Studs or Steel Studs.
12. D312/D312M-15 - Asphalt Used in Roofing.
13. E84-15a - Surface Burning Characteristics of Building Materials.
14. F1667-15 - Driven Fasteners: Nails, Spikes, and Staples.

1.4 SUBMITTALS

- A. Submittal Procedures: Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Submittal Drawings:
 1. Show insulation type, thickness, and R-value for each location.
- C. Manufacturer's Literature and Data:
 1. Description of each product.
 2. Adhesive indicating manufacturer recommendation for each application.
- D. Sustainable Construction Submittals:
 1. Recycled Content: Identify post-consumer and pre-consumer recycled content percentage by weight.
 2. Low Pollutant-Emitting Materials:
 - a. Show volatile organic compound types and quantities.

1.5 DELIVERY

- A. Deliver products in manufacturer's original sealed packaging.
- B. Mark packaging, legibly. Indicate manufacturer's name or brand, type, production run number, and manufacture date.
- C. Before installation, return or dispose of products within distorted, damaged, or opened packaging.

1.6 STORAGE AND HANDLING

- A. Store products indoors in dry, weathertight facility.
- B. Protect products from damage during handling and construction operations.
- C. Protect foam plastic insulation from UV exposure.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

07 21 13-2

10/28/2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

10-01-17

1.7 WARRANTY

- A. Construction Warranty: FAR clause 52.246-21, "Warranty of Construction."

PART 2 - PRODUCTS

2.1 INSULATION - GENERAL

- A. Insulation Thickness:
 - 1. Provide thickness required by R-value shown on drawings.
 - 2. Provide thickness indicated when R-value is not shown on drawings.
- B. Insulation Types:
 - 1. Provide one insulation type for each application.
- C. Sustainable Construction Requirements:
 - 1. Insulation Recycled Content:
 - a. Polyisocyanurate/polyurethane rigid foam: 9 percent recovered material.
 - b. Rock wool material: 75 percent recovered material.
 - 2. Low Pollutant-Emitting Materials: Comply with VOC limits specified in Section 01 81 13, SUSTAINABLE CONSTRUCTION REQUIREMENTS for the following products:
 - a. Non-Flooring Adhesives and Sealants.

2.2 THERMAL INSULATION

- A. Perimeter Insulation in Contact with Soil:
 - 1. Polystyrene Board: ASTM C578, Type IV, V, VI, VII, or IX.
- B. Inside Face of Exterior Wall Insulation:
 - 1. Mineral Fiber Board: ASTM C612, Type IB or II.
- C. Masonry Cavity Wall Insulation:
 - 1. Polyurethane or Polyisocyanurate Board: ASTM C591, Type I, with vapor retarder facing; maximum permeance 29 ng/Pa/s/sq. m (0.5 perms).

2.3 ACOUSTICAL INSULATION

- A. Semi Rigid, Batts and Blankets:
 - 1. Widths and lengths to fit tight against framing.
 - 2. Mineral Fiber Batt or Blankets: ASTM C665 unfaced.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

07 21 13-3

10/28/2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

10-01-17

2.4 ACCESSORIES

- A. Fasteners:
 - 1. Staples or Nails: ASTM F1667, zinc-coated, size and type to suit application.
 - 2. Screws: ASTM C954 or ASTM C1002, size and length to suit application with washer minimum 50 mm (2 inches) diameter.
 - 3. Impaling Pins: Steel pins with head minimum 50 mm (2 inches) diameter.
 - a. Length: As required to extend beyond insulation and retain cap washer when washer is placed on pin.
 - b. Adhesive: Type recommended by manufacturer to suit application.
- B. Insulation Adhesive:
 - 1. Nonflammable type recommended by insulation manufacturer to suit application.
- C. Tape:
 - 1. Pressure sensitive adhesive on one face.

PART 3 - EXECUTION

3.1 PREPARATION

- A. Examine and verify substrate suitability for product installation.
- B. Protect existing construction and completed work from damage.
- C. Clean substrates. Remove contaminants capable of affecting subsequently installed product's performance.

3.2 INSTALLATION - GENERAL

- A. Install products according to manufacturer's instructions and approved submittal drawings.
 - 1. When manufacturer's instructions deviate from specifications, submit proposed resolution for Contracting Officer's Representative consideration.
- B. Install insulation with vapor barrier facing the heated side, unless indicated otherwise.
- C. Install board insulation with joints close and flush, in regular courses, and with end joints staggered.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

07 21 13-4

10/28/2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

10-01-17

- D. Install batt and blanket insulation with joints tight. Fill framing voids completely. Seal penetrations, terminations, , tears, and unlapped joints with tape.
- E. Fit insulation tight against adjoining construction and penetrations, unless indicated otherwise.

3.3 THERMAL INSULATION

- A. Perimeter Insulation in Contact with Soil:
 - 1. Vertical insulation:
 - a. Fill joints of insulation with same material used for bonding.
 - b. Bond polystyrene board to surfaces with adhesive.
 - c. Bond cellular glass insulation to surfaces with hot asphalt or adhesive cement.
 - 2. Horizontal insulation under concrete floor slab:
 - a. Lay insulation boards and blocks horizontally on level, compacted and drained fill.
 - b. Extend insulation from foundation walls towards center of building minimum 600 mm (24 inches).
- B. Exterior Framing or Furring Insulation:
 - 1. General:
 - a. Open voids are not acceptable.
 - b. Pack insulation around door frames and windows, in building expansion joints, door soffits, and other voids.
 - c. Pack behind outlets, around pipes, ducts, and services encased in walls.
 - d. Hold insulation in place with pressure sensitive tape.
 - e. Lap facing flanges together over framing for continuous surface. Seal penetrations through insulation and facings.
 - 2. Metal Studs:
 - a. Fasten insulation between metal studs, framing, and furring with pressure sensitive tape continuous along flanged edges.
- C. Inside Face of Exterior Wall Insulation:
 - 1. Location: On interior face of solid masonry and concrete walls, beams, beam soffits, underside of floors, and to face of studs to support interior wall finish where indicated.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

07 21 13-5

10/28/2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

10-01-17

2. Bond insulation to solid vertical surfaces with adhesive. Fill joints with adhesive cement.
 3. Fasten board insulation to face of studs with screws, nails or staples. Space fastenings maximum 300 mm (12 inches) on center. Stagger fasteners at board joints. Install fasteners at each corner.
- D. Masonry Cavity Wall Insulation:
1. Install insulation on exterior faces of concrete and masonry inner wythes of cavity walls.
 2. Bond polystyrene board to surfaces with adhesive.
 3. Bond polyurethane or polyisocyanurate board, and perlite board to surfaces with adhesive.
 4. Bond cellular glass insulation to surfaces with hot asphalt or adhesive cement.
 5. Fill insulation joints with same material used for bonding.

3.4 ACOUSTICAL INSULATION

A. General:

1. Install insulation without voids.
2. Pack insulation around door frames and windows, in building expansion joints, door soffits, and other voids.
3. Pack behind outlets, around pipes, ducts, and services encased in walls.
4. Hold insulation in place with pressure sensitive tape.
5. Lap facer flanges together over framing for continuous surface. Seal all penetrations through the insulation and facers.
6. Do not compress insulation below required thickness except where embedded items prevent required thickness.

B. Semi Rigid, Batts and Blankets:

1. When insulation is not full thickness of cavity, adhere insulation to one side of cavity, maintaining continuity of insulation and covering penetrations or embedments.
 - a. Metal Framing:
 - 1) Fasten insulation between metal framing with pressure sensitive tape continuous along flanged edges.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

07 21 13-6

10/28/2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

10-01-17

- 2) At metal framing or ceilings suspension systems, install blanket insulation above suspended ceilings or metal framing at right angles to the main runners or framing.
- 3) Tape insulation tightly together so no gaps occur and metal framing members are covered by insulation.

3.5 CLEANING

- A. Remove excess adhesive before adhesive sets.

3.6 PROTECTION

- A. Protect insulation from construction operations.
- B. Repair damage.

- - E N D - -

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System

St. Cloud, Minnesota 56303
Bancroft Architect + Engineers

02-01-16

SECTION 07 22 00
ROOF AND DECK INSULATION

PART 1 - GENERAL

1.1 SUMMARY

- A. Section Includes:
- B. Roof insulation, substrate board, vapor retarder, and cover board on new concrete substrates ready to receive roofing or waterproofing membrane.
- C. Repairs and alteration work to existing roof insulation.

1.2 RELATED REQUIREMENTS

- A. Non-Flooring Adhesives and Sealants VOC Limits: Section 01 81 13, SUSTAINABLE CONSTRUCTION REQUIREMENTS.
- B. Wood Cants, Blocking, and Edge Strips: Section 06 10 00, ROUGH CARPENTRY.

1.3 APPLICABLE PUBLICATIONS

- A. Comply with references to extent specified in this section.
- B. American Society of Heating, Refrigeration and Air Conditioning (ASHRAE):
 - 1. Standard 90.1-13 - Energy Standard for Buildings Except Low-Rise Residential Buildings.
- C. ASTM International (ASTM):
 - 1. C208-12 - Cellulosic Fiber Insulating Board.
 - 2. C552-15 - Cellular Glass Thermal Insulation.
 - 3. C726-05 - Mineral Fiber Roof Insulation Board.
 - 4. C728-15 - Perlite Thermal Insulation Board.
 - 5. C1177/C1177M-13 - Glass Mat Gypsum Substrate for Use as Sheathing.
 - 6. C1278/C1278M-07a(2015) - Fiber-Reinforced Gypsum Panel.
 - 7. C1289-15 - Faced Rigid Cellular Polyisocyanurate Thermal Insulation Board.
 - 8. C1396/C1396M-14a - Gypsum Board.
 - 9. D41/D41M-11 - Asphalt Primer Used in Roofing, Dampproofing, and Waterproofing.
 - 10. D312-06 - Asphalt Used in Roofing.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

07 22 00-1

10/28/2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System

St. Cloud, Minnesota 56303
Bancroft Architect + Engineers

02-01-16

11. D1970/D1970M-15 - Self-Adhering Polymer Modified Bituminous Sheet Materials Used as Steep Roofing Underlayment for Ice Dam Protection.
 12. D2178/D2178M-15 - Asphalt Glass Felt Used in Roofing and Waterproofing.
 13. D2822/D2822M-11 - Asphalt Roof Cement, Asbestos Containing.
 14. D4586/D4586M-07(2012) e1 - Asphalt Roof Cement, Asbestos-Free.
 15. E84-15a - Surface Burning Characteristics of Building Materials.
 16. F1667-15 - Driven Fasteners: Nails, Spikes, and Staples.
- D. National Roofing Contractors Association (NRCA):
1. Manual-15 - The NRCA Roofing Manual: Membrane Roof Systems.
- E. U.S. Department of Agriculture (USDA):
1. USDA BioPreferred Program Catalog.
- F. UL LLC (UL):
1. Listed - Online Certifications Directory.

1.4 SUBMITTALS

- A. Submittal Procedures: Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Submittal Drawings:
1. Show size, configuration, and installation details.
 - a. Nailers, cants, and terminations.
 - b. Layout of insulation showing slopes, tapers, penetrations, and edge conditions.
- C. Manufacturer's Literature and Data:
1. Description of each product.
- D. Samples:
1. Roof insulation, each type.
 2. Fasteners, each type.
- E. Sustainable Construction Submittals:
1. Recycled Content: Identify post-consumer and pre-consumer recycled content percentage by weight.
 2. Biobased Content:
 - a. Show type and quantity for each product.
 3. Low Pollutant-Emitting Materials:

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

07 22 00-2

10/28/2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System

St. Cloud, Minnesota 56303
Bancroft Architect + Engineers

02-01-16

- a. Show volatile organic compound types and quantities.
 - b. Certify each composite wood and agrifiber product contain no added urea formaldehyde.
- F. Qualifications: Substantiate qualifications meet specifications.
- 1. Installer.

1.5 QUALITY ASSURANCE

- A. Installer Qualifications: Same installer as Division 07 roofing section installer.

1.6 DELIVERY

- A. Comply with recommendations of NRCA Manual.
- B. Deliver products in manufacturer's original sealed packaging.
- C. Mark packaging, legibly. Indicate manufacturer's name or brand, type, and manufacture date.
- D. Before installation, return or dispose of products within distorted, damaged, or opened packaging.

1.7 STORAGE AND HANDLING

- A. Comply with recommendations of NRCA Manual.
- B. Store products indoors in dry, weathertight facility.
- C. Protect products from damage during handling and construction operations.

1.8 FIELD CONDITIONS

- A. Environment:
 - 1. Install products when existing and forecasted weather permit installation according to manufacturer's instructions.

1.9 WARRANTY

- A. Construction Warranty: FAR clause 52.246-21, "Warranty of Construction."
- B. Manufacturer's Warranty: Warrant substrate board, vapor retarder, insulation, and cover board against material and manufacturing defects as part of Division 07 roofing system warranty.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

07 22 00-3

10/28/2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System

St. Cloud, Minnesota 56303
Bancroft Architect + Engineers

02-01-16

PART 2 - PRODUCTS

2.1 SYSTEM PERFORMANCE

- A. Insulation Thermal Performance:
 - 1. Overall Average R-Value: RSI-57 (R-33), minimum.
 - 2. Any Location R-Value: RSI-17 (R-10), minimum.
- B. Fire and Wind Uplift Resistance: Provide roof insulation complying with requirements specified in Division 07 roofing section.

2.2 PRODUCTS - GENERAL

- A. Provide each product from one manufacturer.
- B. Sustainable Construction Requirements:
 - 1. Insulation Recycled Content:
 - a. Mineral Fiber: 75 percent total recycled content, minimum.
 - b. Rigid Foam: 9 percent total recycled content, minimum.
 - c.
 - 2. Low Pollutant-Emitting Materials: Comply with VOC limits specified in Section 01 81 13, SUSTAINABLE CONSTRUCTION REQUIREMENTS for the following products:
 - a. Non-flooring adhesives and sealants.
 - b. Composite wood and agrifiber.
 - 3. Bio-Based Materials: Where applicable, provide products designated by USDA and meeting or exceeding USDA recommendations for bio-based content, and products meeting Rapidly Renewable Materials and certified sustainable wood content definitions; refer to www.biopreferred.gov.

2.3 ADHESIVES

- A. Primer: ASTM D41/D41M.
- B. Asphalt: ASTM D312, Type III or IV for vapor retarders and insulation.
- C. Modified Asphaltic Insulation Adhesive: Insulation manufacturer's recommended modified asphaltic, asbestos-free, cold-applied adhesive formulated to adhere roof insulation to substrate or to another insulation layer.
- D. Bead-Applied Urethane Insulation Adhesive: Insulation manufacturer's recommended bead-applied, low-rise, one- or multicomponent urethane

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

07 22 00-4

10/28/2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System

St. Cloud, Minnesota 56303
Bancroft Architect + Engineers

02-01-16

adhesive formulated to adhere roof insulation to substrate or to another insulation layer.

- E. Full-Spread Applied Urethane Insulation Adhesive: Insulation manufacturer's recommended spray-applied, low-rise, two-component urethane adhesive formulated to adhere roof insulation to substrate or to another insulation layer.
- F. Roof Cement: Asbestos free, ASTM D2822/D2822M, Type I or Type II; or, ASTM D4586/D4586M, Type I or Type II.

2.4 ROOF AND DECK INSULATION

- A. Roof and Deck Insulation, General: Preformed roof insulation boards approved by roofing manufacturer.
- B. Polyisocyanurate Board Insulation: ASTM C1289, Type II, Class 1, Grade 2, faced with glass fiber reinforced cellulosic felt facers on both major surfaces of the core foam.
- C. Tapered Roof Insulation System:
 - 1. Fabricate of mineral fiberboard, polyisocyanurate, perlite board, or cellular glass. Use only one insulation material for tapered sections. Use only factory-tapered insulation.
 - 2. Cut to provide high and low points with crickets and slopes as shown.
 - 3. Minimum thickness of tapered sections; 38 mm (1-1/2 inch).
 - 4. Minimum slope 1/48 (1/4 inch per 12 inches).

2.5 INSULATION ACCESSORIES

- A. Glass (Felt): ASTM D2178/D2178M, Type VI, heavy duty ply sheet.
- B. Cants and Tapered Edge Strips:
 - 1. Wood Cant Strips: Refer to Section 06 10 00, ROUGH CARPENTRY.
 - 2. Insulation Cant Strips: ASTM C208, Type II, Grade 1, cellulosic-fiber insulation board.
 - 3. Tapered Edge Strips: 1/12 (1 inch per 12 inches), from 0 mm (0 inches), 300 mm to 450 mm (12 inches to 18 inches) wide.
 - a. Mineral Fiberboard: ASTM C726.
 - b.
- C. Vapor Retarder:

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

07 22 00-5

10/28/2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System

St. Cloud, Minnesota 56303
Bancroft Architect + Engineers

02-01-16

1. Glass-Fiber Felts: ASTM D2178/D2178M, Type IV, asphalt impregnated.
2. Self-Adhering Sheet Vapor Retarder: ASTM D1970/D1970M, minimum 1.0 mm (40 mils) thick membrane of HDPE film fully coated with asphalt adhesive, or 0.76 to 1.0 mm (30 to 40 mils) thick membrane of butyl rubber-based adhesive backed by a layer of high density cross-laminated polyethylene; maximum permeance rating of 6 ng/Pa/s/sq. m (0.1 perms).

D. Substrate Board:

1. Glass-Mat, Water-Resistant Gypsum Roof Board: ASTM C1177/C1177M, Type X, 16 mm (5/8 inch) thick, factory primed.
2. Cellulosic-Fiber-Reinforced, Water-Resistant Gypsum Roof Board: ASTM C1278/C1278M, 16 mm (5/8 inch) thick.

E. Cover Board:

1. Glass-Mat, Water-Resistant Gypsum Roof Board: ASTM C1177/C1177M, 16 mm (5/8 inch) thick, factory primed.

2.6 ACCESSORIES

- A. Fasteners: Corrosion-resistant carbon steel fasteners and galvalume-coated steel or plastic round plates for fastening substrate board and insulation to roof deck.
- B. Nails: ASTM F1667; type to suit application.

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Comply with requirements of Division 07 roofing section.

3.2 PREPARATION

- A. Examine and verify substrate suitability for product installation.
- B. Protect existing construction and completed work from damage.

3.3 INSTALLATION - GENERAL

- A. Install products according to manufacturer's instructions.
 1. When manufacturer's instructions deviate from specifications, submit proposed resolution for Contracting Officer's Representative consideration.
- B. Comply with requirements of UL for insulated steel roof deck.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

07 22 00-6

10/28/2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System

St. Cloud, Minnesota 56303
Bancroft Architect + Engineers

02-01-16

- C. Attach substrate board and other products to meet requirements of Division 07 roofing section.

3.4 SUBSTRATE BOARD INSTALLATION

- A. Fasten substrate board to top flanges of steel decking to resist uplift pressures according requirements for specified roofing system.
 - 1. Locate the long dimension edge joints solidly bearing on top of decking ribs.

3.5 VAPOR RETARDER INSTALLATION Review requirement for vapor retarders for use over decks to receive insulation for heated buildings where the January average means temperature is below 4.5 degrees C (40 degrees F), the relative humidity is 45 percent or greater. Vapor retarders should typically be considered for heated portions of buildings where a high humidity condition is expected such as a kitchen, indoor swimming pool, or laundry.

3.6 Follow NRCA procedures for determining if vapor retarders are required, including venting, and ASHRAE for calculations; however, under conditions of extreme humidity and cold weather conditions, a vapor retarder is required and water vapor transmission analysis is required. Ensure that the vapor retarder is shown at all locations where required on the Drawings

- A. Vapor Retarder Installation, General:
 - 1. Install continuous vapor retarder on roof decks where indicated.
 - 2. Seal penetrations through vapor retarder with roof cement to prevent moisture entry from below.
- B. Cast in Place Concrete Decks, Except Insulating Concrete:
 - 1. Prime deck as specified.
 - 2. Apply two plies of asphalt saturated felt mopped down to deck.

3.7 INSULATION INSTALLATION

- A. Insulation Installation, General:
 - 1. Base Sheet: Where required by roofing system, install one lapped base sheet specified in Division 07 roofing section by mechanically fastening to roofing substrate before installation of insulation.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

07 22 00-7

10/28/2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System

St. Cloud, Minnesota 56303
Bancroft Architect + Engineers

02-01-16

2. Cant Strips: Install preformed insulation cant strips at junctures of roofing system with vertical construction.
 3. Use same insulation as existing for roof repair and alterations unless specified otherwise.
- B. Insulation Thickness:
1. Thickness of roof insulation shown on drawings is nominal. Provide thickness required to comply with specified thermal performance.
 2. Insulation on Metal Decks: Provide insulation in minimum thickness recommended by insulation manufacturer to span deck flutes. Support edges of insulation on metal deck ribs.
 3. When actual insulation thickness differs from drawings, coordinate alignment and location of roof drains, flashing, gravel stops, fascias and similar items.
 4. Where tapered insulation is used, maintain insulation thickness at high points and roof edges shown on drawings.
 - a. Low Point Thickness: Minimum 38 mm (1-1/2 inches).
 5. Use minimum two layers of insulation when required thickness is 68 mm (2.7 inch) or greater.
- C. Lay insulating units with close joints, in regular courses and with end joints staggered.
1. Stagger joints between layers minimum 150 mm (6 inches).
- D. Lay units with long dimension perpendicular to the rolled (longitudinal) direction of the roofing felt.
- E. Seal cut edges at penetrations and at edges against blocking with bitumen or roof cement.
- F. Cut to fit tightly against blocking or penetrations.
- G. Cover all insulation installed on the same day; comply with temporary protection requirements of Division 07 roofing section.
- H. Installation Method:
1. Adhered Insulation:
 - a. Prime substrate as required.
 - b. Set each layer of insulation firmly in solid mopping of hot asphalt.

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System

St. Cloud, Minnesota 56303
Bancroft Architect + Engineers

02-01-16

- c. Set each layer of insulation firmly in ribbons of bead-applied insulation adhesive.
- d. Set each layer of insulation firmly in uniform application of full-spread insulation adhesive.
- 2. Mechanically Fastened Insulation:
 - a. Fasten insulation according to requirements in Division 07 roofing section.
 - b. Fasten insulation to resist uplift pressures specified in Division 07 roofing section.
- 3. Mechanically Fastened and Adhered Insulation:
 - a. Fasten first layer of insulation according to "Mechanically Fastened Insulation" requirements.
 - b. Fasten each subsequent layer of insulation according to "Adhered Insulation" requirements.

3.8 COVER BOARD INSTALLATION

- A. Install cover boards over insulation with long joints in continuous straight lines with staggered end joints.
- B. Offset cover board joints from insulation joints 150 mm (6 inches), minimum.
- C. Secure cover boards according to "Mechanically Fastened Insulation" requirements.

- - E N D - -

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

02-01-16

SECTION 07 53 23
ETHYLENE-PROPYLENE-DIENE-MONOMER ROOFING

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Ethylene Propylene Diene Monomer (EPDM) sheet roofing adhered to insulated concrete roof deck.

1.2 RELATED REQUIREMENTS

- A. Non-Flooring Adhesives and Sealants VOC Limits: Section 01 81 13, SUSTAINABLE CONSTRUCTION REQUIREMENTS.
- B. Substrate Board, Vapor Retarder, Roof Insulation, and Cover Board: Section 07 22 00, ROOF AND DECK INSULATION.

1.3 APPLICABLE PUBLICATIONS

- A. Comply with references to extent specified in this section.
- B. American National Standards Institute/Single-Ply Roofing Institute (ANSI/SPRI):
 1. FX-1-01(R2006) - Standard Field Test Procedure for Determining the Withdrawal Resistance of Roofing Fasteners.
 2. RP-4 2013 - Wind Design Standard for Ballasted Single-ply Roofing Systems.
- C. American Society of Civil Engineers/Structural Engineering Institute (ASCE/SEI):
 1. 7-10 - Minimum Design Loads For Buildings and Other Structures.
- D. American Society of Heating, Refrigerating and Air-Conditioning Engineers, Inc. (ASHRAE):
 1. 90.1-13 - Energy Standard for Buildings Except Low-Rise Residential Buildings.
- E. ASTM International (ASTM):
 1. A276/A276M-15 - Stainless Steel Bars and Shapes.
 2. B209-14 - Aluminum and Aluminum-Alloy Sheet and Plate.
 3. B209M-14 - Aluminum and Aluminum-Alloy Sheet and Plate (Metric).
 4. C67-14 - Sampling and Testing Brick and Structural Clay Tile.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

07 53 23-1

10/28/2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

02-01-16

5. C140/C140M-15 - Sampling and Testing Concrete Masonry Units and Related Units.
 6. C936/C936M-15 - Solid Concrete Interlocking Paving Units.
 7. C1371-15 - Determination of Emittance of Materials Near Room Temperature Using Portable Emissometers.
 8. C1549-09(2014) - Determination of Solar Reflectance Near Ambient Temperature Using a Portable Solar Reflectometer.
 9. D751-06(2011) - Coated Fabrics.
 10. D1248-12 - Polyethylene Plastics Extrusion Materials for Wire and Cable.
 11. D1876-08(2015)e1 - Peel Resistance of Adhesives (T-Peel Test).
 12. D2103-15 - Polyethylene Film and Sheeting.
 13. D2240-05(2010) - Rubber Property-Durometer Hardness.
 14. D3884-09(2013)e1 - Abrasion Resistance of Textile Fabrics (Rotary Platform, Double-Head Method).
 15. D4263-83(2012) - Indicating Moisture in Concrete by the Plastic Sheet Method.
 16. D4586/D4586M-07(2012)e1 - Asphalt Roof Cement, Asbestos-Free.
 17. D4637/D4637M-14e1 - EPDM Sheet Used In Single-Ply Roof Membrane.
 18. E96/E96M-15 - Water Vapor Transmission of Materials.
 19. E408-99(2015) - Total Normal Emittance of Surfaces Using Inspection-Meter Techniques.
 20. E1918-06(2015) - Measuring Solar Reflectance of Horizontal and Low-Sloped Surfaces in the Field.
 21. E1980-11 - Measuring Solar Reflectance of Horizontal and Low-Sloped Surfaces in the Field.
 22. G21-15 - Resistance of Synthetic Polymeric Materials to Fungi.
- F. Cool Roof Rating Council (CRRC):
1. 1-15 - Product Rating Program.
- G. Federal Specifications (Fed. Spec.):
1. UU-B-790A - Building Paper, Vegetable Fiber: (Kraft, Waterproofed, Water Repellent and Fire Resistant).
- H. Florida Department of Business and Professional Regulation (FL):
1. Approved - Product Approval.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

07 53 23-2

10/28/2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

02-01-16

- I. National Roofing Contractors Association (NRCA):
 - 1. Manual-15 - The NRCA Roofing Manual: Membrane Roof Systems.
- J. U.S. Department of Agriculture (USDA): USDA BioPreferred Catalog.
- K. UL LLC (UL):
 - 1. 580-06 - Tests for Uplift Resistance of Roof Assemblies.
 - 2. 1897-15 - Uplift Tests for Roof Covering Systems.
- L. U.S. Department of Commerce National Institute of Standards and Technology (NIST):
 - 1. DOC PS 1-09 - Structural Plywood.
 - 2. DOC PS 2-04 - Performance Standard for Wood-Based Structural-Use Panels.
- M. U.S. Environmental Protection Agency (EPA):
 - 1. Energy Star - ENERGY STAR Program Requirements for Roof Products Version 3.0.

1.4 PREINSTALLATION MEETINGS

- A. Conduct preinstallation meeting at the Project site minimum 30 days before beginning Work of this section.
 - 1. Required Participants:
 - a. Contracting Officer's Representative.
 - b. Contractor.
 - c. Installer.
 - d. Manufacturer's field representative.
 - e. Other installers responsible for adjacent and intersecting work, including roof deck, flashings, roof specialties, roof accessories, utility penetrations, rooftop curbs and equipment, lightning protection.
 - 2. Meeting Agenda: Distribute agenda to participants minimum 3 days before meeting.
 - a. Installation schedule.
 - b. Installation sequence.
 - c. Preparatory work.
 - d. Protection before, during, and after installation.
 - e. Installation.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

07 53 23-3

10/28/2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

02-01-16

- f. Terminations.
 - g. Transitions and connections to other work.
 - h. Inspecting and testing.
 - i. Other items affecting successful completion.
 - j. Pull out test of fasteners.
 - k. Material storage, including roof deck load limitations.
3. Document and distribute meeting minutes to participants to record decisions affecting installation.

1.5 SUBMITTALS

- A. Submittal Procedures: Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Submittal Drawings:
 - 1. Roofing membrane layout.
 - 2. Roofing membrane seaming and joint details.
 - 3. Roof membrane penetration details.
 - 4. Base flashing and termination details.
 - 5. Paver anchoring locations and details.
- C. Manufacturer's Literature and Data:
 - 1. Description of each product.
 - 2. Minimum fastener pull out resistance.
 - 3. Installation instructions.
 - 4. Warranty.
 - 5. Product Data for Federally-Mandated Bio-Based Materials: For roof materials, indicating USDA designation and compliance with definitions for bio-based products, Rapidly Renewable Materials, and certified sustainable wood content.
- D. Sustainable Construction Submittals:
 - 1. Solar Reflectance Index (SRI) for roofing membrane.
 - 2. Low Pollutant-Emitting Materials:
 - a. Show volatile organic compound types and quantities.
 - 3. Energy Star label for roofing membrane.
- E. Samples:
 - 1. Roofing Membrane: 150 mm (6 inch) square.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

07 53 23-4

10/28/2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

02-01-16

2. Base Flashing: 150 mm (6 inch) square.
3. Fasteners: Each type.
4. Roofing Membrane Seam: 300 mm (12 inches) square.
- F. Certificates: Certify products comply with specifications.
 1. Fire and windstorm classification.
 2. Energy performance requirements.
- G. Qualifications: Substantiate qualifications comply with specifications.
 1. Installer, including supervisors with project experience list .
 2. Manufacturer's field representative with project experience list .
- H. Field quality control reports.
- I. Temporary protection plan. Include list of proposed temporary materials.
- J. Operation and Maintenance Data:
 1. Maintenance manuals.

1.6 QUALITY ASSURANCE

- A. Installer Qualifications:
 1. Approved by roofing system manufacturer as installer for roofing system with specified warranty.
 2. Regularly installs specified products.
 3. Installed specified products with satisfactory service on five similar installations for minimum five years.
 4. Employs full-time supervisors experienced installing specified system and able to communicate with Contracting Officer's Representative and installer's personnel.
- B. Manufacturer's Field Representative:
 1. Manufacturer's full-time technical employee or independent roofing inspector.
 2. Individual certified by Roof Consultants Institute as Registered Roof Observer.

1.7 DELIVERY

- A. Deliver products in manufacturer's original sealed packaging.
- B. Mark packaging, legibly. Indicate manufacturer's name or brand, type, and manufacture date.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

07 53 23-5

10/28/2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

02-01-16

- C. Before installation, return or dispose of products within distorted, damaged, or opened packaging.

1.8 STORAGE AND HANDLING

- A. Comply with NRCA Manual storage and handling requirements.
- B. Store products indoors in dry, weathertight facility.
- C. Store adhesives according to manufacturer's instructions.
- D. Protect products from damage during handling and construction operations.
- E. Products stored on the roof deck must not cause permanent deck deflection.

1.9 FIELD CONDITIONS

- A. Environment:
 - 1. Product Temperature: Minimum 4 degrees C (40 degrees F) and rising before installation.
 - 2. Weather Limitations: Install roofing only during dry current and forecasted weather conditions.

1.10 WARRANTY

- A. Construction Warranty: FAR clause 52.246-21, "Warranty of Construction."
- B. Manufacturer's Warranty: Warrant roofing system against material and manufacturing defects and agree to repair any leak caused by a defect in the roofing system materials or workmanship of the installer.
 - 1. Warranty Period: 10 years.

PART 2 - PRODUCTS

2.1 SYSTEM DESCRIPTION

- A. Roofing System: Adhered roofing membrane, base flashing, roof insulation, fasteners, cover boards, substrate boards vapor retarders copings edge metal

2.2 SYSTEM PERFORMANCE

- A. Design roofing system meeting specified performance:
 - 1. Load Resistance: ASCE/SEI 7.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

07 53 23-6

10/28/2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

02-01-16

a. Uplift Pressures:

Corner Uplift Pressure: Local standard governing.

Perimeter Uplift Pressure: Local standard governing.

Field-of-Roof Uplift Pressure: Local standard governing.

2. Energy Performance:

a. EPA Energy Star Listed for low-slope roof products.

b. ASTM E1980; Minimum 78 Solar Reflectance Index (SRI).

c. Three-Year Aged Performance: Minimum 0.55 solar reflectance tested in according to ASTM C1549 or ASTM E1918, and minimum 0.75 thermal emittance tested in according to ASTM C1371 or ASTM E408.

Where tested aged values are not available:

Calculate compliance adjusting initial solar reflectance according to ASHRAE 90.1.

Provide roofing system with minimum 64 three-year aged Solar Reflectance Index calculated according to ASTM E1980 with 12 W/sq. m/degree K (2.1 BTU/h/sq. ft.) convection coefficient.

2.3 PRODUCTS - GENERAL

A. Provide roof system components from one manufacturer.

B. Sustainable Construction Requirements:

1. Bio-Based Materials: Where applicable, provide products designated by USDA and meeting or exceeding USDA recommendations for bio-based content, and products meeting Rapidly Renewable Materials and certified sustainable wood content definitions; refer to www.biopreferred.gov.

2. Low Pollutant-Emitting Materials: Comply with VOC limits specified in Section 01 81 13, SUSTAINABLE CONSTRUCTION REQUIREMENTS for the following products:

a. Non-flooring adhesives and sealants.

2.4 EPDM ROOFING MEMBRANE

A. EPDM Sheet: ASTM D4637/D4637M, Type II - internally reinforced.

1. Thickness: 1.5 mm (60 mils).

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

02-01-16

2. Color: To be selected by the Contracting Officer's Representative from manufacturer's stand colors.

B. Additional Properties:

PROPERTY	TEST METHOD	REQUIREMENT
Shore A Hardness	ASTM D2240	55 to 75 Durometer
Water Vapor Permeance	ASTM E96/E96M	Minimum 8 ng/Pa/s/sq. m (0.14 perms) Water Method
Fungi Resistance	ASTM G21	After 21 days, no sustained growth or discoloration.

1. Use fire retardant membrane when not protected by ballast or pavers. Verify for UL or approval.

2.5 MEMBRANE ACCESSORY MATERIALS

- A. Sheet roofing manufacturer's specified products.
- B. Flashing Sheet: Manufacturer's standard; same material, and color as roofing membrane.
 - 1. Self-curing EPDM flashing adaptable to irregular shapes and surfaces.
 - 2. Minimum Thickness: 1.5 mm (0.060 inch).
- C. Factory Formed Flashings: Inside and outside corners, pipe boots, and other special flashing shapes to minimize field fabrication.
- D. Splice Adhesive or Tape: Manufacturer's standard for roofing membrane and flashing sheet.
- E. Splice Lap Sealant: Liquid EPDM rubber for exposed lap edge.
- F. Bonding Adhesive: Manufacturer's standard, solvent based, to suit substrates.
- G. Termination Bars: Manufacturer's standard, stainless steel or aluminum, 25 mm wide by 3 mm thick (1 inch wide by 1/8 inch thick) factory drilled for fasteners.

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

02-01-16

- H. Battens: Manufacturer's standard, galvanized or galvanized steel, 25 mm wide by 1.3 mm thick (1 inch wide by 0.05 inch thick), factory punched for fasteners.
- I. Pipe Compression Clamp:
 - 1. Stainless steel drawband.
 - 2. Worm drive clamp device.
- J. Fasteners: Manufacturer's standard coated steel with metal or plastic plates, to suit application.
- K. Fastener Sealer: One-part elastomeric adhesive sealant.
- L. Temporary Closure Sealers (Night Sealant): Polyurethane two-part sealer.
- M. Primers, Splice Tapes, Cleaners, and Butyl Rubber Seals: As specified by roof membrane manufacturer.
- N. Asphalt Roof Cement: ASTM D4586/D4586M.

2.6 FASTENERS

- A. Fasteners and washers required for securing pavers together with straps and to walls or other anchorage:
 - 1. Straps for Securing Pavers Together:
 - a. Stainless Steel: ASTM A276/A276M, Type 302 or 304, minimum 0.46 mm (0.018 inch) thick.
 - b. Aluminum Strap: ASTM B209/B209M, minimum 2.39 mm (0.094 inch) thick.
 - c. Round corners on straps.
 - d. Form straps 38 mm (1-1/2 inches) wide, 3 m (10 feet) maximum length with 6 by 10 mm (1/4 by 3/8 inch) punched slotted holes at 100 mm (4 inch) centers centered on width of strap. Punch hole size 2 mm (1/16 inch) larger than fastener shank when shank is thicker than 5 mm (3/16 inch).

2.7 SEPARATION SHEET

- A. Polyethylene Film: ASTM D2103, 0.2 mm (6 mils) thick.
- B. Building Paper: Fed. Spec. UU-B-790.
 - 1. Water Vapor Resistance: Type I, Grade A, Style 4, reinforced.
 - 2. Water Vapor Permeable: Type I, Grade D, Style 4, reinforced.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

07 53 23-9

10/28/2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

02-01-16

2.8 FLEXIBLE TUBING

- A. Closed cell neoprene, butyl polyethylene, vinyl, or polyethylene tube or rod.
- B. Diameter approximately 1-1/2 times joint width.

2.9 WALKWAY PADS

- A. Manufacturer's standard, slip resistant, approximately 450 mm by 450 mm (30 by 30 inches) square and 5 mm (3/16 inch) thick with rounded corners.
 - 1. Provide 24 squares for installation at locations directed by the COR.

2.10 PROTECTION MAT OR SEPARATOR SHEET (NOT USED)

2.11 BALLAST (NOT USED)

2.12 ROOF PAVERS (NOT USED)

2.13 ACCESSORIES

- A. Temporary Protection Materials:
 - 1. Expanded Polystyrene (EPS) Insulation: ASTM C578.

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Examine and verify substrate suitability for product installation with roofing installer and roofing inspector present.
 - 1. Verify roof penetrations are complete, secured against movement, and firestopped .
 - 2. Verify roof deck is adequately secured to resist wind uplift.
 - 3. Verify roof deck is clean, dry, and in-plane ready to receive roofing system.
- B. Correct unsatisfactory conditions before beginning roofing work.

3.2 PREPARATION

- A. Complete roof deck construction before beginning roofing work:

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

07 53 23-10

10/28/2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

02-01-16

1. Curbs, blocking, edge strips, and other components to which roofing and base flashing is attached in place ready to receive insulation and roofing.
 2. Coordinate roofing membrane installation with flashing work and roof insulation work so insulation and flashing are installed concurrently to permit continuous roofing operations.
 3. Complete installation of flashing, insulation, and roofing in same day except for the area where temporary protection is required when work is stopped for inclement weather or end of workday.
- B. Dry out surfaces that become wet from any cause during progress of the work before roofing work is resumed. Apply materials to dry substrates, only.
- C. Broom clean roof decks. Remove dust, dirt and debris.
- D. Remove projections capable of damaging roofing materials.

3.3 TEMPORARY PROTECTION

- A. Install temporary protection consisting of a temporary seal and water cut-offs at the end of each day's work and when work is halted for an indefinite period or work is stopped when precipitation is imminent.
- B. Install temporary cap flashing over top of base flashings where permanent flashings are not in place to protect against water intrusion into roofing system. Securely anchor in place to prevent blow off and damage by construction activities.
- C. Temporarily seal exposed insulation surfaces within roofing membrane.
1. Apply temporary seal and water cut off by extending roofing membrane beyond insulation and securely embedding edge of the roofing membrane in 6 mm (1/4 inch) thick by 50 mm (2 inches) wide strip of temporary closure sealant. Weight roofing membrane edge with sandbags, to prevent displacement; space sandbags maximum 2400 mm (8 feet) on center.
 2. Direct water away from work. Provide drainage, preventing water accumulation.
 3. Check daily to ensure temporary seal remains watertight. Reseal open areas and weight down.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

07 53 23-11

10/28/2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

02-01-16

- D. Before the work resumes, cut off and discard portions of roof membrane in contact with temporary seal.
 - 1. Cut minimum 150 mm (6 inches) back from sealed edges and surfaces.
- E. Remove sandbags and store for reuse.

3.4 INSTALLATION, GENERAL

- A. Install products according to manufacturer's instructions and approved submittal drawings .
 - 1. When manufacturer's instructions deviate from specifications, submit proposed resolution for Contracting Officer's Representative consideration.
- B. Comply with NRCA Manual installation requirements.
- C. Comply with UL 1897 for uplift resistance.
- D. Do not allow membrane and flashing to contact surfaces contaminated with asphalt, coal tar, oil, grease, or other substances incompatible with EPDM.

3.5 ROOFING INSTALLATION

- A. Install membrane perpendicular to long dimension of insulation boards.
- B. Begin membrane installation at roof low point and work towards high point. Lap membrane shingled in water flow direction.
- C. Position membrane free of buckles and wrinkles.
- D. Roll membrane out; inspect for defects as membrane is unrolled. Remove defective areas:
 - 1. Allow 30 minutes for membrane to relax before proceeding.
 - 2. Lap edges and ends minimum 75 mm (3 inches). Clean lap surfaces.
 - 3. Install seam adhesive or tape, unless furnished with factory applied adhesive strips. Apply pressure to develop full adhesion.
 - 4. Check seams to ensure continuous adhesion and correct defects.
 - 5. Finish seam edges with beveled bead of lap sealant.
 - 6. Finish seams same day as membrane is installed.
 - 7. Anchor membrane perimeter to roof deck and parapet wall as indicated on drawings.
- E. Membrane Perimeter Anchorage:

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

07 53 23-12

10/28/2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

02-01-16

1. Install batten with fasteners at perimeter of each roof area, curb flashing, expansion joints and similar penetrations on top of roof membrane as indicated on drawings.
2. Mechanical Fastening:
 - a. Space fasteners maximum 300 mm (12 inches) on center, starting 25 mm (1 inch) from ends.
 - b. When battens are cut, round edge and corners before installing.
 - c. Set fasteners in lap sealant and cover fastener head with fastener sealer, including batten.
 - d. Stop batten where batten interferes with drainage. Space ends of batten 150 mm (6 inch) apart.
 - e. Cover batten with 225 mm (9 inch) wide strip of flashing sheet. Seal laps with lap seam adhesive and finish edges with lap sealant.
 - f. At fascia-cants turn roofing membrane down over front edge of blocking, cant, or nailer. Secure roofing membrane to vertical portion of nailer; with fasteners spaced maximum 150 mm (6 inches) on centers.
 - g. At parapet walls intersecting building walls and curbs, secure roofing membrane to structural deck with fasteners 150 mm (6 inches) on center or as shown in NRCA Manual.
- F. Adhered System Installation:
 1. Apply bonding adhesive in quantities required by roofing membrane manufacturer.
 2. Fold sheet back on itself, clean and coat the bottom side of the membrane and the top of substrate with adhesive. Do not coat the lap joint area.
 3. After adhesive has set according to adhesive manufacturer's instructions, roll roofing membrane into adhesive minimizing voids and wrinkles.
 4. Repeat for other half of sheet.
 5. Cut voids and wrinkles to lay flat. Clean and patch cut area.
- G. Mechanical Fastened System Installation:

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

07 53 23-13

10/28/2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

02-01-16

1. Secure roofing membrane to structural deck with fasteners through battens to achieve specified wind uplift performance.
 - a. Drill pilot holes for fasteners installed into cast-in-place concrete. Drill hole minimum 10 mm (3/8 inch) deeper than fastener penetration.
2. When fasteners are installed within membrane laps, locate battens minimum 13 mm (1/2 inch) from edge of sheets.
3. Apply lap sealant under battens and anchor to deck while lap sealant is still fluid. Cover fastener head with fastener sealer.
4. Where fasteners are installed over roofing membrane after seams are welded, cover fasteners with minimum 200 mm (8 inch) diameter EPDM membrane cap centered over fasteners. Where battens are used cover battens with minimum 200 mm (8 inch) wide EPDM strip cap centered over batten. Splice caps to roofing membrane and finish edges with lap sealant.

3.6 FLASHING INSTALLATION

- A. Install flashings on same day as roofing membrane is installed. When flashing cannot be completely installed in one day, complete installation until flashing is watertight and provide temporary covers or seals.
- B. Flashing Roof Drains:
 1. Install roof drain flashing according to roofing membrane manufacturer's instructions.
 - a. Coordinate to set the metal drain flashing in asphalt roof cement, holding cement back from the edge of the metal flange.
 - b. Do not allow roof cement to contact EPDM roofing membrane.
 - c. Adhere roofing membrane to metal flashing with bonding adhesive.
 2. Turn metal drain flashing and roofing membrane down into drain body. Install clamping ring and strainer.
- C. Installing Base Flashing and Pipe Flashing:
 1. Install flashing sheet to pipes, walls and curbs to minimum 200 mm (8 inches) height above roof surfaces and extend roofing manufacturer's standard lap dimension onto roofing membranes.

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

02-01-16

- a. Adhere flashing with bonding adhesive.
 - b. Form inside and outside corners of flashing sheet according to NRCA Manual. Form pipe flashing according to NRCA Manual.
 - c. Lap ends roofing manufacturer's standard dimension.
 - d. Adhesively splice flashing sheets together, and adhesively splice flashing sheets to roofing membranes. Finish exposed edges with lap sealant.
2. Anchor top of flashing to walls and curbs with fasteners spaced maximum 150 mm (6 inches) on center. Use surface mounted fastening strip with sealant on ducts. Use pipe clamps on pipes or other round penetrations.
 3. Apply sealant to top edge of flashing.
- D. Installing Building Expansion Joints:
1. Install base flashing on curbs as specified.
 2. Coordinate installation with roof expansion joint system.
 3. Install flexible tubing 1-1/2 times width of joint centered over joint. Cover tubing with flashing sheet adhered to base flashing and lapping base flashing roofing manufacturer's standard dimension. Finish edges of laps with lap sealant.
- E. Repairs to Membrane and Flashings:
1. Remove sections of roofing membrane or flashing sheet that are creased, wrinkled, or fish mouthed.
 2. Cover removed areas, cuts and damaged areas with patch extending 100 mm (4 inches) beyond damaged, cut, or removed area. Adhesively splice patch to roofing membrane or flashing sheet. Finish edge of lap with lap sealant.

3.7 WALKWAY PAD INSTALLATION (NOT USED)

3.8 BALLAST AND PAVER INSTALLATION (NOT USED)

3.9 FIELD QUALITY CONTROL

- A. Field Tests: Performed by testing laboratory specified in Section 01 45 29, TESTING LABORATORY SERVICES.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

07 53 23-15

10/28/2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

02-01-16

1. Fastener Pull Out Tests: ANSI/SPRI FX-1; one test for every 230 sq. m (2,500 sq. ft.) of deck. Perform tests for each combination of fastener type and roof deck type before installing roof insulation.
 - a. Test at locations selected by Contracting Officer's Representative.
 - b. Do not proceed with roofing work when pull out resistance is less than manufacturer's required resistance.
 - c. Test Results:

Repeat tests using different fastener type or use additional fasteners achieve pull out resistance required to meet specified wind uplift performance.

Patch cementitious deck to repair areas of fastener tests holes.
 2. Examine and probe roofing membrane and flashing seams in presence of Contracting Officer's Representative and Manufacturer's field representative.
 3. Probe seams to detect marginal bonds, voids, skips, and fishmouths.
 4. Cut 100 mm (4 inch) wide by 300 mm (12 inch) long samples through seams where directed by Contracting Officer's Representative.
 5. Cut one sample for every 450 m (1500 feet) of seams.
 6. Cut samples perpendicular to seams.
 7. Failure of samples to pass ASTM D1876 test will be cause for rejection of work.
 8. Repair areas where samples are taken and where marginal bond, voids, and skips occur.
 9. Repair fish mouths and wrinkles by cutting to lay flat. Install patch over cut area extending 100 mm (4 inches) beyond cut.
- B. Manufacturer Services:
1. Inspect initial installation, installation in progress, and completed work.
 2. Issue supplemental installation instructions necessitated by field conditions.
 3. Prepare and submit inspection reports.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

07 53 23-16

10/28/2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

02-01-16

4. Certify completed installation complies with manufacturer's instructions and warranty requirements.

3.10 CLEANING

- A. Remove excess adhesive before adhesive sets.
- B. Clean exposed roofing surfaces. Remove contaminants and stains to comply with specified solar reflectance performance.

3.11 PROTECTION

- A. Protect roofing system from traffic and construction operations.
 1. Protect roofing system when used for subsequent work platform, materials storage, or staging.
 2. Distribute scaffolding loads to exert maximum 50 percent roofing system materials compressive strength.
- B. Loose lay temporary insulation board overlaid with plywood or OSB.
 1. Weight boards to secure against wind uplift.
- C. Remove protection when when directed by Contacting Officer's Representative .
- D. Repair damage.

- - E N D - -

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

07-01-14

SECTION 07 60 00
FLASHING AND SHEET METAL

PART 1 - GENERAL

1.1 DESCRIPTION

Formed sheet metal work for wall and roof flashing are specified in this section.

1.2 RELATED WORK

- A. Manufactured flashing and copings: Section 07 71 00 ROOF SPECIALTIES.
- B. Flashing components of factory finished roofing and wall systems: Division 07 roofing and wall system sections.
- C. Joint Sealants: Section 07 92 00, JOINT SEALANTS.
- D. Color of factory coated exterior architectural metal and anodized aluminum items: Dark Bronze to match VA Station Standard.
- E. Integral flashing: PLUMBING sections and Division 23 HVAC sections.
- F. Paint materials and application: Section 09 91 00, PAINTING.
- G. Flashing of Roof Drains: Section 22 14 00, FACILITY STORM DRAINAGE.

1.3 APPLICABLE PUBLICATIONS

- A. Publications listed below form a part of this specification to the extent referenced. Publications are referenced in the text by the basic designation only. Editions of applicable publications current on date of issue of bidding documents apply unless otherwise indicated.
- B. Aluminum Association (AA):
 - AA-C22A41.....Aluminum Chemically etched medium matte, with clear anodic coating, Class I Architectural, 0.7-mil thick
 - AA-C22A42.....Chemically etched medium matte, with integrally colored anodic coating, Class I Architectural, 0.7 mils thick
 - AA-C22A44.....Chemically etched medium matte with electrolytically deposited metallic compound, integrally colored coating Class I Architectural, 0.7-mil thick finish

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

07-01-14

- C. American National Standards Institute/Single-Ply Roofing
Institute/Factory Mutual (ANSI/SPRI/FM):
4435/ES-1-11.....Wind Design Standard for Edge Systems Used with
Low Slope Roofing Systems
- D. American Architectural Manufacturers Association (AAMA):
AAMA 620-02.....Voluntary Specification for High Performance
Organic Coatings on Coil Coated Architectural
Aluminum
AAMA 621-02.....Voluntary Specification for High Performance
Organic Coatings on Coil Coated Architectural
Hot Dipped Galvanized (HDG) and Zinc-Aluminum
Coated Steel Substrates
- E. ASTM International (ASTM):
A240/A240M-15.....Standard Specification for Chromium and
Chromium-Nickel Stainless Steel Plate, Sheet
and Strip for Pressure Vessels and for General
Applications.
A653/A653M-15.....Steel Sheet Zinc-Coated (Galvanized) or Zinc
Alloy Coated (Galvanized) by the Hot- Dip
Process
B32-14.....Solder Metal
B209-14.....Aluminum and Aluminum-Alloy Sheet and Plate
B370-12.....Copper Sheet and Strip for Building
Construction
D173-03 (R2011).....Bitumen-Saturated Cotton Fabrics Used in
Roofing and Waterproofing
D412-15.....Vulcanized Rubber and Thermoplastic Elastomers-
Tension
D1187-97 (R2011).....Asphalt Base Emulsions for Use as Protective
Coatings for Metal
D1784-11.....Rigid Poly (Vinyl Chloride) (PVC) Compounds and
Chlorinated Poly (Vinyl Chloride) (CPVC)
Compounds
D3656-13.....Insect Screening and Louver Cloth Woven from
Vinyl-Coated Glass Yarns

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

07 60 00-2

10/28/2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

07-01-14

- D4586-12.....Asphalt Roof Cement, Asbestos Free
- F. Sheet Metal and Air Conditioning Contractors National Association (SMACNA): Architectural Sheet Metal Manual.
- G. National Association of Architectural Metal Manufacturers (NAAMM): AMP 500-06.....Metal Finishes Manual
- H. Federal Specification (Fed. Spec):
A-A-1925A.....Shield, Expansion; (Nail Anchors)
UU-B-790A.....Building Paper, Vegetable Fiber
- I. International Code Commission (ICC): International Building Code, Current Edition

1.4 PERFORMANCE REQUIREMENTS

- A. Wind Uplift Forces: Resist the following forces per FM Approvals 1-49:
1. Wind Zone 1: 0.48 to 0.96 kPa (10 to 20 lbf/sq. ft.): 1.92-kPa (40-lbf/sq. ft.) perimeter uplift force, 2.87-kPa (60-lbf/sq. ft.) corner uplift force, and 0.96-kPa (20-lbf/sq. ft.) outward force.
 2. Wind Zone 1: 1.00 to 1.44 kPa (21 to 30 lbf/sq. ft.): 2.87-kPa (60-lbf/sq. ft.) perimeter uplift force, 4.31-kPa (90-lbf/sq. ft.) corner uplift force, and 1.44-kPa (30-lbf/sq. ft.) outward force.
 3. Wind Zone 2: 1.48 to 2.15 kPa (31 to 45 lbf/sq. ft.): 4.31-kPa (90-lbf/sq. ft.) perimeter uplift force, 5.74-kPa (120-lbf/sq. ft.) corner uplift force, and 2.15-kPa (45-lbf/sq. ft.) outward force.
 4. Wind Zone 3: 2.20 to 4.98 kPa (46 to 104 lbf/sq. ft.): 9.96-kPa (208-lbf/sq. ft.) perimeter uplift force, 14.94-kPa (312-lbf/sq. ft.) corner uplift force, and 4.98-kPa (104-lbf/sq. ft.) outward force.
- B. Wind Design Standard: Fabricate and install copings and roof-edge flashings tested per ANSI/SPRI/FM ES-1 to resist local standard governing design pressure.

1.5 SUBMITTALS

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Shop Drawings: For all specified items, including:
1. Flashings
 2. Gutter and Conductors2. Pre-finished snap-on copings

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

07 60 00-3

10/28/2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

07-01-14

- C. Manufacturer's Literature and Data: For all specified items, including:
 - 1. Two-piece counterflashing
 - 2. Thru wall flashing
 - 3. Coping
- D. Certificates: Indicating compliance with specified finishing requirements, from applicator and contractor.

PART 2 - PRODUCTS

2.1 FLASHING AND SHEET METAL MATERIALS

- A. Aluminum Sheet: ASTM B209, alloy 3003-H14

2.2 FLASHING ACCESSORIES

- A. Bituminous Paint: ASTM D1187, Type I.
- B. Fasteners:
 - 1. Nails:
 - a. Minimum diameter for aluminum nails 3 mm (0.105 inch).
 - 2. Expansion Shields: Fed Spec A-A-1925A.
- C. Sealant: As specified in Section 07 92 00, JOINT SEALANTS for exterior locations.

2.3 SHEET METAL THICKNESS

- A. Except as otherwise shown or specified use thickness or weight of sheet metal as follows:
 - 1. Thickness of aluminum or galvanized steel is specified with each item.

2.4 FABRICATION, GENERAL

- A. Expansion and Contraction Joints:
 - 1. Fabricate in accordance with the Architectural Sheet Metal Manual recommendations for expansion and contraction of sheet metal work in continuous runs.
 - 2. Space joints as shown or as specified.
 - 3. Space expansion and contraction joints for aluminum at intervals not exceeding 5400 mm (18 feet), except do not exceed 3000 mm (10 feet) for gravel stops and fascia-cant systems.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

07 60 00-4

10/28/2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

07-01-14

4. Fabricate slip-type or loose locked joints and fill with sealant unless otherwise specified.
5. Fabricate joint covers of same thickness material as sheet metal served.

B. Cleats:

1. Fabricate cleats to secure flashings and sheet metal work over 300 mm (12 inches) wide and where specified.
2. Provide cleats for maximum spacing of 300 mm (12 inch) centers unless specified otherwise.
3. Form cleats of same metal and weights or thickness as the sheet metal being installed unless specified otherwise.
4. Fabricate cleats from 50 mm (2 inch) wide strip. Form end with not less than 19 mm (3/4 inch) wide loose lock to item for anchorage. Form other end of length to receive nails free of item to be anchored and end edge to be folded over and cover nail heads.

C. Edge Strips or Continuous Cleats:

1. Fabricate continuous edge strips where shown and specified to secure loose edges of the sheet metal work.
2. Except as otherwise specified, fabricate edge strips or minimum 1.25 mm (0.050 inch) thick aluminum.
3. Use material compatible with sheet metal to be secured by the edge strip.
4. Fabricate in 3000 mm (10 feet) maximum lengths with not less than 19 mm (3/4 inch) loose lock into metal secured by edge strip.
5. Fabricate Strips for fascia anchorage to extend below the supporting wood construction to form a drip and to allow the flashing to be hooked over the lower edge at least 19 mm (3/4-inch).
6. Fabricate anchor edge maximum width of 75 mm (3 inches) or of sufficient width to provide adequate bearing area to ensure a rigid installation using 1.6 mm (0.0625 inch) thick aluminum.

D. Drips:

1. Form drips at lower edge of sheet metal counter-flashings (cap flashings), fascias, wall copings, by folding edge back 13 mm (1/2 inch) and bending out 45 degrees from vertical to carry water away from the wall.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

07 60 00-5

10/28/2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

07-01-14

2. Form drip to provide hook to engage cleat or edge strip for fastening for not less than 19 mm (3/4 inch) loose lock where shown.

E. Edges:

1. Edges of flashings concealed in masonry joints opposite drain side shall be turned up 6 mm (1/4 inch) to form dam, unless otherwise specified or shown otherwise.
2. Finish exposed edges of flashing with a 6 mm (1/4 inch) hem formed by folding edge of flashing back on itself when not hooked to edge strip or cleat. Use 6 mm (1/4 inch) minimum penetration beyond wall face with drip for through-wall flashing exposed edge.
3. All metal roof edges shall meet requirements of IBC, current edition.

F. Metal Options:

1. Where options are permitted for different metals use only one metal throughout.

2.5 FINISHES

- A. Use same finish on adjacent metal or components and exposed metal surfaces unless specified or shown otherwise.
- B. In accordance with NAAMM Metal Finishes Manual AMP 500, unless otherwise specified.
- C. Finish exposed metal surfaces as follows, unless specified otherwise:
 1. Aluminum:
 - a. Fluorocarbon Finish: AAMA 620, high performance organic coating.

2.6 THROUGH-WALL FLASHINGS

- A. Form through-wall flashing to provide a mechanical bond or key against lateral movement in all directions. Install a sheet having 2 mm (1/16 inch) deep transverse channels spaced four to every 25 mm (one inch), or ribbed diagonal pattern, or having other deformation unless specified otherwise.
 1. Fabricate in not less than 2400 mm (8 feet) lengths; 3000 mm (10 feet) maximum lengths.
 2. Fabricate so keying nests at overlaps.
- B. For Masonry Work When Concealed Except for Drip:
 1. Either copper, stainless steel, or copper clad stainless steel.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

07 60 00-6

10/28/2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

07-01-14

2. Form an integral dam at least 5 mm (3/16 inch) high at back edge.
 3. Form exposed portions of flashing with drip, approximately 6 mm (1/4 inch) projection beyond wall face.
- C. For Masonry Work When Exposed Edge Forms a Receiver for Counter Flashing:
1. Use same metal and thickness as counter flashing.
 2. Form an integral dam at least 5 mm (3/16 inch) high at back edge.
 3. Form exposed portion as snap lock receiver for counter flashing upper edge.
- D. Windowsill Flashing and Lintel Flashing:
1. Use either copper, stainless steel, copper clad stainless steel plane flat sheet, or nonreinforced elastomeric sheeting, bituminous coated copper, copper covered paper, or polyethylene coated copper.
 2. Fabricate flashing at ends with folded corners to turn up 5 mm (3/16 inch) in first vertical masonry joint beyond masonry opening.
 3. Turn up back edge as shown.
 4. Form exposed portion with drip as specified or receiver.

2.7 BASE FLASHING

- A. Fabricate roof flange not less than 100 mm (4 inches) wide unless shown otherwise. When base flashing length exceeds 2400 mm (8 feet) form flange edge with 13 mm (1/2 inch) hem to receive cleats.
- B. Form base flashing bent from strip except pipe flashing. Fabricate ends for riveted soldered lap seam joints. Fabricate expansion joint ends as specified.
- C. Pipe Flashing: (Other than engine exhaust or flue stack)
1. Fabricate roof flange not less than 100 mm (4 inches) beyond sleeve on all sides.
 2. Extend sleeve up and around pipe and flange out at bottom not less than 13 mm (1/2 inch) and solder to flange and sleeve seam to make watertight.
 3. At low pipes 200 mm (8 inch) to 450 mm (18 inch) above roof:
 - a. Form top of sleeve to turn down into the pipe at least 25 mm (one inch).
 - b. Allow for loose fit around and into the pipe.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

07 60 00-7

10/28/2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

07-01-14

4. At high pipes and pipes with goosenecks or other obstructions which would prevent turning the flashing down into the pipe:
 - a. Extend sleeve up not less than 300 mm (12 inch) above roofing.
 - b. Allow for loose fit around pipe.

2.8 COUNTERFLASHING (CAP FLASHING OR HOODS)

- A. Fabricate to lap base flashing a minimum of 100 mm (4 inches) with drip:
 1. Form lock seams for outside corners. Allow for lap joints at ends and inside corners.
 2. In general, form flashing in lengths not less than 2400 mm (8 feet) and not more than 3000 mm (10 feet).
 3. Two-piece, lock in type flashing may be used in-lieu-of one piece counter-flashing.
 4. Manufactured assemblies may be used.
 5. Where counterflashing is installed at new work use an integral flange at the top designed to be extended into the masonry joint or reglet in concrete.
 6. Where counterflashing is installed at existing work use surface applied type, formed to provide a space for the application of sealant at the top edge.
- B. One-piece Counterflashing:
 1. Back edge turned up and fabricate to lock into reglet in concrete.
 2. Upper edge formed to extend full depth of masonry unit in mortar joint with back edge turned up 6 mm (1/4 inch).
- C. Two-Piece Counterflashing:
 1. Receiver to extend into masonry wall depth of masonry unit with back edge turned up 6 mm (1/4 inch) and exposed edge designed to receive and lock counterflashing upper edge when inserted.
 2. Counterflashing upper edge designed to snap lock into receiver.
- D. Surface Mounted Counterflashing; one or two piece:
 1. Use at existing or new surfaces where flashing can not be inserted in vertical surface.
 2. One piece fabricate upper edge folded double for 65 mm (2 1/2 inches) with top 19 mm (3/4 inch) bent out to form "V" joint sealant pocket with vertical surface. Perforate flat double area against

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

07 60 00-8

10/28/2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

07-01-14

vertical surface with horizontally slotted fastener holes at 400 mm (16 inch) centers between end holes. Option: One piece surface mounted counterflashing (cap flashing) may be used. Fabricate as detailed on Plate 51 of SMACNA Architectural Sheet Metal Manual.

3. Two pieces: Fabricate upper edge to lock into surface mounted receiver. Fabricate receiver joint sealant pocket on upper edge and lower edge to receive counterflashing, with slotted fastener holes at 400 mm (16 inch) centers between upper and lower edge.

E. Pipe Counterflashing:

1. Form flashing for water-tight umbrella with upper portion against pipe to receive a draw band and upper edge to form a "V" joint sealant receiver approximately 19 mm (3/4 inch) deep.
2. Fabricate 100 mm (4 inch) overlap at end.
3. Fabricate draw band of same metal as counter flashing. Use 0.6 Kg (24 oz) copper or 0.33 mm (0.013 inch) thick stainless steel or copper coated stainless steel.
4. Use stainless steel bolt on draw band tightening assembly.
5. Vent pipe counter flashing may be fabricated to omit draw band and turn down 25 mm (one inch) inside vent pipe.

F. Where vented edge decks intersect vertical surfaces, form in one piece, shape to slope down to a point level with and in front of edge-set notched plank; then, down vertically, overlapping base flashing.

2.9 GRAVEL STOPS (NOT USED)

2.10 BITUMEN STOPS (NOT USED)

2.11 HANGING GUTTERS (NOT USED)

2.12 CONDUCTORS (DOWNSPOUTS)

A. Fabricate conductors of same metal and thickness as gutters in sections approximately 3000 mm (10 feet) long [with 19 mm (3/4 inch) wide flat locked seams].

1. Fabricate open face channel shape with hemmed longitudinal edges.

B. Fabricate elbows by mitering, riveting, and soldering except seal aluminum in lieu of solder. Lap upper section to the inside of the lower piece.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

07 60 00-9

10/28/2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

07-01-14

- C. Fabricate conductor brackets or hangers of same material as conductor, 2 mm (1/16 inch) thick by 25 mm (one inch) minimum width. Form to support conductors 25 mm (one inch) from wall surface in accordance with Architectural Sheet Metal Manual Plate 34, Design C for rectangular shapes and E for round shapes.
- D. Conductor Heads:
1. Fabricate of same material as conductor.
 2. Fabricate conductor heads to not less than 250 mm (10 inch) wide by 200 mm (8 inch) deep by 200 mm (8 inches) from front to back.
 3. Form front and side edges channel shape not less than 13 mm (1/2 inch) wide flanges with edge hemmed.
 4. Slope bottom to sleeve to conductor or downspout at not less than 60 degree angle.
 5. Extend wall edge not less than 25 mm (one inch) above front edge.
 6. Solder joints for water tight assembly.
 7. Fabricate outlet tube or sleeve at bottom not less than 50 mm (2 inches) long to insert into conductor.

2.13 SPLASHPANS

- A. Fabricate splashpans from the following:
1. 1.25 mm (0.050 inch) thick aluminum.
- B. Fabricate in accordance with Architectural Sheet Metal Manual Plate 35 with not less than two ribs as shown in alternate section.

2.14 REGLETS

- A. Fabricate reglets of one of the following materials:
1. Plastic coated extruded aluminum, not less than 1.4 mm (0.055 inch) thick prefilled with butyl rubber sealer and complete with plastic wedges inserted at 1000 mm (40 inches) on centers.
- B. Fill open-type reglets with fiberboard or other suitable separator, to prevent crushing of the slot during installation.
- C. Bend edges of reglets for setting into concrete to an angle of not less than 45 degrees, and make wide enough to provide firm anchorage in the concrete.

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

07-01-14

- D. Fabricate reglets for building into horizontal masonry mortar joints not less than 19 mm (3/4 inch) deep, nor more than 25 mm (one inch) deep.
- E. Fabricate mitered corners, fittings, and special shapes as may be required by details.
- F. Reglets for concrete may be formed to receive flashing and have a 10 mm (3/8 inch), 45 degree snap lock.

2.15 INSULATED EXPANSION JOINT COVERS (NOT USED)

2.16 ENGINE EXHAUST PIPE OR FLUE OR STACK FLASHING (NOT USED)

2.17 SCUPPERS (NOT USED)

2.18 GOOSENECK ROOF VENTILATORS (NOT USED)

PART 3 - EXECUTION

3.1 INSTALLATION

A. General:

1. Install flashing and sheet metal items as shown in Sheet Metal and Air Conditioning Contractors National Association, Inc., publication, ARCHITECTURAL SHEET METAL MANUAL, except as otherwise shown or specified.
2. Apply Sealant as specified in Section 07 92 00, JOINT SEALANTS.
3. Apply sheet metal and other flashing material to surfaces which are smooth, sound, clean, dry and free from defects that might affect the application.
4. Remove projections which would puncture the materials and fill holes and depressions with material compatible with the substrate. Cover holes or cracks in wood wider than 6 mm (1/4 inch) with sheet metal compatible with the roofing and flashing material used.
5. Coordinate with masonry work for the application of a skim coat of mortar to surfaces of unit masonry to receive flashing material before the application of flashing.
6. Confine direct nailing of sheet metal to strips 300 mm (12 inch) or less wide. Nail flashing along one edge only. Space nail not over 100 mm (4 inches) on center unless specified otherwise.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

07 60 00-11

10/28/2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

07-01-14

7. Install bolts, rivets, and screws where indicated, specified, or required in accordance with the SMACNA Sheet Metal Manual. Space rivets at 75 mm (3 inch) on centers in two rows in a staggered position. Use neoprene washers under fastener heads when fastener head is exposed.
8. Coordinate with roofing work for the installation of metal base flashings and other metal items having roof flanges for anchorage and watertight installation.
9. Nail continuous cleats on 75 mm (3 inch) on centers in two rows in a staggered position.
10. Nail individual cleats with two nails and bend end tab over nail heads. Lock other end of cleat into hemmed edge.
11. Install flashings in conjunction with other trades so that flashings are inserted in other materials and joined together to provide a watertight installation.
12. Where required to prevent galvanic action between dissimilar metal isolate the contact areas of dissimilar metal with sheet lead, waterproof building paper, or a coat of bituminous paint.
13. Isolate aluminum in contact with dissimilar metals others than stainless steel, white bronze or other metal compatible with aluminum by:
 - a. Paint dissimilar metal with a prime coat of zinc-chromate or other suitable primer, followed by two coats of aluminum paint.
 - b. Paint dissimilar metal with a coat of bituminous paint.
 - c. Apply an approved caulking material between aluminum and dissimilar metal.
14. Paint aluminum in contact with or built into mortar, concrete, plaster, or other masonry materials with a coat of bituminous paint.
15. Paint aluminum in contact with absorptive materials that may become repeatedly wet with two coats of bituminous paint or two coats of aluminum paint.

3.2 THROUGH-WALL FLASHING

A. General:

1. Install continuous through-wall flashing under concrete or stone copings and elsewhere as shown.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

07 60 00-12

10/28/2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

07-01-14

2. Where exposed portions are used as a counterflashings, lap base flashings at least 100 mm (4 inches) and use thickness of metal as specified for exposed locations.
 3. Exposed edge of flashing may be formed as a receiver for two-piece counter flashing as specified.
 4. Terminate exterior edge beyond face of wall approximately 6 mm (1/4 inch) with drip edge where not part of counter flashing.
 5. Turn back edge up 6 mm (1/4 inch) unless noted otherwise where flashing terminates in mortar joint or hollow masonry unit joint.
 6. Terminate interior raised edge in masonry backup unit approximately 38 mm (1 1/2 inch) into unit unless shown otherwise.
 7. Under copings terminate both edges beyond face of wall approximately 6 mm (1/4 inch) with drip edge.
 8. Lap end joints at least two corrugations, but not less than 100 mm (4 inches). Seal laps with sealant.
 9. Where dowels, reinforcing bars and fastening devices penetrate flashing, seal penetration with sealing compound. Sealing compound is specified in Section 07 92 00, JOINT SEALANTS.
 10. Coordinate with other work to set in a bed of mortar above and below flashing so that total thickness of the two layers of mortar and flashing are same as regular mortar joint.
 11. Where ends of flashing terminate turn ends up 25 mm (1 inch) and fold corners to form dam extending to wall face in vertical mortar or veneer joint.
 12. Turn flashing up not less than 200 mm (8 inch) between masonry or behind exterior veneer.
 13. When flashing terminates in reglet extend flashing full depth into reglet and secure with lead or plastic wedges spaced 150 mm (6 inch) on center.
- B. Flashing at Cavity Wall Construction: Where flashing occurs in cavity walls turn vertical portion up against backup under waterproofing, if any, into mortar joint. Turn up over insulation, if any, and horizontally through insulation into mortar joint.
- C. Lintel Flashing when not part of shelf angle flashing:

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

07 60 00-13

10/28/2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

07-01-14

1. Install flashing full length of lintel to nearest vertical joint in masonry over veneer.
 2. Turn ends up 25 mm (one inch) and fold corners to form dam and extend end to face of wall.
 3. Turn back edge up to top of lintel; terminate back edge as specified for back-up wall.
- D. Flashing at Masonry, Stone, or Precast Concrete Copings:
1. Install flashing with drips on both wall faces unless shown otherwise.
 2. Form penetration openings to fit tight against dowel or other item with edge turned up. Seal penetrations with sealant.

3.3 BASE FLASHING (NOT USED)

3.4 COUNTERFLASHING (CAP FLASHING OR HOODS)

A. General:

1. Install counterflashing over and in conjunction with installation of base flashings, except as otherwise specified or shown.
2. Install counterflashing to lap base flashings not less than 100 mm (4 inch).
3. Install upper edge or top of counterflashing not less than 225 mm (9 inch) above top of the roofing.
4. Lap joints not less than 100 mm (4 inch). Stagger joints with relation to metal base flashing joints.
5. Use surface applied counterflashing on existing surfaces and new work where not possible to integrate into item.
6. When fastening to concrete or masonry, use screws driven in expansion shields set in concrete or masonry. Use screws to wood and sheet metal. Set fasteners in mortar joints of masonry work.

B. One Piece Counterflashing:

1. Where flashing is installed at new masonry, coordinate to ensure proper height, embed in mortar, and end lap.
2. Where flashing is installed in reglet in concrete insert upper edge into reglet. Hold flashing in place with lead wedges spaced not more than 200 mm (8 inch) apart. Fill joint with sealant.
3. Where flashing is surface mounted on flat surfaces.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

07 60 00-14

10/28/2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

07-01-14

- a. When top edge is double folded anchor flat portion below sealant "V" joint with fasteners spaced not over 400 mm (16 inch) on center:
 - 1) Locate fasteners in masonry mortar joints.
 - 2) Use screws to sheet metal or wood.
- b. Fill joint at top with sealant.
- 4. Where flashing or hood is mounted on pipe.
 - a. Secure with draw band tight against pipe.
 - b. Set hood and secure to pipe with a one by 25 mm x 3 mm (1 x 1/8 inch) bolt on stainless steel draw band type clamp, or a stainless worm gear type clamp.
 - c. Completely fill joint at top with sealant.
- C. Two-Piece Counterflashing:
 - 1. Where receiver is installed at new masonry coordinate to ensure proper height, embed in mortar, and lap.
 - 2. Surface applied type receiver:
 - a. Secure to face construction in accordance, with manufacturer's instructions.
 - b. Completely fill space at the top edge of receiver with sealant.
 - 3. Insert counter flashing in receiver in accordance with fabricator or manufacturer's instructions and to fit tight against base flashing.
- D. Where vented edge occur install so lower edge of counterflashing is against base flashing.
- E. When counter flashing is a component of other flashing install as shown.

3.5 REGLETS

- A. Install reglets in a manner to provide a watertight installation.
- B. Locate reglets not less than 225 mm (9 inch) nor more than 400 mm (16 inch) above roofing, and not less than 125 mm (5 inch) nor more than 325 mm (13 inch) above cant strip.
- C. Butt and align end joints or each section of reglet and securely hold in position until concrete or mortar are hardened:
 - 1. Coordinate reglets for anchorage into concrete with formwork construction.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

07 60 00-15

10/28/2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

07-01-14

2. Coordinate reglets for masonry to locate horizontally into mortar joints.

3.6 GRAVEL STOPS (NOT USED)

3.7 COPINGS

A. General:

1. On walls topped with a wood plank, install a continuous edge strip on the front and rear edge of the plank. Lock the coping to the edge strip with a 19 mm (3/4 inch) loose lock seam.
2. Where shown turn down roof side of coping and extend down over base flashing as specified for counter-flashing. Secure counter-flashing to lock strip in coping at continuous cleat.
3. Install ends adjoining existing construction so as to form space for installation of sealants. Sealant is specified in Section 07 92 00, JOINT SEALANTS.

B. Aluminum Coping:

1. Install with 6 mm (1/4 inch) joint between ends of coping sections.
2. Install joint covers, centered at each joint, and securely lock in place.

3.8 EXPANSION JOINT COVERS, INSULATED (NOT USED)

3.9 ENGINE EXHAUST PIPE OR STACK FLASHING (NOT USED)

3.10 HANGING GUTTERS (NOT USED)

3.11 CONDUCTORS (DOWNSPOUTS)

- A. Where scuppers discharge into downspouts install conductor head to receive discharge with back edge up behind drip edge of scupper. Fasten and seal joint. Sleeve conductors to gutter outlet tubes and fasten joint and joints between sections.
- B. Set conductors plumb and clear of wall, and anchor to wall with two anchor straps, located near top and bottom of each section of conductor. Strap at top shall be fixed to downspout, intermediate straps and strap at bottom shall be slotted to allow not less than 13 mm (1/2 inch) movement for each 3000 mm (10 feet) of downspout.

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

07-01-14

- C. Install elbows, offsets and shoes where shown and required. Slope not less than 45 degrees.

3.12 SPLASH PANS

- A. Install where downspouts discharge on low slope roofs unless shown otherwise.
- B. Set in roof cement prior to pour coat installation or sealant compatible with single ply roofing membrane.

3.13 GOOSENECK ROOF VENTILATORS (NOT USED)

- - - E N D - - -

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

01-01-21

SECTION 07 71 00

ROOF SPECIALTIES

PART 1 - GENERAL

1.1 DESCRIPTION

A. This section specifies copings.

1.2 RELATED WORK

A. Section 01 81 13, SUSTAINABLE CONSTRUCTION REQUIREMENTS: Sustainable Design Requirements.

B. Section 07 21 13, THERMAL INSULATION: General Insulation.

C. Section 07 22 00, ROOF AND DECK INSULATION: Rigid Insulations for Roofing.

D. Section 07 92 00, JOINT SEALANTS: Sealant Material and Installation.

1.3 QUALITY CONTROL

A. Provide roof accessories that products of manufacturers regularly engaged in producing the kinds of products specified.

B. For each accessory type provide products made by the same manufacturer.

C. Assemble each accessory to the greatest extent possible before delivery to the site.

D. Provide each accessory with FM approval listing for class specified.

1.4 PERFORMANCE REQUIREMENTS

A. Provide roof accessories that withstand exposure to weather and resist thermal movement without failure, rattling, leaking, or fastener disengagement due to defective manufacture, fabrication, or installation.

B. Provide roof accessories listed in FM Approvals "RoofNav" and approved for the windstorm classification based on locally established design standard. Identify materials with FM Approval markings.

C. Manufacture and install copings to allow for thermal movements from ambient and surface temperature changes to prevent buckling, opening of joints, hole elongation, overstressing of components, failure of joint sealants, failure of connections, and other detrimental effects.

1. Provide clips that resist rotation and avoid shear stress as a result of thermal movements.

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

01-01-21

2. For design purposes, base provisions for thermal movement on assumed ambient temperature (range) from minus 18 degrees C (0 degrees F), ambient to 82 degrees C (180 degrees F).

1.5 SUBMITTALS

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Sustainable Design Submittals, as described below:
 - 1. Postconsumer and pre-consumer recycled content as specified in PART 2 - PRODUCTS.
- C. Samples: Representative sample panel of color-anodized aluminum not less than 101 x 101 mm (4 x 4 inches), except extrusions are to be of a width not less than section to be used. Submit sample that shows coating with integral color and texture. Include manufacturer's identifying label.
- D. Shop Drawings: Each item specified showing design, details of construction, installation and fastenings.
- E. Manufacturer's Literature and Data: Each item specified.
- F. Certificates: Stating that aluminum has been given specified thickness of anodizing.

1.6 APPLICABLE PUBLICATIONS:

- A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only.
- B. ASTM International (ASTM):
 - A240/A240M-20.....Chromium and Chromium-Nickel Stainless Steel Plate, Sheet, and Strip for Pressure Vessels and for General Applications
 - A653/A653M-20.....Steel Sheet Zinc-Coated (Galvanized) or Zinc-Iron Alloy Coated (Galvannealed) by the Hot Dip Process
 - A666-15.....Annealed or Cold-Worked Austenitic Stainless Steel Sheet, Strip, Plate, and Flat Bar
 - B209-14.....Aluminum and Aluminum Alloy-Sheet and Plate
 - B209M-14.....Aluminum and Aluminum Alloy-Sheet and Plate (Metric)

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

01-01-21

- B221-14.....Aluminum-Alloy Extruded Bars, Rods, Wire,
Shapes, and Tubes
- B221M-13.....Aluminum-Alloy Extruded Bars, Rods, Wire,
Shapes, and Tubes (Metric)
- B32-08 (2014).....Solder Metal
- B370-12 (2019).....Copper Sheet and Strip for Building
Construction
- B882-10 (2018).....Pre-Patinated Copper for Architectural
Applications
- C612-14 (2019).....Mineral Fiber Block and Board Thermal
Insulation
- D1187/D1187M-97 (2018)...Asphalt-Base Emulsions for Use as Protective
Coatings for Metal
- D1970/D1970M-20.....Self-Adhering Polymer Modified Bituminous Sheet
Materials Used as Steep Roofing Underlayment
for Ice Dam Protection
- D226/D226M-17.....Asphalt-Saturated Organic Felt Used in Roofing
and Waterproofing
- D4869/D4969M-16a.....Asphalt-Saturated Organic Felt Underlayment
Used In Steep Slope Roofing
- C. National Association of Architectural Metal Manufacturers (NAAMM):
AMP 500-06.....Metal Finishes Manual
- D. American Architectural Manufacturers Association (AAMA):
2605-11.....High Performance Organic Coatings on
Architectural Extrusions and Panels.
611-14.....Anodized Architectural Aluminum
- E. FM Global (FM):
RoofNav.....Approved Roofing Assemblies and Products

PART 2 - PRODUCTS

2.1 MATERIALS

- A. Aluminum Sheet: ASTM B209M (B209).
- B. Recycled Content of Metal Products: Postconsumer recycled content plus one-half of preconsumer recycled content not less than 30 percent.

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

01-01-21

2.2 UNDERLAYMENT (NOT USED)

2.3 SOLDER (NOT USED)

2.4 COPINGS

- A. Fabricate of aluminum sheet not less than 3.2 mm (0.125/ inch) thick.
- B. Turn outer edges down each face of wall as shown on construction documents.
- C. Maximum lengths of 3.05 M (10 feet).
- D. Shop fabricate external and internal corners as one-piece assemblies with not less than 305 mm (12 inch) leg lengths.
- E. Provide 101 mm (4 inch) wide 0.81 mm (0.032 inch) thick watertight joint covers.
- F. Provide anchor gutter bar of 0.81 mm (0.032 inch) thick with anchor holes formed for underside of joint.
- G. Provide concealed guttered splice plate of 0.81 mm (0.032 inch) thick with butyl or other resilient seal strips anchored to splice plate for underside of joint. Use galvanized steel anchor plate providing compression spring anchoring of coping cover.
- H. Finish: Two-coat fluoropolymer, Color: Dark Bronze to match Station standard.

2.5 EXTRUDED ALUMINUM GRAVEL STOPS AND FASCIAS (NOT USED)

2.6 EXTRUDED ALUMINUM FASCIA-CANT SYSTEM (NOT USED)

2.7 EXTRUDED ALUMINUM ROOF EXPANSION JOINT COVERS (NOT USED)

2.8 FINISH:

- A. In accordance with NAAMM AMP 500-505.
- B. Fluoropolymer Finishes: High performance organic coating. Prepare, pretreat, and apply coating to exposed metal surfaces to comply with coating and resin manufacturers' written instructions.
 - 1. Two-Coat Fluoropolymer: AAMA 2605. Fluoropolymer finish containing not less than 70 percent PVDF resin by weight in color coat.

PART 3 - EXECUTION

3.1 INSTALLATION

- A. Examine substrates, areas, and conditions, to verify actual locations, dimensions, and other conditions affecting performance of the Work.
- B. Verify that substrate is sound, dry, smooth, clean, sloped for drainage where applicable, and securely anchored.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

01-01-21

- C. Install roof accessories where indicated in construction documents.
- D. Secure with fasteners in accordance with manufacture's printed installation instructions and approved shop drawings unless shown otherwise. Provide fasteners suitable for application, for metal types being secured and designed to meet performance requirements.
- E. Coordinate to install insulation where shown; see Section 07 21 13, THERMAL INSULATION and Section 07 22 00, ROOF AND DECK INSULATION.
- F. Comply with section 07 92 00, JOINT SEALANTS to install sealants where required by manufacturer's installation instructions.
- G. Coordinate with roofing work for installation of items in sequence to prevent water infiltration.
- H. Aluminum Coping:
 - 1. Install sections of coping with approximately 6 mm (1/4-inch) space between ends of sections.
 - 2. Center joint gutter bar and covers at joints and lock in place.
 - 3. When snap-on system is installed ensure front and back edges are locked in place.

3.2 PROTECTION OF ALUMINUM

- A. Provide protection for aluminum against galvanic action wherever dissimilar materials are in contact, by painting the contact surfaces of the dissimilar material with two (2) coats of asphalt coating (complete coverage), or by separating the contact surfaces with a preformed neoprene tape having pressure sensitive adhesive coating on one (1) side.
- B. Paint aluminum in contact with wood, concrete and masonry, or other absorptive materials, that may become repeatedly wet, with two (2) coats of asphalt coating.

3.3 ADJUSTING

- A. Adjust expansion joints to close tightly and be watertight; insuring maximum allowance for building movement.

3.4 PROTECTION

- A. Protect roof accessories from damage during installation and after completion of the work from subsequent construction.

- - - E N D - - -

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

10-01-15

SECTION 07 72 00
ROOF ACCESSORIES

PART 1 - GENERAL

1.1 DESCRIPTION:

A. This section specifies gravity ventilators.

1.2 RELATED WORK:

- A. Sustainable Design Requirements: Section 01 81 13, SUSTAINABLE CONSTRUCTION REQUIREMENTS.
- B. Color and texture of finish: Station standard Dark Bronze.
- C. Sealant material and installation: Section 07 92 00, JOINT SEALANTS.
- D. General insulation: Section 07 21 13, THERMAL INSULATION.
- E. Rigid insulations for roofing: Section 07 22 00, ROOF AND DECK INSULATION

1.3 QUALITY ASSURANCE:

- A. Provide roof accessories that are the products of manufacturers regularly engaged in producing the kinds of products specified.
- B. For each accessory type provide the same product made by the same manufacturer.
- C. Assemble each accessory to the greatest extent possible before delivery to the site.

1.4 SUBMITTALS:

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Sustainable Design Submittals, as described below:
 - 1. Postconsumer and preconsumer recycled content as specified in PART 2 - PRODUCTS.
- C. Samples: Submit representative sample panel of color anodized aluminum not less than 101 x 101 mm (4 x 4 inches). For extrusions, submit width not less than section to be installed. Show coating with integral color and texture and include manufacturer's identifying label.
- D. Shop Drawings: Each item specified showing design, details of construction, installation and fastenings.
- E. Manufacturer's Literature and Data: Each item specified.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

07 72 00-1

10/28/2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

10-01-15

F. Certificates: Stating that aluminum has been given specified thickness of anodizing.

1.5 APPLICABLE PUBLICATIONS:

A. The publications listed below form a part of this specification to the extend referenced. The publications are referenced in the text by the basic designation only.

B. Federal Specifications (Fed. Spec.):

RR-G-1602D.....Grating, Metal, Other Than Bar Type (Floor,
Except for Naval Vessels)

C. ASTM International (ASTM):

A653/A653M-10.....Steel Sheet, Zinc-Coated (Galvanized) or Zinc-
Iron Alloy-Coated (Galvannealed) By the Hot-Dip
Process

B209-14.....Aluminum and Aluminum Alloy-Sheet and Plate

B209M-14.....Aluminum and Aluminum-Alloy Sheet and Plate
(Metric)

B221-14.....Aluminum-Alloy Extruded Bars, Rods, Wire,
Shapes, and Tubes

B221M-13.....Aluminum and Aluminum-Alloy Extruded Bars,
Rods, Wire, Shapes, and Tubes (Metric)

C726-12.....Mineral Wool Roof Insulation Board

C1289-14a.....Faced Rigid Cellular Polyisocyanurate Thermal
Insulation Board

D1187/D1187M-97 (R2011)..Asphalt-Base Emulsions for Use as Protective
Coatings for Metal

D. National Association of Architectural Metal Manufacturers (NAAMM):

AMP 500 Series.....Metal Finishes Manual

E. American Architectural Manufacturers Association (AAMA):

2603-13.....Performance Requirements and Test Procedures
for Pigmented Organic Coatings on Aluminum
Extrusions and Panels

2605-13.....High Performance Organic Coatings on
Architectural Extrusions and Panels.

611-14.....Anodized Architectural Aluminum

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

07 72 00-2

10/28/2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

10-01-15

621-02.....High Performance Organic Coatings on Coil
Coated Architectural Hot Dipped Galvanized
(HDG) and Zinc-Aluminum Coated Steel Substrates

F. American Society of Civil Engineers (ASCE):

ASCE 7-10.....Minimum Design Loads for Buildings and Other
Structures

G. U.S. National Archives and Records Administration (NARA):

29 CFR 1910.23.....Guarding Floor and Wall Openings and Holes

PART 2 - PRODUCTS

2.1 MATERIALS:

A. Aluminum, Extruded: ASTM B221M (B221).

B. Aluminum Sheet: ASTM B209M (B209).

2.2 ROOF HATCH (SCUTTLE) (NOT USED)

2.3 EQUIPMENT SUPPORTS (NOT USED)

2.4 LOW SILHOUETTE GRAVITY VENTILATORS:

A. Fabricate base of 1 mm (0.04 inch) thick aluminum, and vent of 0.8 mm (0.032 inch) thick aluminum.

1. Height not to exceed 305 mm (12 inches) above top of roof curb.

2. Design ventilators to withstand 137 Km (85 miles) per hour wind velocity.

3. Provide ventilators with a removable 18 by 18 mesh by 0.28 mm (0.11 inch) diameter aluminum wire cloth insect screen.

4. Provide security grille where indicated on construction documents.

B. Construct damper of the same material as the ventilator and design to completely close opening or remain wide open. Hold damper in closed position by a brass chain and catch. Extend chains 305 mm (12 inches) below and engage catch when damper is closed.

C. Finish: Station standard Dark Bronze.

2.5 METAL GRATING ROOF WALKWAY SYSTEM (NOT USED)

2.6 FINISH:

A. In accordance with NAAMM AMP 500 Series.

B. Fluoropolymer Finish: High performance organic coating. Prepare, pretreat, and apply coating to exposed metal surfaces to comply with coating and resin manufacturer's written instructions.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

07 72 00-3

10/28/2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

10-01-15

1. Two-Coat Fluoropolymer Finish: AAMA 2605. System consisting of primer and fluoropolymer color topcoat containing not less than 70 percent PVDF resin by weight.

PART 3 - EXECUTION

3.1 INSTALLATION:

- A. Install roof specialties where indicated on construction documents.
- B. Secure with fasteners in accordance with manufacture's printed installation instructions and approved shop drawings unless shown otherwise.
- C. Coordinate to install insulation where shown; see Section 07 21 13, THERMAL INSULATION and Section 07 22 00, ROOF AND DECK INSULATION.
- D. Comply with section 07 92 00, JOINT SEALANTS to install sealants where required by manufactures installation instructions require sealant.
- E. Coordinate with roofing work for installation of items in sequence to prevent water infiltration.
 1. After completion of base flashing bend down cap flashing flange and secure to blocking with screws.
 2. Install expansion joint cover with 6 mm (1/4 inch) wide space at end joints and tension bars at 610 mm (24 inches) on center.
 3. Install cover plates with formed aluminum flashing concealed and centered on joint. Flashing to lap cover not less than 101 mm (4 inches).
- F. Equipment Supports: Do not anchor to insulating concrete or metal deck. Anchor only to building structure as per manufacturers recommendations.

3.2 PROTECTION OF ALUMINUM:

- A. Provide protection for aluminum against galvanic action wherever dissimilar materials are in contact, by painting the contact surfaces of the dissimilar material with two (2) coats of asphalt coating (complete coverage), or by separating the contact surfaces with a preformed neoprene tape having pressure sensitive adhesive coating on side.
- B. Paint aluminum in contact with wood, concrete and masonry, or other absorptive materials, that may become repeatedly wet, with two coats of asphalt coating.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

07 72 00-4

10/28/2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

10-01-15

3.3 ADJUSTING:

- A. Adjust roof hatch hardware to operate freely and so that cover will operate without binding, close tightly at perimeter, and latch securely.

3.4 PROTECTION:

- A. Protect roof accessories from damage during installation and after completion of the work from subsequent construction.

- - - E N D - - -

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

02-01-16

SECTION 07 84 00
FIRESTOPPING

PART 1 - GENERAL

1.1 DESCRIPTION:

- A. Provide UL or equivalent approved firestopping system for the closures of openings in walls, floors, and roof decks against penetration of flame, heat, and smoke or gases in fire resistant rated construction.
- B. Provide UL or equivalent approved firestopping system for the closure of openings in walls against penetration of gases or smoke in smoke partitions.

1.2 RELATED WORK:

- A. Sustainable Design Requirements: Section 01 81 13, SUSTAINABLE CONSTRUCTION REQUIREMENTS.
- B. Expansion and seismic joint firestopping: Section 07 95 13, EXPANSION JOINT COVER ASSEMBLIES.
- C. Spray applied fireproofing: Section 07 81 00, APPLIED FIREPROOFING
- D. Sealants and application: Section 07 92 00, JOINT SEALANTS.
- E. Fire and smoke damper assemblies in ductwork: Section 23 31 00, HVAC DUCTS AND CASINGS and Section 23 37 00, AIR OUTLETS AND INLETS.

1.3 SUBMITTALS:

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Sustainable Design Submittals, as described below:
 - 1. Volatile organic compounds per volume as specified in PART 2 - PRODUCTS.
- C. Installer qualifications.
- D. Inspector qualifications.
- E. Manufacturers literature, data, and installation instructions for types of firestopping and smoke stopping used.
- F. List of FM, UL, or WH classification number of systems installed.
- G. Certified laboratory test reports for ASTM E814 tests for systems not listed by FM, UL, or WH proposed for use.
- H. Submit certificates from manufacturer attesting that firestopping materials comply with the specified requirements.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

07 84 00-1

10/28/2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

02-01-16

1.4 DELIVERY AND STORAGE:

- A. Deliver materials in their original unopened containers with manufacturer's name and product identification.
- B. Store in a location providing protection from damage and exposure to the elements.

1.5 QUALITY ASSURANCE:

- A. FM, UL, or WH or other approved laboratory tested products will be acceptable.
- B. Installer Qualifications: A firm that has been approved by FM Global according to FM Global 4991 or been evaluated by UL and found to comply with UL's "Qualified Firestop Contractor Program Requirements." Submit qualification data.
- C. Inspector Qualifications: Contractor to engage a qualified inspector to perform inspections and final reports. The inspector to meet the criteria contained in ASTM E699 for agencies involved in quality assurance and to have a minimum of two years' experience in construction field inspections of firestopping systems, products, and assemblies. The inspector to be completely independent of, and divested from, the Contractor, the installer, the manufacturer, and the supplier of material or item being inspected. Submit inspector qualifications.

1.6 APPLICABLE PUBLICATIONS

- A. Publications listed below form a part of this specification to the extent referenced. Publications are referenced in the text by the basic designation only.
- B. ASTM International (ASTM):
 - E84-14.....Surface Burning Characteristics of Building Materials
 - E699-09.....Standard Practice for Evaluation of Agencies Involved in Testing, Quality Assurance, and Evaluating of Building Components
 - E814-13a.....Fire Tests of Through-Penetration Fire Stops
 - E2174-14.....Standard Practice for On-Site Inspection of Installed Firestops

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

02-01-16

E2393-10a.....Standard Practice for On-Site Inspection of
Installed Fire Resistive Joint Systems and
Perimeter Fire Barriers

C. FM Global (FM):

Annual Issue Approval Guide Building Materials

4991-13.....Approval of Firestop Contractors

D. Underwriters Laboratories, Inc. (UL):

Annual Issue Building Materials Directory

Annual Issue Fire Resistance Directory

723-10(2008).....Standard for Test for Surface Burning
Characteristics of Building Materials

1479-04(R2014).....Fire Tests of Through-Penetration Firestops

E. Intertek Testing Services - Warnock Hersey (ITS-WH):

Annual Issue Certification Listings

F. Environmental Protection Agency (EPA):

40 CFR 59(2014).....National Volatile Organic Compound Emission
Standards for Consumer and Commercial Products

PART 2 - PRODUCTS

2.1 FIRESTOP SYSTEMS:

- A. Provide either factory built (Firestop Devices) or field erected (through-Penetration Firestop Systems) to form a specific building system maintaining required integrity of the fire barrier and stop the passage of gases or smoke. Firestop systems to accommodate building movements without impairing their integrity.
- B. Through-penetration firestop systems and firestop devices tested in accordance with ASTM E814 or UL 1479 using the "F" or "T" rating to maintain the same rating and integrity as the fire barrier being sealed. "T" ratings are not required for penetrations smaller than or equal to 101 mm (4 in.) nominal pipe or 0.01 sq. m (16 sq. in.) in overall cross sectional area.
- C. Firestop sealants used for firestopping or smoke sealing to have the following properties:
 - 1. Contain no flammable or toxic solvents.
 - 2. Release no dangerous or flammable out gassing during the drying or curing of products.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

07 84 00-3

10/28/2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

02-01-16

3. Water-resistant after drying or curing and unaffected by high humidity, condensation or transient water exposure.
 4. When installed in exposed areas, capable of being sanded and finished with similar surface treatments as used on the surrounding wall or floor surface.
 5. VOC Content: Firestopping sealants and sealant primers to comply with the following limits for VOC content when calculated according to 40 CFR 59, (EPA Method 24):
 - a. Sealants: 250 g/L.
 - b. Sealant Primers for Nonporous Substrates: 250 g/L.
 - c. Sealant Primers for Porous Substrates: 775 g/L.
 6. Color: Red (No exceptions.)
- D. Firestopping system or devices used for penetrations by glass pipe, plastic pipe or conduits, unenclosed cables, or other non-metallic materials to have following properties:
1. Classified for use with the particular type of penetrating material used.
 2. Penetrations containing loose electrical cables, computer data cables, and communications cables protected using firestopping systems that allow unrestricted cable changes without damage to the seal.
- E. Maximum flame spread of 25 and smoke development of 50 when tested in accordance with ASTM E84 or UL 723. Material to be an approved firestopping material as listed in UL Fire Resistance Directory or by a nationally recognized testing laboratory.
- F. FM, UL, or WH rated or tested by an approved laboratory in accordance with ASTM E814.
- G. Materials to be nontoxic and noncarcinogen at all stages of application or during fire conditions and to not contain hazardous chemicals. Provide firestop material that is free from Ethylene Glycol, PCB, MEK, and asbestos.
- H. For firestopping exposed to view, traffic, moisture, and physical damage, provide products that do not deteriorate when exposed to these conditions.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

07 84 00-4

10/28/2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

02-01-16

1. For piping penetrations for plumbing and wet-pipe sprinkler systems, provide moisture-resistant through-penetration firestop systems.
2. For floor penetrations with annular spaces exceeding 101 mm (4 in.) or more in width and exposed to possible loading and traffic, provide firestop systems capable of supporting the floor loads involved either by installing floor plates or by other means acceptable to the firestop manufacturer.
3. For penetrations involving insulated piping, provide through-penetration firestop systems not requiring removal of insulation.

2.2 SMOKE STOPPING IN SMOKE PARTITIONS:

- A. Provide silicone sealant in smoke partitions as specified in Section 07 92 00, JOINT SEALANTS.
- B. Provide mineral fiber filler and bond breaker behind sealant.
- C. Sealants to have a maximum flame spread of 25 and smoke developed of 50 when tested in accordance with ASTM E84.
- D. When used in exposed areas capable of being sanded and finished with similar surface treatments as used on the surrounding wall or floor surface.

PART 3 - EXECUTION

3.1 EXAMINATION:

- A. Submit product data and installation instructions, as required by article, submittals, after an on-site examination of areas to receive firestopping.
- B. Examine substrates and conditions with installer present for compliance with requirements for opening configuration, penetrating items, substrates, and other conditions affecting performance of firestopping. Do not proceed with installation until unsatisfactory conditions have been corrected.

3.2 PREPARATION:

- A. Remove dirt, grease, oil, laitance and form-release agents from concrete, loose materials, or other substances that prevent adherence and bonding or application of the firestopping or smoke stopping materials.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

07 84 00-5

10/28/2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

02-01-16

- B. Remove insulation on insulated pipe for a distance of 150 mm (6 inches) on each side of the fire rated assembly prior to applying the firestopping materials unless the firestopping materials are tested and approved for use on insulated pipes.
- C. Prime substrates where required by joint firestopping system manufacturer using that manufacturer's recommended products and methods. Confine primers to areas of bond; do not allow spillage and migration onto exposed surfaces.
- D. Masking Tape: Apply masking tape to prevent firestopping from contacting adjoining surfaces that will remain exposed upon completion of work and that would otherwise be permanently stained or damaged by such contact or by cleaning methods used to remove smears from firestopping materials. Remove tape as soon as it is possible to do so without disturbing seal of firestopping with substrates.

3.3 INSTALLATION:

- A. Do not begin firestopping work until the specified material data and installation instructions of the proposed firestopping systems have been submitted and approved.
- B. Install firestopping systems with smoke stopping in accordance with FM, UL, WH, or other approved system details and installation instructions.
- C. Install smoke stopping seals in smoke partitions.
- D. Contractor shall provide for certified third-party fire proofing and caulking inspections. The inspectors shall use a 25% sampling method with a 10% retest requirement until all samples pass.

3.4 CLEAN-UP:

- A. As work on each floor is completed, remove materials, litter, and debris.
- B. Clean up spills of liquid type materials.
- C. Clean off excess fill materials and sealants adjacent to openings and joints as work progresses by methods and with cleaning materials approved by manufacturers of firestopping products and of products in which opening and joints occur.
- D. Protect firestopping during and after curing period from contact with contaminating substances or from damage resulting from construction operations or other causes so that they are without deterioration or

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

07 84 00-6

10/28/2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

02-01-16

damage at time of Substantial Completion. If, despite such protection, damage or deterioration occurs, cut out and remove damaged or deteriorated firestopping immediately and install new materials to provide firestopping complying with specified requirements.

3.5 INSPECTIONS AND ACCEPTANCE OF WORK:

- A. Do not conceal or enclose firestop assemblies until inspection is complete and approved by the Contracting Officer Representative (COR).
- B. Furnish service of approved inspector to inspect firestopping in accordance with ASTM E2393 and ASTM E2174 for firestop inspection, and document inspection results. Submit written reports indicating locations of and types of penetrations and type of firestopping used at each location; type is to be recorded by UL listed printed numbers.

- - - E N D - - -

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

10-01-17

SECTION 07 92 00
JOINT SEALANTS

PART 1 - GENERAL

1.1 DESCRIPTION:

- A. This section covers interior and exterior sealant and their application, wherever required for complete installation of building materials or systems.

1.2 RELATED WORK (INCLUDING BUT NOT LIMITED TO THE FOLLOWING):

- A. Sustainable Design Requirements: Section 01 81 13, SUSTAINABLE CONSTRUCTION REQUIREMENTS.
- B. Masonry Control and Expansion Joint: Section 04 20 00, UNIT MASONRY.
- C. Firestopping Penetrations: Section 07 84 00, FIRESTOPPING.
- D. Sound Rated Gypsum Partitions/Sound Sealants: Section 09 29 00, GYPSUM BOARD.
- E. Mechanical Work: Section 21 05 11, COMMON WORK RESULTS FOR FIRE SUPPRESSION.
- F. Section 22 05 11, COMMON WORK RESULTS FOR PLUMBING.
- G. Section 23 05 11, COMMON WORK RESULTS FOR HVAC AND STEAM GENERATION.

1.3 QUALITY ASSURANCE:

- A. Installer Qualifications: An experienced installer with a minimum of three (3) years' experience and who has specialized in installing joint sealants similar in material, design, and extent to those indicated for this Project and whose work has resulted in joint-sealant installations with a record of successful in-service performance. Submit qualification.
- B. Source Limitations: Obtain each type of joint sealant through one (1) source from a single manufacturer.
- C. Product Testing: Obtain test results from a qualified testing agency based on testing current sealant formulations within a 12-month period.
 - 1. Testing Agency Qualifications: An independent testing agency qualified according to ASTM C1021.
 - 2. Test elastomeric joint sealants for compliance with requirements specified by reference to ASTM C920, and where applicable, to other standard test methods.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

07 92 00-1

10/28/2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

10-01-17

3. Test elastomeric joint sealants according to SWRI's Sealant Validation Program for compliance with requirements specified by reference to ASTM C920 for adhesion and cohesion under cyclic movement, adhesion-in peel, and indentation hardness.
 4. Test other joint sealants for compliance with requirements indicated by referencing standard specifications and test methods.
- D. Lab Tests: Submit samples of materials that will be in contact or affect joint sealants to joint sealant manufacturers for tests as follows:
1. Adhesion Testing: Before installing elastomeric sealants, test their adhesion to protect joint substrates according to the method in ASTM C794 to determine if primer or other specific joint preparation techniques are required.
 2. Compatibility Testing: Before installing elastomeric sealants, determine compatibility when in contact with glazing and gasket materials.
 3. Stain Testing: Perform testing per ASTM C1248 on interior and exterior sealants to determine if sealants or primers will stain adjacent surfaces. No sealant work is to start until results of these tests have been submitted to the Contracting Officer Representative (COR) and the COR has given written approval to proceed with the work.
- E. Preconstruction Field-Adhesion Testing: Before installing elastomeric sealants, field test their adhesion to joint substrates according to Method A, Field-Applied Sealant Joint Hand Pull Tab, in Appendix X1.1 in ASTM C1193 or Method A, Tail Procedure, in ASTM C1521.
1. Locate test joints as directed by Contracting Officer's Representative (COR).
 2. Conduct field tests for each application indicated below:
 - a. Each type of elastomeric sealant and joint substrate indicated.
 - b. Each type of non-elastomeric sealant and joint substrate indicated.
 3. Notify COR seven (7) days in advance of dates and times when test joints will be erected.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

07 92 00-2

10/28/2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

10-01-17

4. Arrange for tests to take place with joint sealant manufacturer's technical representative present.

1.4 CERTIFICATION:

- A. Contractor is to submit to the COR written certification that joints are of the proper size and design, that the materials supplied are compatible with adjacent materials and backing, that the materials will properly perform to provide permanent watertight, airtight or vapor tight seals (as applicable), and that materials supplied meet specified performance requirements.

1.5 SUBMITTALS:

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Sustainable Design Submittals, as described below:
1. Volatile organic compounds per volume as specified in PART 2 - PRODUCTS.
- C. Installer qualifications.
- D. Contractor certification.
- E. Manufacturer's installation instructions for each product used.
- F. Cured samples of exposed sealants for each color.
- G. Manufacturer's Literature and Data:
1. Primers
 2. Sealing compound, each type, including compatibility when different sealants are in contact with each other.
- H. Manufacturer warranty.

1.6 PROJECT CONDITIONS:

- A. Environmental Limitations:
1. Do not proceed with installation of joint sealants under following conditions:
 - a. When ambient and substrate temperature conditions are outside limits permitted by joint sealant manufacturer or are below 4.4 degrees C (40 degrees F).
 - b. When joint substrates are wet.
- B. Joint-Width Conditions:

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

10-01-17

1. Do not proceed with installation of joint sealants where joint widths are less than those allowed by joint sealant manufacturer for applications indicated.

C. Joint-Substrate Conditions:

1. Do not proceed with installation of joint sealants until contaminants capable of interfering with adhesion are removed from joint substrates.

1.7 DELIVERY, HANDLING, AND STORAGE:

- A. Deliver materials in manufacturers' original unopened containers, with brand names, date of manufacture, shelf life, and material designation clearly marked thereon.
- B. Carefully handle and store to prevent inclusion of foreign materials.
- C. Do not subject to sustained temperatures exceeding 32 degrees C (90 degrees F) or less than 5 degrees C (40 degrees F).

1.8 DEFINITIONS:

- A. Definitions of terms in accordance with ASTM C717 and as specified.
- B. Backing Rod: A type of sealant backing.
- C. Bond Breakers: A type of sealant backing.
- D. Filler: A sealant backing used behind a back-up rod.

1.9 WARRANTY:

- A. Construction Warranty: Comply with FAR clause 52.246-21 "Warranty of Construction".
- B. Manufacturer Warranty: Manufacturer shall warranty their sealant for a minimum of five (5) years from the date of installation and final acceptance by the Government. Submit manufacturer warranty.

1.10 APPLICABLE PUBLICATIONS:

- A. Publications listed below form a part of this specification to extent referenced. Publications are referenced in text by basic designation only.
- B. ASTM International (ASTM):
 - C509-06.....Elastomeric Cellular Preformed Gasket and Sealing Material
 - C612-14.....Mineral Fiber Block and Board Thermal Insulation

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

10-01-17

- C717-14a.....Standard Terminology of Building Seals and Sealants
- C734-06 (R2012).....Test Method for Low-Temperature Flexibility of Latex Sealants after Artificial Weathering
- C794-10.....Test Method for Adhesion-in-Peel of Elastomeric Joint Sealants
- C919-12.....Use of Sealants in Acoustical Applications.
- C920-14a.....Elastomeric Joint Sealants.
- C1021-08 (R2014).....Laboratories Engaged in Testing of Building Sealants
- C1193-13.....Standard Guide for Use of Joint Sealants.
- C1248-08 (R2012).....Test Method for Staining of Porous Substrate by Joint Sealants
- C1330-02 (R2013).....Cylindrical Sealant Backing for Use with Cold Liquid Applied Sealants
- C1521-13.....Standard Practice for Evaluating Adhesion of Installed Weatherproofing Sealant Joints
- D217-10.....Test Methods for Cone Penetration of Lubricating Grease
- D1056-14.....Specification for Flexible Cellular Materials—Sponge or Expanded Rubber
- E84-09.....Surface Burning Characteristics of Building Materials
- C. Sealant, Waterproofing and Restoration Institute (SWRI).
The Professionals' Guide
- D. Environmental Protection Agency (EPA):
40 CFR 59 (2014).....National Volatile Organic Compound Emission Standards for Consumer and Commercial Products

PART 2 - PRODUCTS

2.1 SEALANTS:

- A. Exterior Sealants:
1. S-#1 Vertical surfaces, provide non-staining ASTM C920, Type S or M, Grade NS, Class 25
 2. S-#2 Horizontal surfaces, provide ASTM C920, Type S or M, Grade P, Class 25, Use T.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

10-01-17

3. Provide location(s) of exterior sealant as follows:
 - a. Joints formed where frames and subsills of windows, doors, louvers, and vents adjoin masonry, concrete, or metal frames. Provide sealant at exterior surfaces of exterior wall penetrations.
 - b. Metal to metal.
 - c. Masonry to masonry or stone.
 - f. Masonry expansion and control joints.
 - h. Masonry joints where shelf angles occur.
 - i. Voids where items penetrate exterior walls.
 - j. Metal reglets, where flashing is inserted into masonry joints, and where flashing is penetrated by coping dowels.

B. Floor Joint Sealant:

1. ASTM C920, Type S or M, Grade P, Class 25, Use T.
2. S-3 Provide location(s) of floor joint sealant as follows:
 - a. Control and expansion joints in floors, slabs, ceramic tile, and walkways.

C. Interior Sealants:

1. VOC Content of Interior Sealants: Sealants and sealant primers used inside the weatherproofing system are to comply with the following limits for VOC content when calculated according to 40 CFR 59, (EPA Method 24):
 - a. Architectural Sealants: 250 g/L.
 - b. Sealant Primers for Nonporous Substrates: 250 g/L.
 - c. Sealant Primers for Porous Substrates: 775 g/L.
2. S-#3 Vertical and Horizontal Surfaces: ASTM C920, Type S or M, Grade NS, Class 25,
3. Provide location(s) of interior sealant as follows:
 - a. Typical narrow joint 6 mm, (1/4 inch) or less at walls and adjacent components.
 - b. Perimeter of doors, windows, access panels which adjoin concrete or masonry surfaces.
 - c. Interior surfaces of exterior wall penetrations.
 - d. Joints at masonry walls and columns, piers, concrete walls or exterior walls.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

07 92 00-6

10/28/2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

10-01-17

- e. Perimeter of lead faced control windows and plaster or gypsum wallboard walls.
- f. Exposed isolation joints at top of full height walls.
- g. Joints between bathtubs and ceramic tile; joints between shower receptors and ceramic tile; joints formed where nonplanar tile surfaces meet.
- h. Joints formed between tile floors and tile base cove; joints between tile and dissimilar materials; joints occurring where substrates change.
- i. Behind escutcheon plates at valve pipe penetrations and showerheads in showers.

D. Acoustical Sealant:

- 1. Conforming to ASTM C919; flame spread of 25 or less; and a smoke developed rating of 50 or less when tested in accordance with ASTM E84. Acoustical sealant shall have a consistency of 250 to 310 when tested in accordance with ASTM D217; remain flexible and adhesive after 500 hours of accelerated weathering as specified in ASTM C734; and be non-staining.
- 2. Provide location(s) of acoustical sealant as follows:
 - a. Exposed acoustical joint at sound rated partitions.
 - b. Concealed acoustic joints at sound rated partitions.
 - c. Joints where item pass-through sound rated partitions.

2.2 COLOR:

- A. Sealants used with exposed masonry are to match color of mortar joints.
- B. Sealants used with unpainted concrete are to match color of adjacent concrete.
- C. Color of sealants for other locations to be light gray or aluminum, unless otherwise indicated in construction documents.

2.3 JOINT SEALANT BACKING:

- A. General: Provide sealant backings of material and type that are non-staining; are compatible with joint substrates, sealants, primers, and other joint fillers; and are approved for applications indicated by sealant manufacturer based on field experience and laboratory testing.

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

10-01-17

- B. Cylindrical Sealant Backings: ASTM C1330, of type indicated below and of size and density to control sealant depth and otherwise contribute to producing optimum sealant performance:
 - 1. Type C: Closed-cell material with a surface skin.
- C. Elastomeric Tubing Sealant Backings: Neoprene, butyl, EPDM, or silicone tubing complying with ASTM D1056 or synthetic rubber (ASTM C509), nonabsorbent to water and gas, and capable of remaining resilient at temperatures down to minus 32 degrees C (minus 26 degrees F). Provide products with low compression set and of size and shape to provide a secondary seal, to control sealant depth, and otherwise contribute to optimum sealant performance.
- D. Bond-Breaker Tape: Polyethylene tape or other plastic tape recommended by sealant manufacturer for preventing sealant from adhering to rigid, inflexible joint-filler materials or joint surfaces at back of joint where such adhesion would result in sealant failure. Provide self-adhesive tape where applicable.

2.4 WEEPS:

- A. Weep/Vent Products: Provide the following unless otherwise indicated or approved.
 - 1. Vent weeps - full thickness of stone or masonry veneer.

2.5 FILLER:

- A. Mineral fiberboard: ASTM C612, Class 1.
- B. Thickness same as joint width.
- C. Depth to fill void completely behind back-up rod.

2.6 PRIMER:

- A. As recommended by manufacturer of caulking or sealant material.
- B. Stain free type.

2.7 CLEANERS FOR -NON-POROUS SURFACES:

- A. Chemical cleaners compatible with sealant and acceptable to manufacturer of sealants and sealant backing material. Cleaners to be free of oily residues and other substances capable of staining or harming joint substrates and adjacent non-porous surfaces and formulated to promote adhesion of sealant and substrates.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

07 92 00-8

10/28/2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

10-01-17

PART 3 - EXECUTION

3.1 INSPECTION:

- A. Inspect substrate surface for bond breaker contamination and unsound materials at adherent faces of sealant.
- B. Coordinate for repair and resolution of unsound substrate materials.
- C. Inspect for uniform joint widths and that dimensions are within tolerance established by sealant manufacturer.

3.2 PREPARATIONS:

- A. Prepare joints in accordance with manufacturer's instructions and SWRI (The Professionals' Guide).
- B. Clean surfaces of joint to receive caulking or sealants leaving joint dry to the touch, free from frost, moisture, grease, oil, wax, lacquer paint, or other foreign matter that would tend to destroy or impair adhesion.
 - 1. Clean porous joint substrate surfaces by brushing, grinding, blast cleaning, mechanical abrading, or a combination of these methods to produce a clean, sound substrate capable of developing optimum bond with joint sealants.
 - 2. Remove loose particles remaining from above cleaning operations by vacuuming or blowing out joints with oil-free compressed air. Porous joint surfaces include but are not limited to the following:
 - a. Concrete.
 - b. Masonry.
 - c. Unglazed surfaces of ceramic tile.
 - 3. Remove laitance and form-release agents from concrete.
 - 4. Clean nonporous surfaces with chemical cleaners or other means that do not stain, harm substrates, or leave residues capable of interfering with adhesion of joint sealants. Nonporous surfaces include but are not limited to the following:
 - a. Metal.
 - b. Glass.
 - c. Porcelain enamel.
 - d. Glazed surfaces of ceramic tile.
- C. Do not cut or damage joint edges.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

07 92 00-9

10/28/2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

10-01-17

- D. Apply non-staining masking tape to face of surfaces adjacent to joints before applying primers, caulking, or sealing compounds.
 - 1. Do not leave gaps between ends of sealant backings.
 - 2. Do not stretch, twist, puncture, or tear sealant backings.
 - 3. Remove absorbent sealant backings that have become wet before sealant application and replace them with dry materials.
- E. Apply primer to sides of joints wherever required by compound manufacturer's printed instructions or as indicated by pre-construction joint sealant substrate test.
 - 1. Apply primer prior to installation of back-up rod or bond breaker tape.
 - 2. Use brush or other approved means that will reach all parts of joints. Avoid application to or spillage onto adjacent substrate surfaces.

3.3 BACKING INSTALLATION:

- A. Install backing material, to form joints enclosed on three sides as required for specified depth of sealant.
- B. Where deep joints occur, install filler to fill space behind the backing rod and position the rod at proper depth.
- C. Cut fillers installed by others to proper depth for installation of backing rod and sealants.
- D. Install backing rod, without puncturing the material, to a uniform depth, within plus or minus 3 mm (1/8 inch) for sealant depths specified.
- E. Where space for backing rod does not exist, install bond breaker tape strip at bottom (or back) of joint so sealant bonds only to two opposing surfaces.

3.4 SEALANT DEPTHS AND GEOMETRY:

- A. At widths up to 6 mm (1/4 inch), sealant depth equal to width.
- B. At widths over 6 mm (1/4 inch), sealant depth 1/2 of width up to 13 mm (1/2 inch) maximum depth at center of joint with sealant thickness at center of joint approximately 1/2 of depth at adhesion surface.

3.5 INSTALLATION:

- A. General:

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

07 92 00-10

10/28/2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

10-01-17

1. Apply sealants and caulking only when ambient temperature is between 5 degrees C and 38 degrees C (40 degrees and 100 degrees F).
 2. Do not install polysulfide base sealants where sealants may be exposed to fumes from bituminous materials, or where water vapor in continuous contact with cementitious materials may be present.
 3. Do not install sealant type listed by manufacture as not suitable for use in locations specified.
 4. Apply caulking and sealing compound in accordance with manufacturer's printed instructions.
 5. Avoid dropping or smearing compound on adjacent surfaces.
 6. Fill joints solidly with compound and finish compound smooth.
 7. Tool exposed joints to form smooth and uniform beds, with slightly concave surface conforming to joint configuration per Figure 5A in ASTM C1193 unless shown or specified otherwise in construction documents. Remove masking tape immediately after tooling of sealant and before sealant face starts to "skin" over. Remove any excess sealant from adjacent surfaces of joint, leaving the working in a clean finished condition.
 8. Finish paving or floor joints flush unless joint is otherwise detailed.
 9. Apply compounds with nozzle size to fit joint width.
 10. Test sealants for compatibility with each other and substrate. Use only compatible sealant. Submit test reports.
 11. Replace sealant which is damaged during construction process.
- B. Weeps: Place weep vents in joints where moisture may accumulate, including at base of cavity walls, above shelf angles, at all flashing, and as indicated on construction documents.
1. Space weep vents not more than 406 mm (16 inches) o.c.
- C. For application of sealants, follow requirements of ASTM C1193 unless specified otherwise. Take all necessary steps to prevent three-sided adhesion of sealants.
- D. Interior Sealants: Where gypsum board partitions are of sound rated, fire rated, or smoke barrier construction, follow requirements of ASTM C919 only to seal all cut-outs and intersections with the adjoining construction unless specified otherwise.

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

10-01-17

1. Apply a 6 mm (1/4 inch) minimum bead of sealant each side of runners (tracks), including those used at partition intersections with dissimilar wall construction.
2. Coordinate with application of gypsum board to install sealant immediately prior to application of gypsum board.
3. Partition intersections: Seal edges of face layer of gypsum board abutting intersecting partitions, before taping and finishing or application of veneer plaster-joint reinforcing.
4. Openings: Apply a 6 mm (1/4 inch) bead of sealant around all cutouts to seal openings of electrical boxes, ducts, pipes and similar penetrations. To seal electrical boxes, seal sides and backs.
5. Control Joints: Before control joints are installed, apply sealant in back of control joint to reduce flanking path for sound through control joint.

3.6 FIELD QUALITY CONTROL:

- A. Field-Adhesion Testing: Field-test joint-sealant adhesion to joint substrates according to Method A, Field-Applied Sealant Joint Hand Pull Tab, in Appendix X1 in ASTM C1193 or Method A, Tail Procedure, in ASTM C1521.
 1. Extent of Testing: Test completed elastomeric sealant joints as follows:
 - a. Perform 10 tests for first 305 m (1000 feet) of joint length for each type of elastomeric sealant and joint substrate.
 - b. Perform one test for each 305 m (1000 feet) of joint length thereafter or one test per each floor per elevation.
- B. Inspect joints for complete fill, for absence of voids, and for joint configuration complying with specified requirements. Record results in a field adhesion test log.
- C. Inspect tested joints and report on following:
 1. Whether sealants in joints connected to pulled-out portion failed to adhere to joint substrates or tore cohesively. Include data on pull distance used to test each type of product and joint substrate.
 2. Compare these results to determine if adhesion passes sealant manufacturer's field-adhesion hand-pull test criteria.
 3. Whether sealants filled joint cavities and are free from voids.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

07 92 00-12

10/28/2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

10-01-17

4. Whether sealant dimensions and configurations comply with specified requirements.
- D. Record test results in a field adhesion test log. Include dates when sealants were installed, names of persons who installed sealants, test dates, test locations, whether joints were primed, adhesion results and percent elongations, sealant fill, sealant configuration, and sealant dimensions.
- E. Repair sealants pulled from test area by applying new sealants following same procedures used to originally seal joints. Ensure that original sealant surfaces are clean and new sealant contacts original sealant.
- F. Evaluation of Field-Test Results: Sealants not evidencing adhesive failure from testing or noncompliance with other indicated requirements, will be considered satisfactory. Remove sealants that fail to adhere to joint substrates during testing or to comply with other requirements. Retest failed applications until test results prove sealants comply with indicated requirements.

3.7 CLEANING:

- A. Fresh compound accidentally smeared on adjoining surfaces: Scrape off immediately and rub clean with a solvent as recommended by manufacturer of the adjacent material or if not otherwise indicated by the caulking or sealant manufacturer.
- B. Leave adjacent surfaces in a clean and unstained condition.

- - - E N D - - -

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

02-01-16

SECTION 07 95 13
EXPANSION JOINT COVER ASSEMBLIES

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Prefabricated floor, wall, and ceiling building expansion joint assemblies.

1.2 RELATED REQUIREMENTS

- A. Color of Elastomer Inserts, Filler Strips, and Metal Finishes: As approved by Contracting Officer's representative from manufacturer's stand colors.

1.3 APPLICABLE PUBLICATIONS

- A. Comply with references to extent specified in this Section.
- B. American Society of Civil Engineers (ASCE):
1. ASCE/SEI 7-10 - Minimum Design Loads For Buildings and Other Structures.
- C. ASTM International (ASTM):
1. A36/A36M-14 - Structural Steel.
 2. A240/A240M-15b - Chromium and Chromium-Nickel Stainless Steel Plate, Sheet and Strip for Pressure Vessels and for General Applications.
 3. A283/A283M-13 - Low and Intermediate Tensile Strength Carbon Steel Plates.
 4. A786/A786M-05(2009) - Hot-Rolled Carbon, Low-Alloy, High-Strength Low-Alloy, and Alloy Steel Floor Plates.
 5. B36/B36M-13 - Brass, Plate, Sheet, Strip, and Rolled Bar.
 6. B121/B121M-11 - Leaded Brass Plate, Sheet, Strip and Rolled Bar.
 7. B209-14 - Aluminum and Aluminum-Alloy Sheet and Plate.
 8. B209M-14 - Aluminum and Aluminum-Alloy Sheet and Plate (Metric).
 9. B221-14 - Aluminum and Aluminum-Alloy Extruded Bars, Rods, Wire, Profiles, and Tubes.
 10. B221M 13 - Aluminum and Aluminum-Alloy Extruded Bars, Rods, Wire, Profiles, and Tubes (Metric).
 11. B455-10 - Copper-Zinc-Lead Alloy (Leaded-Brass) Extruded Shapes.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

07 95 13-1

10/28/2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

02-01-16

12. C864-05(2011) - Dense Elastomeric Compression Seal Gaskets, Setting Blocks, and Spacers.
13. D1187/D1187M-97(2011)e1 - Asphalt-Base Emulsions for Use as Protective Coatings for Metal.
14. E1399/E1399M-97(2013)e1 - Standard Test Method for Cyclic Movement and Measuring the Minimum and Maximum Joint Widths of Architectural Joint Systems.
15. E1966-15 - Standard Test Method for Fire-Resistive Joint Systems.
- D. National Association of Architectural Metal Manufacturers (NAAMM):
 1. AMP 500-06 - Metal Finishes Manual.
- E. UL LLC (UL):
 1. 2079-15 - Standard for Tests for Fire Resistance of Building Joint Systems.

1.4 PREINSTALLATION MEETINGS

- A. Conduct preinstallation meeting minimum 30 days before beginning Work of this Section.
 1. Required Participants:
 - a. Contracting Officer's Representative.
 - b. Contractor.
 - c. Installer.
 - d. Manufacturer's field representative.
 - e. Other installers responsible for adjacent and intersecting work, including_masonry and concrete.
 2. Meeting Agenda: Distribute agenda to participants minimum 3 days before meeting.
 - a. Installation schedule.
 - b. Installation sequence.
 - c. Preparatory work.
 - d. Protection before, during, and after installation.
 - e. Installation.
 - f. Terminations.
 - g. Transitions and connections to other work.
 - h. Other items affecting successful completion.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

07 95 13-2

10/28/2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

02-01-16

3. Document and distribute meeting minutes to participants to record decisions affecting installation.

1.5 SUBMITTALS

- A. Submittal Procedures: Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Submittal Drawings:
 1. Include large-scale details indicating profiles of each type of expansion joint cover, splice joints between joint sections, transitions to other assemblies, terminations, anchorages, fasteners, and relationship to adjoining work and finishes.
 2. Show size, configuration, and fabrication and installation details.
 3. Include composite drawings showing work specified in other Sections coordinated with expansion joints.
- C. Manufacturer's Literature and Data:
 1. Description of each product specified.
 2. Show movement capability of each cover assembly
 3. Description of materials and finishes.
 4. Installation instructions.
- D. Samples: Submit 300 mm (12 inch) long samples.
 1. Each type and color of metal finish for each required thickness and alloy.
 2. Each type and color of flexible seal.
- E. Sustainable Construction Submittals:
 1. Recycled Content: Identify post-consumer and pre-consumer recycled content percentage by weight.
 2. Low Pollutant-Emitting Materials:
 - a. Identify volatile organic compound types and quantities.
- F. Qualifications: Substantiate qualifications comply with specifications.
 1. Installer with project experience list .
- G. Certificates: Indicate products comply with specifications.
 1. Fire rated expansion joint cover assemblies.
- H. Operation and Maintenance Data:
 1. Care instructions for each exposed finish product.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

07 95 13-3

10/28/2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

02-01-16

1.6 QUALITY ASSURANCE

- A. Installer Qualifications:
 - 1. Regularly installs specified products.
 - 2. Installed specified products with satisfactory service on five similar installations for minimum five years.

1.7 DELIVERY

- A. Deliver products in manufacturer's original sealed packaging.
- B. Mark packaging, legibly. Indicate manufacturer's name or brand, type, color, and manufacture date.
- C. Before installation, return or dispose of products within distorted, damaged, or opened packaging.

1.8 STORAGE AND HANDLING

- A. Store products indoors in dry, weathertight facility.
- B. Protect products from damage during handling and construction operations.

1.9 FIELD CONDITIONS

- A. Field Measurements: Verify field conditions affecting expansion joint cover assembly fabrication and installation. Show field measurements on Submittal Drawings.
 - 1. Coordinate field measurement and fabrication schedule to avoid delay.

1.10 WARRANTY

- A. Construction Warranty: FAR clause 52.246-21, "Warranty of Construction."

PART 2 - PRODUCTS

2.1 SYSTEM DESCRIPTION

- A. Provide joint cover assemblies that permit unrestrained movement of joint without disengagement of cover, and, where applicable, maintain moisture, watertight and fire-rated protection.
- B. Provide templates to related trades for location of support and anchorage items.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

07 95 13-4

10/28/2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

02-01-16

2.2 SYSTEM PERFORMANCE

- A. Design expansion joint cover assemblies complying with specified performance.
- B. Joint Movement: ASTM E1399.
 - 1. Nominal Joint Width: 2 inches unless otherwise noted.
 - 2. Minimum Movement Capability: 50 percent.
 - 3. Movement Type: Thermal and wind and seismic.
- C. Floor Joints: Live loads, including rolling loads.
 - 1. Load Resistance: ASCE/SEI 7; Design criteria as indicated on Drawings.
 - 2. Maximum Deflection: 1/360 of span, maximum.
- D. Fire Rated Joints: ASTM E1399, ASTM E1966, or UL 2079, including hose stream test at full-rated period.
 - 1. Fire rating: Match adjacent floor, wall, and ceiling construction.
 - 2. System: Capable of anticipated movement while maintaining fire rating.
 - 3. Coverless Applications: Maintain fire rating without joint cover system.

2.3 MATERIALS

- A. Stainless Steel: ASTM A240/A240M, Type 302 or 304.
- B. Structural Steel Shapes: ASTM A36/A36M.
- C. Steel Plate: ASTM A283/A283M, Grade C.
- D. Rolled Steel Floor Plate: ASTM A786/A786M.
- E. Aluminum:
 - 1. Extruded: ASTM B221M (ASTM B221), alloy 6063-T5, 6063-T6, or 6061-T6.
 - 2. Plate and Sheet: ASTM B209M (ASTM B209), alloy 6061-T6.
- F. Bronze: Manufacturer's standard alloy.
 - 1. Extruded: ASTM B455.
 - 2. Plate: ASTM B121.
- G. Brass: ASTM B36/B36M.
- H. Elastomeric Sealant: As specified in Section 07 92 00, JOINT SEALANTS.
- I. Elastomeric Seals:

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

07 95 13-5

10/28/2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

02-01-16

1. Flexible extruded polyvinyl chloride, meeting a Shore A hardness of 75 with UV stabilizer. Manufacturer's standard colors.
- J. Thermoplastic Rubber:
 1. ASTM C864.
 2. Dense Neoprene or other material standard with expansion joint manufacturers having the same physical properties.
- K. Compression Seals: Pre-compressed secondary sealant using preformed expanding foam sealant; open-cell polyurethane foam impregnated with polymer-modified acrylic adhesive.
- L. Water Barrier Sheets: Neoprene or EPDM flexible sheet materials minimum 45 mils thick.
 1. Provide with drain tubes for horizontal applications.
- M. Vinyl Invertor Sealant Waterstops: Manufacturer's standard shapes and grade.
- N. Moisture Barrier: Fabric reinforced clear vinyl sheet material sized to accommodate opening.
- O. Flexible Membrane: 1.5 mm (60 mil) EPDM sheet, with manufacturer's standard support foam.
- P. Fire Barrier: Labeled by an approved independent testing laboratory for fire resistance rating indicated for maximum joint width.
 - a. Thermal Insulation: Manufacturer's standard with factory cut miters and transitions.
 - b. Fire Barrier Lengths:
 - 1) Joint widths up to and including 150 mm (6 inches): Maximum 15 m (50 feet) to minimize field splicing.
 - 2) Other Joint widths: 3 m (10 foot) with overlapping ends for field splicing.
- Q. Ceramic Blanket: Manufacturer's standard joint filler to achieve fire rating indicated.
- R. Butyl Caulk Tape: Self adhering double sided butyl rubber sealant tape with easy-release silicone coated paper.

2.4 PRODUCTS - GENERAL

- A. Basis of Design: Section 09 06 00, SCHEDULE FOR FINISHES.
- B. Provide each product from one manufacturer.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

07 95 13-6

10/28/2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

02-01-16

1. Provide ceiling and wall expansion joint cover assemblies design matching floor to wall and floor to floor expansion joint cover design.
 2. Provide expansion joint cover assembly designs, profiles, materials and configuration indicated, as required to accommodate joint size variations in adjacent surfaces, and anticipated movement.
- C. Sustainable Construction Requirements:
1. Steel Recycled Content: 30 percent total recycled content, minimum.
 2. Stainless Steel Recycled Content: 70 percent total recycled content, minimum.
 3. Aluminum Recycled Content: 80 percent total recycled content, minimum.
 4. Low Pollutant-Emitting Materials: Maximum VOC content by weight.
 - a. Non-Flooring Adhesives and Sealants.

2.5 FABRICATION

- A. Fabricate Expansion Joint Cover Assemblies:
1. As complete assembly ready for installation.
 2. In longest practicable lengths to minimize number of end joints.
 3. With factory mitered corners where joint changes directions or abuts other materials.
 - a. With closure materials and transition pieces, tee-joints, corners, curbs, cross-connections and other assemblies.
 4. Joints within enclosed spaces such as chase walls, include 1 mm (0.04 inch) thick galvanized steel cover where conventional expansion joint cover is not used.
 5. Where floor slab is fire rated provide ceramic blanket at joints.
 6. Seal Strip: Factory-formed and bonded to metal frames and anchor members.
 7. Compression Seals: Fabricate from expanding foam as secondary seal and elastomeric sealant to sizes and profiles shown.
- B. Floor-to-Floor Metal Plate Joints:
1. Frames: Metal, continuous on both sides of joint designed to support cover plate.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

07 95 13-7

10/28/2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

02-01-16

- a. Flush Design: Seating surface and raised floor rim to accommodate adjacent flooring.
 - b. Anchorage: Concealed bolt and steel anchors for embedment in concrete.
 2. Cover Plate: Metal, matching frames where exposed.
 - a. Supported Load: 19.2 MPa (400 psf), minimum.
 - b. Rattle-free due to traffic.
 3. Fillers: Resilient material between raised rim of frame and edge of cover plate, where shown.
 - a. No gaps or bulges over full design range joint movement.
 4. Fire Barrier: As required for fire resistance rating.
 5. Water Stop: Manufacturer's standard, continuous, full length of joint.
- C. Extruded Thermoplastic Rubber Joint Assemblies:
1. Frames: Aluminum, both sides of joint.
 2. Primary Seal: Flexible rubber on exposed face after frame installation with factory welded watertight miters and transitions.
 - a. Anchor spaced at ends and not over 600 mm (24 inches).
 - 1) Variable movement extruded rubber primary seal designed to remain in aluminum frame, throughout movement of joint.
 - b. Flush mounted seal minimum 3 mm (0.12 inch) thick with dual movement grooves designed for plus or minus 50 percent, movement of joint width.
 - c. Seismic seal minimum 3 mm (0.12 inch) thick with multi-movement grooves designed for plus or minus 100 percent movement of joint width.
 - d. Recessed front face seal minimum 3 mm (0.12 inch) thick with no movement grooves, designed for plus or minus 50 percent movement of joint width.
 - e. Provide pantographic wind load supports, maximum 2400 mm (8 feet) on center to support seal systems of 300 mm (12 inches) wide and greater.
 3. Secondary Seal: Continuous vinyl sheet seal.
 4. Finishes: As specified in Section 09 06 00, SCHEDULE FOR FINISHES.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

07 95 13-8

10/28/2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

02-01-16

D. Ceiling and Soffit Assemblies:

1. Frames: Metal, continuous on both sides of joint, flush mounted with no exposed fasteners.
2. Flexible Insert: Variable movement semi-rigid vinyl locked into frame.
 - a. Face Style: Flush or accordion, as shown, to span joint width without sagging.
3. Seismic: As required by Code.
4. Finishes: As specified in the drawings, SCHEDULE OF FINISHES.

E. Preformed Sealant Joint: Factory installed elastomeric sealant between extruded aluminum angle frame both sides.

1. Frames: Extruded aluminum angle on both sides of joint.
2. Filler: Elastomeric sealant.
3. Anticipated movement: 25 percent maximum.

2.6 FINISHES

- A. Carbon Steel: NAAMM AMP 500, Galvanized G90.
- B. Stainless Steel: NAAMM AMP 500, No. 2B bright finish.
- C. Aluminum Anodized Finish: NAAMM AMP 500.
 1. Clear Anodized Finish: AA-C22A41; Class I Architectural, 0.018 mm (0.7 mil) thick.
 2. Color Anodized Finish: AA-C22A42 or AA-C22A44; Class I Architectural, 0.018 mm (0.7 mil) thick.

2.7 ACCESSORIES

- A. General: Manufacturer's standard anchors, fasteners, set screws, spaces, protective coating, and filler materials, adhesive and other accessories required for installation.
- B. Barrier Coating: ASTM D1187/D1187M.
- C. Adhesives: Low pollutant-emitting, water-based type recommended by adhered product manufacturer for each application.
- D. Fasteners: Type and size recommended by expansion joint cover assembly manufacturer.
 1. Exterior Applications: Stainless steel.
 2. Fasteners for Aluminum: Stainless steel.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

07 95 13-9

10/28/2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

02-01-16

3. Other Applications: Galvanized steel or stainless steel.

PART 3 - EXECUTION

3.1 PREPARATION

- A. Examine and verify substrate suitability for product installation.
 - 1. Provide items embedded in concrete and masonry in time for building into work without delaying work.
- B. Protect existing construction and completed work from damage.

3.2 INSTALLATION

- A. Install products according to manufacturer's instructions and approved submittal drawings.
 - 1. When manufacturer's instructions deviate from specifications, submit proposed resolution for Contracting Officer's Representative consideration.
- B. Install anchorage devices and fasteners for securing expansion joint assemblies to in-place construction where anchors are not embedded in concrete and masonry.
 - 1. Secure with metal fasteners, type and size to suit application.
- C. Perform cutting, drilling and fitting required for installation of expansion joint cover assemblies.
- D. Install joint cover assemblies aligned and positioned in correct relationship to expansion joint opening and adjoining finished surfaces measured from established lines and levels.
 - 1. Allow for thermal expansion and contraction of metal to avoid buckling.
 - 2. Accommodate joint opening size at time of installation.
- E. Set floor covers at elevations flush with adjacent finished flooring, unless shown otherwise.
- F. Grout floor frames set in prepared recesses.
- G. Locate wall, ceiling and soffit covers in continuous contact with adjacent surfaces. Secure with required accessories.

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

02-01-16

- H. Locate anchors at interval recommended by manufacturer, but minimum 75 mm (3 inches) from each end, and maximum 600 mm (24 inches) on centers.
- I. Maintain continuity of expansion joint cover assemblies with end joints held to a minimum and metal members aligned mechanically using splice joints.
- J. Cut and fit ends to accommodate thermal expansion and contraction of metal to avoid buckling of frames and cover plates.
- K. Flush Metal Cover Plates:
 - 1. Secure flexible filler between frames to allow compression and expansion.
 - 2. Adhere flexible filler materials to frames with adhesive or pressure-sensitive tape as recommended by manufacturer.
- L. Waterstops:
 - 1. Install in conjunction with floor joints, and where shown.
 - 2. Install continuously to prevent water damage to finish spaces.
 - 3. Seal waterstop to frames to prevent water leakage.
 - 4. Install drainage tubes from waterstops to discharge collected water in nearest plumbing air gap drain.
- M. Fire Barriers:
 - 1. Install in compliance with tested assembly.
 - 2. Install at joints in floors and in fire rated walls.
 - 3. Use fire barrier sealant furnished with expansion joint assembly.
- N. Apply sealant where required to prevent water and air infiltration.
- O. Vertical Exterior Extruded Thermoplastic Rubber.
 - 1. Install side frames mounted on sealant or butyl caulk tape with appropriate anchors 600 mm (24 inches) on center complete with secondary seal.
 - 2. Install primary seals retained in extruded aluminum side frames.
- P. Extruded Thermoplastic Rubber or Seals:
 - 1. For straight sections, install preformed seals in continuous lengths.
 - 2. Vulcanize or heat-seal field spliced joints to provide watertight joints as recommended by manufacturer.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

07 95 13-11

10/28/2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

02-01-16

Q. Preformed Elastomeric Sealant Joint:

1. Locate joint directly over joints in wall and floor substrates.
2. Fasten full length to substrate using construction adhesive.
3. Install flush or slightly below finish material.

3.3 CLEANING

- A. Remove excess adhesive before adhesive sets.
- B. Clean exposed metal surfaces. Remove contaminants and stains.

3.4 PROTECTION

- A. Cover floor joints with plywood where wheel traffic occurs before Substantial completion.
- B. Remove protective covering when adjacent work areas are completed. Clean exposed surfaces in compliance with manufacture's printed instructions.

- - E N D - -

DIVISION 08

OPENINGS

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

08-01-16

SECTION 08 11 13
HOLLOW METAL DOORS AND FRAMES

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Hollow metal doors hung in hollow metal frames at interior locations.
2. Hollow metal door frames for wood doors and borrowed lights at interior locations.

1.2 RELATED REQUIREMENTS

- A. Door Hardware: Section 08 71 00, DOOR HARDWARE.
- B. Glazing: Section 08 80 00, GLAZING.
- C. Card Readers and Biometric Devices: Section 28 13 00, PHYSICAL ACCESS CONTROL SYSTEM.

1.3 APPLICABLE PUBLICATIONS

- A. Comply with references to extent specified in this section.
- B. American National Standard Institute (ANSI):
 1. A250.8-2014 - Standard Steel Doors and Frames.
- C. ASTM International (ASTM):
 1. A240/A240M-15b - Chromium and Chromium-Nickel Stainless Steel Plate, Sheet, and Strip for Pressure Vessels and for General Applications.
 2. A653/A653M-15 - Steel Sheet, Zinc-Coated (Galvanized) or Zinc-Iron Alloy-Coated (Galvannealed) by the Hot-Dip.
- D. Master Painters Institute (MPI):
 1. No. 18 - Primer, Zinc Rich, Organic.
- E. National Association of Architectural Metal Manufacturers (NAAMM):
 1. AMP 500-06 - Metal Finishes Manual.
- F. National Fire Protection Association (NFPA):
 1. 80-16 - Fire Doors and Other Opening Protectives.
- G. UL LLC (UL):
 1. 10C-09 - Positive Pressure Fire Tests of Door Assemblies.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

08 11 13-1

10/28/2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

08-01-16

2.1784-15 - Air Leakage Tests of Door Assemblies and Other Opening
Protectives.

1.4 SUBMITTALS

- A. Submittal Procedures: Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Submittal Drawings:
 - 1. Show size, configuration, and fabrication and installation details.
- C. Manufacturer's Literature and Data:
 - 1. Description of each product.
 - 2. Include schedule showing each door and frame requirements fire label and smoke control label for openings.
 - 3. Installation instructions.
- D. Sustainable Construction Submittals:
 - 1. Recycled Content: Identify post-consumer and pre-consumer recycled content percentage by weight.
- E. Test reports: Certify each product complies with specifications.
 - 1. Sound rated door.
- F. Qualifications: Substantiate qualifications comply with specifications.
 - 1. Manufacturer with project experience list.

1.5 QUALITY ASSURANCE

- A. Manufacturer Qualifications:
 - 1. Regularly manufactures specified products.
 - 2. Manufactured specified products with satisfactory service on five similar installations for minimum five years.

1.6 DELIVERY

- A. Fasten temporary steel spreaders across the bottom of each door frame before shipment.
- B. Deliver products in manufacturer's original sealed packaging.
- C. Mark packaging, legibly. Indicate manufacturer's name or brand, type, production run number, and manufacture date.
- D. Before installation, return or dispose of products within distorted, damaged, or opened packaging.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

08 11 13-2

10/28/2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

08-01-16

1.7 STORAGE AND HANDLING

- A. Store products indoors in dry, weathertight, conditioned facility.
- B. Protect products from damage during handling and construction operations.

1.8 WARRANTY

- A. Construction Warranty: FAR clause 52.246-21, "Warranty of Construction."

PART 2 - PRODUCTS

2.1 SYSTEM PERFORMANCE

- A. Design hollow metal doors and frames complying with specified performance:
 - 1. Fire Doors and Frames: UL 10C; NFPA 80 labeled.
 - a. Fire Ratings: See drawings.
 - 2. Smoke Control Doors and Frames: UL 1784; NFPA 80 labeled, maximum 0.15424 cu. m/s/sq. m (3.0 cfm/sf) at 24.9 Pa (0.10 inches water gage) pressure differential.
 - 3. Sound Rated Doors and Frames: Minimum 45 sound transmission class (STC) when tested according to ASTM E90.

2.2 MATERIALS

- A. Sheet Steel: ASTM A1008/A1008M, cold-rolled.

2.3 PRODUCTS - GENERAL

- A. Basis of Design: Hardware placement to match Steel Craft. Verify final hardware placement with Contracting Officer's Representative (COR).
- B. Provide hollow metal doors and frames from one manufacturer.
- C. Sustainable Construction Requirements:
 - 1. Steel Recycled Content: 30 percent total recycled content, minimum.

2.4 HOLLOW METAL DOORS

- A. Hollow Metal Doors: ANSI A250.8; 44 mm (1-3/4 inches) thick.
 - 1. Interior Doors: Level 2 and Physical Performance Level B, heavy duty; Model 2, seamless at all locations.
- B. Door Faces:

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

08 11 13-3

10/28/2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

08-01-16

1. Interior Doors: Sheet steel.

C. Door Cores:

1. Interior Doors: Kraft paper honeycomb.

2. Fire Doors: Manufacturer's standard complying with specified fire rating performance.

2.5 HOLLOW METAL FRAMES

A. Hollow Metal Frames: ANSI A250.8; face welded. See drawings for sizes and designs.

1. Interior Frames:

a. Level 2 Hollow Metal Doors: 1.3 mm (0.053 inch) thick.

b. Wood Doors and Borrowed Lights 1.3 mm (0.053 inch) thick.

2. Interior Borrowed Light Frames: 1.3 mm (0.051 inch) thick.

B. Frame Materials:

1. Interior Frames: Sheet steel

2.6 LOUVERS (NOT USED)

2.7 FABRICATION

A. Hardware Preparation: ANSI A250.8; for hardware specified in Section 08 71 00, DOOR HARDWARE.

B. Hollow Metal Door Fabrication:

1. Close top edge of exterior doors flush and seal to prevent water intrusion.

2. Fill spaces between vertical steel stiffeners with insulation.

C. All door frames to have hospital stops unless otherwise noted on the drawings.

D. Fire and Smoke Control Doors:

1. Close top and vertical edges flush.

2. Apply steel astragal to active leaf at pair and double egress doors.

a. Exception: Where vertical rod exit devices are specified for both leaves swinging in same direction.

3. Fire and Smoke Control Door Clearances: NFPA 80.

E. Sound Rated Doors:

1. Seals: Integral spring type automatic door bottom seal.

F. Hollow Metal Frame Fabrication:

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

08 11 13-4

10/28/2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

08-01-16

1. Concealed Closers in Head Frame: Provide 1 mm (0.042 inch) thick steel removable stop sections for access to concealed face plates and control valves, except when cover plates are furnished with closer.
2. Terminated Stops: ANSI A250.8.
3. Borrowed Light and Panel Opening Frames:
 - a. Provide integral stop on exterior, corridor, or secure side of door.
 - b. Design rabbet width and depth to receive glazing material or panel shown on drawings.
4. Frame Anchors:
 - a. Floor anchors:
 - 1) Provide extension type floor anchors to compensate for depth of floor fills.
 - 2) Provide 1.3 mm (0.053 inch) thick steel clip angles welded to jamb and drilled to receive floor fasteners.
 - 3) Provide 50 mm by 50 mm by 9 mm (2 inch by 2 inch by 3/8 inch) clip angle for lead lined frames, drilled for floor fasteners.
 - 4) Provide mullion 2.3 mm (0.093 inch) thick steel channel anchors, drilled for two floor fasteners and frame anchor screws.
 - 5) Provide continuous 1 mm (0.042 inch) thick steel rough bucks drilled for floor fasteners and frame anchor screws for sill sections.
 - a) Space floor bolts 50 mm (2 inches) on center.
 - b. Jamb anchors:
 - 1) Place anchors on jambs:
 - a) Near top and bottom of each frame.
 - b) At intermediate points at maximum 600 mm (24 inches) spacing.
 - 2) Form jamb anchors from steel minimum 1 mm (0.042 inch) thick.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

08 11 13-5

10/28/2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

08-01-16

- 3) Anchors set in masonry: Provide adjustable anchors designed for friction fit against frame and extended into masonry minimum 250 mm (10 inches). Provide one of following types:
 - a) Wire Loop Type: 5 mm (3/16 inch) diameter wire.
 - b) T-Shape type.
 - c) Strap and stirrup type: Corrugated or perforated sheet steel.
- 4) Anchors for stud partitions: Provide tabs for securing anchor to sides of studs. Provide one of the following:
 - a) Welded type.
 - b) Lock-in snap-in type.
- 5) Anchors for frames set in prepared openings:
 - a) Steel pipe spacers 6 mm (1/4 inch) inside diameter, welded to plate reinforcing at jamb stops, or hat shaped formed strap spacers 50 mm (2 inches) wide, welded to jamb near stop.
 - b) Drill jamb stop and strap spacers for 6 mm (1/4 inch) flat head bolts to pass through frame and spacers.
 - c) Two piece frames: Subframe or rough buck drilled for 6 mm (1/4 inch) bolts.
- 6) Modify frame anchors to fit special frame and wall construction.
- 7) Provide special anchors where shown on drawings and where required to suit application.

G. Sound Rated Door Frames:

1. Seals: Integral continuous gaskets on frames.

2.8 FINISHES

- A. Steel: ANSI A250.8; shop primed.

2.9 ACCESSORIES

- A. Primers: ANSI A250.8.
- B. Welding Materials: AWS D1.1/D1.1M, type to suit application.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

08 11 13-6

10/28/2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

08-01-16

- C. Fasteners:
 - 1. Metal Framing: Steel drill screws.
 - 2. Masonry and Concrete: Expansion bolts
- D. Anchors: Galvanized steel .

PART 3 - EXECUTION

3.1 PREPARATION

- A. Examine and verify substrate suitability for product installation.
- B. Protect existing construction and completed work from damage.
- C. Apply barrier coating to metal surfaces in contact with cementitious materials to minimum 0.7 mm (30 mils) dry film thickness.

3.2 INSTALLATION - GENERAL

- A. Install products according to manufacturer's instructions and approved submittal drawings.
 - 1. When manufacturer's instructions deviate from specifications, submit proposed resolution for Contracting Officer's Representative consideration.
 - 2. Install fire doors and frames according to NFPA 80.
 - 3. Install smoke control doors and frames according to NFPA 105.

3.3 FRAME INSTALLATION

- A. Apply barrier coating to concealed surfaces of frames built into masonry.
- B. Plumb, align, and brace frames until permanent anchors are set.
 - 1. Use triangular bracing near each corner on both sides of frames with temporary wood spreaders at midpoint.
 - 2. Use wood spreaders at bottom of frame when shipping spreader is removed.
 - 3. Where construction permits concealment, leave shipping spreaders in place after installation, otherwise remove spreaders when frames are set and anchored.
 - 4. Remove wood spreaders and braces when walls are built and jamb anchors are secured.
- C. Floor Anchors:

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

08 11 13-7

10/28/2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

08-01-16

1. Anchor frame jambs to floor with two expansion bolts.
2. Power actuated drive pins are acceptable to secure frame anchors to concrete floors.

D. Jamb Anchors:

1. Metal Framed Walls: Secure anchors to sides of studs with two fasteners through anchor tabs.
 - a. Subframe or Rough Buck Securement:
 - 1) 6 mm (1/4 inch) diameter expansion bolts on 600 mm (24 inch) centers.
 - 2) Power activated drive pins on 600 mm (24 inches) centers.
 - b. Secure two-piece frames to subframe or rough buck with machine screws on both faces.

E. Touch up damaged factory finishes.

1. Repair painted surfaces with touch up primer.

3.4 DOOR INSTALLATION

- A. Install doors plumb and level.
- B. Adjust doors for smooth operation.
- C. Touch up damaged factory finishes.
 1. Repair galvanized surfaces with galvanized repair paint.
 2. Repair painted surfaces with touch up primer.

3.5 CLEANING

- A. Clean exposed door and frame surfaces. Remove contaminants and stains.

3.6 PROTECTION

- A. Protect doors and frames from traffic and construction operations.
- B. Remove protective materials immediately before acceptance.
- C. Repair damage.

- - - E N D - - -

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

02-01-16

SECTION 08 14 00
INTERIOR WOOD DOORS

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Interior flush wood doors with transparent finish.

1.2 RELATED REQUIREMENTS

A. Paints and Coatings and Composite Wood and Agrifiber VOC Limits:
Section 01 81 13, SUSTAINABLE CONSTRUCTION REQUIREMENTS.

B. Door Hardware including hardware location (height): Section 08 71 00,
DOOR HARDWARE.

C. Installation of Doors and Hardware: Section 08 11 13, HOLLOW METAL
DOORS AND FRAMES Section 08 71 00, DOOR HARDWARE.

D. Door Finish: Match Station standard or as otherwise approved by the VA
Contracting Officer's Representative (COR).

1.3 APPLICABLE PUBLICATIONS

A. Comply with references to extent specified in this section.

B. American National Standards Institute/Window and Door Manufacturers
Association (ANSI/WDMA):

1. I.S. 1A-13 - Architectural Wood Flush Doors.

C. ASTM International (ASTM):

1. E90-09 - Laboratory Measurements of Airborne Sound Transmission Loss
of Building Partitions and Elements.

D. National Fire Protection Association (NFPA):

1. 80-16 - Fire Doors and Other Opening Protectives.
2. 252-12 - Fire Tests of Door Assemblies.

E. UL LLC (UL):

1. 10C-09 - Positive Pressure Fire Tests of Door Assemblies.

F. Window and Door Manufacturers Association (WDMA):

1. TM 7-14 - Cycle-Slam Test.
2. TM 8-14 - Hinge Loading Test.
3. TM 10-14 - Screw Holding Capacity.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

08 14 00-1

10/28/2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

02-01-16

1.4 SUBMITTALS

- A. Submittal Procedures: Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Submittal Drawings:
 - 1. Show size, configuration, and fabrication and installation details.
 - 2. Include details of glazing.
 - 3. Indicate project specific requirements not included in Manufacturer's Literature and Data submittal.
- C. Manufacturer's Literature and Data:
 - 1. Description of each product.
 - 2. Fire rated doors showing conformance with NFPA 80.
- D. Samples:
 - 1. Corner section of flush veneered door 300 mm (12 inches) square, showing details of construction, labeled to show grade and type number and conformance to specified standard.
 - 2. Veneer sample 200 mm by 275 mm (8 inch by 11 inch) showing specified wood species sanded to receive a transparent finish. Factory finish veneer sample where the prefinished option is accepted.
- E. Sustainable Construction Submittals:
 - 1. Low Pollutant-Emitting Materials:
 - a. Show volatile organic compound types and quantities.
- F. Test Reports: Indicate each product complies with specifications.
 - 1. Screw Holding Capacity Test.
 - 2. Cycle-Slam Test.
 - 3. Hinge-Loading Test.
- G. Operation and Maintenance Data:
 - 1. Care instructions for each exposed finish product.

1.5 QUALITY ASSURANCE

- A. Manufacturer Qualifications:
 - 1. Regularly and presently manufactures specified products.
 - 2. Manufactures specified products with satisfactory service on five similar installations for minimum five years.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

08 14 00-2

10/28/2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

02-01-16

1.6 DELIVERY

- A. Deliver products in manufacturer's original sealed packaging.
 - 1. Minimum 0.15 mm (6 mil) polyethylene bags or cardboard packaging to remain unbroken during delivery and storage.
- B. Mark packaging, legibly. Indicate manufacturer's name or brand, type, color, and manufacture date.
 - 1. Identify door opening corresponding to Door Schedule.
- C. Before installation, return or dispose of products within distorted, damaged, or opened packaging.

1.7 STORAGE AND HANDLING

- A. Store products indoors in dry, weathertight, conditioned facility.
 - 1. Store doors according to ANSI/WDMA I.S. 1A.
- B. Protect products from damage during handling and construction operations.

1.8 FIELD CONDITIONS

- A. Environment:
 - 1. Product Temperature: Minimum 21 degrees C (70 degrees F) for minimum 48 hours before installation.
 - 2. Work Area Ambient Temperature Range: 21 to 27 degrees C (70 to 80 degrees F) continuously, beginning 48 hours before installation.
 - 3. Install products when building is permanently enclosed and when wet construction is completed, dried, and cured.
 - a. Comply with door manufacturer's instructions for relative humidity.

1.9 WARRANTY

- A. Construction Warranty: FAR clause 52.246-21, "Warranty of Construction."
- B. Manufacturer's Warranty: Warrant interior factory finished flush wood doors against material and manufacturing defects.
 - 1. Warranty Period: Lifetime of original installation.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

08 14 00-3

10/28/2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

02-01-16

PART 2 - PRODUCTS

2.1 PRODUCTS - GENERAL

- A. Basis of Design: See ROOM FINISH LEGEND as part of the drawings. Veneer finish to Match Station Standard or as otherwise approved by the COR.
- B. Provide each product from one manufacturer.
- C. Sustainable Construction Requirements:
 - 1. Low Pollutant-Emitting Materials: Comply with VOC limits specified in Section 01 81 13, SUSTAINABLE CONSTRUCTION REQUIREMENTS for the following products:
 - a. Paints and coatings.
 - b. Composite wood and agrifiber.

2.2 FLUSH WOOD DOORS

- A. General:
 - 1. ANSI/WDMA I.S. 1A, Extra Heavy Duty.
 - 2. Adhesive: Type II.
 - 3. Core: Structural composite lumber, except when mineral core is required for fire rating.
 - 4. Thickness: 44 mm (1-3/4 inches) unless otherwise shown or specified.
- B. Faces:
 - 1. ANSI/WDMA I.S. 1A.
 - 2. One species throughout project unless scheduled or otherwise shown.
 - 3. Transparent Finished Faces: Premium Grade. rotary cut, AA Grade face veneer. Wood species to match Station Standard.
 - a. Match face veneers for doors for uniform effect of color and grain at joints.
 - b. Door Edges: Same species as door face veneer, except maple is acceptable for stile face veneer on birch doors.
 - c. In existing buildings, where doors are required to have transparent finish, use wood species, grade, and assembly of face veneers to match adjacent existing doors.
 - 4. Factory sand doors for finishing.
- C. Wood For Stops, Louvers, Muntins and Moldings for Flush Doors Required to Have Transparent Finish:

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

08 14 00-4

10/28/2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

02-01-16

1. Solid wood of same species as face veneer, except maple is acceptable on birch doors.
 2. Glazing:
 - a. On non-fire-rated doors, use applied wood stops nailed tightly on room side and attached on opposite side with flathead, countersunk wood screws, spaced approximately 125 mm (5 inches) on center.
- D. Fire-Rated Wood Doors:
1. Fire Resistance Rating:
 - a. B Label: 1-1/2 hours.
 - b. C Label: 3/4 hour.
 2. Labels:
 - a. Comply with NFPA 252, UL 10C, and labeled by qualified testing and inspection agency showing fire resistance rating.
 - b. Metal labels with raised or incised markings.
 3. Performance Criteria for Stiles of Doors Utilizing Standard Mortise Leaf Hinges:
 - a. Hinge Loading: WDMA TM 8. Average of 10 test samples for Extra Heavy-Duty doors.
 - b. Direct Screw Withdrawal: WDMA TM 10 for Extra Heavy-Duty doors. Average of 10 test samples using a steel, fully threaded #12 wood screw.
 - c. Cycle-Slam: 1,000,000 cycles with no loose hinge screws or other visible signs of failure when tested according to WDMA TM 7.
 4. Hardware Reinforcement:
 - a. Provide fire and/or smoke rated doors with hardware reinforcement blocking to meet requirements of rated partition in which door is being installed.
 - b. Size of lock blocks as required to secure hardware specified.
 - c. Top, Bottom and Intermediate Rail Blocks: Minimum 125 mm (5 inches) by full core width.
 - d. Reinforcement blocking in compliance with labeling requirements.
 - e. Mineral material similar to core is not acceptable.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

08 14 00-5

10/28/2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

02-01-16

5. Other Core Components: Manufacturer's standard as allowed by labeling requirements.

E. Sound Rated Doors:

1. Fabricated as specified for flush wood doors with additional construction requirements to comply with specified sound transmission class (STC).
2. STC Rating of door assembly in place when tested according to ASTM E90 by independent acoustical testing laboratory minimum 35.
3. Accessories:
 - a. Frame Gaskets and Automatic Door Bottom Seal: As specified in Section 08 71 00, DOOR HARDWARE.

2.3 STILE AND RAIL WOOD DOORS (NOT USED)

2.4 FABRICATION

- A. Factory machine interior wood doors to receive hardware, bevels, undercuts, cutouts, accessories and fitting for frame.
 1. Factory fit fire rated doors according to NFPA 80.
- B. Rout doors for hardware using templates and location heights specified in Section 08 71 00, DOOR HARDWARE.
- C. Factory fit doors to frame, bevel lock edge of doors 3 mm (1/8 inch) for each 50 mm (2 inches) of door thickness, undercut where shown.
- D. Clearances between Doors and Frames and Floors:
 1. Fire Rated Doors: Comply with NFPA 80.
 - a. Doors with Automatic Bottom Seal: Maximum clearance 10 mm (3/8 inch) at threshold.
 - b. Other Door Bottoms: Maximum 3 mm (1/8 inch) clearance at the jambs, heads, and meeting stiles, and a 19 mm (3/4 inch) clearance at bottom, except as otherwise specified.
 2. Door Jambs, Heads, and Meeting Stiles: Maximum 3 mm (1/8 inch).
- E. Provide cutouts for glazed openings.
- F. Finish surfaces, including both faces, top and bottom and edges of the doors smooth to touch.
- G. Identify each door on top edge.

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

02-01-16

1. Mark with stamp, brand or other indelible mark, giving manufacturer's name, door's trade name, construction of door, date of manufacture and quality.
2. Mark door or provide separate certification including name of inspection organization.
3. Identify door manufacturing standard, including glue type.
4. Identify veneer and quality certification.

2.5 FINISHES

- A. Field Finished Doors: Seal top and bottom edges of doors with two coats of catalyzed polyurethane or water-resistant sealer.
- B. Factory Transparent Finish:
 1. Factory finish flush wood doors.
 - a. ANSI/WDMA I.S. 1A Section F-3 Finish System Descriptions for System 5, Conversion Varnish or System 7, Catalyzed Vinyl.
 - b. Use stain when required to produce finish specified ROOM FINISH LEGEND as part of the drawings.

PART 3 - EXECUTION

3.1 PREPARATION

- A. Examine and verify substrate suitability for product installation.
 1. Verify door frames are properly anchored.
 2. Verify door frames are plumb, square, in plane, and within tolerances for door installation.
- B. Protect existing construction and completed work from damage.
- C. Install astragal on active leaf of pair of smoke doors and one leaf of double egress smoke doors.

3.2 INSTALLATION

- A. Install products according to manufacturer's instructions and approved submittal drawings.
 1. Install fire rated doors according to NFPA 80.
 2. When manufacturer's instructions deviate from specifications, submit proposed resolution for Contracting Officer's Representative consideration.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

08 14 00-7

10/28/2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

02-01-16

3.3 PROTECTION

- A. After installation, place shipping container over door and tape in place.
 - 1. Do not apply tape to door faces and edges.
- B. Provide protective covering over exposed hardware in addition to covering door.
- C. Maintain covering in good condition until removal is directed by Contracting Officer's Representative.

- - E N D - -

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

02-01-16

SECTION 08 31 13
ACCESS DOORS AND FRAMES

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Access doors and panels installed in walls and ceilings.

1.2 RELATED REQUIREMENTS

- A. Lock Cylinders: Section 08 71 00, DOOR HARDWARE.
- B. Field Painting: Section 09 91 00, PAINTING.
- C. Access Doors for Control or Drain Valves: Section 21 10 00, WATER-BASED FIRE-SUPPRESSION SYSTEMS.
- D. Access Doors for Plumbing Valves: Section 21 40 00, PLUMBING FIXTURES.
- E. Locations of Access Doors for Ductwork Cleanouts: Section 23 31 00, HVAC DUCTS AND CASINGS.

1.3 APPLICABLE PUBLICATIONS

- A. Comply with references to extent specified in this section.
- B. American Welding Society (AWS):
 1. D1.3/D1.3M-08 - Structural Welding Code - Sheet Steel.
- C. ASTM International (ASTM):
 1. A653/A653M-15 - Steel Sheet, Zinc-Coated (Galvanized) or Zinc-Iron Alloy-Coated (Galvannealed) by the Hot-Sip Process.
 2. A1008/A1008M-15 - Steel, Sheet, Cold-Rolled, Carbon, Structural, High-Strength Low-Alloy, High-Strength Low-Alloy with Improved Formability, Solution Hardened, and Baked Hardenable.
 3. E119-15 - Fire Test of Building Construction and Materials.
- D. National Fire Protection Association (NFPA):
 1. 80-16 - Fire Doors and Other Opening Protectives.
 2. 251-12 - Fire Tests of Door Assemblies.
- E. National Association of Architectural Metal Manufacturers (NAAMM):
 1. AMP 500-06 - Metal Finishes Manual.
- F. UL LLC (UL):
 1. Listed - Online Certifications Directory.
 2. 10B-08 - Standard for Fire Tests of Door Assemblies.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

08 31 13-1

10/28/2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

02-01-16

3. 263-11 - Fire Tests of Building Construction and Materials.

1.4 SUBMITTALS

- A. Submittal Procedures: Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Submittal Drawings:
 - 1. Show size, configuration, and fabrication and installation details.
- C. Manufacturer's Literature and Data:
 - 1. Description of each product.
 - 2. Installation instructions.
- D. Sustainable Construction Submittals:
 - 1. Recycled Content: Identify post-consumer and pre-consumer recycled content percentage by weight.

1.5 DELIVERY

- A. Deliver products in manufacturer's original sealed packaging.
- B. Mark packaging, legibly. Indicate manufacturer's name or brand, type, color, production run number, and manufacture date.
- C. Before installation, return or dispose of products within distorted, damaged, or opened packaging.

1.6 STORAGE AND HANDLING

- A. Store products indoors in dry, weathertight facility.
- B. Protect products from damage during handling and construction operations.

1.7 FIELD CONDITIONS

- A. Field Measurements: Verify field conditions affecting access door fabrication and installation. Show field measurements on Submittal Drawings.
 - 1. Coordinate field measurement and fabrication schedule to avoid delay.

1.8 WARRANTY

- A. Construction Warranty: FAR clause 52.246-21, "Warranty of Construction."

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

08 31 13-2

10/28/2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

02-01-16

PART 2 - PRODUCTS

2.1 MATERIALS

- A. Steel Sheet: ASTM A1008/A1008M.

2.2 PRODUCTS - GENERAL

- A. Provide each product from one manufacturer.
- B. Sustainable Construction Requirements:
 - 1. Steel Access Doors Recycled Content: 30 percent total recycled content, minimum.

2.3 ACCESS DOORS, FIRE-RATED

- A. Door Construction:
 - 1. Ceiling Access Door Construction: ASTM E119 or UL 263.
 - 2. Wall Access Doors: NFPA 252 or UL 10B.
- B. Label: Class B opening according to UL 10B or test by another nationally recognized laboratory. 1 hour fire-rated with maximum temperature rise of 120 degrees C (216 degrees F).
- C. Door Panel: Minimum 0.9 mm (0.0359 inch) thick steel sheet, with mineral-fiber insulation core, insulated sandwich type construction.
- D. Frame: Minimum 1.5 mm (0.0598 inch) thick steel sheet, depth and configuration to suit material and construction type where installed.
 - 1. Frame Flange: Provide at units installed in concrete, masonry, or gypsum board.
 - 2. Exposed Joints in Flange: Weld and grind smooth.
- E. Provide automatic closing device.
- F. Hinge: Continuous steel hinge with stainless steel pin.
- G. Lock: Self-latching, mortise type with provision for fitting flush a standard screw-in type lock cylinder.
 - 1. Lock cylinder specified in Section 08 71 00, DOOR HARDWARE.
 - 2. Latch release device operable from inside of door.
- H. Anchors for Fire-Rated Access Doors: Comply with requirements of applicable fire test.

2.4 ACCESS DOORS, FLUSH PANEL, NON-RATED

- A. Door Panel:
 - 1. 1.9 mm (0.07 inch) thick steel sheet.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

08 31 13-3

10/28/2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

02-01-16

2. Reinforce to maintain flat surface.

B. Frame:

1. 1.5 mm (0.06 inch) thick steel sheet, depth and configuration to suit material and construction type where installed.
2. Frame Flange: Provide at units installed in concrete, masonry, and gypsum board.
3. Exposed Joints in Flange: Weld and grind smooth.

C. Hinge:

1. Concealed spring hinge, 175 degrees of opening.
2. Removable hinge pin to allow removal of door panel from frame.

D. Lock:

1. Flush, screwdriver-operated cam lock.

2.5 ACCESS DOOR, RECESSED PANEL, NON-RATED (NOT USED)

2.6 FABRICATION - GENERAL

- A. Size: Minimum 600 mm (24 inches) square door unless otherwise shown.
- B. Component Fabrication: Straight, square, flat and in same plane where required.
 1. Exposed Edges: Slightly rounded, without burrs, snags and sharp edges.
 2. Exposed Welds: Continuous, ground smooth.
 3. Welding: AWS D1.3/D1.3M. Locks and Non-Continuous Hinges: Provide in numbers required to maintain alignment of door panel with frame. For fire-rated doors, provide hinges and locks as required by fire test.
- C. Anchoring: Make provisions in frame for anchoring to adjacent construction. Provide anchors in size, number and location on four sides to secure access door to substrate. Provide anchors as required by fire test.

2.7 FINISHES

- A. Steel Paint Finish:
 1. Manufacturer's standard powder-coat primer coat.
 2. Field paint finish coat to match adjacent surfaces.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

08 31 13-4

10/28/2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

02-01-16

2.8 ACCESSORIES

- A. Fasteners: Type and size recommended by access door manufacturer, to suit application.
 - 1. Stainless steel fasteners.

PART 3 - EXECUTION

3.1 PREPARATION

- A. Examine and verify substrate suitability for product installation.
 - 1. Verify access door locations and sizes provide required maintenance access to installed building services components.
- B. Protect existing construction and completed work from damage.

3.2 INSTALLATION - GENERAL

- A. Install products according to manufacturer's instructions and approved submittal drawings.
 - 1. When manufacturer's instructions deviate from specifications, submit proposed resolution for Contracting Officer's Representative consideration.
- B. Install access doors and panels permitting access to service valves, traps, dampers, cleanouts, and other mechanical, electrical and conveyor control items concealed in walls and partitions.
- C. Install fire rated access door according to NFPA 80.
- D. Install fire-rated doors in fire-rated partitions and ceilings.
- E. Install flush access panels in partitions and in gypsum board and plaster ceilings.

3.3 ACCESS DOOR AND FRAME INSTALLATION

- A. Wall Installations: Install access doors in openings with sides vertical.
- B. Frames without Flanges: Install frame flush with surrounding finish surfaces.
- C. Frames with Flanges: Overlap opening, with face uniformly spaced from finish surface.
- D. Secure frames to adjacent construction with fasteners.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

08 31 13-5

10/28/2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

02-01-16

- E. Install type, size and quantity of anchoring device suitable for material surrounding opening to maintain alignment, and resist displacement, during normal use of access door.
- F. Field Painting Primed Access Doors: Comply with the requirements of Section 09 91 00, PAINTING.

3.4 ADJUSTMENT

- A. Adjust hardware so door panel opens freely.
- B. Adjust door when closed so door panel is centered in frame.

- - E N D - -

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

01-01-20

SECTION 08 71 00
DOOR HARDWARE

PART 1 - GENERAL

1.1 DESCRIPTION

- A. Door hardware and related items necessary for complete installation and operation of doors.

1.2 RELATED WORK

- A. Caulking: Section 07 92 00 JOINT SEALANTS.
- B. Application of Hardware: Section 08 14 00, WOOD DOORS, Section 08 11 13, HOLLOW METAL DOORS AND FRAMES and Section 08 71 13, AUTOMATIC DOOR OPERATORS
- C. Painting: Section 09 91 00, PAINTING.
- D. Electrical: Division 26, ELECTRICAL.
- E. Fire Detection: Section 28 31 00, FIRE DETECTION AND ALARM.

1.3 GENERAL

- A. All hardware shall comply with UFAS, (Uniform Federal Accessible Standards) unless specified otherwise.
- B. Provide rated door hardware assemblies where required by most current version of the International Building Code (IBC).
- C. Hardware for Labeled Fire Doors and Exit Doors: Conform to requirements of NFPA 80 for labeled fire doors and to NFPA 101 for exit doors, as well as to other requirements specified. Provide hardware listed by UL, except where heavier materials, large size, or better grades are specified herein under paragraph HARDWARE SETS. In lieu of UL labeling and listing, test reports from a nationally recognized testing agency may be submitted showing that hardware has been tested in accordance with UL test methods and that it conforms to NFPA requirements.
- D. Hardware for application on metal and wood doors and frames shall be made to standard templates. Furnish templates to the fabricator of these items in sufficient time so as not to delay the construction.
- E. The following items shall be of the same manufacturer, except as otherwise specified:
 - 1. Mortise locksets.
 - 2. Hinges for hollow metal and wood doors.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

08 71 00-1

10/28/2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

01-01-20

3. Surface applied overhead door closers.
4. Exit devices.
5. Floor closers.

1.4 WARRANTY

A. Automatic door operators shall be subject to the terms of FAR Clause 52.246-21, except that the Warranty period shall be two years in lieu of one year for all items except as noted below:

1. Locks, latchsets, and panic hardware: 5 years.
2. Door closers and continuous hinges: 10 years.

1.5 MAINTENANCE MANUALS

A. In accordance with Section 01 00 00, GENERAL REQUIREMENTS Article titled "INSTRUCTIONS", furnish maintenance manuals and instructions on all door hardware. Provide installation instructions with the submittal documentation.

1.6 SUBMITTALS

A. Submittals shall be in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA AND SAMPLES. Submit 6 copies of the schedule per Section 01 33 23. Submit 2 final copies of the final approved schedules to VAMC Locksmith as record copies (VISN Locksmith if the VAMC does not have a locksmith).

B. Hardware Schedule: Prepare and submit hardware schedule in the following form:

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

01-01-20

Hardware Set per 08 71 00-3.5	Designated Door Openings	Hardware Item	Quantity per Set	Size	Reference Publication Type No.	Finish	Manufacturer Name and Model No.	Key Controls Symbols	UL No. (if Fire-Rated and Listed)	ANSI/BHMA Finish Designation

C. Samples and Manufacturers' Literature:

1. Samples: All hardware items (proposed for the project) that have not been previously approved by Builders Hardware Manufacturers Association shall be submitted for approval. Tag and mark all items with manufacturer's name, catalog number and project number.
2. Samples are not required for hardware listed in the specifications by manufacturer's catalog number, if the contractor proposes to use the manufacturer's product specified.

D. Certificate of Compliance and Test Reports: Submit certificates that hardware conforms to the requirements specified herein. Certificates shall be accompanied by copies of reports as referenced. The testing shall have been conducted either in the manufacturer's plant and certified by an independent testing laboratory or conducted in an independent laboratory, within four years of submittal of reports for approval.

Contract No. 36C26319D0022
 Station Project No. 656-400
 Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

01-01-20

1.7 DELIVERY AND MARKING

A. Deliver items of hardware to job site in their original containers, complete with necessary appurtenances including screws, keys, and instructions. Tag one of each different item of hardware and deliver to Contracting Officer's Representative (COR) for reference purposes. Tag shall identify items by Project Specification number and manufacturer's catalog number. These items shall remain on file in COR's office until all other similar items have been installed in project, at which time the COR will deliver items on file to Contractor for installation in predetermined locations on the project.

1.8 PREINSTALLATION MEETING

A. Convene a preinstallation meeting not less than 30 days before start of installation of door hardware. Require attendance of parties directly affecting work of this section, including Contractor and Installer, COR and VA Station Locksmith, and Hardware Manufacturer's Representative. Review the following:

1. Inspection of door hardware.
2. Job and surface readiness.
3. Coordination with other work.
4. Protection of hardware surfaces.
5. Substrate surface protection.
6. Installation.
7. Adjusting.
8. Repair.
9. Field quality control.
10. Cleaning.

1.9 INSTRUCTIONS

A. Hardware Set Symbols on Drawings: Except for protective plates, door stops, mutes, thresholds and the like specified herein, hardware requirements for each door are indicated on drawings by symbols. Symbols for hardware sets consist of letters (e.g., "HW") followed by a number. Each number designates a set of hardware items applicable to a door type.

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

01-01-20

- B. Keying: Station basis of design for all core cylinders is BEST 7-pin TE core series, interchangeable core, or VA approved equal. Provide removable construction core cylinders that are removable only with a special key or tool without disassembly of lever of lockset. VA will provide final core.

1.10 APPLICABLE PUBLICATIONS

- A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only. In text, hardware items are referred to by series, types, etc., listed in such specifications and standards, except as otherwise specified.
- B. American Society for Testing and Materials (ASTM):
- F883-04.....Padlocks
 - E2180-07.....Standard Test Method for Determining the
Activity of Incorporated Antimicrobial Agent(s)
In Polymeric or Hydrophobic Materials
- C. American National Standards Institute/Builders Hardware Manufacturers Association (ANSI/BHMA):
- A156.1-06.....Butts and Hinges
 - A156.2-03.....Bored and Pre-assembled Locks and Latches
 - A156.3-08.....Exit Devices, Coordinators, and Auto Flush
Bolts
 - A156.4-08.....Door Controls (Closers)
 - A156.5-14.....Cylinders and Input Devices for Locks.
 - A156.6-05.....Architectural Door Trim
 - A156.8-05.....Door Controls-Overhead Stops and Holders
 - A156.11-14.....Cabinet Locks
 - A156.12-05Interconnected Locks and Latches
 - A156.13-05.....Mortise Locks and Latches Series 1000
 - A156.14-07Sliding and Folding Door Hardware
 - A156.15-06.....Release Devices-Closer Holder, Electromagnetic
and Electromechanical
 - A156.16-08.....Auxiliary Hardware
 - A156.17-04Self-Closing Hinges and Pivots
 - A156.18-06.....Materials and Finishes

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

01-01-20

- A156.20-06Strap and Tee Hinges, and Hasps
- A156.21-09.....Thresholds
- A156.22-05.....Door Gasketing and Edge Seal Systems
- A156.23-04.....Electromagnetic Locks
- A156.24-03.....Delayed Egress Locking Systems
- A156.25-07Electrified Locking Devices
- A156.26-06.....Continuous Hinges
- A156.28-07Master Keying Systems
- A156.29-07Exit Locks and Alarms
- A156.30-03High Security Cylinders
- A156.31-07Electric Strikes and Frame Mounted Actuators
- A156.36-10.....Auxiliary Locks
- A250.8-03.....Standard Steel Doors and Frames
- D. National Fire Protection Association (NFPA):
 - 80.....Fire Doors and Other Opening Protectives
 - 101.....Life Safety Code
- E. Underwriters Laboratories, Inc. (UL):
 - Building Materials Directory (2008)

PART 2 - PRODUCTS

2.1 BUTT HINGE

- A. ANSI A156.1. Provide only five-knuckle ball bearing hinges. The following types of butt hinges shall be used for the types of doors listed, except where otherwise specified:
 - 1. Interior Doors: Type A8112/A5112 for doors 900 mm (3 feet) wide or less and Type A8111/A5111 for doors over 900 mm (3 feet) wide.
 - 2. Station basis of design Hager BB1279 4.5" x 4.5" US 26 D HT (or VA approved equal).
- B. Provide quantity and size of hinges per door leaf as follows:
 - 1. Doors up to 1210 mm (4 feet) high: 2 hinges.
 - 2. Doors 1210 mm (4 feet) to 2260 mm (7 feet 5 inches) high: 3 hinges minimum.
 - 3. Doors up to 900 mm (3 feet) wide, standard weight: 114 mm x 114 mm (4-1/2 inches x 4-1/2 inches) hinges.
 - 4. Doors over 900 mm (3 feet) to 1065 mm (3 feet 6 inches) wide, standard weight: 127 mm x 114 mm (5 inches x 4-1/2 inches).

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

01-01-20

5. Doors over 1065 mm (3 feet 6 inches) to 1210 mm (4 feet), heavy weight: 127 mm x 114 mm (5 inches x 4-1/2 inches).
 6. Provide heavy-weight hinges where specified.
 7. At doors weighing 330 kg (150 lbs.) or more, furnish 127 mm (5 inch) high hinges.
- C. See Articles "MISCELLANEOUS HARDWARE" and "HARDWARE SETS" for pivots and hinges other than butts specified above.

2.2 CONTINUOUS HINGES (NOT USED)

2.3 DOOR CLOSING DEVICES

- A. Closing devices shall be products of one manufacturer for each type specified.

2.4 OVERHEAD CLOSERS

- A. Conform to ANSI A156.4, Grade 1.
- B. Station basis of design: Corbin Russwin DC6200 Series (DC6210) (or VA approved equal).
- C. Closers shall conform to the following:
1. The closer shall have minimum 50 percent adjustable closing force over minimum value for that closer and have adjustable hydraulic back check effective between 60 degrees and 85 degrees of door opening.
 2. Where specified, closer shall have hold-open feature.
 3. Size Requirements: Provide multi-size closers, sizes 1 through 6, except where multi-size closer is not available for the required application.
 4. Material of closer body shall be forged or cast.
 5. Arm and brackets for closers shall be steel, malleable iron or high strength ductile cast iron.
 6. Where closers are exposed to the exterior or are mounted in rooms that experience high humidity, provide closer body and arm assembly of stainless-steel material.
 7. Closers shall have full size metal cover; plastic covers will not be accepted.

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

01-01-20

8. Closers shall have adjustable hydraulic back-check, separate valves for closing and latching speed, adjustable back-check positioning valve, and adjustable delayed action valve.
9. Provide closers with any accessories required for the mounting application, including (but not limited to) drop plates, special soffit plates, spacers for heavy-duty parallel arm fifth screws, bullnose or other regular arm brackets, longer or shorter arm assemblies, and special factory templating. Provide special arms, drop plates, and templating as needed to allow mounting at doors with overhead stops and/or holders.
10. Closer arms or backcheck valve shall not be used to stop the door from overswing, except in applications where a separate wall, floor, or overhead stop cannot be used.
11. Provide parallel arm closers with heavy duty rigid arm.
12. Where closers are to be installed on the push side of the door, provide parallel arm type except where conditions require use of top jamb arm.
13. Provide all surface closers with the same body attachment screw pattern for ease of replacement and maintenance.
14. All closers shall have a 1 ½" (38mm) minimum piston diameter.

2.5 FLOOR CLOSERS AND FLOOR PIVOT SETS (NOT USED)

2.6 DOOR STOPS

- A. Conform to ANSI A156.16.
- B. Provide door stops wherever an opened door or any item of hardware thereon would strike a wall, column, equipment or other parts of building construction. For concrete, masonry or quarry tile construction, use lead expansion shields for mounting door stops.
- C. Where cylindrical locks with turn pieces or pushbuttons occur, equip wall bumpers Type L02251 (rubber pads having concave face) to receive turn piece or button.
- D. Provide floor stops (Type L02141 or L02161 in office areas; Type L02121 x 3 screws into floor elsewhere. Wall bumpers, where used, must be installed to impact the trim or the door within the leading half of its width. Floor stops, where used, must be installed within 4-inches of the wall face and impact the door within the leading half of its width.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

08 71 00-8

10/28/2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

01-01-20

- E. Where drywall partitions occur, use floor stops, Type L02141 or L02161 in office areas, Type L02121 elsewhere.
- F. Omit stops where automatic operated doors occur.
- G. Provide appropriate roller bumper for each set of doors (except where closet doors occur) where two doors would interfere with each other in swinging.
- H. Provide appropriate door mounted stop on doors in individual toilets where floor or wall mounted stops cannot be used.
- I. Provide door stops on doors where combination closer magnetic holders are specified, except where wall stops cannot be used or where floor stops cannot be installed within 4-inches of the wall.
- J. Where the specified wall or floor stop cannot be used, provide concealed overhead stops (surface-mounted where concealed cannot be used).

2.7 OVERHEAD DOOR STOPS AND HOLDERS

- A. Conform to ANSI Standard A156.8. Overhead holders shall be of sizes recommended by holder manufacturer for each width of door. Set overhead holders for 110 degree opening, unless limited by building construction or equipment. Provide Grade 1 overhead concealed slide type: stop-only at rated doors and security doors, hold-open type with exposed hold-open on/off control at all other doors requiring overhead door stops.
 - 1. Match Station standard for overhead stops and holders.
 - 2. Where used in conjunction with closer, coordinate type.

2.8 FLOOR DOOR HOLDERS (NOT USED)

2.9 LOCKS AND LATCHES

- A. Conform to ANSI A156.2. Locks and latches for doors 45 mm (1-3/4 inch) thick or over shall have beveled fronts. Lock cylinders shall have not less than seven pins. Cylinders for all locksets shall be removable core type. Cylinders shall be furnished with construction removable cores and construction master keys. Cylinder shall be removable by special key or tool. Construct all cores so that they will be interchangeable into the core housings of all mortise locks. Disassembly of lever or lockset shall not be required to remove core from lockset. All locksets or latches on double doors with fire label

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

01-01-20

shall have latch bolt with 19 mm (3/4 inch) throw unless shorter throw allowed by the door manufacturer's fire label. Provide temporary keying device or construction core to allow opening and closing during construction and prior to the installation of final cores.

B. In addition to above requirements, locks and latches shall comply with following requirements:

1. Mortise Lock and Latch Sets: Conform to ANSI/BHMA A156.13. Mortise locksets shall be series 1000, minimum Grade 2. All locksets and latchsets shall have lever handles fabricated from cast stainless steel. Provide sectional (lever x rose) lever design matching Corbin ML2000 Series. No substitute lever material shall be accepted. All locks and latchsets shall be furnished with 122.55 mm (4-7/8-inch) curved lip strike and wrought box. At outswing pairs with overlapping astragals, provide flat lip strip with 21mm (7/8-inch) lip-to-center dimension. Lock function F02 shall be furnished with emergency tools/keys for emergency entrance. All lock cases installed on lead lined doors shall be lead lined before applying final hardware finish. Furnish armored fronts for all mortise locks. Where mortise locks are installed in high-humidity locations or where exposed to the exterior on both sides of the opening, provide non-ferrous mortise lock case. Match Station basis of design: Use Best TE series key way mortise lock set with 7-pin interchangeable cores; Corbin ML2000 Series (or VA approved equal): ML2055 Classroom; ML2057 Storeroom, ML2069 Patient Bathroom.
2. Auxiliary locks shall be as specified under hardware sets and conform to ANSI A156.36.

2.10 PUSH-BUTTON COMBINATION LOCKS

- A. ANSI/BHMA A156.5, Grade 1. Battery operated pushbutton entry.
- B. Construction: Heavy duty mortise lock housing conforming to ANSI/BHMA A156.13, Grade 1. Lever handles and operating components in compliance with the UFAS and the ADA Accessibility Guidelines. Match lever handles of locks and latchsets on adjacent doors.
- C. Special Features: Key override to permit a master keyed security system and a pushbutton security code activated passage feature to allow access without using the entry code.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

08 71 00-10

10/28/2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

01-01-20

2.11 ELECTROMAGNETIC LOCKS

- A. ANSI/BHMA A156.23; electrically powered, of strength and configuration indicated; with electromagnet attached to frame and armature plate attached to door. Listed under Category E in BHMA's "Certified Product Directory."
 - 1. Match Station basis of design: Detex ECL-230D (or VA approved equal).

2.12 ELECTRIC STRIKES

- A. ANSI/ BHMA A156.31 Grade 1.
- B. General: Use fail-secure electric strikes at fire-rated doors.
- C. Station basis of design manufacturer: Folger Adam 12/24v failsafe (or VA approved equal).

2.13 KEYS (NOT USED)

2.14 KEY CABINET (NOT USED)

2.15 ARMOR PLATES, KICK PLATES, MOP PLATES AND DOOR EDGING

- A. Conform to ANSI Standard A156.6.
- B. Where scheduled provide protective plates and door edging as specified below:
 - 1. Kick plates, mop plates and armor plates of metal, Type J100 series.
 - 2. Provide kick plates and mop plates where specified. Kick plates shall be 254 mm (10 inches) or 305 mm (12 inches) high. Mop plates shall be 152 mm (6 inches) high. Both kick and mop plates shall be minimum 1.27 mm (0.050 inches) thick. Provide kick and mop plates beveled on all 4 edges (B4E). On push side of doors where jamb stop extends to floor, make kick plates 38 mm (1-1/2 inches) less than width of door, except pairs of metal doors which shall have plates 25 mm (1 inch) less than width of each door. Extend all other kick and mop plates to within 6 mm (1/4 inch) of each edge of doors. Kick and mop plates shall butt astragals. For jamb stop requirements, see specification sections pertaining to door frames.
 - 3. Armor plates for doors are listed under Article "Hardware Sets". Armor plates shall be thickness as noted in the hardware set, 875 mm (35 inches) high and 38 mm (1-1/2 inches) less than width of doors, except on pairs of metal doors. Provide armor plates beveled on all

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

08 71 00-11

10/28/2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

01-01-20

- 4 edges (B4E). Plates on pairs of metal doors shall be 25 mm (1 inch) less than width of each door. Where top of intermediate rail of door is less than 875 mm (35 inches) from door bottom, extend armor plates to within 13 mm (1/2 inch) of top of intermediate rail. On doors equipped with panic devices, extend armor plates to within 13 mm (1/2 inch) of panic bolt push bar.
4. Where louver or grille occurs in lower portion of doors, substitute stretcher plate and kick plate in place of armor plate. Size of stretcher plate and kick plate shall be 254 mm (10 inches) high.
- C. Where scheduled provide kickplates fabricated from vinyl acrylic polyvinyl chloride resilient material, minimum 1.52 mm (0.060 inches) thick.
1. Station basis of design: Acrovyn 4000 .060", Color: #209 Slate (or VA approved equal).
 2. Provide adhesive as recommended by resilient material manufacturer.
- D. Provide stainless steel edge guards where so specified at wood doors. Provide mortised type instead of surface type except where door construction and/or ratings will not allow. Provide edge guards of bevel and thickness to match wood door. Provide edge guards with factory cut-outs for door hardware that must be installed through or extend through the edge guard. Provide full-height edge guards except where door rating does not allow; in such cases, provide edge guards to height of bottom of typical lockset armor front. Forward edge guards to wood door manufacturer for factory installation on doors.

2.16 EXIT DEVICES

- A. Conform to ANSI Standard A156.3. Exit devices shall be Grade 1; type and function are specified in hardware sets. Provide flush with finished floor strikes for vertical rod exit devices in interior of building. Trim shall have cast satin stainless steel lever handles of design similar to locksets, unless otherwise specified. Provide key cylinders for keyed operating trim and, where specified, cylinder dogging.

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

01-01-20

- B. Surface vertical rod panics shall only be provided less bottom rod; provide fire pins as required by exit device and door fire labels. Do not provide surface vertical rod panics at exterior doors.
- C. Concealed vertical rod panics shall be provided less bottom rod at interior doors, unless lockable or otherwise specified; provide fire pins as required by exit device and door fire labels. Where concealed vertical rod panics are specified at exterior doors, provide with both top and bottom rods.
- D. Where removable mullions are specified at pairs with rim panic devices, provide mullion with key-removable feature.
- E. At non-rated openings with panic hardware, provide panic hardware with key cylinder dogging feature.
- F. Exit devices for fire doors shall comply with Underwriters Laboratories, Inc., requirements for Fire Exit Hardware. Submit proof of compliance.
- G. Station basis of design: Von Duprin 98/99 Series.

2.17 FLUSH BOLTS (LEVER EXTENSION)

- A. Conform to ANSI A156.16. Flush bolts shall be Type L24081 unless otherwise specified. Furnish proper dustproof strikes conforming to ANSI A156.16, for flush bolts required on lower part of doors.
- B. Lever extension manual flush bolts shall only be used at non-fire-rated pairs for rooms only accessed by maintenance personnel.
- C. Face plates for cylindrical strikes shall be rectangular and not less than 25 mm by 63 mm (1 inch by 2-1/2 inches).
- D. Friction-fit cylindrical dustproof strikes with circular face plate may be used only where metal thresholds occur.
- E. Provide extension rods for top bolt where door height exceeds 2184 mm (7 feet 2 inches).

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

01-01-20

2.18 FLUSH BOLTS (AUTOMATIC) (NOT USED)

2.19 LIGATURE RESISTANT DOOR ALARM (NOT USED)

2.19 DOOR PULLS WITH PLATES (NOT USED)

2.20 PUSH PLATES (NOT USED)

2.21 COMBINATION PUSH AND PULL PLATES (NOT USED)

2.22 COORDINATORS (NOT USED)

2.23 THRESHOLDS

- A. Conform to ANSI A156.21, mill finish extruded aluminum, except as otherwise specified. In existing construction, thresholds shall be installed in a bed of sealant with ¼-20 stainless steel machine screws and expansion shields. In new construction, embed aluminum anchors coated with epoxy in concrete to secure thresholds. Furnish thresholds for the full width of the openings.
- B. At any interior doors exposed to moisture, provide threshold with non-slip abrasive finish.
- C. Provide with miter returns where threshold extends more than 12 mm (0.5 inch) beyond face of frame.

2.24 AUTOMATIC DOOR BOTTOM SEAL AND RUBBER GASKET FOR LIGHT PROOF OR SOUND CONTROL DOORS

- A. Conform to ANSI A156.22. Provide mortise or under-door type, except where not practical. For mortise automatic door bottoms, provide type specific for door construction (wood or metal).

2.25 WEATHERSTRIPS (FOR EXTERIOR DOORS) (NOT USED)

2.26 MISCELLANEOUS HARDWARE

- A. Access Doors: Except for fire-rated doors and doors to Temperature Control Cabinets, equip each single or double metal access door with Lock Type E07213, conforming to ANSI A156.11. Key locks as directed. Ship lock prepaid to the door manufacturer. Hinges shall be provided by door manufacturer.
- B. Mutes: Conform to ANSI A156.16. Provide door mutes or door silencers Type L03011 or L03021, depending on frame material, of white or light gray color, on each steel or wood door frame, except at fire-rated frames and frames for sound-resistant, lightproof and electromagnetically shielded doors. Furnish 3 mutes for single doors and 2 mutes for each pair of doors.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

08 71 00-14

10/28/2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

01-01-20

2.27 PADLOCKS FOR VARIOUS DOORS, GATES AND HATCHES (NOT USED)

2.28 THERMOSTATIC TEMPERATURE CONTROL VALVE CABINETS (NOT USED)

2.29 HINGED WIRE GUARDS (FOR WINDOWS, DOORS AND TRANSOMS) AND WIRE PARTITION DOORS (NOT USED)

2.30 FINISHES

- A. Exposed surfaces of hardware shall have ANSI A156.18, finishes as specified below. Finishes on all hinges, pivots, closers, thresholds, etc., shall be as specified below under "Miscellaneous Finishes."
- B. 626 or 630: All surfaces on interior, except where other finishes are specified.
- C. Miscellaneous Finishes:
 - 1. Hinges --interior doors: 652.
 - 2. Door Closers: Factory applied paint finish. Dull or Satin Aluminum color.
 - 3. Thresholds: Mill finish aluminum.
 - 4. Other primed steel hardware: 600.
- D. Hardware Finishes for Existing Buildings: U.S. Standard finishes shall match finishes of hardware in (similar) existing spaces except where otherwise specified.

2.31 BASE METALS

- A. Apply specified U.S. Standard finishes on different base metals as following:

Finish	Base Metal
652	Steel
626	Brass or bronze
630	Stainless steel

PART 3 - EXECUTION

3.1 HARDWARE HEIGHTS

- A. Locate hardware on doors at heights to match Station standard Steel Craft, however the Contractor shall visit the site, verify location of existing hardware and submit locations to VA COR for approval.
 - 1. All hand-operated hardware to be centered within 864 mm (34 inches) to 1200 mm (48 inches)per code.

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

01-01-20

3.2 INSTALLATION

A. Closer devices, including those with hold-open features, shall be equipped and mounted to provide maximum door opening permitted by building construction or equipment. Closers shall be mounted on side of door inside rooms, inside stairs, and away from corridors . Where closers are mounted on doors they shall be mounted with hex nuts and bolts; foot shall be fastened to frame with machine screws.

B. Hinge Size Requirements:

Door Thickness	Door Width	Hinge Height
45 mm (1-3/4 inch)	900 mm (3 feet) and less	113 mm (4-1/2 inches)
45 mm (1-3/4 inch)	Over 900 mm (3 feet) but not more than 1200 mm (4 feet)	125 mm (5 inches)
35 mm (1-3/8 inch) (hollow core wood doors)	Not over 1200 mm (4 feet)	113 mm (4-1/2 inches)

C. Hinge leaves shall be sufficiently wide to allow doors to swing clear of door frame trim and surrounding conditions.

D. Where new hinges are specified for new doors in existing frames or existing doors in new frames, sizes of new hinges shall match sizes of existing hinges; or, contractor may reuse existing hinges provided hinges are restored to satisfactory operating condition as approved by COR. Existing hinges shall not be reused on door openings having new doors and new frames. Coordinate preparation for hinge cut-outs and screw-hole locations on doors and frames.

E. Hinges Required Per Door:

Door Description	Number butts
Doors 1500 mm (5 ft) or less in height	2 butts
Doors over 1500 mm (5 ft) high and not over 2280 mm (7 ft 6 in) high	3 butts
Doors over 2280 mm (7 feet 6 inches) high	4 butts
Doors with spring hinges 1370 mm (4 feet 6 inches) high or less	2 butts
Doors with spring hinges over 1370 mm (4 feet 6 inches)	3 butts

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

01-01-20

- F. Fastenings: Suitable size and type and shall harmonize with hardware as to material and finish. Provide machine screws and lead expansion shields to secure hardware to concrete, ceramic or quarry floor tile, or solid masonry. Fiber or rawl plugs and adhesives are not permitted. All fastenings exposed to weather shall be of nonferrous metal.
- G. After locks have been installed; show in presence of COR that keys operate their respective locks in accordance with keying requirements. (All keys, Master Key level and above shall be sent Registered Mail to the Medical Center Director along with the bitting list. Also a copy of the invoice shall be sent to the COR for his records.) Installation of locks which do not meet specified keying requirements shall be considered sufficient justification for rejection and replacement of all locks installed on project.

3.3 FINAL INSPECTION

- A. Installer to provide letter to VA COR that upon completion, installer has visited the Project and has accomplished the following:
 - 1. Re-adjust hardware.
 - 2. Evaluate maintenance procedures and recommend changes or additions and instruct VA personnel.
 - 3. Identify items that have deteriorated or failed.
 - 4. Submit written report identifying problems.

3.4 DEMONSTRATION

- A. Demonstrate efficacy of mechanical hardware and electrical, and electronic hardware systems, including adjustment and maintenance procedures, to satisfaction of Resident/Project Engineer and VA Locksmith.

3.5 HARDWARE SETS

- A. Following sets of hardware correspond to hardware symbols shown on drawings. Only those hardware sets that are shown on drawings will be required. Disregard hardware sets listed in specifications but not shown on drawings.
- B. Hardware Consultant working on a project will be responsible for providing additional information regarding these hardware sets. The numbers shown in the following sets come from BHMA standards.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

08 71 00-17

10/28/2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

01-01-20

ELECTRIC HARDWARE ABBREVIATIONS LEGEND:

ADO = Automatic Door Operator

EMCH = Electro-Mechanical Closer-Holder

MHO = Magnetic Hold-Open (wall- or floor-mounted)

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

01-01-20

INTERIOR SINGLE DOORS

HW-1 (NOT USED) HW-1A (NOT USED)

HW-1B (NOT USED)

HW-1C (NOT USED)

HW-1D (NOT USED)

HW-1E (NOT USED)

HW-1F (NOT USED)

HW-1G (NOT USED)

HW-1H (NOT USED)

HW-1J (NOT USED)

HW-1K (NOT USED)

HW-1L (NOT USED)

HW-1M (NOT USED)

HW-1N (NOT USED)

HW-1P (NOT USED)

HW-1Q

DOORS: EXAM ROOMS 133-A, 133-B, 135-A, 135-B, 136-A, 136-B, 137-A, 137-B,
139-A, 130-B, 147-A, 147-B, 145-A, 145-B, 144-A, 144-B, 143-A, 143-B,
142-A, 142-B, 141-A, 141-B, 148-A, 148-B, 150-A, 150-B, 151-A, 151-B

PROCEDURE ROOM 154

PCMHI 138-A, 138-B

Each Door to Have:

NON-RATED

	QUANTITY & TYPE AS REQUIRED
Hinges	
1 Latchset	F04
1 Kick Plate	PVC .060"
1 Closer (@ rated doors)	C02011/C02021
1 Wall Stop	L02101
1 Auto Door Bottom	R0Y346 - HEAVY DUTY
2 Sets Self-Adhesive Seals	R0Y154

HW-1R (NOT USED)

HW-2 (NOT USED)

HW-2A (NOT USED)

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

01-01-20

HW-2B (NOT USED)

HW-2C (NOT USED)

HW-2D (NOT USED)

HW-2E (NOT USED)

HW-2F (NOT USED)

HW-2G

DOORS: TOILET ROOM 131 (Waiting Area)

Each Door to Have:

NON-RATED

<u>Hinges</u>	<u>QUANTITY & TYPE AS REQUIRED</u>
1 Keyed Privacy Indicator Lock	F13 x OCCUPANCY INDICATOR
1 Closer	C02011/C02021
1 Kick Plate	PVC .060"
1 Mop Plate (@ Inswing Doors)	PVC .060"
1 Wall Stop	L02101 CONVEX
1 Auto Door Bottom	R0Y346 - HEAVY DUTY
2 Set Self-Adhesive Seals	R0Y154

HW-2H

DOORS: TOILET ROOMS 134, 149, 155

Each Door to Have:

NON-RATED

<u>Hinges</u>	<u>QUANTITY & TYPE AS REQUIRED</u>
1 Hospital Privacy Latch	F02-MOD x TURNPIECE BOTH SIDES X OCCUPANCY INDICATOR
1 Kick Plate	PVC .060"
1 Mop Plate (@ Inswing Doors)	PVC .060"
1 Edge Guard (@ Wood Doors)	J208M / J211 (VERIFY), CUT: HARDWARE
1 Wall Stop	LC2101
3 Silencers	L03011

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

01-01-20

HW-2J (NOT USED)

HW-2K (NOT USED)

HW-3

DOORS: RECEPTION 159A-B

Each Door to Have:

NON-RATED

	QUANTITY & TYPE AS REQUIRED
Hinges	
1 Office Lock	F04
1 Closer	C02011/C02021
1 Kick Plate	PVC .060"
1 Wall Stop	L02101
1 Set Self-Adhesive Seals	ROY154

HW-3A

DOORS: RECEPTION 159A-A

Each Door to Have:

NON-RATED

	QUANTITY & TYPE AS REQUIRED
Hinges	
1 Office Lock	F04
1 Closer	C02011/C02021
1 Overhead Stop	COORDINATE TYPE WITH CLOSER
1 Kick Plate	PVC .060"
1 Set Self-Adhesive Seals	ROY154
1 Floor Stop	L02121 x 3 FASTENERS

HW-3B

DOORS: TEAM WORK AREA 158-A, 158-B, 132-A

Each Door to Have:

NON-RATED

	QUANTITY & TYPE AS REQUIRED
Hinges	
1 Office Lock	F04
1 Closer	C02011/C02021
1 Kick Plate	PVC .060"

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

08 71 00-21

10/28/2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

01-01-20

- 1 Set Self-Adhesive Seals ROY154
- 1 Floor Stop L02121 x 3 FASTENERS

HW-3C (NOT USED)

HW-3D (NOT USED)

HW-3E

DOORS: MEDICATION ROOM 146-A, 146-B

Each Door to Have:

NON-RATED

- | <u>Hinges</u> | <u>QUANTITY & TYPE AS REQUIRED</u> |
|---------------------------|---|
| 1 Office Lock | F04 |
| 1 Wall Stop | L02101 |
| 1 Set Self-Adhesive Seals | ROY154 |
| 1 Electrified Lock | F07 (E01-REX, E06) 24VDC |
| 1 Power Supply | Regulated, Filtered, 24VDC, Amperage
as required |

120VAC POWER, CONDUIT, AND WIRING BY DIVISION 26.CARD READER BY DIVISION

28. Station Basis of Design to match noted in 28 05 00-2.2.C.13.

HW-3E-1 (NOT USED)

HW-3E-2 (NOT USED)

HW-3E-3 (NOT USED)

HW-3F (NOT USED)

HW-3G (NOT USED)

HW-3G-1 (NOT USED)

HW-3H (NOT USED)

HW-3J (NOT USED)

HW-4 (NOT USED)

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

01-01-20

HW-4A

DOORS: WAITING 159
CORRIDORS C2-A, C3-A

Each [ADO] Door to Have:

NON-RATED

Hinges	QUANTITY & TYPE AS REQUIRED
1 Transfer Hinge	4 WIRE TYPE AS REQUIRED
1 Classroom Lock	F08
1 Electric Strike	E09311 (FAIL-SECURE), 24VDC
1 Power Supply	REGULATED, FILTERED, 24VDC, AMPERAGE AS REQUIRED
1 Kick Plate	PVC .060"
1 Edge Guard (@ Wood Doors)	J208M / J211 (VERIFY), CUT: HARDWARE
1 Set Self-Adhesive Seals	R0Y154

AUTOMATIC DOOR OPERATOR AND CONTROLS BY SECTION 08 71 13, AUTOMATIC DOOR OPERATORS.

POWER TRANSFER FOR RE-ACTIVATION SENSOR WIRING (RE-ACTIVATION SENSORS PROVIDED BY SECTION 08 71 13).

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

01-01-20

HW-4B (NOT USED)

HW-4C (NOT USED)

HW-4D

DOORS: CORRIDOR C3-B

Each Door to Have:

RATED

1 Hinge	QUANTITY & TYPE AS REQUIRED
1 Classroom Lock	F08 (Corbin ML2055)
1 Closer	C02011/C02021
1 Armor Plate	J101 x 1.275 MM (0.050 INCH) THICKNESS
1 Kick Plate PVC .060"	
1 Edge Guard (@ Wood Doors)	J208M / J211 (VERIFY), CUT: HARDWARE
1 Wall Stop L02101	
1 Set Self-Adhesive Seals	R0Y154

HW-4E (NOT USED)

HW-4F (NOT USED)

HW-4G (NOT USED)

HW-4H (NOT USED)

HW-4J (NOT USED)

HW-4K (NOT USED)

HW-4L (NOT USED)

HW-4M (NOT USED)

HW-4N (NOT USED)

HW-4P (NOT USED)

HW-4Q (NOT USED)

HW-4R (NOT USED)

HW-4S (NOT USED)

HW-4T (NOT USED)

HW-4U (NOT USED)

HW-4V (NOT USED)

HW-4X (NOT USED)

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

08 71 00-24

10/28/2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

01-01-20

HW-4Y (NOT USED)

HW-5

DOORS: TEAM WORK AREA 132-B
TEAM WORK AREA 132-C

Each Door to Have:

RATED

	QUANTITY & TYPE AS REQUIRED
Hinges	
1 Storeroom Lock	F07
1 Closer	C02011/C02021
1 Kick Plate	PVC .060"
1 Wall Stop	L02101
1 Set Self-Adhesive Seals	R0Y154

HW SET: 5B

DOORS: STORAGE 130A, STORAGE 132A, STORAGE 109
LOW VOLTAGE 130B, ELECTRICAL 130C

Each Door to Have:

RATED

	QUANTITY & TYPE AS REQUIRED
Hinges	
1 Storeroom Lock	F07
1 Closer	C02011/C02021
1 Overhead Stop	COORDINATE WITH CLOSER
1 Armor Plate	J101 x 1.275 MM (0.050 INCH) THICKNESS
1 Kick Plate	PVC .060"
1 Edge Guard (@ Wood Doors)	J208M / J211 (VERIFY), CUT: HARDWARE
1 Set Self-Adhesive Seals	R0Y154

HW SET:-5C (NOT USED)

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

01-01-20

HW SET: 5D

DOORS: HAC 156, 121, 121A

Each Door to Have:

RATED

	QUANTITY & TYPE AS REQUIRED
Hinges	
1 Storeroom Lock	F07
1 Kick Plate	J102 (@ STORAGE, EVM, & HAC ROOMS ONLY)
1 Armor Plate	J101 x 1.275 MM (0.050 INCH) THICKNESS
1 Wall Stop	L02101
1 Closer	C02011/C02021
3 Silencers	L03011

HW-5E (NOT USED)

HW-5F (NOT USED)

HW SET: 5G

DOORS: CORRIDOR 25
UNFINISHED SPACE 19A-B
STORAGE 25B

Each Door to Have:

RATED

	QUANTITY & TYPE AS REQUIRED
Hinges	
1 Storeroom Lock	F07
1 Kick Plate	J102
1 Closer	C02011/C02021
1 Overhead Stop	COORDINATE WITH CLOSERS
1 Threshold	J32300 x 57 MM WIDTH (2-1/4 INCHES)
1 Auto Door Bottom	R0Y346 - HEAVY DUTY
2 Sets Self-Adhesive Seals	R0Y154

HW-5H (NOT USED)

HW-5J (NOT USED)

HW-5K (NOT USED)

HW-5L (NOT USED)

HW-6 (NOT USED)

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

08 71 00-26

10/28/2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

01-01-20

HW-6A (NOT USED)

HW-6B (NOT USED)

HW-6C (NOT USED)

HW-6D (NOT USED)

HW-6E (NOT USED)

HW-6F (NOT USED)

HW-6G (NOT USED)

HW-7 (NOT USED)

HW-7A (NOT USED)

HW-7B (NOT USED)

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

01-01-20

INTERIOR PAIRS OF DOORS

HW-8 (NOT USED)

HW-8A (NOT USED)

HW-8B (NOT USED)

HW-8C (NOT USED)

HW-8D (NOT USED)

HW-8E (NOT USED)

HW-8F (NOT USED)

HW-9 (NOT USED)

HW-10 (NOT USED)

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

01-01-20

HW-10A (NOT USED)

HW-10B (NOT USED)

HW-10C (NOT USED)

HW-10D (NOT USED)

HW-10E (NOT USED)

HW-10F (NOT USED)

HW-10G (NOT USED)

HW-10H (NOT USED)

HW-10J (NOT USED)

HW-10K (NOT USED)

HW-10L (NOT USED)

HW SET: 10M (NOT USED)

HW-11 (NOT USED)

HW-11A (NOT USED)

HW-11B (NOT USED)

HW-11C

DOORS: CORRIDOR 19A

Each Pair to Have:

RATED

Hinges	QUANTITY & TYPE AS REQUIRED
1 Set Auto Flush Bolts	TYPE 25 LESS BOTTOM BOLT
1 Storeroom Lock	F07
1 Coordinator	TYPE 21A
1 Overlapping Astragal with Self-Adhesive Seal	R0Y634 x R0Y154 x THRU-BOLTS
2 Closers	C02011/C02021
2 Kick Plates	J102 (@ STORAGE ROOMS ONLY)
2 Overhead Stops	COORDINATE WITH CLOSERS
1 Threshold	J32300 x 57 MM WIDTH (2-1/4 INCHES)
2 Auto Door Bottoms	R0Y346 - HEAVY DUTY
2 Set Self-Adhesive Seals	R0Y154

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

08 71 00-29

10/28/2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

01-01-20

HW-12 (NOT USED)

HW-12A (NOT USED)

HW-12B (NOT USED)

HW-12C (NOT USED)

HW-12D (NOT USED)

HW-12E (NOT USED)

HW-12F (NOT USED)

HW-12G (NOT USED)

HW-12H (NOT USED)

HW-12J (NOT USED)

HW-13 (NOT USED)

EXTERIOR SINGLE DOORS (NOT USED)

EXTERIOR PAIRS OF DOORS (NOT USED)

EXTERIOR SINGLE GATES (NOT USED)

EXTERIOR PAIRS OF GATES (NOT USED)

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

01-01-20

RESIDENTIAL UNIT SINGLE DOORS (NOT USED)

RESIDENTIAL UNIT PAIRS OF DOORS (NOT USED)

INTERIOR SINGLE SECURITY DOORS

HW-SH-1 (NOT USED)

HW-SH-2 (NOT USED)

HW-SH-3

DOOR: CORRIDOR C2-B

Each [AC, EL, REX, DPS] Door to Have:

RATED/NON-RATED

Hinges	QUANTITY & TYPE AS REQUIRED
1 Transfer Hinge	4-WIRE TYPE AS REQUIRED
1 Electrified Lock	DETEX ECL-230D
1 Power Supply	REGULATED, FILTERED, 24VDC, AMPERAGE AS REQUIRED
1 Closer	C02011/C02021
1 Overhead Stop	MATCH STATION STANDARD
1 Auto Door Bottom	R0Y346 - HEAVY DUTY
2 Sets Self-Adhesive Seals	R0Y154
1 Alarm Contact	

120VAC POWER, CONDUIT, AND WIRING BY DIVISION 26.

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

01-01-20

HW-SH-3A (NOT USED)

HW-SH-3B (NOT USED)

HW SET: SH-3C

DOORS: SOILED HOLDING 157
SPS/LOGISTICS 152
CLEAN STORAGE ROOMS 129, 140, 153, 158A

Each [PB] Door to Have:

RATED

<u>Hinges</u>	<u>QUANTITY & TYPE AS REQUIRED</u>
1 Push-button Combination Lock	N3 - A156.13 F07 G1 E06
1 Closer	C02011/C02021
1 Armor Plate	J101 x 1.275 MM (0.050 INCH) THICKNESS
1 Edge Guard (@ Wood Doors)	J208M / J211 (VERIFY), CUT: HARDWARE
1 Overhead Stop	COORDINATE WITH STATION STANDARD
1 Set Self-Adhesive Seals	R0Y154

HW-SH-3D (NOT USED)

HW-SH-3E (NOT USED)

HW-SH-3F (NOT USED)

HW-SH-3G (NOT USED)

HW-SH-3H (NOT USED)

HW-SH-4 (NOT USED)

HW-SH-4A (NOT USED)

HW-SH-4B (NOT USED)

HW-SH-5 (NOT USED)

HW-SH-6 (NOT USED)

INTERIOR PAIRS OF SECURITY DOORS (NOT USED)

EXTERIOR SINGLE SECURITY DOORS (NOT USED)

MENTAL HEALTH AREAS (NOT USED)

- - - E N D - - -

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

08 71 00-32

10/28/2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

02-01-16

SECTION 08 71 13
AUTOMATIC DOOR OPERATORS

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Automatic operators for swinging doors.

1.2 RELATED REQUIREMENTS

- A. Door Hardware: Section 08 71 00, DOOR HARDWARE.
- B. Access Control Devices: Division 28, ELECTRONIC SAFETY AND SECURITY.
- C. Electric General Wiring, Connections and Equipment Requirements:
Division 26, ELECTRICAL.

1.3 APPLICABLE PUBLICATIONS

- A. Comply with references to extent specified in this section.
- B. ASTM International (ASTM):
 1. B209-14 - Aluminum and Aluminum-Alloy Sheet and Plate.
 2. A1008/A1008M-15 - Steel, Sheet, Cold-Rolled, Carbon, Structural, High-Strength Low-Alloy, High-Strength Low-Alloy with Improved Formability, Solution Hardened, and Baked Hardenable.
- C. Builders Hardware Manufacturers Association (BHMA):
 1. BHMA A156.10-11 - Power Operated Pedestrian Doors.
- D. National Fire Protection Association (NFPA):
 1. 101-15 - Life Safety Code.
- E. Underwriters Laboratories (UL):
 1. 325-13 - Standard for Doors, Drapery, Gate, Louver, and Window Operators and Systems.

1.4 SUBMITTALS

- A. Submittal Procedures: Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Submittal Drawings:
 1. Show size, configuration, and fabrication and installation details.
- C. Manufacturer's Literature and Data:
 1. Description of each product.
 2. Installation instructions.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

08 71 13-1

10/28/2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

02-01-16

3. Warranty.

D. Sustainable Construction Submittals:

1. Recycled Content: Identify post-consumer and pre-consumer recycled content percentage by weight.

E. Test reports: Certify each product complies with specifications.

F. Qualifications: Substantiate qualifications comply with specifications.

1. Manufacturer with project experience list.

2. Installer with project experience list.

G. Operation and Maintenance Data:

1. Care instructions for each exposed finish product.

2. Start-up, maintenance, troubleshooting, emergency, and shut-down instructions for each operational product.

1.5 QUALITY ASSURANCE

A. Manufacturer's Qualifications:

1. Regularly manufactures specified products.

2. Manufactured specified products with satisfactory service on five similar installations for minimum five years.

a. Provide contact names and addresses for completed projects when requested by Contracting Officer's Representative.

B. Installer's Qualifications: Experienced installer, approved by the manufacturer.

1.6 WARRANTY

A. Construction Warranty: FAR clause 52.246-21, "Warranty of Construction."

B. Manufacturer's Warranty: Warrant automatic door operators against material and manufacturing defects.

1. Warranty Period: Two years.

PART 2 - PRODUCTS

2.1 SYSTEM PERFORMANCE

A. Comply with requirements of BHMA A156.10. Unless otherwise indicated on Drawings, provide operators that move doors from fully closed to fully

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

02-01-16

opened position in five seconds maximum time interval, when speed adjustment is at maximum setting.

- B. Equipment: Conforming to UL 325. Provide key operated power disconnect wall switch for each door installation.
- C. Electrical Wiring, Connections and Equipment: Motors, starters, controls, associated devices, and interconnecting wiring required for installation. Equipment and wiring as specified in Division 26, ELECTRICAL.

2.2 PRODUCTS - GENERAL

- A. Provide door operators from one manufacturer.
- B. Provide one type of operator throughout project.
- C. Sustainable Construction Requirements:
 - 1. Steel Recycled Content: 30 percent total recycled content, minimum.
 - 2. Aluminum Recycled Content: 80 percent total recycled content, minimum.

2.3 SWING DOOR OPERATORS

- A. General:
 - 1. Type: Institutional type.
 - 2. Size: As recommended by manufacturer for door weight and sizes.
- B. Function:
 - 1. Provide operators, enclosed in housing, permitting opening of door by energizing motor and stopped by electrically reducing Voltage and stalling motor against mechanical stop.
 - 2. Door to close by means of spring energy, and closing force controlled by gear system and motor being used as dynamic brake without power or controlled by hydraulic closer in electro-hydraulic operators.
 - 3. Opening and Closing Speeds: Field adjustable.
 - 4. Operators with checking mechanism providing cushioning action at last part of door travel, in both opening and closing cycle.
 - 5. Operators capable of recycling doors instantaneously to fully open position from any point in closing cycle when control switch is activated.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

08 71 13-3

10/28/2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

02-01-16

6. When automatic power is interrupted or shut-off, permit doors to easily open manually without damage to automatic operator system.
- C. Connect hardware with drive arm attached to door with pin linkage rotating in a self-lubricating bearing. Prevent doors from pivoting on shaft of operator.
- D. Operator Housing:
 1. ASTM B209, Type 6063-T5 aluminum alloy, 112 mm (4-1/2 inches) wide by 140 mm (5.5 inches) high by 3.2 mm (0.125 inch) thick, aluminum extrusions with enclosed end caps for application to 100 mm (4 inches) and larger frame systems.
- E. Power Operator:
 1. Completely assembled and sealed unit including gear drive transmission, mechanical spring and bearings, located in aluminum case and filled with special lubricant for extreme temperature conditions. Rubber mounted units with provisions for easy maintenance and replacement, without removing door from pivots or frame.
- F. Motors:
 1. Provide with interlock to prevent operation when doors are electrically locked from opening.
- G. Electrical Control:
 1. Self-contained electrical control unit, including necessary transformers, relays, rectifiers, and other electronic components for proper operation and switching of power operator.
 2. Connecting Harnesses: Interlocking plugs.
- H. Accessories:
 1. Metal mounting supports, brackets and other accessories necessary for installation of operators at head of door frames.
- I. Microprocessor Controls:
 1. Multi-function microprocessor control providing adjustable hold open time (1-30 seconds) with fully adjustable opening speed, LED indications for sensor input signals and operator status and power assist close options. Control capable of receiving activation signals from any device with normally open dry contact output.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

08 71 13-4

10/28/2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

02-01-16

2. Hold doors held open by low Voltage applied to the continuous duty motor.
3. Controls:
 - a. Adjustable safety circuit that monitors door operation and stops opening direction of door if obstruction is sensed.
 - b. Recycle feature that reopens door if obstruction is sensed at any point during closing cycle.
 - c. Standard three position key switch with functions for ON, OFF, and HOLD OPEN, mounted on operator enclosure, door frame, or wall, as indicated on drawings.

2.4 POWER UNITS

- A. Self-contained, electric operated and independent of door operator.
 1. Capacity and size of power circuits according to automatic door operator manufacturer's specifications and Division 26 - ELECTRICAL.

2.5 DOOR CONTROLS

- A. Control Devices: BHMA A156.10; control opening and closing functions.
- B. Open doors when control device is actuated; hold doors in open positions; then, close doors after a adjustable time period , unless safety device or reactivated control interrupts operation.
- C. Manual Controls:
 1. Push Plate Wall Switch: Recessed type, stainless steel push plate minimum 100 mm by 100 mm (4 inch by 4 inch), with 13 mm (1/2 inch) high letters "To Operate Door-Push" engraved on face of plate.
- D. Motion Detector:
 1. Mounting: Surface or concealed.
 2. Detection Area: 1500 mm (60 inches) deep and 1500 mm (60 inches) across, plus or minus 150 mm (6 inches).
 3. Response Time: 25 milliseconds, maximum.
 4. Control Power: 24 Volt DC.
 5. Design units to be unaffected by cleaning material, solvents, dust, dirt and outdoor weather conditions.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

08 71 13-5

10/28/2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

02-01-16

2.6 SAFETY DEVICES

- A. Swing Doors: Install presence sensor on pull side of door to detect any person standing in door swing path and prevent door from opening.
 - 1. Time delay Switches: Adjustable between 3 to 60 seconds and control closing cycle of doors.
- B. Install decal signs with "In" or "Do Not Enter" on both faces of each door.

PART 3 - EXECUTION

3.1 PREPARATION

- A. Examine and verify substrate suitability for product installation.
 - 1. Verify door opening is correctly sized and within acceptable tolerances.
- B. Protect existing construction and completed work from damage.

3.2 INSTALLATION

- A. Install products according to manufacturer's instructions and approved submittal drawings.
 - 1. When manufacturer's instructions deviate from specifications, submit proposed resolution for Contracting Officer's Representative consideration.
- B. Coordinate door installation with other related work.
- C. Install manual controls and power disconnect switches recessed or semi-flush mounted in partitions.
- D. Secure operator components to adjacent construction with suitable fastenings.
- E. Conceal conduits, piping, and electric equipment, in finish work.
- F. Install power units in locations shown.
 - 1. Where units are mounted on walls, provide metal supports or shelves for units.
 - 2. Ensure equipment, including time delay switches, are accessible for maintenance and adjustment.
- G. Ensure operators are adjusted and function properly for type of expected traffic.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

08 71 13-6

10/28/2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

02-01-16

- H. Synchronize each leaf of pair doors to open and close simultaneously.
Permit each door leaf to be opened manually, independent of other door leaf.
- I. Install controls at positions shown and ensuring convenience for expected traffic.
- J. Push Plate Wall Switches Mounting Height: 1000 mm (40 inches) maximum, unless otherwise approved by Contracting Officer's Representative.

3.3 DEMONSTRATION AND TRAINING

- A. Instruct VA personnel in proper automatic door operator operation and maintenance.
 - 1. Trainer: Manufacturer approved instructor.
 - 2. Training Time: 2 hours minimum.
- B. Coordinate instruction to VA personnel with VA Contracting Officer's Representative.

- - E N D - -

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

10-01-15

SECTION 08 80 00
GLAZING

PART 1 - GENERAL

1.1 DESCRIPTION:

A. This section specifies the following:

1. Glass.

1.2 RELATED WORK:

- A. Sustainable Design Requirements: Section 01 81 13, SUSTAINABLE CONSTRUCTION REQUIREMENTS.
- B. Factory glazed by manufacturer in following units:
1. Doors: Section 08 14 00, INTERIOR WOOD DOORS.
 2. Mirrors: Section 10 28 00, TOILET, BATH, AND LAUNDRY ACCESSORIES.

1.3 LABELS:

- A. Temporary labels:
1. Provide temporary label on each light of glass identifying manufacturer or brand and glass type, quality and nominal thickness.
 2. Label in accordance with NFRC label requirements.
 3. Temporary labels are to remain intact until glass is approved by Contracting Officer's Representative (COR).
- B. Permanent labels:
1. Locate in corner for each pane.
 2. Label in accordance with ANSI Z97.1 and SGCC label requirements.
 - a. Tempered glass.

1.4 PERFORMANCE REQUIREMENTS:

- A. General: Design glazing system consistent with guidance and practices presented in the GANA Glazing Manual, GANA Laminated Glazing Manual, and GANA Sealant Manual, as applicable to project. Installed glazing is to withstand applied loads, thermal stresses, thermal movements, building movements, permitted tolerances, and combinations of these conditions without failure, including loss or glass breakage attributable to defective manufacture, fabrication, or installation; failure of sealants or gaskets to remain watertight and airtight; deterioration of glazing materials; unsafe engagement of the framing

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

10-01-15

system; deflections beyond specified limits; or other defects in construction.

B. Glazing Unit Design: Design glass, including engineering analysis meeting requirements of authorities having jurisdiction. Thicknesses listed are minimum. Coordinate thicknesses with framing system manufacturers.

1. Design glass in accordance with ASTM E1300, and for conditions beyond the scope of ASTM E1300, by a properly substantiated structural analysis.

1.5 SUBMITTALS:

A. In accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.

B. Sustainable Design Submittals, as described below:

1. Volatile organic compounds per volume as specified in PART 2 - PRODUCTS.

D. Manufacturer Warranty.

E. Manufacturer's Literature and Data:

1. Glass, each kind required.
2. Glazing cushion.
- 3 Sealing compound.

F. Samples:

1. Size: 305 mm by 305 mm (12 inches by 12 inches).

G. Preconstruction Adhesion and Compatibility Test Report: Submit glazing sealant manufacturer's test report indicating glazing sealants were tested for adhesion to glass and glazing channel substrates and for compatibility with glass and other glazing materials.

1.6 DELIVERY, STORAGE AND HANDLING:

A. Delivery: Schedule delivery to coincide with glazing schedules so minimum handling of crates is required. Do not open crates except as required for inspection for shipping damage.

B. Storage: Store cases according to printed instructions on case, in areas least subject to traffic or falling objects. Keep storage area clean and dry.

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

10-01-15

C. Handling: Unpack cases following printed instructions on case. Stack individual windows on edge leaned slightly against upright supports with separators between each..

1.7 PROJECT CONDITIONS:

Field Measurements: Field measure openings before ordering tempered glass products to assure for proper fit of field measured products.

1.8 WARRANTY:

- A. Construction Warranty: Comply with the FAR clause 52.246-21 "Warranty of Construction".
- B. Manufacturer Warranty: Manufacturer shall warranty their glazing from the date of installation and final acceptance by the Government as follows: Submit manufacturer warranty.

1.9 APPLICABLE PUBLICATIONS:

- A. Publications listed below form a part of this specification to extent referenced. Publications are referenced in text by basic designation only.
- B. American Architectural Manufacturers Association (AAMA):
 - 800.....Test Methods for Sealants
 - 810.1-77.....Expanded Cellular Glazing Tape
- C. American National Standards Institute (ANSI):
 - Z97.1-14.....Safety Glazing Material Used in
Building - Safety Performance Specifications
and Methods of Test
- D. American Society of Civil Engineers (ASCE):
 - 7-10.....Wind Load Provisions
- E. ASTM International (ASTM):
 - C542-05(R2011).....Lock-Strip Gaskets
 - C716-06.....Installing Lock-Strip Gaskets and Infill
Glazing Materials
 - C794-10.....Adhesion-in-Peel of Elastomeric Joint Sealants
 - C864-05(R2011).....Dense Elastomeric Compression Seal Gaskets,
Setting Blocks, and Spacers
 - C920-14a.....Elastomeric Joint Sealants
 - C964-07(R2012).....Standard Guide for Lock-Strip Gasket Glazing

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

10-01-15

C1036-11 (R2012).....Flat Glass

C1048-12.....Heat-Treated Flat Glass-Kind HS, Kind FT Coated
and Uncoated Glass.

C1172-14.....Laminated Architectural Flat Glass

C1349-10.....Standard Specification for Architectural Flat
Glass Clad Polycarbonate

C1376-10.....Pyrolytic and Vacuum Deposition Coatings on
Flat Glass

D635-10.....Rate of Burning and/or Extent and Time of
Burning of Self-Supporting Plastic in a
Horizontal Position

D4802-10.....Poly (Methyl Methacrylate) Acrylic Plastic
Sheet

E84-14.....Surface Burning Characteristics of Building
Materials

E119-14.....Standard Test Methods for Fire Test of Building
Construction and Material

E1300-12a.....Load Resistance of Glass in Buildings

E1886-13a.....Standard Test Method for Performance of
Exterior Windows, Curtain Walls, Doors, and
Impact Protective Systems Impacted by
Missile(s) and Exposed to Cyclic Pressure
Differentials

E1996-14a.....Standard Specification for Performance of
Exterior Windows, Curtain Walls, Doors, and
Impact Protective Systems Impacted by Windborne
Debris in Hurricanes

E2141-12.....Test Methods for Assessing the Durability of
Absorptive Electrochromic Coatings on Sealed
Insulating Glass Units

E2190-10.....Insulating Glass Unit

E2240-06.....Test Method for Assessing the Current-Voltage
Cycling Stability at 90 Degree C (194 Degree F)
of Absorptive Electrochromic Coatings on Sealed
Insulating Glass Units

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

08 80 00-4

10/28/2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

10-01-15

- E2241-06.....Test Method for Assessing the Current-Voltage
Cycling Stability at Room Temperature of
Absorptive Electrochromic Coatings on Sealed
Insulating Glass Units
- E2354-10.....Assessing the Durability of Absorptive
Electrochromic Coatings within Sealed
Insulating Glass Units
- E2355-10.....Test Method for Measuring the Visible Light
Transmission Uniformity of an Absorptive
Electrochromic Coating on a Glazing Surface
- F1233-08.....Standard Test Method for Security Glazing
Materials and Systems
- F1642-12.....Test Method for Glazing and Glazing Systems
Subject to Airblast Loadings
- E. Code of Federal Regulations (CFR):
16 CFR 1201-10.....Safety Standard for Architectural Glazing
Materials
- F. Glass Association of North America (GANA):
2010 Edition.....GANA Glazing Manual
2008 Edition.....GANA Sealant Manual
2009 Edition.....GANA Laminated Glazing Reference Manual
2010 Edition.....GANA Protective Glazing Reference Manual
- G. International Code Council (ICC):
IBC.....International Building Code
- H. Insulating Glass Certification Council (IGCC)
- I. Insulating Glass Manufacturer Alliance (IGMA):
TB-3001-13.....Guidelines for Sloped Glazing
TM-3000.....North American Glazing Guidelines for Sealed
Insulating Glass Units for Commercial and
Residential Use
- J. Intertek Testing Services - Warnock Hersey (ITS-WHI)
- K. National Fire Protection Association (NFPA):
80-16.....Fire Doors and Windows
252-12.....Fire Tests of Door Assemblies

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

08 80 00-5

10/28/2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

10-01-15

257-12.....Standard on Fire Test for Window and Glass

Block Assemblies

- L. National Fenestration Rating Council (NFRC)
- M. Safety Glazing Certification Council (SGCC) 2012:
Certified Products Directory (Issued Semi-Annually).
- N. Underwriters Laboratories, Inc. (UL):
 - 9-08 (R2009).....Fire Tests of Window Assemblies
 - 263-14.....Fire Tests of Building Construction and
Materials
 - 752-11.....Bullet-Resisting Equipment.
- O. Unified Facilities Criteria (UFC):
 - 4-010-01-03 (R2007).....DOD Minimum Antiterrorism Standards for
Buildings
- P. U.S. Veterans Administration:
 - Physical Security Design Manual for VA Facilities (VAPSDG); Life Safety
Protected
 - Physical Security Design Manual for VA Facilities (VAPSDG); Mission
Critical Facilities
 - Architectural Design Manual for VA Facilities (VASDM)
- Q. Environmental Protection Agency (EPA):
 - 40 CFR 59 (2014).....National Volatile Organic Compound Emission
Standards for Consumer and Commercial Products

PART 2 - PRODUCT

2.1 GLASS:

- A. Provide minimum thickness stated and as additionally required to meet performance requirements.
 - 1. Provide minimum 6 mm (1/4 inch) thick glass units unless otherwise indicated.
- B. Obtain glass units from single source from single manufacturer for each glass type.
- C. Clear Glass:
 - 1. ASTM C1036, Type I, Class 1, Quality q4.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

08 80 00-6

10/28/2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

10-01-15

- 2.2 HEAT-TREATED GLASS (NOT USED)
- 2.3 COATED GLASS (NOT USED)
- 2.4 ELECTROCHROMIC COATED GLASS (NOT USED)
- 2.5 PLASTIC GLAZING (NOT USED)
- 2.6 LAMINATED GLASS (NOT USED)
- 2.7 SECURITY GLAZING ASSEMBLY (NOT USED)
- 2.8 INSULATING GLASS UNITS (NOT USED)
- 2.9 FIRE PROTECTION AND FIRE RESISTANCE GLAZING (NOT USED)
- 2.10 SWITCHABLE PRIVACY GLASS (NOT USED)
- 2.11 INSULATING PLASTIC SHEETS (NOT USED)
- 2.12 GLAZING ACCESSORIES:

A. As required to supplement the accessories provided with the items to be glazed and to provide a complete installation. Ferrous metal accessories exposed in the finished work are to have a finish that will not corrode or stain while in service. Fire rated glazing to be installed with glazing accessories in accordance with the manufacturer's installation instructions.

B. Setting Blocks: ASTM C864:

1. Silicone type.
2. Channel shape; having 6 mm (1/4 inch) internal depth.
3. Shore A hardness of 80 to 90 Durometer.
4. Block lengths: 50 mm (2 inches) except 100 to 150 mm (4 to 6 inches) for insulating glass.
5. Block width: Approximately 1.6 mm (1/16 inch) less than the full width of the rabbet.
6. Block thickness: Minimum 4.8 mm (3/16 inch). Thickness sized for rabbet depth as required.

C. Spacers: ASTM C864:

1. Channel shape having a 6 mm (1/4 inch) internal depth.
2. Flanges not less 2.4 mm (3/32 inch) thick and web 3 mm (1/8 inch) thick.
3. Lengths: 25 to 76 mm (1 to 3 inches).
4. Shore A hardness of 40 to 50 Durometer.

D. Glazing Tapes:

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

08 80 00-7

10/28/2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

10-01-15

1. Semi-solid polymeric based closed cell material exhibiting pressure-sensitive adhesion and withstanding exposure to sunlight, moisture, heat, cold, and aging.
 2. Shape, size and degree of softness and strength suitable for use in glazing application to prevent water infiltration.
 3. Complying with AAMA 800 for the following types:
 - a. AAMA 810.1, Type 1, for glazing applications in which tape acts as the primary sealant.
 - b. AAMA 810.1, Type 2, for glazing applications in which tape is used in combination with a full bead of liquid sealant.
- E. Glazing Gaskets: ASTM C864:
1. Firm dense wedge shape for locking in sash.
 2. Soft, closed cell with locking key for sash key.
 3. Flanges may terminate above the glazing-beads or terminate flush with top of beads.
- F. Glazing Sealants: ASTM C920, silicone neutral cure:
1. Type S.
 2. Class 25 or 50 as recommended by manufacturer for application.
 3. Grade NS.
 4. Shore A hardness of 25 to 30 Durometer.
 5. VOC Content: For sealants used inside the weatherproofing system, not more than 250 g/L or less when calculating according to 40 CFR 59, (EPA Method 24).
- M. Color:
1. Color of glazing compounds, gaskets, and sealants which will be exposed in the finished work and unpainted are to be black, gray, or neutral color. Final color to be selected by the Contracting Officer's Representative (COR).

PART 3 - EXECUTION

3.1 EXAMINATION:

- A. Verification of Conditions:
1. Examine openings for glass and glazing units; determine they are proper size; plumb; square; and level before installation is started.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

08 80 00-8

10/28/2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

10-01-15

2. Verify that glazing openings conform with details, dimensions and tolerances indicated on manufacturer is approved shop drawings.

B. Review for conditions which may adversely affect glass and glazing unit installation, prior to commencement of installation. Do not proceed with installation until unsatisfactory conditions have been corrected.

3.2 PREPARATION:

- A. For sealant glazing, prepare glazing surfaces in accordance with GANA Sealant Manual.
- B. Determine glazing unit size and edge clearances by measuring the actual unit to receive the glazing.
- C. Shop fabricate and cut glass with smooth, straight edges of full size required by openings to provide GANA recommended edge clearances.
- D. Verify that components used are compatible.
- E. Clean and dry glazing surfaces.
- F. Prime surfaces scheduled to receive sealants, as determined by preconstruction sealant-substrate testing.

3.3 INSTALLATION - GENERAL:

- A. Install in accordance with GANA Glazing Manual, GANA Sealant Manual, IGMA TB-3001, and IGMA TM-3000 unless specified otherwise.
- B. Glaze in accordance with recommendations of glazing and framing manufacturers, and as required to meet the Performance Test Requirements specified in other applicable sections of specifications.
- C. Set glazing without bending, twisting, or forcing of units.
- D. Do not allow glass to rest on or contact any framing member.
- E. Tempered Glass: Install with roller distortions in horizontal position unless otherwise directed.

3.4 INSTALLATION - ELECTROCHROMIC GLAZING (NOT USED)

3.5 INSTALLATION - DRY METHOD (TAPE AND GASKET SPLINE GLAZING):

- A. Cut glazing tape to length; install on glazing pane. Seal corners by butting and sealing junctions with butyl sealant.
- B. Place setting blocks at 1/4 points with edge block no more than 150 mm (6 inches) from corners.
- C. Rest glazing on setting blocks and push against fixed stop with sufficient pressure to attain full contact.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

08 80 00-9

10/28/2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

10-01-15

- D. Install removable stops without displacing glazing spline. Exert pressure for full continuous contact.
- E. Do not exceed edge pressures stipulated by glass manufacturers for installing glass lites.
- F. Trim protruding tape edge.

3.6 INSTALLATION - WET/DRY METHOD (PREFORMED TAPE AND SEALANT) :

- A. Cut glazing tape to length and set against permanent stops, 5 mm (3/16 inch) below sight line. Seal corners by butting tape and dabbing with butyl sealant.
- B. Apply heel bead of butyl sealant along intersection of permanent stop with frame ensuring full perimeter seal between glass and frame to complete the continuity of the air and vapor seal.
- C. Place setting blocks at 1/4 points with edge block no more than 152 mm (6 inches) from corners.
- D. Rest glazing on setting blocks and push against tape and heel bead of sealant with sufficient pressure to achieve full contact at perimeter of pane or glass unit.
- E. Install removable stops, with spacer strips inserted between glazing and applied stops, 6 mm (1/4 inch) below sight line. Place glazing tape on glazing pane or unit with tape flush with sight line.
- F. Fill gap between glazing and stop with sealant to depth equal to bite of frame on glazing, but not more than 9 mm (3/8 inch) below sight line. Sealant type is to be compatible with glazing tape.
- G. Apply cap bead of sealant along void between the stop and the glazing, to uniform line, flush with sight line. Tool or wipe sealant surface smooth.

3.7 INSTALLATION - WET METHOD (SEALANT AND SEALANT) :

- A. Place setting blocks at 1/4 points and install glazing pane or unit.
- B. Install removable stops with glazing centered in space by inserting spacer shims both sides at 600 mm (24 inch) intervals, 6 mm (1/4 inch) below sight line.
- C. Fill gaps between glazing and stops with sealant to depth of bite on glazing, but not more than 9 mm (3/8 inch) below sight line to ensure full contact with glazing and continue the air and vapor seal.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

08 80 00-10

10/28/2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

10-01-15

D. Apply sealant to uniform line, flush with sight line. Tool or wipe sealant surface smooth.

3.8 INSTALLATION - EXTERIOR BUTT GLAZED METHOD (SEALANT ONLY) (NOT USED)

3.9 INSTALLATION - INTERIOR WET/DRY METHOD (TAPE AND SEALANT) :

- A. Cut glazing tape to length and install against permanent stops, projecting 1.6 mm (1/16 inch) above sight line.
- B. Place setting blocks at 1/4 points with edge block no more than 150 mm (6 inches) from corners.
- C. Rest glazing on setting blocks and push against tape to ensure full contact at perimeter of pane or unit.
- D. Install removable stops, spacer shims inserted between glazing and applied stops at 600 mm (24 inch) intervals, 6 mm (1/4 inch) below sight line.
- E. Fill gaps between pane and applied stop with sealant to depth equal to bite on glazing, to uniform and level line. Sealant type is to be compatible with glazing tape.
- F. Trim protruding tape edge.

3.10 INSTALLATION - INTERIOR WET METHOD (COMPOUND AND COMPOUND) (NOT USED)

3.11 INSTALLATION - REGLAZING HISTORIC FRAMING (NOT USED)

3.12 COMMISSIONING - ELECTROCHROMIC GLAZING (NOT USED)

3.13 REPLACEMENT AND CLEANING:

- A. Clean new glass surfaces removing temporary labels, paint spots, and defacement after approval by COR.
- B. Replace cracked, broken, and imperfect glass, or glass which has been installed improperly.
- C. Leave glass, putty, and other setting material in clean, whole, and acceptable condition.

3.14 PROTECTION:

- A. Protect finished surfaces from damage during erection, and after completion of work. Strippable plastic coatings on colored anodized finish are not acceptable.
- B. Glass Type MG#1: Clear fully tempered float glass.
 - 1. Unit Thickness: 6 mm (0.23 inch).
 - 2. Safety glazing label required.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

08 80 00-11

10/28/2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

10-01-15

3.16 LAMINATED GLASS SCHEDULE (NOT USED)

3.20 FIRE-PROTECTIVE AND FIRE-RESISTANCE GLAZING SCHEDULE (NOT USED)

- - - E N D - - -

DIVISION 09

FINISHES

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

02-01-15

SECTION 09 05 16
SUBSURFACE PREPARATION FOR FLOOR FINISHES

PART 1 - GENERAL

1.1 DESCRIPTION

- A. This section specifies subsurface preparation requirements for areas to receive the installation of applied flooring. This section includes removal of existing floor coverings and floor leveling and repair as required.

1.2 RELATED WORK

- A. Section 07 92 00, JOINT SEALANTS.
- B. Section 09 65 19, RESILIENT TILE FLOORING.
- C. Section 09 68 00, CARPETING.

1.3 SUBMITTALS

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA and TEST DATA.
- B. Written approval confirming product compatibility with subfloor material manufacturer and the flooring manufacturer
- C. Product Data:
 - 1. Underlayment Primer
 - 2. Cementitious Self-Leveling Underlayment
 - 3. Cementitious Trowel-Applied Underlayment (Not suitable for resinous floor finishes)

1.4 DELIVERY AND STORAGE

- A. Deliver materials in containers with labels legible and intact and grade-seals unbroken.
- B. Store material to prevent damage or contamination.

1.5 APPLICABLE PUBLICATIONS

- A. Publications listed below form a part of this specification to the extent referenced. Publications are referenced in text by basic designation only.
- B. ASTM International (ASTM):
 - D638-14(2014).....Standard Test Method for Tensile Properties of
Plastics

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

09 05 16-1

10/28/2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

02-01-15

D4259-18(2019).....Standard Practice for Preparation of Concrete
by Abrasion Prior to Coating Application.
C109/C109M-20b(2020)....Standard Test Method for Compressive Strength
of Hydraulic Cement Mortars (Using 2-in. or
[50-mm] Cube Specimens
7234-19(2020).....Standard Test Method for Pull-Off Adhesion
Strength of Coatings on Concrete Using Portable
Pull-Off Adhesion Testers
E96/E96M-16(2016).....Standard Test Methods for Water Vapor
Transmission of Materials
F710-1e1(2020).....Standard Practice for Preparing Concrete Floors
to Receive Resilient Flooring
F1869-16a.....Standard Test Method for Measuring Moisture
Vapor Emission Rate of Concrete Subfloor Using
Anhydrous Calcium Chloride
F2170-19a(2020).....Standard Test Method for Determining Relative
Humidity in Concrete Floor Slabs Using in situ
Probes
C348-20(2020).....Standard Test Method for Flexural Strength of
Hydraulic-Cement Mortars
C191-19(2020).....Standard Test Method for Time of Setting of
Hydraulic Cement by Vicat Needle

PART 2 - PRODUCTS

2.1 MOISTURE REMEDIATION COATING (NOT USED)

2.2 CEMENTITIOUS SELF-LEVELING UNDERLAYMENT

A. System Descriptions:

1. High performance self-leveling underlayment resurfacer. Single component, self-leveling, cementitious material designed for easy application as an underlayment for all types of flooring materials. It is used for substrate repair and leveling.

- B. Products: Subject to compliance with applicable fire, health, environmental, and safety requirements for storage, handling, installation, and clean up. Gypsum-based products are unacceptable.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

09 05 16-2

10/28/2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

02-01-15

C. System Characteristics:

1. Wearing Surface: smooth
2. Thickness: Per architectural drawings, ranging from feathered edge to 1", per application. Applications greater than 1" require additional 3/8" aggregate to mix or as recommended by manufacturer.

D. Underlayment shall be calcium aluminate cement-based, containing Portland cement. Gypsum-based products are unacceptable.

E. Compressive Strength: Minimum 4100 psi in 28 days in accordance with ASTM C109/C109M.

F. Flexural Strength: Minimum 1000 psi in 28 days in accordance with ASTM C348

G. Dry Time: Underlayment shall receive the application of moisture insensitive tile in 6 hours and floor coverings in 16 hours.

H. Primer: compatible and as recommended by manufacturer for use over intended substrate

I. System Components: Manufacturer's standard components that are compatible with each other and as follows:

1. Primer:

- a. Resin: copolymer
- b. Formulation Description: single component ready to use.
- c. Application Method: Squeegee and medium nap roller.
- d. All puddles shall be removed, and material shall be allowed to dry, 1-2 hours at 70F/21C.
- e. Number of Coats: (1) one.

2. Grout Resurfacing Base:

- a. Formulation Description: Single component, cementitious self-leveling high-early and high-ultimate strength grout.
- b. Application Method: colloidal mix pump, cam rake, spike roll.
 - 1) Thickness of Coats: Per architectural scope, 1" lifts.
 - 2) Number of Coats: More than one if needed.
- c. Aggregates: for applications greater than linch, require additional 3/8" aggregate to mix.

Property	Test	Value
----------	------	-------

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

09 05 16-3

10/28/2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

02-01-15

J. Property	Test	Value
Compressive Strength	ASTM C109/C109M	2,200 psi @ 24 hrs 3,000 psi @ 7 days
Initial set time Final Set time	ASTM C191	30-45 min. 1 to 1.5 hours
Bond Strength	ASTM D7234	100% bond to concrete failure

2.3 CEMENTITIOUS TROWEL-APPLIED UNDERLAYMENT (NOT SUITABLE FOR RESINOUS FLOOR FINISHES)

- A. Underlayment shall be calcium aluminate cement-based, containing Portland cement. Gypsum-based products are unacceptable.
- B. Compressive Strength: Minimum 4000 psi in 28 days
- C. Trowel-applied underlayment shall not contain silica quartz (sand).
- D. Dry Time: Underlayment shall receive the application of floor covering in 15-20 minutes.

PART 3 - EXECUTION

3.1 ENVIRONMENTAL REQUIREMENTS

- A. Maintain ambient temperature of work areas at not less than 16 degree C (60 degrees F), without interruption, for not less than 24 hours before testing and not less than three days after testing.
- B. Maintain higher temperatures for a longer period of time where required by manufacturer's recommendation.
- C. Do not install materials when the temperatures of the substrate or materials are not within 60-85 degrees F/ 16-30 degrees C.

3.2 SURFACE PREPARATION

- A. Existing concrete slabs with existing floor coverings:
 - 1. Conduct visual observation of existing floor covering for adhesion, water damage, alkaline deposits, and other defects.
 - 2. Remove existing floor covering and adhesives. Comply with local, state and federal regulations and the RFCI Recommended Work Practices for Removal of Resilient Floor Coverings, as applicable to the floor covering being removed.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

09 05 16-4

10/28/2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

02-01-15

- B. Concrete shall meet the requirements of ASTM F710 and be sound, solid, clean, and free of all oil, grease, dirt, curing compounds, and any substance that might act as a bond-breaker before application. As required prepare slab by mechanical methods. No chemicals or solvents shall be used.
- C. General: Prepare and clean substrates according to flooring manufacturer's written instructions for substrate indicated.
- D. Prepare concrete substrates per ASTM D4259 as follows:
 - 1. Dry abrasive blasting.
 - 2. Wet abrasive blasting.
 - 3. Vacuum-assisted abrasive blasting.
 - 4. Centrifugal-shot abrasive blasting.
 - 5. Comply with manufacturer's written instructions.
- E. Repair damaged and deteriorated concrete according to flooring manufacturer's written recommendations.
- F. Verify that concrete substrates are dry.
- G. Perform anhydrous calcium chloride test, ASTM F 1869. Proceed with application only after substrates have maximum moisture-vapor-emission rate of per flooring manufactures formal and project specific written recommendation.
- H. Perform in situ probe test, ASTM F2170. Proceed with application only after substrates do not exceed a maximum potential equilibrium relative humidity per flooring manufacture's formal and project specific written recommendation.
- I. Provide a written report showing test placement and results.
- J. Prepare joints in accordance with Section 07 92 00, JOINT SEALANTS and material manufacturer's instructions.
- K. Alkalinity: Measure surface pH in accordance with procedures provided in ASTM F710 or as outlined by qualified testing agency or flooring manufacturer's technical representative.
- L. Tolerances: Subsurface shall meet the flatness and levelness tolerance specified on drawings or recommended by the floor finish manufacturer.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

09 05 16-5

10/28/2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

02-01-15

Tolerance shall also not to exceed 1/4" deviation in 10'. As required, install underlayment to achieve required tolerance.

- M. Other Subsurface: For all other subsurface conditions, such as wood or metal, contact the floor finish or underlayment manufacturer, as appropriate, for proper preparation practices.

3.3 MOISTURE REMEDIATION COATING (NOT USED)

3.4 CEMENTITIOUS UNDERLAYMENT

- A. Install cementitious self-leveling underlayment as required to correct surface defects, floor flatness or levelness corrections to meet the tolerance requirements as or detailed on drawings, address non-moving cracks or joints, provide a smooth surface for the installation of floor covering, or meet elevation requirements detailed on drawings.
- B. Mix and apply in accordance with manufacturer's instructions.

3.5 PROTECTION

- A. Prior to the installation of the finish flooring, the surface of the underlayment should be protected from abuse by other trades by the use of plywood, tempered hardwood, or other suitable protection course

3.6 FIELD QUALITY CONTROL

- A. Where specified, field sampling of products shall be conducted by a qualified, independent testing facility.

- - - E N D - - -

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

06-01-18

SECTION 09 22 16
NON-STRUCTURAL METAL FRAMING

PART 1 - GENERAL

1.1 DESCRIPTION

This section specifies steel studs wall systems, shaft wall systems, ceiling or soffit suspended or furred framing, wall furring, fasteners, and accessories for the screw attachment of gypsum board, plaster bases or other building boards.

1.2 RELATED WORK

- A. Support for wall mounted items: Section 05 50 00, METAL FABRICATIONS.
- B. Ceiling suspension systems for acoustical tile or panels and lay in gypsum board panels: Section 09 51 00, ACOUSTICAL CEILINGS Section 09 29 00, GYPSUM BOARD.

1.3 TERMINOLOGY

- A. Description of terms shall be in accordance with ASTM C754, ASTM C11, ASTM C841 and as specified.
- B. Underside of Structure Overhead: In spaces where steel trusses or bar joists are shown, the underside of structure overhead shall be the underside of the floor or roof construction supported by beams, trusses, or bar joists. In interstitial spaces with walk-on floors the underside of the walk-on floor is the underside of structure overhead.
- C. Thickness of steel specified is the minimum bare (uncoated) steel thickness.

1.4 SUBMITTALS

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Manufacturer's Literature and Data:
 - 1. Studs, runners and accessories.
 - 2. Hanger inserts.
 - 3. Channels (Rolled steel).
 - 4. Furring channels.
 - 5. Screws, clips and other fasteners.
- C. Shop Drawings:

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

09 22 16-1

10/28/2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

06-01-18

1. Typical ceiling suspension system.
 2. Typical metal stud and furring construction system including details around openings and corner details.
 3. Typical shaft wall assembly as applicable.
 4. Typical fire rated assembly and column fireproofing showing details of construction same as that used in fire rating test.
- D. Test Results: Fire rating test designation, each fire rating required for each assembly.

1.5 DELIVERY, IDENTIFICATION, HANDLING AND STORAGE

In accordance with the requirements of ASTM C754.

1.6 APPLICABLE PUBLICATIONS

- A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only.
- B. American Society For Testing And Materials (ASTM)
- A641-09.....Zinc-Coated (Galvanized) Carbon Steel Wire
 - A653/653M-11.....Specification for Steel Sheet, Zinc Coated (Galvanized) or Zinc-Iron Alloy-Coated (Galvannealed) by Hot-Dip Process.
 - C11-10.....Terminology Relating to Gypsum and Related Building Materials and Systems
 - C635-07.....Manufacture, Performance, and Testing of Metal Suspension System for Acoustical Tile and Lay-in Panel Ceilings
 - C636-08.....Installation of Metal Ceiling Suspension Systems for Acoustical Tile and Lay-in Panels
 - C645-09.....Non-Structural Steel Framing Members
 - C754-11.....Installation of Steel Framing Members to Receive Screw-Attached Gypsum Panel Products
 - C841-03 (R2008).....Installation of Interior Lathing and Furring
 - C954-10.....Steel Drill Screws for the Application of Gypsum Panel Products or Metal Plaster Bases to Steel Studs from 0.033 in. (0.84 mm) to 0.112 in. (2.84 mm) in Thickness

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

09 22 16-2

10/28/2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

06-01-18

E580-11.....Application of Ceiling Suspension Systems for
Acoustical Tile and Lay-in Panels in Areas
Requiring Moderate Seismic Restraint.

PART 2 - PRODUCTS

2.1 PROTECTIVE COATING

Galvanize steel studs, runners (track), rigid (hat section) furring channels, "Z" shaped furring channels, and resilient furring channels, with coating designation of G40 or equivalent.

2.2 STEEL STUDS AND RUNNERS (TRACK)

- A. ASTM C645, modified for thickness specified and sizes as shown.
 - 1. Use C 645 steel, 0.75 mm (0.0296-inch) minimum base-metal (30 mil).
 - 2. Runners same thickness as studs.
 - 3. Exception: Members that can show certified third party testing with gypsum board in accordance with ICC ES AC86 (Approved May 2012) need not meet the minimum thickness limitation or minimum section properties set forth in ASTM C 645. The submission of an evaluation report is acceptable to show conformance to this requirement. Use C 645 steel, 0.48mm (0.019 inch) minimum base-metal (19 mil).
- B. Provide not less than two cutouts in web of each stud, approximately 300 mm (12 inches) from each end, and intermediate cutouts on approximately 600 mm (24-inch) centers.
- C. Doubled studs for openings and studs for supporting concrete backer-board.
- D. Studs 3600 mm (12 feet) or less in length shall be in one piece.
- E. Shaft Wall Framing:
 - 1. Conform to rated wall construction.
 - 2. C-H Studs or C-T Studs.
 - 3. E Studs.
 - 4. J Runners.
 - 5. Steel Jamb-Strut.

2.3 FURRING CHANNELS

- A. Rigid furring channels (hat shape): ASTM C645.
- B. Resilient furring channels:
 - 1. Not less than 0.45 mm (0.0179-inch) thick bare metal.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

09 22 16-3

10/28/2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

06-01-18

2. Semi-hat shape, only one flange for anchorage with channel web leg slotted on anchorage side, channel web leg on other side stiffens fastener surface but shall not contact anchorage surface other channel leg is attached to.

C. "Z" Furring Channels:

1. Not less than 0.45 mm (0.0179-inch)-thick base metal, with 32 mm (1-1/4 inch) and 19 mm (3/4-inch) flanges.

2. Web furring depth to suit thickness of insulation.

D. Rolled Steel Channels: ASTM C754, cold rolled; or, ASTM C841, cold rolled.

2.4 FASTENERS, CLIPS, AND OTHER METAL ACCESSORIES

A. ASTM C754, except as otherwise specified.

B. For fire rated construction: Type and size same as used in fire rating test.

C. Fasteners for steel studs thicker than 0.84 mm (0.033-inch) thick. Use ASTM C954 steel drill screws of size and type recommended by the manufacturer of the material being fastened.

D. Clips: ASTM C841 (paragraph 6.11), manufacturer's standard items. Clips used in lieu of tie wire shall have holding power equivalent to that provided by the tie wire for the specific application.

E. Concrete ceiling hanger inserts (anchorage for hanger wire and hanger straps): Steel, zinc-coated (galvanized), manufacturers standard items, designed to support twice the hanger loads imposed and the type of hanger used.

F. Tie Wire and Hanger Wire:

1. ASTM A641, soft temper, Class 1 coating.

2. Gage (diameter) as specified in ASTM C754 or ASTM C841.

G. Attachments for Wall Furring:

1. Manufacturer's standard items fabricated from zinc-coated (galvanized) steel sheet.

2. For concrete or masonry walls: Metal slots with adjustable inserts or adjustable wall furring brackets. Spacers may be fabricated from 1 mm (0.0396-inch) thick galvanized steel with corrugated edges.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

09 22 16-4

10/28/2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

06-01-18

H. Power Actuated Fasteners: Type and size as recommended by the manufacturer of the material being fastened.

2.5 SUSPENDED CEILING SYSTEM FOR GYPSUM BOARD (OPTION)

A. Conform to ASTM C635, heavy duty, with not less than 35 mm (1-3/8 inch) wide knurled capped flange face designed for screw attachment of gypsum board.

B. Wall track channel with 35 mm (1-3/8 inch) wide flange.

PART 3 - EXECUTION

3.1 INSTALLATION CRITERIA

- A. Where fire-rated construction is required for walls, partitions, columns, beams and floor-ceiling assemblies, the construction shall be same as that used in fire rating test.
- B. Construction requirements for fire rated assemblies and materials shall be as shown and specified, the provisions of the Scope paragraph (1.2) of ASTM C754 and ASTM C841 regarding details of construction shall not apply.

3.2 INSTALLING STUDS

- A. Install studs in accordance with ASTM C754, except as otherwise shown or specified.
- B. Space studs not more than 405 mm (16 inches) on center.
- C. Cut studs 6 mm to 9 mm (1/4 to 3/8-inch) less than floor to underside of structure overhead when extended to underside of structure overhead.
- D. Where studs are shown to terminate above suspended ceilings, provide bracing as shown or extend studs to underside of structure overhead.
- E. Extend studs to underside of structure overhead for fire, rated partitions, smoke partitions, shafts, and sound rated partitions and insulated exterior wall furring.
- F. Openings:
 - 1. Frame jambs of openings in stud partitions and furring with two studs placed back-to-back or as shown.
 - 2. Fasten back-to-back studs together with 9 mm (3/8-inch) long Type S pan head screws at not less than 600 mm (two feet) on center, staggered along webs.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

09 22 16-5

10/28/2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

06-01-18

3. Studs fastened flange to flange shall have splice plates on both sides approximately 50 X 75 mm (2 by 3 inches) screwed to each stud with two screws in each stud. Locate splice plates at 600 mm (24 inches) on center between runner tracks.

G. Fastening Studs:

1. Fasten studs located adjacent to partition intersections, corners and studs at jambs of openings to flange of runner tracks with two screws through each end of each stud and flange of runner.
2. Do not fasten studs to top runner track when studs extend to underside of structure overhead.

H. Chase Wall Partitions:

1. Locate cross braces for chase wall partitions to permit the installation of pipes, conduits, carriers and similar items.
2. Use studs or runners as cross bracing not less than 63 mm (2-1/2 inches wide).

- I. Form building seismic or expansion joints with double studs back-to-back spaced 75 mm (three inches) apart plus the width of the seismic or expansion joint.

- J. Form control joint, with double studs spaced 13 mm (1/2-inch) apart.

3.3 INSTALLING WALL FURRING FOR FINISH APPLIED TO ONE SIDE ONLY

- A. In accordance with ASTM C754, or ASTM C841 except as otherwise specified or shown.

B. Wall furring-Stud System:

1. Framed with 63 mm (2-1/2 inch) or narrower studs, 600 mm (24 inches) on center.
2. Brace as specified in ASTM C754 for Wall Furring-Stud System or brace with sections or runners or studs placed horizontally at not less than three foot vertical intervals on side without finish.
3. Securely fasten braces to each stud with two Type S pan head screws at each bearing.

C. Direct attachment to masonry or concrete; rigid channels or "Z" channels:

1. Install rigid (hat section) furring channels at 600 mm (24 inches) on center, horizontally or vertically.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

09 22 16-6

10/28/2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

06-01-18

2. Install "Z" furring channels vertically spaced not more than 600 mm (24 inches) on center.
3. At corners where rigid furring channels are positioned horizontally, provide mitered joints in furring channels.
4. Ends of spliced furring channels shall be nested not less than 200 mm (8 inches).
5. Fasten furring channels to walls with power-actuated drive pins or hardened steel concrete nails. Where channels are spliced, provide two fasteners in each flange.
6. Locate furring channels at interior and exterior corners in accordance with wall finish material manufacturers printed erection instructions. Locate "Z" channels within 100 mm (4 inches) of corner.

D. Installing Wall Furring-Bracket System: Space furring channels not more than 400 mm (16 inches) on center.

3.4 INSTALLING SUPPORTS REQUIRED BY OTHER TRADES

- A. Provide for attachment and support of electrical outlets, plumbing, laboratory or heating fixtures, recessed type plumbing fixture accessories, access panel frames, wall bumpers, wood seats, toilet stall partitions, dressing booth partitions, urinal screens, chalkboards, tackboards, wall-hung casework, handrail brackets, recessed fire extinguisher cabinets and other items like auto door buttons and auto door operators supported by stud construction.
- B. Provide additional studs where required. Install metal backing plates, or special metal shapes as required, securely fastened to metal studs.

3.5 INSTALLING SHAFT WALL SYSTEM

- A. Conform to UL Design No. U438 for two-hour fire rating. Provide one hour fire rating Shaft wall where indicated.
- B. Position J runners at floor and ceiling with the short leg toward finish side of wall. Securely attach runners to structural supports with power driven fasteners at both ends and 600 mm (24 inches) on center.
- C. After liner panels have been erected, cut C-H studs and E studs, from 9 mm (3/8-inch) to not more than 13 mm (1/2-inch) less than

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

09 22 16-7

10/28/2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

06-01-18

floor-to-ceiling height. Install C-H studs between liner panels with liner panels inserted in the groove.

- D. Install full-length steel E studs over shaft wall line at intersections, corners, hinged door jambs, columns, and both sides of closure panels.
- E. Suitably frame all openings to maintain structural support for wall:
 - 1. Provide necessary liner fillers and shims to conform to label frame requirements.
 - 2. Frame openings cut within a liner panel with E studs around perimeter.
 - 3. Frame openings with vertical E studs at jambs, horizontal J runner at head and sill.
- F. Elevator Shafts:
 - 1. Frame elevator door frames with 0.87 mm (0.0341-inch) thick J strut or J stud jambs having 75 mm (three-inch) long legs on the shaft side.
 - 2. Protrusions including fasteners other than flange of shaft wall framing system or offsets from vertical alignments more than 3 mm (1/8-inch) are not permitted unless shown.
 - 3. Align shaft walls for plumb vertical flush alignment from top to bottom of shaft.

3.6 INSTALLING FURRED AND SUSPENDED CEILINGS OR SOFFITS

- A. Install furred and suspended ceilings or soffits in accordance with ASTM C754 or ASTM C841 except as otherwise specified or shown for screw attached gypsum board ceilings and for plaster ceilings or soffits.
 - 1. Space framing at 400 mm (16-inch) centers for metal lath anchorage.
 - 2. Space framing at 600 mm (24-inch) centers for gypsum board anchorage.
- B. New exposed concrete slabs:
 - 1. Use metal inserts required for attachment and support of hangers or hanger wires with tied wire loops for embedding in concrete.
 - 2. Furnish for installation under Division 3, CONCRETE.
 - 3. Suspended ceilings under concrete rib construction shall have runner channels at right angles to ribs and be supported from ribs with

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

09 22 16-8

10/28/2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

06-01-18

hangers at ends and at 1200 mm (48-inch) maximum intervals along channels. Stagger hangers at alternate channels.

- C. Concrete slabs on steel decking composite construction:
1. Use pull down tabs when available.
 2. Use power activated fasteners when direct attachment to structural framing can not be accomplished.
- D. Where bar joists or beams are more than 1200 mm (48 inches) apart, provide intermediate hangers so that spacing between supports does not exceed 1200 mm (48 inches). Use clips, bolts, or wire ties for direct attachment to steel framing.
- E. Existing concrete construction exposed or concrete on steel decking:
1. Use power actuated fasteners either eye pin, threaded studs or drive pins for type of hanger attachment required.
 2. Install fasteners at approximate mid height of concrete beams or joists. Do not install in bottom of beams or joists.
- F. Steel decking without concrete topping:
1. Do not fasten to steel decking 0.76 mm (0.0299-inch) or thinner.
 2. Toggle bolt to decking 0.9 mm (0.0359-inch) or thicker only where anchorage to steel framing is not possible.
- G. Installing suspended ceiling system for gypsum board (ASTM C635 Option):
1. Install only for ceilings to receive screw attached gypsum board.
 2. Install in accordance with ASTM C636.
 - a. Install main runners spaced 1200 mm (48 inches) on center.
 - b. Install 1200 mm (four foot) tees not over 600 mm (24 inches) on center; locate for edge support of gypsum board.
 - c. Install wall track channel at perimeter.
- H. Installing Ceiling Bracing System:
1. Construct bracing of 38 mm (1-1/2 inch) channels for lengths up to 2400 mm (8 feet) and 50 mm (2 inch) channels for lengths over 2400 mm (8 feet) with ends bent to form surfaces for anchorage to carrying channels and overhead construction. Lap channels not less than 600 mm (2 feet) at midpoint back-to-back. Screw or bolt lap together with two fasteners.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

09 22 16-9

10/28/2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

06-01-18

2. Install bracing at an approximate 45 degree angle to carrying channels and structure overhead; secure as specified to structure overhead with two fasteners and to carrying channels with two fasteners or wire ties.

3.7 TOLERANCES

- A. Fastening surface for application of subsequent materials shall not vary more than 3 mm (1/8-inch) from the layout line.
- B. Plumb and align vertical members within 3 mm (1/8-inch.)
- C. Level or align ceilings within 3 mm (1/8-inch.)

- - - E N D - - -

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

06-01-18

SECTION 09 29 00
GYPSUM BOARD

PART 1 - GENERAL

1.1 DESCRIPTION

This section specifies installation and finishing of gypsum board.

1.2 RELATED WORK

- A. Installation of steel framing members for walls, partitions, furring, soffits, and ceilings: Section 05 40 00, COLD-FORMED METAL FRAMING.
- B. Sound deadening board: Section 07 21 13, THERMAL INSULATION.
- C. Acoustical Sealants: Section 07 92 00, JOINT SEALANTS.

1.3 TERMINOLOGY

- A. Definitions and description of terms shall be in accordance with ASTM C11, C840, and as specified.
- B. Underside of Structure Overhead: In spaces where steel trusses or bar joists are shown, the underside of structure overhead shall be the underside of the floor or roof construction supported by the trusses or bar joists.
- C. "Yoked": Gypsum board cut out for opening with no joint at the opening (along door jamb or above the door).

1.4 SUBMITTALS

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Manufacturer's Literature and Data:
 - 1. Cornerbead and edge trim.
 - 2. Finishing materials.
 - 3. Laminating adhesive.
 - 4. Gypsum board, each type.
- C. Shop Drawings:
 - 1. Typical gypsum board installation, showing corner details, edge trim details and the like.
 - 2. Typical sound rated assembly, showing treatment at perimeter of partitions and penetrations at gypsum board.
 - 3. Typical shaft wall assembly.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

09 29 00-1

10/28/2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

06-01-18

4. Typical fire rated assembly and column fireproofing, indicating details of construction same as that used in fire rating test.

D. Samples:

1. Cornerbead.
2. Edge trim.
3. Control joints.

E. Test Results:

1. Fire rating test, each fire rating required for each assembly.
2. Sound rating test.

F. Certificates: Certify that gypsum board types, gypsum backing board types, cementitious backer units, and joint treating materials do not contain asbestos material.

1.5 DELIVERY, IDENTIFICATION, HANDLING AND STORAGE

In accordance with the requirements of ASTM C840.

1.6 ENVIRONMENTAL CONDITIONS

In accordance with the requirements of ASTM C840.

1.7 APPLICABLE PUBLICATIONS

A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only.

B. American Society for Testing and Materials (ASTM):

- C11-15.....Terminology Relating to Gypsum and Related Building Materials and Systems
- C475-15.....Joint Compound and Joint Tape for Finishing Gypsum Board
- C840-13.....Application and Finishing of Gypsum Board
- C919-12.....Sealants in Acoustical Applications
- C954-15.....Steel Drill Screws for the Application of Gypsum Board or Metal Plaster Bases to Steel Stud from 0.033 in. (0.84mm) to 0.112 in. (2.84mm) in thickness
- C1002-14.....Steel Self-Piercing Tapping Screws for the Application of Gypsum Panel Products or Metal Plaster Bases to Wood Studs or Steel Studs

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

06-01-18

C1047-14.....Accessories for Gypsum Wallboard and Gypsum

Veneer Base

C1177-13.....Glass Mat Gypsum Substrate for Use as Sheathing

C1658-13.....Glass Mat Gypsum Panels

C1396-14.....Gypsum Board

C. Underwriters Laboratories Inc. (UL):

Latest Edition.....Fire Resistance Directory

D. Inchcape Testing Services (ITS):

Latest Editions.....Certification Listings

PART 2 - PRODUCTS

2.1 GYPSUM BOARD

A. Gypsum Board: ASTM C1396, Type X, 16 mm (5/8 inch) thick unless shown otherwise.

B. Coreboard or Shaft Wall Liner Panels.

1. ASTM C1396, Type X.

2. ASTM C1658: Glass Mat Gypsum Panels,

3. Coreboard for shaft walls 300, 400, 600 mm (12, 16, or 24 inches) wide by required lengths 25 mm (one inch) thick with paper faces treated to resist moisture.

C. Water Resistant Gypsum Backing Board: ASTM C620, Type X, 16 mm (5/8 inch) thick.

D. Paper facings shall contain 100 percent post-consumer recycled paper content.

2.2 GYPSUM SHEATHING BOARD

A. ASTM C1396, Type X, water-resistant core, 16 mm (5/8 inch) thick.

B. ASTM C1177, Type X.

2.3 ACCESSORIES

A. ASTM C1047, except form of 0.39 mm (0.015 inch) thick zinc coated steel sheet or rigid PVC plastic.

B. Flanges not less than 22 mm (7/8 inch) wide with punchouts or deformations as required to provide compound bond.

2.4 FASTENERS

A. ASTM C1002 and ASTM C840, except as otherwise specified.

B. ASTM C954, for steel studs thicker than 0.04 mm (0.33 inch).

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

09 29 00-3

10/28/2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

06-01-18

- C. Select screws of size and type recommended by the manufacturer of the material being fastened.
- D. For fire rated construction, type and size same as used in fire rating test.
- E. Clips: Zinc-coated (galvanized) steel; gypsum board manufacturer's standard items.

2.5 FINISHING MATERIALS AND LAMINATING ADHESIVE

ASTM C475 and ASTM C840. Free of antifreeze, vinyl adhesives, preservatives, biocides and other VOC. Adhesive shall contain a maximum VOC content of 50 g/l.

PART 3 - EXECUTION

3.1 GYPSUM BOARD HEIGHTS

- A. Extend all layers of gypsum board from floor to underside of structure overhead on following partitions and furring:
 - 1. Two sides of partitions:
 - a. Fire rated partitions.
 - b. Smoke partitions.
 - c. Sound rated partitions.
 - d. Full height partitions shown (FHP).
 - e. Corridor partitions.
 - 2. One side of partitions or furring:
 - a. Inside of exterior wall furring or stud construction.
 - b. Room side of room without suspended ceilings.
 - c. Furring for pipes and duct shafts, except where fire rated shaft wall construction is shown.
 - 3. Extend all layers of gypsum board construction used for fireproofing of columns from floor to underside of structure overhead, unless shown otherwise.
- B. In locations other than those specified, extend gypsum board from floor to heights as follows:
 - 1. Not less than 100 mm (4 inches) above suspended acoustical ceilings.
 - 2. At ceiling of suspended gypsum board ceilings.
 - 3. At existing ceilings.

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

06-01-18

3.2 INSTALLING GYPSUM BOARD

- A. Coordinate installation of gypsum board with other trades and related work.
- B. Install gypsum board in accordance with ASTM C840, except as otherwise specified.
- C. Moisture and Mold-Resistant Assemblies: Provide and install moisture and mold-resistant glass mat gypsum wallboard products with moisture-resistant surfaces complying with ASTM C1658 where shown and in locations which might be subject to moisture exposure during construction.
- D. Use gypsum boards in maximum practical lengths to minimize number of end joints.
- E. Bring gypsum board into contact, but do not force into place.
- F. Ceilings:
 - 1. For single-ply construction, use perpendicular application.
 - 2. For two-ply assemblies:
 - a. Use perpendicular application.
 - b. Apply face ply of gypsum board so that joints of face ply do not occur at joints of base ply with joints over framing members.
- G. Walls (Except Shaft Walls):
 - 1. When gypsum board is installed parallel to framing members, space fasteners 300 mm (12 inches) on center in field of the board, and 200 mm (8 inches) on center along edges.
 - 2. When gypsum board is installed perpendicular to framing members, space fasteners 300 mm (12 inches) on center in field and along edges.
 - 3. Stagger screws on abutting edges or ends.
 - 4. For single-ply construction, apply gypsum board with long dimension either parallel or perpendicular to framing members as required to minimize number of joints except gypsum board shall be applied vertically over "Z" furring channels.
 - 5. For two-ply gypsum board assemblies, apply base ply of gypsum board to assure minimum number of joints in face layer. Apply face ply of wallboard to base ply so that joints of face ply do not occur at joints of base ply with joints over framing members.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

09 29 00-5

10/28/2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

06-01-18

6. For three-ply gypsum board assemblies, apply plies in same manner as for two-ply assemblies, except that heads of fasteners need only be driven flush with surface for first and second plies. Apply third ply of wallboard in same manner as second ply of two-ply assembly, except use fasteners of sufficient length enough to have the same penetration into framing members as required for two-ply assemblies.
7. No offset in exposed face of walls and partitions will be permitted because of single-ply and two-ply or three-ply application requirements.
8. Installing Two Layer Assembly Over Sound Deadening Board:
 - a. Apply face layer of wallboard vertically with joints staggered from joints in sound deadening board over framing members.
 - b. Fasten face layer with screw, of sufficient length to secure to framing, spaced 300 mm (12 inches) on center around perimeter, and 400 mm (16 inches) on center in the field.
9. Control Joints ASTM C840 and as follows:
 - a. Locate at both side jambs of openings if gypsum board is not "yoked". Use one system throughout.
 - b. Not required for wall lengths less than 9000 mm (30 feet).
 - c. Extend control joints the full height of the wall or length of soffit/ceiling membrane.
- H. Acoustical or Sound Rated Partitions, Fire and Smoke Partitions:
 1. Cut gypsum board for a space approximately 3 mm to 6 mm (1/8 to 1/4 inch) wide around partition perimeter.
 2. Coordinate for application of caulking or sealants to space prior to taping and finishing.
 3. For sound rated partitions, use sealing compound (ASTM C919) to fill the annular spaces between all receptacle boxes and the partition finish material through which the boxes protrude to seal all holes and/or openings on the back and sides of the boxes. STC minimum values as shown.
- I. Electrical and Telecommunications Boxes:
 1. Seal annular spaces between electrical and telecommunications receptacle boxes and gypsum board partitions.
- J. Accessories:

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

09 29 00-6

10/28/2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

06-01-18

1. Set accessories plumb, level and true to line, neatly mitered at corners and intersections, and securely attach to supporting surfaces as specified.
2. Install in one piece, without the limits of the longest commercially available lengths.
3. Corner Beads:
 - a. Install at all vertical and horizontal external corners and where shown.
 - b. Use screws only. Do not use crimping tool.
4. Edge Trim (casings Beads):
 - a. At both sides of expansion and control joints unless shown otherwise.
 - b. Where gypsum board terminates against dissimilar materials and at perimeter of openings, except where covered by flanges, casings or permanently built-in equipment.
 - c. Where gypsum board surfaces of non-load bearing assemblies abut load bearing members.
 - d. Where shown.

3.3 INSTALLING GYPSUM SHEATHING

- A. Install in accordance with ASTM C840, except as otherwise specified or shown.
- B. Use screws of sufficient length to secure sheathing to framing.
- C. Space screws 9 mm (3/8 inch) from ends and edges of sheathing and 200 mm (8 inches) on center. Space screws a maximum of 200 mm (8 inches) on center on intermediate framing members.
- D. Apply 600 mm by 2400 mm (2 foot by 8 foot) sheathing boards horizontally with tongue edge up.
- E. Apply 1200 mm by 2400 mm or 2700 mm (4 ft. by 8 ft. or 9 foot) gypsum sheathing boards vertically with edges over framing.

3.4 CAVITY SHAFT WALL

- A. Coordinate assembly with Section 09 22 16, NON-STRUCTURAL METAL FRAMING, for erection of framing and gypsum board.
- B. Conform to UL Design No. U438 or FM WALL CONSTRUCTION 12-2/HR (Nonbearing for two-hour fire rating. Conform to FM WALL CONSTRUCTION 25-1/HR (Non-loadbearing) for one-hour fire rating where shown.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

09 29 00-7

10/28/2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

06-01-18

- C. Cut coreboard (liner) panels 25 mm (one inch) less than floor-to-ceiling height, and erect vertically between J-runners on shaft side.
1. Where shaft walls exceed 4300 mm (14 feet) in height, position panel end joints within upper and lower third points of wall.
 2. Stagger joints top and bottom in adjacent panels.
 3. After erection of J-struts of opening frames, fasten panels to J-struts with screws of sufficient length to secure to framing staggered from those in base, spaced 300 mm (12 inches) on center.
- D. Gypsum Board:
1. Two hour wall:
 - a. Erect base layer (backing board) vertically on finish side of wall with end joints staggered. Fasten base layer panels to studs with 25 mm (one inch) long screws, spaced 406 mm (16 inches) on center.
 - b. Use laminating adhesive between plies in accordance with UL or FM if required by fire test.
 - c. Apply face layer of gypsum board required by fire test vertically over base layer with joints staggered and attach with screws of sufficient length to secure to framing staggered from those in base, spaced 300 mm (12 inches) on center.
 2. One hour wall with one layer on finish side of wall: Apply face layer of gypsum board vertically. Attach to studs with screws of sufficient length to secure to framing, spaced 300 mm (12 inches) on center in field and along edges.
 3. Where coreboard is covered with face layer of gypsum board, stagger joints of face layer from those in the coreboard base.
- E. Treat joints, corners, and fasteners in face layer as specified for finishing of gypsum board.

3.5 FINISHING OF GYPSUM BOARD

- A. Finish joints, edges, corners, and fastener heads in accordance with ASTM C840. Use Level 4 finish for all finished areas open to public view.
- B. Before proceeding with installation of finishing materials, assure the following:

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

09 29 00-8

10/28/2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

06-01-18

1. Gypsum board is fastened and held close to framing or furring.
 2. Fastening heads in gypsum board are slightly below surface in dimple formed by driving tool.
- C. Finish joints, fasteners, and all openings, including openings around penetrations, on that part of the gypsum board extending above suspended ceilings to seal surface of non-decorated smoke barrier, fire rated and sound rated gypsum board construction. After the installation of hanger rods, hanger wires, supports, equipment, conduits, piping and similar work, seal remaining openings and maintain the integrity of the smoke barrier, fire rated and sound rated construction/ Sanding is not required of non-decorated surfaces.

3.6 REPAIRS

- A. After taping and finishing has been completed, and before decoration, repair all damaged and defective work, including nondecorated surfaces.
- B. Patch holes or openings 13 mm (1/2 inch) or less in diameter, or equivalent size, with a setting type finishing compound or patching plaster.
- C. Repair holes or openings over 13 mm (1/2 inch) diameter, or equivalent size, with 16 mm (5/8 inch) thick gypsum board secured in such a manner as to provide solid substrate equivalent to undamaged surface.
- D. Tape and refinish scratched, abraded or damaged finish surfaces including cracks and joints in non-decorated surface to provide smoke tight construction, fire protection equivalent to the fire rated construction and STC equivalent to the sound rated construction.

3.7 UNACCESSIBLE CEILINGS (NOT USED)

- - - E N D - - -

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303
Bancroft Architects + Engineers

09-01-15

SECTION 09 30 13
CERAMIC/PORCELAIN TILING

PART 1 - GENERAL

1.1 DESCRIPTION

- A. This section specifies interior porcelain tile, waterproofing membranes for thin-set applications, crack isolation membranes, and tile backer board.

1.2 RELATED WORK

- A. Sustainable Design Requirements: Section 01 81 13, SUSTAINABLE CONSTRUCTION REQUIREMENTS.
- B. Preformed expansion joints in tile flooring: Section 07 95 13, EXPANSION JOINT COVER ASSEMBLIES.
- C. Sealing of Joints: Section 07 92 00, JOINT SEALANTS.
- D. Color, Texture, Pattern, and Size of Field Tile and Trim Shapes Specified: See Drawings for ROOM FINISH LEGEND. Color of Grout Specified: As selected from manufacturers full range of colors..
- E. Metal and Resilient Edge Strips at Joints with New Resilient Flooring, and Carpeting: Section 09 65 19, RESILIENT TILE FLOORING and Section 09 68 00, CARPETING.

1.3 SUBMITTALS

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Sustainable Design Submittals as described below:
 - 1. Volatile organic compounds per volume as specified in PART 2 - PRODUCTS.
- C. Samples:
 - 1. Base tile, each type, each color, each size.
 - 2. Porcelain tile, each type, color, patterns and size.
 - 3. Wall (or wainscot) tile, each color, size and pattern.
 - 4. Trim shapes, bullnose cap and cove including bullnose cap and base pieces at internal and external corners of vertical surfaces, each type, color, and size.
- D. Product Data:

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

09 30 13-1

10/28/2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303
Bancroft Architects + Engineers

09-01-15

1. Porcelain tile, marked to show each type, size, and shape required.
 2. Commercial urethane water based grout.
 3. Cementitious backer unit.
 4. Dry-set portland cement mortar.
 5. Divider strip.
 6. Elastomeric membrane and bond coat.
 7. Reinforcing tape.
 8. Leveling compound.
 9. Latex-portland cement mortar.
 10. Organic adhesive.
 11. Slip resistant tile.
 12. Waterproofing isolation membrane.
 13. Fasteners.
- E. Certification:
1. Master grade certificate, ANSI A137.1.
 2. Manufacturer's certificates indicating that the following materials comply with specification requirements:
 - a. Commercial urethane water based grout.
 - b. Modified epoxy emulsion.
 - c. Commercial portland cement mortar.
 - d. Cementitious backer unit.
 - e. Dry-set portland cement mortar.
 - f. Elastomeric membrane and bond coat.
 - g. Reinforcing tape.
 - h. Latex-portland cement mortar.
 - i. Leveling compound.
 - j. Organic adhesive.
 - k. Waterproof isolation membrane.
 - l. Factory back mounted tile documentation for suitability for application in wet area.
- F. Installer Qualifications:
1. Submit letter stating individual installer's experience.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

09 30 13-2

10/28/2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303
Bancroft Architects + Engineers

09-01-15

1.4 DELIVERY AND STORAGE

- A. Deliver materials in containers with labels legible and intact and grade-seals unbroken.
- B. Store material to prevent damage or contamination.

1.5 QUALITY ASSURANCE

- A. Installers to be from a company specializing in performing installation of products specified and have a minimum of three (3) years' experience.
- B. Each type and color of tile to be provided from a single source.
- C. Each type and color of mortar, adhesive, and grout to be provided from the same source.

1.6 WARRANTY

- A. Construction Warranty: Comply with FAR clause 52.246-21, "Warranty of Construction".

1.7 APPLICABLE PUBLICATIONS

- A. Publications listed below form a part of this specification to the extent referenced. Publications are referenced in text by basic designation only.
- B. American National Standards Institute (ANSI):
 - A10.20-06(R2011).....Safe Operating Practices for Tile, Terrazzo and Marble WorkA108/A118/A136-14 Installation of Ceramic Tile
 - A108.01-13.....Subsurfaces and Preparations by Other Trades
 - A108.02-13.....Materials, Environmental, and Workmanship
 - A108.1A-14.....Installation of Ceramic Tile in the Wet-Set Method with Portland Cement Mortar
 - A108.1B-10.....Installation of Ceramic Tile on a Cured Portland Cement Mortar Setting Bed with Dry-Set or Latex-Portland Cement Mortar
 - A108.1C-10.....Contractors Option; Installation of Ceramic Tile in the Wet-Set method with Portland Cement Mortar or Installation of Ceramic Tile on a Cured Portland Cement Mortar Setting Bed with Dry-Set or Latex-Portland Cement Mortar

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

09-01-15

- A108.4-09.....Ceramic Tile with Organic Adhesives or Water
Cleanable Tile-Setting Epoxy Adhesive
- A108.10-10.....Grout in Tilework
- A108.13-10.....Load Bearing, Bonded, Waterproof Membranes for
Thin-Set Ceramic Tile and Dimension Stone
- A118.1-12.....Dry-Set Portland Cement Mortar
- A118.3-13.....Chemical Resistant, Water Cleanable Tile-
Setting and -Grouting Epoxy and Water Cleanable
Tile-Setting Epoxy Adhesive
- A118.4-12.....Latex-Portland Cement Mortar

- A118.6-10.....Cement Grouts for Tile Installation
- A118.7-10.....High Performance Cement Grouts for Tile
Installation
- A118.9-10.....Cementitious Backer Units
- A118.10-14.....Load Bearing, Bonded, Waterproof Membranes for
Thin-Set Ceramic Tile and Dimension Stone
Installation
- A136.1-13.....Organic Adhesives for Installation of Ceramic
Tile
- A137.1-12.....American National Standard Specifications for
Ceramic Tile
- C. ASTM International (ASTM):
- A666-10.....Annealed or Cold-Worked Austenitic Stainless
Steel Sheet, Strip, Plate and Flat Bar
- A1064/A1064M-14.....Carbon-Steel Wire and Welded Wire
Reinforcement, Plain and Deformed, for Concrete
- C109/C109M-13.....Standard Test Method for Compressive Strength
of Hydraulic Cement Mortars (Using 2 inch. or
[50-mm] Cube Specimens)
- C241/C241M-15e.....Abrasion Resistance of Stone Subjected to Foot
Traffic
- C348-14.....Standard Test Method for Flexural Strength of
Hydraulic-Cement Mortars

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

09 30 13-4

10/28/2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

09-01-15

- C627-10.....Evaluating Ceramic Floor Tile Installation
Systems Using the Robinson-Type Floor Tester
- C954-11.....Steel Drill Screws for the Application of
Gypsum Board on Metal Plaster Base to Steel
Studs from 0.033 in (0.84 mm) to 0.112 in (2.84
mm) in thickness
- C979/C979M-10.....Pigments for Integrally Colored Concrete
- C1002-14.....Steel Self-Piercing Tapping Screws for the
Application of Panel Products
- C1027-09.....Test Method for Determining Visible Abrasion
Resistance of Glazed Ceramic Tile
- C1127-01 (R2009).....Standard Guide for Use of High Solids Content,
Cold Liquid-Applied Elastomeric Waterproofing
Membrane with an Integral Wearing Surface
- C1178/C1178M-13.....Standard Specification for Coated Glass Mat
Water-Resistant Gypsum Backing Panel
- C1325-14.....Non-Asbestos Fiber-Mat Reinforced Cementitious
Backer Units
- C1353/C1353M-09 (R2013) ..Abrasion Resistance of Dimension Stone
Subjected to Foot Traffic Using a Rotary
Platform, Double-Head Abraser
- D1204-14.....Test Method for Linear Dimensional Changes of
Nonrigid Thermoplastic Sheeting or Film at
Elevated Temperature
- D2240-05 (R2010).....Test Method for Rubber Property - Durometer
Hardness
- D2497-07 (R2012).....Tolerances for Manufactured Organic-Base
Filament Single Yarns
- D3045-92 (R2010).....Heat Aging of Plastics Without Load
- D4397-10.....Standard Specification for Polyethylene
Sheeting for Construction, Industrial and
Agricultural Applications

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

09-01-15

D5109-12.....Standard Test Methods for Copper-Clad
Thermosetting Laminates for Printed Wiring
Boards

D. Code of Federal Regulation (CFR):

40 CFR 59.....Determination of Volatile Matter Content, Water
Content, Density Volume Solids, and Weight
Solids of Surface Coating

E. Tile Council of North America, Inc. (TCNA):

Handbook for Ceramic Tile Installation (2014)

DCOF AcuTest-2012.....Dynamic Coefficient of Friction Test

PART 2 - PRODUCTS

2.1 TILE

A. Comply with ANSI A137.1, Standard Grade, except as modified:

1. Inspection procedures listed under the Appendix of ANSI A137.1.

2. Abrasion Resistance Classification:

a. Tested in accordance with values listed in Table 1, ASTM C1027.

b. Class V, 12000 revolutions for floors in Corridors, Kitchens,
Storage including Refrigerated Rooms

c. Class IV, 6000 revolutions for remaining areas.

3. Slip Resistant Tile for Floors:

a. Coefficient of friction, when tested in accordance with
ANSI A137.1 and measured per the TCNA DCOF AcuTest.

1) Equal to or greater than .42 for level interior tile floors
that will be walked on when wet.

b. Porcelain Paver Tile: Matte surface finish.

4. Factory Blending: For tile with color variations, within the ranges
selected during sample submittals blend tile in the factory and
package so tile units taken from one (1) package show the same range
in colors as those taken from other packages and match approved
samples.

5. Factory-Applied Temporary Protective Coating:

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

09-01-15

- a. Protect exposed face surfaces (top surface) of tile against adherence of mortar and grout by pre-coating with a continuous film of hot applied petroleum paraffin wax.
 - b. Do not coat unexposed tile surfaces.
 - c. Pre-wax tiles set or grouted with urethane.
- B. Porcelain Paver Tile: Nominal 8 mm (5/16 inch) thick, with cushion edges. Porcelain tile produced by the dust pressed method are to be made of approximately 50% feldspar; the remaining 50% is to be made up of various high-quality light firing ball clays yielding a tile with a water absorption rate of 0.5% or less and a breaking strength of between 176 to 181 kg (390 to 400 lbs.).
- C. Trim Shapes:
1. Conform to applicable requirements of adjoining floor and wall tile.
 2. Use trim shapes sizes conforming to size of adjoining field wall tile unless detailed on construction documents or specified otherwise.
 3. Internal and External Corners:
 - a. Square internal and external corner joints are not acceptable.
 - b. External corners including edges: Use bullnose shapes.
 - c. Internal corners: Use cove shapes.
 - d. Base to floor internal corners: Use special shapes providing integral cove vertical and horizontal joint.
 - e. Base to floor external corners: Use special shapes providing bullnose vertical edge with integral cove horizontal joint. Use stop at bottom of openings having bullnose return to wall.
 - f. Wall top edge internal corners: Use special shapes providing integral cove vertical joint with bullnose top edge.
 - g. Wall top edge external corners: Use special shapes providing bullnose vertical and horizontal joint edge.
 - h. Provide cove and bullnose shapes where indicated in construction documents, and required to complete tile work.

2.2 BACKER UNITS

A. Cementitious Backer Units:

1. Use in showers or wet areas, or as indicated on drawings.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

09 30 13-7

10/28/2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303
Bancroft Architects + Engineers

09-01-15

2. Conform to ASTM C1325; Type A.
3. Use in maximum lengths available to minimize end to end butt joints.

2.3 JOINT MATERIALS FOR CEMENTITIOUS BACKER UNITS

- A. Reinforcing Tape: Vinyl coated woven glass fiber mesh tape, open weave, 50 mm (2 inches) wide. Tape with pressure sensitive adhesive backing will not be permitted.
- B. Tape Embedding Material: Latex-portland cement mortar complying with ANSI A108.01.
- C. Joint material, including reinforcing tape, and tape embedding material, are to be as specifically recommended by the backer unit manufacturer.

2.4 FASTENERS

- A. Screws for Cementitious Backer Units.
 1. Standard screws for gypsum board are not acceptable.
 2. Minimum 11 mm (7/16 inch) diameter head, corrosion resistant coated, with washers.
 3. ASTM C954 for steel 1 mm (0.033 inch) thick.
 4. ASTM C1002 for steel framing less than 0.0329 inch thick.
- B. Washers: Galvanized steel, 13 mm (1/2 inch) minimum diameter.

2.5 SETTING MATERIALS OR BOND COATS

- A. Conform to TCNA Handbook for Ceramic Tile Installation.
- B. Portland Cement Mortar: ANSI A108.02.
- C. Latex-Portland Cement Mortar: ANSI A118.4.
 1. For wall applications, provide non-sagging, latex-portland cement mortar complying with ANSI A118.4.
 2. Prepackaged Dry-Mortar Mix: Factory-prepared mixture of portland cement; dry, redispersible, ethylene vinyl acetate additive; and other ingredients to which only water needs to be added at Project site.
- D. Dry-Set Portland Cement Mortar: ANSI A118.1. For wall applications, provide non-sagging, latex-portland cement mortar complying with ANSI A118.1.
- E. Organic Adhesives: ANSI A136.1, Type 1.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

09 30 13-8

10/28/2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
 St. Cloud, Minnesota 56303
 Bancroft Architects + Engineers

09-01-15

F. Elastomeric Waterproofing Membrane and Bond Coat:

1. TCNA F122-14 (on ground concrete) and TCNA F112A-14 (above ground concrete).
2. ANSI A118.10.
3. One component polyurethane, liquid applied material having the following additional physical properties:
 - a. Hardness: Shore "A" between 40-60.
 - b. Elongation: Between 300-600 percent.
 - c. Tensile strength: Between .27 - .41 Newton per square millimeter (40-60 pounds per square inch gauge).
 - d. No volatile compounds (VOC).
4. Coal tar modified urethanes are not acceptable.

G. Waterproofing Isolation Membrane:

1. Sheet System TCNA F122-14 (on-ground concrete) and TCNA F122A-14 (above-ground concrete).
2. Composite sheet consisting of ASTM D5109, Type II, Grade I Chlorinated Polyethylene (CM) sheet reinforced on both sides with a non-woven polyester fiber.
3. Designed for use in wet areas as an isolation and positive waterproofing membranes for thin-set bonding of sheet to substrate and thin-set bonding of ceramic and porcelain tile or marble to sheet. Suited for both horizontal and vertical applications.
4. Conform to the following additional physical properties:

Property	Units	Results	Test Method
Hardness Shore A	Points	70-80	ASTM D2240 (10 Second Reading)
Shrinkage	Percent	5 maximum	ASTM D1204
Brittleness		No crack remains flexible at temperature -37 degrees C (-35 degrees F)	ASTM D2497 13 mm (1/2-inch) Mandrel Bend

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

09-01-15

Retention of Properties after Heat Aging	Percent of original	80 Tensile 80 Breaking 80 Elongation	ASTM D3045, 90 degrees C (194 degrees F) for 168 hours
--	---------------------	--	---

5. Manufacturer's standard sheet size with prefabricated or preformed inside and outside corners.
6. Sheet manufacturer's solvent welding liquid or xylene and edge sealant.

2.6 GROUTING MATERIALS

A. Coloring Pigments:

1. Pure mineral pigments, lime proof and nonfading, complying with ASTM C979/C979M.
2. Coloring pigments may only be added to grout by the manufacturer.
3. Job colored grout is not acceptable.
4. Use is required in Commercial Portland Cement Grout, Dry-Set Grout, and Latex-Portland Cement Grout.

B. Sand-Portland Cement Grout: ANSI A108.10, consisting of white or gray cement and white or colored aggregate as required to produce color indicated.

C. Standard Cement Grout: ANSI A118.6.

D. High Performance Tile Grout: ANSI A118.7 with a VOC content of 65 g/L or less when calculated according to 40 CFR 59 (EPA Method 24).

1. Polymer Type: Ethylene vinyl acetate or acrylic additive, in dry, redispersible form, prepackaged with other dry ingredients.
2. Polymer Type: Urethane water based prepackaged.

2.7 PATCHING AND LEVELING COMPOUND

A. Portland cement base, polymer-modified, self-leveling compound, manufactured specifically for resurfacing and leveling concrete floors. Products containing gypsum are not acceptable.

B. Provide a patching and leveling compound with the following minimum physical properties:

1. Compressive strength - 25 MPa (3500 psig) per ASTM C109/C109M.
2. Flexural strength - 7 MPa (1000 psig) per ASTM C348 (28 day value).
3. Tensile strength - 4.1 MPa (600 psi) per ANSI 118.7.

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

09-01-15

4. Density - 1.9.

- C. Capable of being applied in layers up to 38 mm (1-1/2 inches) thick without fillers and up to 101 mm (4 inches) thick with fillers, being brought to a feather edge, and being trowelled to a smooth finish.
- D. Primers, fillers, and reinforcement as required by manufacturer for application and substrate condition.
- E. Ready for use in 48 hours after application.

2.8 MARBLE (NOT USED)

2.9 METAL DIVIDER STRIPS

- A. Terrazzo type divider strips.
- B. Heavy top type strip with 5 mm (3/16 inch) wide top and 38 mm (1 1/2 inch) long leg. Height to match tile and setting-bed thickness.
- C. Embedded leg perforated and deformed for keying to mortar.
- D. Stainless-steel, ASTM A666, 300 Series exposed-edge material.

2.10 WATER (NOT USED)

2.11 CLEANING COMPOUNDS

- A. Specifically designed for cleaning masonry and concrete and which will not prevent bond of subsequent tile setting materials including patching and leveling compounds and elastomeric waterproofing membrane and coat.
- B. Materials containing acid or caustic Material are not acceptable.

2.12 FLOOR MORTAR BED REINFORCING (NOT USED)

2.13 POLYETHYLENE SHEET (NOT USED)

PART 3 - EXECUTION

3.1 ENVIRONMENTAL REQUIREMENTS

- A. Maintain ambient temperature of work areas at not less than 16 degrees C (60 degrees F), without interruption, for not less than 24 hours before installation and not less than three (3) days after installation.
- B. Maintain higher temperatures for a longer period of time where required by manufacturer's recommendation and ANSI Specifications for installation.

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

09-01-15

- C. Do not install tile when the temperature is above 38 degrees C (100 degrees F).
- D. Do not install materials when the temperature of the substrate is below 16 degrees C (60 degrees F).
- E. Do not allow temperature to fall below 10 degrees C (50 degrees F) after third day of completion of tile work.

3.2 ALLOWABLE TOLERANCE

- A. Variation in plane of sub-floor, including concrete fills leveling compounds and mortar beds:
 - 1. Not more than 6 mm in 3048 mm (1/4 inch in 10 feet) from required elevation where portland cement mortar setting bed is used.
 - 2. Not more than 3 mm in 3048 mm (1/8 inch in 10 feet) where dry-set portland cement, and latex-portland cement mortar setting beds and chemical-resistant bond coats are used.
- B. Variation in Plane of Wall Surfaces:
 - 1. Not more than 6 mm in 2438 mm (1/4 inch in 8 feet) from required plane where portland cement mortar setting bed is used.
 - 2. Not more than 3 mm in 2438 mm (1/8 inch in 8 feet) where dry-set or latex-portland cement mortar or organic adhesive setting materials is used.

3.3 SURFACE PREPARATION

- A. Cleaning New Concrete or Masonry:
 - 1. Chip out loose material, clean off all oil, grease dirt, adhesives, curing compounds, and other deterrents to bonding by mechanical method, or by using products specifically designed for cleaning concrete and masonry.
 - 2. Use self-contained power blast cleaning systems to remove curing compounds and steel trowel finish from concrete slabs where ceramic tile will be installed directly on concrete surface with thin-set materials.
 - 3. Steam cleaning or the use of acids and solvents for cleaning will not be permitted.
- B. Patching and Leveling:

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

09-01-15

1. Mix and apply patching and leveling compound in accordance with manufacturer's instructions.
 2. Fill holes and cracks and align concrete floors that are out of required plane with patching and leveling compound.
 - a. Thickness of compound as required to bring finish tile system to elevation shown on construction documents.
 - b. Float finish except finish smooth for elastomeric waterproofing.
 - c. At substrate expansion, isolation, and other moving joints, allow joint of same width to continue through underlayment.
 3. Apply patching and leveling compound to concrete and masonry wall surfaces that are out of required plane.
 4. Apply leveling coats of material compatible with wall surface and tile setting material to wall surfaces, other than concrete and masonry that are out of required plane.
- C. Mortar Bed for Slopes to Drains:
1. Slope compound to drain where drains are shown on construction documents.
 2. Install mortar bed in depressed slab sloped to drains not less than 3.2 mm in 305 mm (1/8 inch per foot).
 3. Allow not less than 50 mm (2 inch) depression at edge of depressed slab.
 4. Screed for slope to drain and float finish.
 5. Cure mortar bed for not less than seven (7) days. Do not use curing compounds or coatings.
 6. Perform flood test to verify mortar bed slopes to drain before installing tile. Contracting Officer Representative (COR) to be present during flood test.
- D. Additional preparation of concrete floors for tile set with epoxy, or furan-resin is to be in accordance with the manufacturer's printed instructions.
- E. Cleavage Membrane:
1. Install polythene sheet as cleavage membrane in depressed slab when waterproof membrane is not scheduled or indicated.
 2. Turn up at edge of depressed floor slab to top of floor.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

09 30 13-13

10/28/2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

09-01-15

F. Walls:

1. In showers or other wet areas cover studs with polyethylene sheet.
2. Apply patching and leveling compound to concrete and masonry surfaces that are out of required plane.
3. Apply leveling coats of material compatible with wall surface and tile setting material to wall surfaces, other than concrete and masonry that are out of required plane.
4. Apply metal lath to framing in accordance with ANSI A108.1:
 - a. Use fasteners specified in paragraph "Fasteners." Use washers when lath opening is larger than screw head.
 - b. Apply scratch and leveling coats to metal lath in accordance with ANSI A108.1C.
 - c. Total thickness of scratch and leveling coats:
 - 1) Apply 9 mm to 16 mm (3/8 inch to 5/8 inch) thick over solid backing.
 - 2) 16 mm to 19 mm (5/8 to 3/4 inch) thick on metal lath over studs.
 - 3) Where wainscots are required to finish flush with wall surface above, adjust thickness required for flush finish.
 - d. Apply scratch and leveling coats more than 19 mm (3/4 inch) thick in two (2) coats.

G. Existing Floors and Walls:

1. Remove existing composition floor finishes and adhesive. Prepare surface by grinding, chipping, self-contained power blast cleaning or other suitable mechanical methods to completely expose uncontaminated concrete or masonry surfaces. Follow safety requirements of ANSI A10.20.
2. Remove existing concrete fill or topping to structural slab. Clean and level the substrate for new setting bed and waterproof membrane or cleavage membrane.
3. Where new tile bases are required to finish flush with plaster above or where they are extensions of similar bases in conjunction with existing floor tiles, cut channel in floor slab and expose rough

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

09-01-15

wall construction sufficiently to accommodate new tile base and setting material.

3.4 CEMENTITIOUS BACKER UNITS

- A. Remove polyethylene wrapping from cementitious backer units and separate to allow for air circulation. Allow moisture content of backer units to dry down to a maximum of 35 percent before applying joint treatment and tile.
- B. Install in accordance with ANSI A118.9 except as specified otherwise.
- C. Install units horizontally or vertically to minimize joints with end joints over framing members. Units with rounded edges; face rounded edge away from studs to form a "V" joint for joint treatment.
- D. Secure cementitious backer units to each framing member with screws spaced not more than 203 mm (8 inches) on center and not closer than 13 mm (1/2 inch) from the edge of the backer unit or as recommended by backer unit manufacturer. Install screws so that the screw heads are flush with the surface of the backer unit.
- E. Where backer unit joins shower pans or waterproofing, lap backer unit overturned up waterproof system. Install fasteners only through top one-inch of turned up waterproof systems.
- F. Do not install joint treatment for seven (7) days after installation of cementitious backer unit.
- G. Joint Treatment:
 - 1. Fill horizontal and vertical joints and corners with latex-portland cement mortar. Apply fiberglass tape over joints and corners and embed with same mortar.
 - 2. Leave 6 mm (1/4 inch) space for sealant at lips of tubs, sinks, or other plumbing receptors.

3.5 GLASS MAT WATER-RESISTANT BACKING BOARD (NOT USED)

3.6 MARBLE (NOT USED)

3.7 METAL DIVIDER STRIPS

- A. Install metal divider strips in floor joints between ceramic and quarry tile floors and between tile floors and adjacent flooring of other

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

09-01-15

materials where the finish floors are flush unless shown otherwise on construction documents.

- B. Set divider strip in mortar bed to line and level centered under doors or in openings.

3.8 CERAMIC TILE - GENERAL

- A. Comply with ANSI A108/A118/A136 series of tile installation standards applicable to methods of installation and TCNA Installation Guidelines.

- B. Installing Mortar Beds for Floors:

1. Install mortar bed in a manner that does not damage cleavage or waterproof membrane; 32 mm (1-1/2 inch) minimum thickness.
2. Install floor mortar bed reinforcing centered in mortar fill.
3. Screed finish to level plane or slope to drains shown on construction documents, float finish.
4. For thin set systems cure mortar bed not less than seven (7) days. Do not use curing compounds or coatings.
5. For tile set with portland cement paste over plastic mortar bed coordinate to set tile before mortar bed sets.

- C. Setting Beds or Bond Coats:

1. Set floor tile in elastomeric bond coat over elastomeric membrane per ANSI 108.13, TCNA System F122-14 where indicated on construction documents.
2. Set wall tile installed over concrete or masonry in dry-set portland cement mortar, or latex-portland cement mortar, ANSI 108.1B and TCNA System W211-14, W221-14 or W222-14.
3. Set wall tile installed over concrete backer board in latex-portland cement mortar, ANSI A108.1B.
4. Set wall tile installed over portland cement mortar bed on metal lath base in portland cement paste over plastic mortar bed, or dry-set portland cement mortar or latex-portland cement mortar over a cured mortar bed, ANSI A108.1C, TCNA System W231-14, W241-14.
5. Set tile installed over gypsum board and gypsum plaster in organic adhesive, ANSI A108.1, TCNA System W242-14.
6. Set trim shapes in same material specified for setting adjoining tile.

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

09-01-15

D. Workmanship:

1. Lay out tile work so that no tile less than one-half full size is used. Make all cuts on the outer edge of the field.
2. Set tile firmly in place with finish surfaces in true planes. Align tile flush with adjacent tile unless shown otherwise on construction documents.
3. Form intersections and returns accurately.
4. Cut and drill tile neatly without marring surface.
5. Cut edges of tile abutting penetrations, finish, or built-in items:
 - a. Fit tile closely around electrical outlets, piping, fixtures and fittings, so that plates, escutcheons, collars and flanges will overlap cut edge of tile.
 - b. Seal tile joints watertight as specified in Section 07 92 00, JOINT SEALANTS, around electrical outlets, piping fixtures and fittings before cover plates and escutcheons are set in place.
6. Completed work is to be free from hollow sounding areas and loose, cracked or defective tile.
7. Remove and reset tiles that are out of plane or misaligned.
8. Floors:
 - a. Extend floor tile beneath casework and equipment, except those units mounted in wall recesses.
 - b. Align finish surface of new tile work flush with other and existing adjoining floor finish where indicated in construction documents.
 - c. In areas where floor drains occur, slope tile to drains.
 - d. Push and vibrate tiles over 203 mm (8 inches) square to achieve full support of bond coat.
9. Walls:
 - a. Cover walls and partitions, including pilasters, furred areas, and freestanding columns from floor to ceiling, or from floor to nominal wainscot heights as indicated in construction documents with tile.
 - b. Finish reveals of openings with tile, except where other finish materials are indicated in construction documents.

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

09-01-15

- c. At window openings, provide tile stools and reveals.
 - d. Finish wall surfaces behind and at sides of casework and equipment, except those units mounted in wall recesses, with same tile as scheduled for room proper.
10. Joints:
- a. Keep all joints in line, straight, level, perpendicular and of even width unless shown otherwise on construction documents.
 - b. Make joints 2 mm (1/16 inch) wide for glazed wall tile and mosaic tile work.
 - c. Make joints in quarry tile work not less than 6 mm (1/4 inch) nor more than 9 mm (3/8 inch) wide. Finish joints flush with surface of tile.
 - d. Make joints in paver tile, porcelain type; maximum 3 mm (1/8 inch) wide.
11. Back Buttering: For installations indicated below, obtain 100 percent mortar coverage by complying with applicable special requirements for back buttering of tile in referenced ANSI A108/A118/A136 series of tile installation standards:
- a. Tile wall installations in wet areas, including showers, tub enclosures, laundries and swimming pools.
 - b. Tile installed with chemical-resistant mortars and grouts.
 - c. Tile wall installations composed of tiles 203 by 203 mm (8 by 8 inches) or larger.
 - d. Exterior tile wall installations.

3.9 CERAMIC TILE INSTALLED WITH PORTLAND CEMENT MORTAR

- A. Mortar Mixes for Floor, Wall and Base Tile: ANSI A108.1A. except specified otherwise.
- B. Installing Wall and Base Tile: ANSI A108.1A, except specified otherwise.
- C. Installing Floor Tile: ANSI A108.1A, except as specified otherwise. Slope mortar beds to floor drains at a minimum of 3 mm in 305 mm (1/8 inch per foot).

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

09-01-15

3.10 PORCELAIN TILE INSTALLED WITH LATEX PORTLAND CEMENT BONDING MORTAR

- A. Due to the denseness of porcelain tile use latex portland cement bonding mortar that meets the requirements of ANSI A108.01. Mix bonding mortars in accordance with manufacturer's instructions. Provide liquid ratios and comply with dwell times during the placement of bonding mortar and tile.

3.11 THIN SET CERAMIC AND PORCELAIN TILE INSTALLED WITH DRY-SET PORTLAND CEMENT AND LATEX-PORTLAND CEMENT MORTAR

- A. Installation of Tile: ANSI A108.1B, except as specified otherwise.
- B. Slope tile work to drains at not less than 3 mm in 305 mm (1/8 inch per foot).

3.12 THIN SET CERAMIC AND PORCELAIN TILE INSTALLED WITH ORGANIC ADHESIVE

- A. Installation of Tile: ANSI A108.4.

3.13 THIN SET CERAMIC AND PORCELAIN TILE INSTALLED WITH CHEMICAL-RESISTANT BOND COAT

- A. Epoxy Resin Type: Install tile in accordance with Installation of Tile with Epoxy Mortar; ANSI A108.6.
- B. Furan Resin Type: Proportion, mix and place in accordance with the manufacturer's printed instructions. Set tile in accordance with ANSI A108.8.

3.14 CERAMIC AND PORCELAIN TILE INSTALLED WITH ELASTOMERIC BOND COAT

- A. Surface Preparation: Prepare surfaces as specified.
- B. Installation of Elastomeric Membrane: ANSI A108.10 and TCNA F122-14 (on ground concrete) and F122A-14 (above-ground concrete).
 - 1. Prime surfaces, where required, in accordance with manufacturer's instructions.
 - 2. Install first coat of membrane material in accordance with manufacturer's instructions, in thickness of 0.76 to 1.3 mm (30 to 50 mils).
 - 3. Extend material over flashing rings of drains and turn up vertical surfaces not less than 101 mm (4 inches) above finish floor surface.
 - 4. When material has set, recoat areas with a second coat of elastomeric membrane material for a total thickness of 1.3 to 1.9 mm (50 to 75 mils).

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

09-01-15

5. After curing test for leaks with 25 mm (1 inch) of water for 24 hours.

C. Installation of Tile in Elastomeric Membrane:

1. Spread no more material than can be covered with tile before material starts to set.
2. Apply tile in second coat of elastomeric membrane material in accordance with the coating manufacturer's instructions in lieu of aggregate surfacing specified in ASTM C1127. Do not install top coat over tile.

3.15 GROUTING

A. Grout Type and Location:

1. Grout for glazed wall and base tile, paver tile .

B. Workmanship:

1. Install and cure grout in accordance with the applicable standard.
2. Sand Portland Cement Grout: ANSI A108.10.
3. Standard Cement Grout: ANSI A118.6.
4. High Performance Grout: ANSI A118.7.
5. Water-Cleanable Urethane Grout: ANSI A118.3.

3.16 MOVEMENT JOINTS

- A. Prepare tile expansion, isolation, construction and contraction joints for installation of sealant. Refer to Section 07 92 00, JOINT SEALANTS.
- B. TCNA details EJ 171-14.
- C. At expansion joints, rake out joint full depth of tile and setting bed and mortar bed. Do not cut waterproof or isolation membrane.

3.17 CLEANING

- A. Thoroughly sponge and wash tile. Polish glazed surfaces with clean dry cloths.
- B. Methods and materials used are not permitted to damage or impair appearance of tile surfaces.
- C. The use of acid or acid cleaners on glazed tile surfaces is prohibited.
- D. Clean tile grouted with epoxy, furan and commercial portland cement grout and tile set in elastomeric bond coat as recommended by the manufacturer of the grout and bond coat.

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303
Bancroft Architects + Engineers

09-01-15

3.18 PROTECTION

- A. Keep traffic off tile floor, until grout and setting material is fully set and cured.
- B. Where traffic occurs over tile floor is unavoidable, cover tile floor with not less than 9 mm (3/8 inch) thick plywood, wood particle board, or hardboard securely taped in place. Do not remove protective cover until time for final inspection. Clean tile of any tape, adhesive and stains.

3.19 TESTING FINISH FLOOR

- A. Test floors in accordance with ASTM C627 to show compliance with codes 1 through 10.

- - - E N D - - -

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303
Bancroft Architects + Engineers

12-01-18

SECTION 09 51 00
ACOUSTICAL CEILINGS

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Acoustical units.
2. Metal ceiling suspension system for acoustical ceilings.

1.2 RELATED REQUIREMENTS

- A. Adhesive VOC Limits: Section 01 81 13, SUSTAINABLE CONSTRUCTION REQUIREMENTS.
- B. Color, pattern, and location of each type of acoustical unit: Refer to Drawings for ROOM FINISH LEGEND.
- C. Ceiling Suspension System: Section 09 22 16, NON-STRUCTURAL METAL FRAMING.

1.3 APPLICABLE PUBLICATIONS

- A. Comply with references to extent specified in this section.
- B. ASTM International (ASTM):
 1. A641/A641M-09a(2014) - Zinc-coated (Galvanized) Carbon Steel Wire.
 2. A653/A653M-15e1 - Steel Sheet, Zinc-Coated (Galvanized) or Zinc-Iron Alloy-coated (Galvannealed) by the Hot-Dip Process.
 3. C423-09a - Sound Absorption and Sound Absorption Coefficients by the Reverberation Room Method.
 4. C634-13 - Terminology Relating to Environmental Acoustics.
 5. C635/C635M-13a - Manufacture, Performance, and Testing of Metal Suspension Systems for Acoustical Tile and Lay-in Panel Ceilings.
 6. C636/C636M-13 - Installation of Metal Ceiling Suspension Systems for Acoustical Tile and Lay-in Panels.
 7. D1779-98(2011) - Adhesive for Acoustical Materials.
 8. E84-15b - Surface Burning Characteristics of Building Materials.
 9. E119-16 - Fire Tests of Building Construction and Materials.
 10. E413-16 - Classification for Rating Sound Insulation.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

09 51 00-1

10/28/2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

12-01-18

11. E580/E580M-14 - Installation of Ceiling Suspension Systems for Acoustical Tile and Lay-in Panels in Areas Subject to Earthquake Ground Motions.

12. E1264-14 - Classification for Acoustical Ceiling Products.

C. International Organization for Standardization (ISO):

1. ISO 14644-1 - Classification of Air Cleanliness.

1.4 PREINSTALLATION MEETINGS

A. Conduct preinstallation meeting at project site minimum 30 days before beginning Work of this section.

1. Required Participants:

a. Contracting Officer's Representative.

b. VA Interior Designer.

c. Inspection and Testing Agency.

d. Contractor.

e. Installer.

f. Manufacturer's field representative.

g. Other installers responsible for adjacent and intersecting work, including sprinkler, HVAC, and, lighting installers.

2. Meeting Agenda: Distribute agenda to participants minimum 3 days before meeting.

a. Installation schedule.

b. Installation sequence.

c. Preparatory work.

d. Protection before, during, and after installation.

e. Installation.

f. Terminations.

g. Transitions and connections to other work.

h. Inspecting and testing.

i. Other items affecting successful completion.

3. Document and distribute meeting minutes to participants to record decisions affecting installation.

1.5 SUBMITTALS

A. Submittal Procedures: Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.

Contract No. 36C26319D0022

Station Project No. 656-400

Bancroft-AE No. 18-116

09 51 00-2

10/28/2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

12-01-18

B. Submittal Drawings:

1. Show size, configuration, and fabrication and installation details.

C. Manufacturer's Literature and Data:

1. Description of each product.
2. Ceiling suspension system indicating manufacturer recommendation for each application.
3. Installation instructions.
4. Warranty.

D. Samples:

1. Acoustical units, 150 mm (6 inches) in size, each type, including units specified to match existing.
 - a. Submit quantity required to show full color and texture range.
2. Suspension system, trim and molding, 300 mm (12 inches) long.
3. Colored markers for access service.
4. Approved samples may be incorporated into work.

E. Sustainable Construction Submittals:

1. Recycled Content: Identify post-consumer and pre-consumer recycled content percentage by weight.
2. Biobased Content:
 - a. Show type and quantity for each product.
 - b. Show volatile organic compound types and quantities.

F. Certificates: Certify products comply with specifications.

1. Acoustical units, each type.

G. Qualifications: Substantiate qualifications comply with specifications.

1. Manufacturer with project experience list.

H. Operation and Maintenance Data:

1. Care instructions for each exposed finish product.

1.6 QUALITY ASSURANCE

A. Manufacturer Qualifications:

1. Regularly manufactures specified products.
2. Manufactured specified products with satisfactory service on five similar installations for minimum five years.
 - a. Project Experience List: Provide contact names and addresses for completed projects.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

09 51 00-3

10/28/2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

12-01-18

1.7 DELIVERY

- A. Deliver products in manufacturer's original sealed packaging.
- B. Mark packaging, legibly. Indicate manufacturer's name or brand, type, color, production run number, and manufacture date.
- C. Before installation, return or dispose of products within distorted, damaged, or opened packaging.

1.8 STORAGE AND HANDLING

- A. Store products indoors in dry, weathertight, conditioned facility.
- B. Protect products from damage during handling and construction operations.

1.9 FIELD CONDITIONS

- A. Environment:
 - 1. Product Temperature: Minimum 21 degrees C (70 degrees F) for minimum 48 hours before installation.
 - 2. Work Area Ambient Conditions: HVAC systems are complete, operational, and maintaining facility design operating conditions continuously, beginning 48 hours before installation until Government occupancy.
 - 3. Install products when building is permanently enclosed and when wet construction is completed, dried, and cured.

1.10 WARRANTY

- A. Construction Warranty: FAR clause 52.246-21, "Warranty of Construction."

PART 2 - PRODUCTS

2.1 SYSTEM DESCRIPTION

- A. Ceiling System: Acoustical ceilings units on exposed grid suspension systems.

2.2 SYSTEM PERFORMANCE

- A. Design product complying with specified performance:
 - 1. Maximum Deflection: 1/360 of span, maximum.
- B. Fire Resistance: ASTM E119; as component of 1 hour rated floor-ceiling or roof-ceiling assembly.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

09 51 00-4

10/28/2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

12-01-18

C. Surface Burning Characteristics: When tested according to ASTM E84.

1. Flame Spread Rating: 25 maximum.
2. Smoke Developed Rating: 450 maximum.

2.3 PRODUCTS - GENERAL

A. Basis of Design: See Drawings for ROOM FINISH LEGEND.

B. Provide acoustical units from one manufacturer.

1. Provide each product exposed to view from one production run.

C. Provide suspension system from same manufacturer.

D. Sustainable Construction Requirements:

1. Mineral Base Recycled Content: 25 percent, recycled content, minimum. Select products with recycled content to achieve overall Project recycled content requirement.
2. Steel Recycled Content: 30 percent total recycled content, minimum.
3. Biobased Content: 37 percent by weight biobased material, minimum.
4. Low Pollutant-Emitting Materials: Comply with VOC limits specified in Section 01 81 13, SUSTAINABLE CONSTRUCTION REQUIREMENTS for the following products:
 - a. Non-flooring adhesives and sealants.

2.4 ACOUSTICAL UNITS

A. General:

1. Ceiling Panel and Tile: ASTM E1264, bio-based content according to USDA Bio-Preferred Product requirements.
 - a. Mineral Fiber: 3.6 kg/sq. m (3/4 psf) weight, minimum.
2. Classification: Provide type and form as follows:
 - a. Type III Units - Mineral base with water-based painted finish maximum 10 g/l VOC; Form 2 - Water felted, minimum 16 mm (5/8 inch) thick.
 - b. NRC (Noise Reduction Coefficient): ASTM C423, minimum 0.55, unless specified otherwise.
 - c. CAC (Ceiling Attenuation Class): ASTM E413, minimum 33, unless specified otherwise.
 - d. LR (Light Reflectance): Minimum 0.80.
3. Lay-in panels: With square edges.
 - a. Sizes:

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

09 51 00-5

10/28/2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

12-01-18

- 1) See Drawing I601, ROOM FINISH LEGEND.

2.5 METAL SUSPENSION SYSTEM

- A. General: ASTM C635, intermediate-duty, except as otherwise specified.
1. Suspension System: Provide the following:
 - a. Galvanized cold-rolled steel, bonderized.
 2. Main and Cross Runner: Use same construction Do not use lighter-duty sections for cross runners.
- B. Exposed Grid Suspension System: Support of lay-in panels.
1. Grid Width: 22 mm (7/8 inch) minimum with 8 mm (5/16 inch) minimum panel bearing surface.
 2. Molding: Fabricate from the same material with same exposed width and finish.
 3. Finish: Baked-on enamel flat texture finish.
 - a. Color: To match adjacent acoustical units unless specified otherwise in the ROOM FINISH LEGEND as part of the drawings.
- C. Carrying Channels Secondary Framing: Cold-rolled or hot-rolled steel, black asphaltic paint finish, rust free.
1. Weight per 300 m (per thousand linear feet), minimum:

Size		Cold-rolled		Hot-rolled	
Mm	inches	kg	pound	kg	pound
38	1-1/2	215.4	475	508	1120
50	2	267.6	590	571.5	1260

- D. Anchors and Inserts: Provide anchors or inserts to support twice the loads imposed by hangers.
1. Hanger Inserts: Steel, zinc-coated (galvanized after fabrication).
 - a. Nailing type option for wood forms:
 - 1) Upper portion designed for anchorage in concrete and positioning lower portion below surface of concrete approximately 25 mm (one inch).
 - 2) Lower portion provided with minimum 8 mm (5/16 inch) hole to permit attachment of hangers.
 - b. Flush ceiling insert type:

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

12-01-18

- 1) Designed to provide a shell covered opening over a wire loop to permit attachment of hangers and keep concrete out of insert recess.
- 2) Insert opening inside shell approximately 16 mm (5/8 inch) wide by 9 mm (3/8 inch) high over top of wire.
- 3) Wire 5 mm (3/16 inch) diameter with length to provide positive hooked anchorage in concrete.

E. Clips: Galvanized steel, designed to secure framing member in place.

F. Tile Splines: ASTM C635.

G. Wire: ASTM A641.

1. Size:

- a. Wire Hangers: Minimum diameter 2.68 mm (0.1055 inch).
- b. Bracing Wires: Minimum diameter 3.43 mm (0.1350 inch).

2.6 ACCESSORIES

A. Adhesives: Low pollutant-emitting, water-based type recommended by adhered product manufacturer for each application.

B. Perimeter Seal: Vinyl, polyethylene or polyurethane open cell sponge material, density of 1.3 plus or minus 10 percent, compression set less than 10 percent with pressure sensitive adhesive coating on one side.

1. Thickness: As required to fill voids between back of wall molding and finish wall.

2. Size: Minimum 9 mm (3/8 inch) wide strip.

C. Access Identification Markers: Colored markers with pressure sensitive adhesive on one side, paper or plastic, 6 to 9 mm (1/4 to 3/8 inch) diameter.

1. Color Code: Provide the following color markers for service identification:

Color	Service
Red	Sprinkler System: Valves and Controls
Green	Domestic Water: Valves and Controls
Yellow	Chilled Water and Heating Water
Orange	Ductwork: Fire Dampers
Blue	Ductwork: Dampers and Controls

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

12-01-18

Color	Service
Black	Gas: Laboratory, Medical, Air and Vacuum

PART 3 - EXECUTION

3.1 PREPARATION

- A. Examine and verify substrate suitability for product installation.
- B. Protect existing construction and completed work from damage.
- C. Remove existing acoustical panels, suspension system to permit new installation.
 - 1. Dispose of removed materials.

3.2 INSTALLATION - GENERAL

- A. Install products according to manufacturer's instructions and approved submittal drawings.
 - 1. When manufacturer's instructions deviate from specifications, submit proposed resolution for Contracting Officer's Representative consideration.

3.3 ACOUSTICAL UNIT INSTALLATION

- A. Applications:
 - 1. Cut acoustic units for perimeter borders and penetrations to fit tight against penetration for joint not concealed by molding.
- B. Layout acoustical unit symmetrically, with minimum number of joints.
- C. Installation:
 - 1. Install acoustic tiles after wet finishes have been installed and solvents have cured.
 - 2. Install lay-in acoustic panels in exposed grid with minimum 6 mm (1/4 inch) bearing at edges on supports.
 - a. Install tile to lay level and in full contact with exposed grid.
 - b. Replace cracked, broken, stained, dirty, or tile.
 - 3. Tile in concealed grid upward access suspension system:
 - a. Install acoustical tile with joints close, straight and true to line, and with exposed surfaces level and flush at joints.
 - b. Make corners and arises full, and without worn or broken places.
 - c. Locate acoustical units providing access to service systems.
 - 4. Adhesive applied tile:

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

12-01-18

- a. Condition of surface according to ASTM D1779, Note 1, Cleanliness of Surface, and Note 4, Rigidity of Base Surface.
 - b. Size or seal surface as recommended by manufacturer of adhesive and allow to dry before installing units.
5. Markers:
- a. Install color coded markers to identify the various concealed piping, mechanical, and plumbing systems.
 - b. Attach colored markers to exposed grid on opposite sides of the units providing access.
 - c. Attach marker on exposed ceiling surface of upward access acoustical unit.
- D. Touch up damaged factory finishes.
1. Repair painted surfaces with touch up primer.

3.4 CEILING SUSPENSION SYSTEM INSTALLATION

- A. General: Install according to ASTM C636.
1. Use direct or indirect hung suspension system or combination of both.
 2. Support a maximum area of 1.48 sq. m (16 sq. ft.) of ceiling per hanger.
 3. Prevent deflection in excess of 1/360 of span of cross runner and main runner.
 4. Provide additional hangers located at each corner of support components.
 5. Provide minimum 100 mm (4 inch) clearance from the exposed face of the acoustical units to the underside of ducts, pipe, conduit, secondary suspension channels, concrete beams or joists; and steel beam or bar joist unless furred system is shown.
 6. Provide main runners minimum 1200 mm (48 inches) in length.
 7. Install hanger wires vertically. Angled wires are not acceptable except for seismic restraint bracing wires.
- B. Direct Hung Suspension System: ASTM C635.
1. Support main runners by hanger wires attached directly to the structure overhead.

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

12-01-18

2. Maximum spacing of hangers, 1200 mm (4 feet) on centers unless interference occurs by mechanical systems. Use indirect hung suspension system where not possible to maintain hanger spacing.

C. Anchorage to Structure:

1. Concrete:

- a. Install hanger inserts and wire loops required for support of hanger and bracing wire. Install hanger wires with looped ends through steel deck when steel deck does not have attachment device.
- b. Use eye pins or threaded studs with screw-on eyes in existing or already placed concrete structures to support hanger and bracing wire. Install in sides of concrete beams or joists at mid height.

2. Steel:

- a. Install carrying channels for attachment of hanger wires.
 - 1) Size and space carrying channels to support load within performance limit.
 - 2) Attach hangers to steel carrying channels, spaced four feet on center, unless area supported or deflection exceeds the amount specified.
- b. Attach carrying channels to the bottom flange of steel beams spaced not 1200 mm (4 feet) on center before fireproofing is installed. Weld or use steel clips for beam attachment.
- c. Attach hangers to bottom chord of bar joists or to carrying channels installed between the bar joists when hanger spacing prevents anchorage to joist. Rest carrying channels on top of the bottom chord of the bar joists, and securely wire tie or clip to joist.

D. Indirect Hung Suspension System: ASTM C635.

1. Space carrying channels for indirect hung suspension system maximum 1200 mm (4 feet) on center. Space hangers for carrying channels maximum 2400 mm (8 feet) on center or for carrying channels less than 1200 mm (4 feet) on center so as to insure that specified requirements are not exceeded.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

09 51 00-10

10/28/2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

12-01-18

2. Support main runners by specially designed clips attached to carrying channels.

3.5 CEILING TREATMENT

A. Moldings:

1. Install metal wall molding at perimeter of room, column, or edge at vertical surfaces.
2. Install special shaped molding at changes in ceiling heights and at other breaks in ceiling construction to support acoustical units and to conceal their edges.

B. Perimeter Seal:

1. Install perimeter seal between vertical leg of wall molding and finish wall, partition, and other vertical surfaces.
2. Install perimeter seal to finish flush with exposed faces of horizontal legs of wall molding.

C. Existing ceiling:

1. Where extension of existing ceilings occurs, match existing.
2. Where acoustical units are salvaged and reinstalled or joined, use salvaged units within a space. Do not mix new and salvaged units within a space which results in contrast between old and new acoustic units.
3. Comply with specifications for new acoustical units for new units required to match appearance of existing units.

3.6 CLEANING

- A. Remove excess adhesive before adhesive sets.
- B. Clean exposed surfaces. Remove contaminants and stains.

- - - E N D - - -

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

02-01-16

SECTION 09 65 13
RESILIENT BASE AND ACCESSORIES

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

1. Resilient base (RB) adhered to interior walls and partitions.

1.2 RELATED REQUIREMENTS (NOT USED)

1.3 APPLICABLE PUBLICATIONS

A. Comply with references to extent specified in this section.

B. ASTM International (ASTM):

1. F1344-15 - Rubber Floor Tile.
2. F1859-14 - Rubber Sheet Floor Covering without Backing.
3. F1860-14 - Rubber Sheet Floor Covering with Backing.
4. F1861-08(2012)e1 - Resilient Wall Base.
5. D4259-88(2012) - Abrading Concrete.

C. Federal Specifications (Fed. Spec.):

1. RR-T-650E - Treads, Metallic and Non-Metallic, Skid-Resistant.

D. International Concrete Repair Institute (ICRI):

1. 310.2R-13 - Selecting and Specifying Concrete Surface Preparation for Sealers, Coatings, and Polymer Overlays.

1.4 SUBMITTALS

A. Submittal Procedures: Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.

B. Manufacturer's Literature and Data:

1. Description of each product.
2. Adhesives and primers indicating manufacturer's recommendation for each application.
3. Installation instructions.

C. Samples:

1. Resilient Base: 150 mm (6 inches) long, each type and color.
2. Resilient Stair Treads: 150 mm (6 inches) long, each type and color.
3. Sheet Rubber Flooring: 300 mm (12 inches) square, each type and color.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

09 65 13-1

10/28/2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

02-01-16

- D. Sustainable Construction Submittals:
 - 1. Recycled Content: Identify post-consumer and pre-consumer recycled content percentage by weight.
 - 2. Low Pollutant-Emitting Materials:
 - a. Show volatile organic compound types and quantities.
- E. Operation and Maintenance Data:
 - 1. Care instructions for each exposed finish product.

1.5 DELIVERY

- A. Deliver products in manufacturer's original sealed packaging.
- B. Mark packaging, legibly. Indicate manufacturer's name or brand, type, color, production run number, and manufacture date.
- C. Before installation, return or dispose of products within distorted, damaged, or opened packaging.

1.6 STORAGE AND HANDLING

- A. Store products indoors in dry, weathertight facility.
- B. Protect products from damage when handling and during construction operations.

1.7 FIELD CONDITIONS

- A. Environment:
 - 1. Product Temperature: Minimum 21 degrees C (70 degrees F) for minimum 48 hours before installation.
 - 2. Work Area Ambient Temperature Range: 21 to 27 degrees C (70 to 80 degrees F) continuously, beginning 48 hours before installation.
 - 3. Install products when building is permanently enclosed and when wet construction is completed, dried, and cured.

1.8 WARRANTY

- A. Construction Warranty: FAR clause 52.246-21, "Warranty of Construction."

PART 2 - PRODUCTS

2.1 PRODUCTS

- A. Basis of Design: See Drawings for ROOM FINISH LEGEND.
- B. Provide each product from one manufacturer and from one production run.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

09 65 13-2

10/28/2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

02-01-16

C. Sustainable Construction Requirements:

1. Low Pollutant-Emitting Materials: Comply with VOC limits specified in Section 01 81 13, SUSTAINABLE CONSTRUCTION REQUIREMENTS for the following products:
 - a. Flooring Adhesives and Sealants.

2.2 RESILIENT BASE

- A. Resilient Base: 3 mm (1/8 inch) thick, 100 mm (4 inches) high.
 1. Type: Vinyl; use one type throughout.
 2. ASTM F1861, Type TV thermoplastic vinyl, Group 2 - layered.
- B. Applications:
 1. Style B - Cove.

2.3 RESILIENT STAIR TREADS (NOT USED)

2.4 SHEET RUBBER FLOORING (NOT USED)

2.5 PRIMER (FOR CONCRETE FLOORS)

- A. Primer: Type recommended by adhesive manufacturer.

2.6 LEVELING COMPOUND (FOR CONCRETE FLOORS)

- A. Leveling Compound: Provide products mixed with latex or polyvinyl acetate resins.

2.7 ADHESIVES

- A. Adhesives: Low pollutant-emitting, water-based type recommended by adhered product manufacturer for each application.

PART 3 - EXECUTION

3.1 PREPARATION

- A. Examine and verify substrate suitability for product installation.
- B. Protect existing construction and completed work from damage.
- C. Remove existing base to permit new installation.
 1. Dispose of removed materials.
- D. Correct substrate deficiencies.
 1. Fill cracks, pits, and depressions with leveling compound.
 2. Remove protrusions; grind high spots.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

09 65 13-3

10/28/2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

02-01-16

3. Apply leveling compound to achieve 3 mm (1/8 inch) in 3 m (10 feet) maximum surface variation.
- E. Clean substrates. Remove contaminants capable of affecting subsequently installed product's performance.
 1. Mechanically clean concrete floor substrate according to ASTM D4259.
 2. Surface Profile: ICRI Guideline No. 310.2R.
- F. Allow substrate to dry and cure.
- G. Perform flooring manufacturer's recommended bond, substrate moisture content, and pH tests.

3.2 INSTALLATION GENERAL

- A. Install products according to manufacturer's instructions.
 1. When instructions deviate from specifications, submit proposed resolution for Contracting Officer consideration.

3.3 RESILIENT BASE INSTALLATION

- A. Applications:
 1. Install resilient base in rooms scheduled on Drawings.
 2. Install resilient base on casework, and other curb supported fixed equipment.
 3. Extend resilient base into closets, alcoves, and cabinet knee spaces, and around columns within scheduled room.
- B. Lay out resilient base with minimum number of joints.
 1. Length: 600 mm (24 inches) minimum, each piece.
 2. Locate joints 150 mm (6 inches) minimum from corners and intersection of adjacent materials.
- C. Installation:
 1. Apply adhesive uniformly for full contact between resilient base and substrate.
 2. Set resilient base with hairline butted joints aligned along top edge.
- D. Factory form corners and end stops.
 1. V-groove back of outside corner.
 2. V-groove face of inside corner and notch cove for miter joint.
- E. Roll resilient base ensuring complete adhesion.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

09 65 13-4

10/28/2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

02-01-16

3.4 RESILIENT STAIR TREAD INSTALLATION (NOT USED)

3.5 SHEET RUBBER FLOORING INSTALLATION (NOT USED))

3.6 CLEANING

- A. Remove excess adhesive before adhesive sets.
- B. Clean exposed resilient base, surfaces. Remove contaminants and stains.
 - 1. Clean with mild detergent. Leave surfaces free of detergent residue.
- C. Polish exposed resilient base to gloss sheen.

3.7 PROTECTION

- A. Prohibit traffic on flooring 72 hours, minimum, after installation.
- B. Protect products from construction traffic and operations.
 - 1. Cover flooring with reinforced kraft paper, and plywood or hardboard.
 - 2. Maintain protection until directed by Contracting Officer's Representative.
- C. Replace damaged products and re-clean.
 - 1. Damaged Products include cut, gouged, scraped, torn, and unbonded products.

- - E N D - -

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

05-01-18

SECTION 09 65 19
RESILIENT TILE FLOORING

PART 1 - GENERAL

1.1 DESCRIPTION

- A. This section specifies the installation of solid vinyl tile flooring and accessories required for a complete installation.

1.2 RELATED WORK

- A. Sustainable Design Requirements: Section 01 81 13, SUSTAINABLE CONSTRUCTION REQUIREMENTS.
- B. Resilient Base: Section 09 65 13, RESILIENT BASE AND ACCESSORIES.
- C. Subfloor Testing and Preparation: Section 09 05 16, SUBSURFACE PREPARATION FOR FLOOR FINISHES.
- D. Removal of Existing Construction Containing Asbestos: Section 02 82 13.19, ASBESTOS FLOOR TILE AND MASTIC ABATEMENT.
- E. Color, Pattern and Texture for Resilient Tile Flooring and Accessories: Refer to drawing I601, ROOM FINISH LEGEND.

1.3 SUBMITTALS

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Sustainable Design Submittals as described below:
 - 1. Volatile organic compounds per volume as described in PART 2 - PRODUCTS.
 - 2. Postconsumer and pre-consumer recycled content as described in PART 2 - PRODUCTS.
- C. Manufacturer's Literature and Data:
 - 1. Description of each product.
 - 2. Resilient material manufacturer's recommendations for adhesives, underlayment, primers, and polish.
 - 3. Application, installation and maintenance instructions.
- D. Samples:
 - 1. Tile: Each type, color, thickness and finish.
 - 2. Edge Strips: Each type, color, thickness and finish.
 - 3. Feature Strips: Each type, color, thickness and finish.
- E. Shop Drawings:

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

09 65 19-1

10/28/2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

05-01-18

1. Layout of patterns as shown on the construction documents.
2. Edge strip locations showing types and detail cross sections.

F. Test Reports:

1. Abrasion resistance: Depth of wear for each tile type and color and volume loss of tile, certified by independent laboratory. Tested per ASTM F510/F510M.
2. Moisture and pH test results as per Section 09 05 16, SUBSURFACE PREPARATION FOR FLOOR FINISHES.

1.4 DELIVERY

- A. Deliver materials to the site in original sealed packages or containers, clearly marked with the manufacturer's name or brand, type and color, production run number and date of manufacture.
- B. Materials from containers which have been distorted, damaged or opened prior to installation are not acceptable.

1.5 STORAGE

- A. Store materials in a clean, dry, enclosed space off the ground, protected from harmful weather conditions and at temperature and humidity conditions recommended by the manufacturer. Protect adhesives from freezing. Store flooring, adhesives, and accessories in the spaces where they will be installed for at least 48 hours before beginning installation.

1.6 QUALITY ASSURANCE

- A. Installer Qualifications: A company specializing in installation with minimum three (3) years' experience and employs experienced flooring installers who have retained, and currently hold, an INSTALL Certification, or a certification from a comparable certification program.
 1. Installers to be certified by INSTALL or a comparable certification program with the following minimum criteria:
 - a. US Department of Labor approved four (4) year apprenticeship program, 160 hours a year.
 - b. Career long training.
 - c. Manufacturer endorsed training.
 - d. Fundamental journeyman skills certification.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

09 65 19-2

10/28/2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

05-01-18

B. Furnish product type materials from the same production run.

1.7 WARRANTY

A. Construction Warranty: Comply with FAR clause 52.246-21, "Warranty of Construction".

1.8 APPLICABLE PUBLICATIONS

A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only.

B. ASTM International (ASTM):

- D2047-11.....Test Method for Static Coefficient of Friction of Polish-Coated Flooring Surfaces as Measured by the James Machine
- D2240-05 (R2010).....Test Method for Rubber Property—Durometer Hardness
- D4078-02 (R2008).....Water Emulsion Floor Finish
- E648-14c.....Critical Radiant Flux of Floor Covering Systems Using a Radiant Energy Source
- E662-14.....Specific Optical Density of Smoke Generated by Solid Materials
- E1155/E1155M-14.....Determining Floor Flatness and Floor Levelness Numbers
- F510/F510M-14.....Resistance to Abrasion of Resilient Floor Coverings Using an Abrader with a Grit Feed Method
- F710-11.....Preparing Concrete Floors to Receive Resilient Flooring
- F925-13.....Test Method for Resistance to Chemicals of Resilient Flooring
- F1066-04 (R2018).....Vinyl Composition Floor Tile
- F1344-12 (R2013).....Rubber Floor Tile
- F1700-13a.....Solid Vinyl Floor Tile
- F1869-11.....Test Method for Measuring Moisture Vapor Emission Rate of Concrete Subfloor Using Anhydrous Calcium Chloride

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

05-01-18

F2170-11.....Test Method for Determining Relative Humidity
in Concrete Floor Slabs Using in Situ Probes

F2195-13.....Linoleum Floor Tile

C. Code of Federal Regulation (CFR):

40 CFR 59.....Determination of Volatile Matter Content, Water
Content, Density Volume Solids, and Weight
Solids of Surface Coating

D. International Standards and Training Alliance (INSTALL):

PART 2 - PRODUCTS

2.1 PERFORMANCE REQUIREMENTS

- A. Provide adhesives, underlayment, primers, and polish recommended by resilient floor material manufacturer.
- B. Critical Radiant Flux: 0.45 watts per sq. cm or more, Class I, per ASTM E648.
- C. Smoke Density: Less than 450 per ASTM E662.
- D. Slip Resistance - Not less than 0.5 when tested with ASTM D2047.

2.2 RUBBER TILE (NOT USED)

2.3 LINOLEUM TILE (NOT USED)

2.4 SOLID VINYL-TILE (NOT USED)

2.5 LUXURY VINYL TILE (NOT USED)

2.6 VINYL COMPOSITE TILE

- A. Basis of Design: See Drawings for ROOM FINISH LEGEND.
- B. ASTM F1066
 - 1. Class 2 Through-Pattern
 - 2. ISO 10595, Type II
- C. Thickness: 3.2 mm (.125 inches)
- D. Size: 305 mm x 305 mm (12 inch x 12 inch)

2.7 ADHESIVES

- A. Provide water resistant type adhesive for flooring, base and accessories as recommended by the manufacturer to suit substrate conditions. VOC content to be less than the 50 grams/L when calculated according to 40 CFR 59 (EPA Method 24). Submit manufacturer's descriptive data, documentation stating physical characteristics, and mildew and germicidal characteristics.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

05-01-18

2.8 PRIMER FOR CONCRETE SUBFLOORS

- A. Provide in accordance with Section 09 05 16, SUBSURFACE PREPARATION FOR FLOOR FINISHES.

2.9 LEVELING COMPOUND FOR CONCRETE FLOORS

- A. Provide cementitious products with latex or polyvinyl acetate resins in the mix in accordance with Section 09 05 16, SUBSURFACE PREPARATION FOR FLOOR FINISHES.

2.10 POLISH AND CLEANERS

- A. Cleaners: As recommended in writing by floor tile manufacturer.
- B. Polish: ASTM D4078.

2.11 MOULDING

- A. Provide tapered mouldings of vinyl and types as indicated on the construction documents for both edges and transitions of flooring materials specified. Provide vertical lip on moulding of maximum 6 mm (1/4 inch). Provide bevel change in level between 6 and 13 mm (1/4 and 1/2 inch) with a slope no greater than 1:2.
- B. Fasteners for Aluminum Mouldings: Stainless steel of type required for substrate condition.

PART 3 - EXECUTION

3.1 ENVIRONMENTAL REQUIREMENTS

- A. Maintain flooring materials and areas to receive resilient flooring at a temperature above 20 degrees C (68 degrees F) for three (3) days before application, during application and two (2) days after application, unless otherwise directly by the flooring manufacturer for the flooring being installed. Maintain a minimum temperature of 13 degrees C (55 degrees F) thereafter. Provide adequate ventilation to remove moisture from area and to comply with regulations limiting concentrations of hazardous vapors.
- B. Do not install flooring until building is permanently enclosed and wet construction in or near areas to receive tile materials is complete, dry and cured.

3.2 SUBFLOOR TESTING AND PREPARATION

- A. Prepare and test surfaces to receive resilient tile and adhesive as per Section 09 05 16, SUBSURFACE PREPARATION FOR FLOOR FINISHES.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

09 65 19-5

10/28/2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

05-01-18

1. Remove existing resilient floor and existing adhesive.
- B. Prepare concrete substrates in accordance with ASTM F710.
- C. Perform work regarding removal of flooring and adhesive containing asbestos as specified in Section 02 82 13.19, ASBESTOS FLOOR TILE AND MASTIC ABATEMENT.

3.3 INSTALLATION

- A. Install in accordance with manufacturer's instructions for application and installation unless specified otherwise.
- B. Mix tile from at least two containers. An apparent line either of shades or pattern variance is not acceptable.
- C. Tile Layout:
 1. If layout is not shown on construction documents, lay tile symmetrically about center of room or space with joints aligned.
 2. Vary edge width as necessary to maintain full size tiles in the field, no edge tile to be less than 1/2 the field tile size, except where irregular shaped rooms make it impossible.
 3. Place tile pattern in the same direction; do not alternate tiles unless specifically indicated in the construction documents to the contrary.
- D. Application:
 1. Adhere floor tile to flooring substrates using a full spread of adhesive applied to substrate to produce a completed installation without open cracks, voids, raising and puckering at joints, telegraphing of adhesive spreader marks, and other surface imperfections.
 2. Scribe, cut, and fit floor tiles to butt neatly and tightly to vertical surfaces and permanent fixtures including built-in furniture, cabinets, pipes, outlets, and door frames.
 3. Extend floor tiles into toe spaces, door reveals, closets, and similar openings. Extend floor tiles to center of door openings.
 4. Roll tile floor with a minimum 45 kg (100 pound) roller.
- E. Seal joints at pipes with sealants in accordance with Section 07 92 00, JOINT SEALANTS.
- F. Installation of Edge Strips:

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

09 65 19-6

10/28/2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

05-01-18

1. Locate edge strips under center line of doors unless otherwise shown on construction documents.
2. Set resilient edge strips in adhesive. Anchor metal edge strips with anchors and screws.
3. Where tile edge is exposed, butt edge strip to touch along tile edge.
4. Where thin set ceramic tile abuts resilient tile, set edge strip against floor file and against the ceramic tile edge.

3.4 CLEANING AND PROTECTION

- A. Clean adhesive marks on exposed surfaces during the application of resilient materials before the adhesive sets. Exposed adhesive is not acceptable.
- B. Keep traffic off resilient material for a minimum 72 hours after installation.
- C. Clean flooring as recommended in accordance with manufacturer's printed maintenance instructions and within the recommended time frame. As required by the manufacturer, apply the recommended number of coats and type of polish and/or finish in accordance with manufacturer's written instructions.
- D. When construction traffic occurs over tile, cover resilient materials with reinforced kraft paper properly secured and maintained until removal is directed by COR. At entrances and where wheeled vehicles or carts are used, cover tile with plywood, hardboard, or particle board over paper, secured and maintained until removal is directed by COR.
- E. When protective materials are removed and immediately prior to acceptance, replace damaged tile and mouldings, re-clean resilient materials.

3.5 LOCATION

- A. Unless otherwise indicated in construction documents, install tile flooring, under areas where casework, laboratory and pharmacy furniture and other equipment occur.
- B. Extend tile flooring for room into adjacent closets and alcoves.

- - - E N D - - -

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

10-01-15

SECTION 09 68 00
CARPETING

PART 1 - GENERAL

1.1 DESCRIPTION

- A. Section specifies carpet, edge strips, adhesives, and other items required for complete installation.

1.2 RELATED WORK

- A. Sustainable Design Requirements: Section 01 81 13, SUSTAINABLE CONSTRUCTION REQUIREMENTS.
- B. Manufacturer, Color and Style of Carpet and Edge Strip: REFER TO ROOM FINISH LEGEND as part of the drawings.
- C. Resilient Wall Base: Section 09 65 13, RESILIENT BASE AND ACCESSORIES.
- D. Testing of Concrete Floors Before Installation: Section 09 05 16, SUBSURFACE PREPARATION FOR FLOOR FINISHES.

1.3 QUALITY ASSURANCE

- A. Installer Qualifications: A company specializing in carpet installation with a minimum three (3) years' experience and employing experienced flooring installers who have retained, and currently hold, an INSTALL Certification, or a certification from a comparable certification program, and a valid OSHA 10 certification.
 - 1. Installers to be certified by INSTALL or a comparable certification program with the following minimum criteria:
 - a. US Department of Labor approved four (4) year apprenticeship program, 160 hours a year.
 - b. Career long training.
 - c. Manufacturer endorsed training.
 - d. Fundamental journeyman skills certification.

1.4 SUBMITTALS

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Sustainable Design Submittals as described below:
 - 1. Volatile organic compounds per volume as specified in PART 2 - PRODUCTS.
- C. Product Data:

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

09 68 00-1

10/28/2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

10-01-15

1. Manufacturer's catalog data and printed documentation stating physical characteristics, durability, resistance to fading and flame resistance characteristics for each type of carpet material and installation accessory.
2. Manufacturer's printed installation instructions for the carpet, including preparation of installation substrate, seaming techniques and recommended adhesives and tapes.

D. Samples:

1. Carpet: "Production Quality" samples 305 x 305 mm (12 x 12 inches) of carpets, showing quality, pattern and color specified in ROOM FINISH LEGEND as part of the drawings.
2. Floor Edge Strip (Molding): 152 mm (6 inches) long of each color and type specified.
3. Base Edge Strip (Molding): 152 mm (6 inches) long of each color specified.

E. Shop Drawings: Installer's layout plan showing seams and cuts for sheet carpet and carpet module.

F. Maintenance Data: Carpet manufacturer's maintenance instructions describing recommended type of cleaning equipment and material, spotting and cleaning methods and cleaning cycles.

G. Installer's Qualifications.

H. Manufacturer's warranty.

1.5 DELIVERY AND STORAGE

- A. Deliver carpet in manufacturer's original wrappings and packages clearly labeled with manufacturer's brand name, size, dye lot number and related information. Transport carpet to job site in a manner that prevents damage and distortion that might render it unusable. When bending or folding is unavoidable for delivery purposes, unfold carpet and lay flat immediately.
- B. Deliver adhesives in containers clearly labeled with manufacturer's brand name, number, installation instructions, safety instructions and flash points.
- C. Store in a clean, dry, well-ventilated area, protected from damage and soiling. Before installation, acclimate carpet to the atmospheric

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

09 68 00-2

10/28/2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

10-01-15

conditions of the areas in which it will be installed for 2 days prior to installation

1.6 ENVIRONMENTAL REQUIREMENTS

- A. Maintain areas in which carpeting is to be installed at a temperature between 18 - 35 degrees C (65 - 95 degrees F) with a maximum relative humidity of 65 percent for two (2) days before installation, during installation and for three (3) days after installation.
- B. Minimum Substrate Surface Temperature: 18 degrees C (65 degrees F) at time of installation.
- C. Three (3) days after installation, maintain minimum temperature of 10 degrees C (50 degrees F) for the duration of the contract.

1.7 WARRANTY

- A. Construction Warranty: Comply with FAR clause 52.246-21, "Warranty of Construction".
- B. Manufacturer Warranty: Manufacturer shall warranty their carpet for a minimum of ten (10) years from date of installation and final acceptance by the Government. Submit manufacturer warranty.

1.8 APPLICABLE PUBLICATIONS

- A. Publications listed below form a part of this specification to extent referenced. Publications are referenced in text by basic designation only.
- B. American National Standards Institute (ANSI):
ANSI/NSF 140-10.....Sustainable Carpet Assessment Standard
- C. American Association of Textile Chemists and Colorists (AATCC):
16-04.....Colorfastness to Light
134-11.....Electric Static Propensity of Carpets
165-08.....Colorfastness to Crocking: Textile Floor Coverings-AATCC Crockmeter Method
174-11.....Antimicrobial Activity Assessment of New Carpets
- D. ASTM International (ASTM):
D1335-12.....Tuft Bind of Pile Yarn Floor Coverings
D3278-96(R2011).....Flash Point of Liquids by Small Scale Closed-Cup Apparatus

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

10-01-15

D5116-10.....Determinations of Organic Emissions from Indoor
Materials/Products

D5252-11.....Operation of the Hexapod Tumble Drum Tester

D5417-11.....Operation of the Vettermann Drum Tester

E648-14c.....Critical Radiant Flux of Floor-Covering Systems
Using a Radiant Heat Energy Source

E. Code of Federal Regulation (CFR):

40 CFR 59.....Determination of Volatile Matter Content, Water
Content, Density Volume Solids, and Weight
Solids of Surface Coating

F. The Carpet and Rug Institute (CRI):

CIS.....Carpet Installation Standard

G. International Standards and Training Alliance (INSTALL)

H. International Organization for Standardization (ISO):

2551-81.....Machine-Made Textile Floor Coverings

I. U.S. Consumer Product and Safety Commission (CPSC):

16 CFR 1630.....Surface Flammability of Carpets and Rugs

PART 2 - PRODUCTS

2.1 CARPET

A. Basis-of-Design: See ROOM FINISH SCHEDULE as part of the drawings.

B. Physical Characteristics:

1. Carpet free of visual blemishes, streaks, poorly dyed areas, fuzzing
of pile yarn, spots or stains and other physical and manufacturing
defects.

2. Type:

a. Carpet Construction: Tufted.

b. Carpet Type: Broadloom (12 feet) minimum usable carpet width ,
with exception of corridors.

c. Pile Type: Level-loop. Pile type and thickness must conform to
ADA requirements.

d. Pile Fiber: Commercial 100 percent branded (federally registered
trademark), nylon continuous filament.

3. Static Control: Provide static control to permanently regulate
static buildup to less than 3.5 kV when tested at 20 percent

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

10-01-15

- relative humidity and 21 degrees C (70 degrees F) in accordance with AATCC 134.
4. Backing Materials: Provide impervious moisture backing that is 100 percent PVC free.
 - a. Broadloom:
 - 1) Primary Backing: Manufacturer's standard material .
 - 2) Secondary Backing: Manufacturer's standard material .
 - 3) Backcoating: Manufacturer's standard material .
 5. Appearance Retention Rating (ARR): Carpet to be tested and have the minimum 3.5 - 4.0 severe ARR when tested in accordance with either the ASTM D5252 (Hexapod) or ASTM D5417 (Vettermann) test methods using the number of cycles for short and long term tests as specified in the ASTM standard.
 6. Tuft Bind: Comply with ASTM D1335 for tuft bind force required to pull a tuft or loop free from carpet backing with a minimum 36 N (8 pound) average force for modular carpet tile.
 7. Colorfastness to Crocking: Dry and wet crocking and water bleed, comply with AATCC 165 Color Transference Chart for colors, minimum class 4 rating.
 8. Colorfastness to Light (AATCC 16, Option 3): Color change between the exposed and unexposed carpet areas equivalent to a minimum of Grade 4 on the Gray Scale for Color Change after an exposure of 40 AFU (AATCC fading units) for all specified colors.
 9. Delamination Strength: Minimum of 440 N/m (2.5 lb./inch) between secondary backing.
 10. Flammability and Critical Radiant Flux Requirements:
 - a. Comply with 16 CFR 1630.
 - b. Test Carpet in accordance with ASTM E648.
 - c. Class I: Minimum critical radiant flux of 0.45 watts per square centimeter (2.9 watts per square inch).
 - d. Carpet in corridors, exits and Medical Facilities to be Class I.
 11. Average Pile Yarn Density (APYD):
 - a. Corridors, lobbies, entrances, common areas or multipurpose rooms, open offices, waiting areas and dining areas: Minimum APYD 6000.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

09 68 00-5

10/28/2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

10-01-15

- b. Other areas: Minimum APYD 4000.
- 12. Antimicrobial: Nontoxic antimicrobial treatment in accordance with AATCC 174 Part I (qualitative), guaranteed by the carpet manufacturer to last the life of the carpet.
- 13. VOC Limits: Use carpet that complies with the following limits for VOC content when tested according to ASTM D5116:
 - a. Carpet, Total VOCs: 0.5 mg/sq.m x hr.
 - b. Carpet, 4-PC (4-Phenylcyclohexene): 0.05 mg/sq.m x hr.
 - c. Carpet, Formaldehyde: 0.05 mg/sq.m x hr.
 - d. Carpet, Styrene: 0.4 mg/sq.m x hr.

2.2 ADHESIVE AND CONCRETE PRIMER

- A. Provide water resistant, mildew resistant, nonflammable, and non-staining adhesives and concrete primers for carpet installation. Provide release adhesive for modular tile carpet as recommended by the carpet manufacturer. Provide adhesives flashpoint of minimum 60 degrees C (140 degrees F) in accordance with ASTM D3278. Materials are to have a VOC maximum of 50 g/L when calculated according to 40 CFR 59, (EPA Method 24).

2.3 SEAMING TAPE

- A. Provide tape for seams as recommended by the carpet manufacturer for the type of seam used in installation. Seam sealant is to have a maximum VOC content of 50 g/L when calculated according to 40 CFR 59, (EPA Method 24). Do not use sealants that contain 1,1,1-trichloroethane or toluene.

2.4 EDGE STRIPS (MOLDING)

- A. Metal:
 - 1. Hammered surface aluminum, pinless, clamp down type designed for the carpet being installed.
 - 2. Floor flange not less than 38 mm (1-1/2 inches) wide, face not less than 16 mm (5/8 inch) wide.
- B. Vinyl Edge Strip:
 - 1. Beveled floor flange minimum 50 mm (2 inches) wide.
 - 2. Beveled surface to finish flush with carpet for tight joint and other side to floor finish.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

09 68 00-6

10/28/2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

10-01-15

C. Carpet Base Top Edge Strip:

1. Vinyl "J" strip wall flange minimum of 38 mm (1-1/2 inches) wide with cap beveled from wall to finish flush with carpet being installed.

PART 3 - EXECUTION

3.1 SURFACE PREPARATION

- A. Contractor to prepare and test surfaces to receive carpet and adhesives as per ROOM FINISH LEGEND as a part of the drawings.

3.2 GENERAL INSTALLATION

- A. Isolate area of installation from rest of building.
- B. Perform all work by manufacturer's approved installers. Conduct installation in accordance with the manufacturer's printed instructions and CRI CIS.
- C. Protect edges of carpet meeting hard surface flooring with molding and install in accordance with the molding manufacturer's printed instructions.
- D. Follow ventilation, personal protection, and other safety precautions recommended by the adhesive manufacturer. Continue ventilation during installation and for at least three (3) days following installation.
- E. Do not permit traffic or movement of furniture or equipment in carpeted area for 24 hours after installation.
- F. Complete other work which would damage the carpet prior to installation of carpet.
- G. Follow carpet manufacturer's recommendations for matching pattern and texture directions.
- H. Cut openings in carpet where required for installing equipment, pipes, outlets, and penetrations. Bind or seal cut edge of sheet carpet. Use additional adhesive to secure carpets around pipes and other vertical projections.

3.3 BROADLOOM CARPET INSTALLATION

- A. Install broadloom carpet direct glue down smooth, uniform, and secure, with a minimum of seams.
- B. Apply regular, unnoticeable, and treated seams with a seam adhesive.
Run side seams toward the light, where practical, and where such layout

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

10-01-15

does not increase the number of seams. Install breadths parallel, with carpet pile in the same directions.

- C. Match patterns accurately. Neatly cut and fit cutouts, at door jambs, columns and ducts securely.
- D. Locate seams at doorways parallel to and centered directly under doors. Do not make seams perpendicular to doors or at pivot points.
- E. Provide seams at changes in directions of corridors to follow the wall line parallel to the carpet direction. Lay the carpet lengthwise down the corridors with widths less than 1.82 m (6 feet).

3.4 MODULAR TILE INSTALLATION (NOT USED)

3.5 EDGE STRIPS INSTALLATION

- A. Install edge strips over exposed carpet edges adjacent to uncarpeted finish flooring.
- B. Anchor metal strips to floor with suitable fasteners. Apply adhesive to edge strips, insert carpet into lip and press it down over carpet.
- C. Anchor vinyl edge strip to floor with adhesive. Apply adhesive to edge strip and insert carpet into lip and press lip down over carpet.
- D. Carpet Base Top Edge Strip Installation:
 - 1. Place carpet molding at top edge of carpet where turned up as base.
 - 2. Install molding in accordance with manufacturer's instructions.

3.6 PROTECTION AND CLEANING

- A. Once a carpet installation is complete, clean up scrap materials and debris, and vacuum the area, using manufacturer-approved equipment. Inspect seams carefully for evenness and protruding backing yarns, and inspect the perimeter of the installation for an acceptable finished appearance.
- B. Protect installed carpet if furniture is being moved, by laying plywood, fiberboard or porous non-staining sheeting material for minimum time practical. Based on manufacturer guidelines, protect carpet from rolling or foot traffic. Protect against other materials or renovation or construction activities, including dust, debris, paint, contractor traffic, until it is ready for its final use.
- C. Do not move furniture or equipment on unprotected carpeted surfaces.

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

10-01-15

D. Just before final acceptance of work, remove protection and vacuum
carpet clean.

- - - E N D - - -

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

01-01-16

SECTION 09 91 00
PAINTING

PART 1 - GENERAL

1.1 DESCRIPTION

- A. Work of this Section includes all labor, materials, equipment, and services necessary to complete the painting and finishing as shown on the construction documents and/or specified herein, including, but not limited to, the following:
1. Prime coats which may be applied in shop under other sections.
 2. Prime painting unprimed surfaces to be painted under this Section.
 3. Painting items furnished with a prime coat of paint, including touching up of or repairing of abraded, damaged or rusted prime coats applied by others.
 4. Painting ferrous metal (except stainless steel) exposed to view.
 5. Painting galvanized ferrous metals exposed to view.
 6. Painting interior concrete block exposed to view.
 7. Painting gypsum drywall exposed to view.
 8. Painting of wood exposed to view, except items which are specified to be painted or finished under other Sections of these specifications. Back painting of all wood in contact with concrete, masonry or other moisture areas.
 9. Painting pipes, pipe coverings, conduit, ducts, insulation, hangers, supports and other mechanical and electrical items and equipment exposed to view.
 10. Painting surfaces above, behind or below grilles, gratings, diffusers, louvers, lighting fixtures, and the like, which are exposed to view through these items.
 11. Painting includes shellacs, stains, varnishes, coatings specified, and striping or markers and identity markings.
 12. Incidental painting and touching up as required to produce proper finish for painted surfaces, including touching up of factory finished items.
 13. Painting of any surface not specifically mentioned to be painted herein or on construction documents, but for which painting is

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

09 91 00-1

10/28/2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

01-01-16

obviously necessary to complete the job, or work which comes within the intent of these specifications, is to be included as though specified.

1.2 RELATED WORK

- A. Activity Hazard Analysis: Section 01 35 26, SAFETY REQUIREMENTS.
- B. Sustainable Design Requirements: Section 01 81 13, SUSTAINABLE DESIGN REQUIREMENTS.
- C. Lead Paint Removal: Section 02 83 33.13, LEAD-BASED PAINT REMOVAL AND DISPOSAL.
- D. Masonry Repairs: Section 04 05 13, MASONRY MORTARING and Section 04 05 16, MASONRY GROUTING.
- E. Shop prime painting of steel and ferrous metals: Division 05 - METALS, Division 08 - OPENINGS; Division 10 - SPECIALTIES; Division 11 - EQUIPMENT; Division 12 - FURNISHINGS; Division 21 - FIRE SUPPRESSION; Division 22 - PLUMBING; Division 23 - HEATING; VENTILATION AND AIR-CONDITIONING; Division 26 - ELECTRICAL; Division 27 - COMMUNICATIONS; and Division 28 - ELECTRONIC SAFETY AND SECURITY sections.
- F. Prefinished flush doors with transparent finishes: Section 08 14 00, WOOD DOORS.
- G. Type of Finish, Color, and Gloss Level of Finish Coat: See ROOM FINISH SCHEDULE as part of the drawings.

1.3 SUBMITTALS

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Sustainable Design Submittals as described below:
 - 1. Volatile organic compounds per volume as specified in PART 2 - PRODUCTS.
- C. Painter qualifications.
- D. Manufacturer's Literature and Data:
 - 1. Before work is started, or sample panels are prepared, submit manufacturer's literature and technical data, the current Master Painters Institute (MPI) "Approved Product List" indicating brand label, product name and product code as of the date of contract award, will be used to determine compliance with the submittal requirements of this specification. The Contractor may choose to use subsequent MPI "Approved Product List", however, only one (1) list may be used for the

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

09 91 00-2

10/28/2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

01-01-16

entire contract and each coating system is to be from a single manufacturer. All coats on a particular substrate must be from a single manufacturer. No variation from the MPI "Approved Product List" where applicable is acceptable.

E. Sample Panels:

1. After painters' materials have been approved and before work is started submit sample panels showing each type of finish and color specified.
2. Panels to Show Color: Composition board, 100 x 250 mm (4 x 10 inch).
3. Panel to Show Transparent Finishes: Wood of same species and grain pattern as wood approved for use, 100 x 250 mm (4 x 10 inch face) minimum, and where both flat and edge grain will be exposed, 250 mm (10 inches) long by sufficient size, 50 x 50 mm (2 x 2 inch) minimum or actual wood member to show complete finish.
4. Attach labels to panel stating the following:
 - a. Federal Specification Number or manufacturers name and product number of paints used.
 - b. Specification code number specified in the ROOM FINISH LEGEND as part of the drawings.
 - c. Product type and color.
 - d. Name of project.
5. Strips showing not less than 50 mm (2 inch) wide strips of undercoats and 100 mm (4 inch) wide strip of finish coat.

F. Sample of identity markers if used.

G. Manufacturers' Certificates indicating compliance with specified requirements:

1. Manufacturer's paint substituted for Federal Specification paints meets or exceeds performance of paint specified.
2. High temperature aluminum paint.
3. Epoxy coating.
4. Intumescent clear coating or fire-retardant paint.

1.4 DELIVERY AND STORAGE

A. Deliver materials to site in manufacturer's sealed container marked to show following:

1. Name of manufacturer.
2. Product type.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

09 91 00-3

10/28/2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

01-01-16

3. Batch number.
 4. Instructions for use.
 5. Safety precautions.
- B. In addition to manufacturer's label, provide a label legibly printed as following:
1. Federal Specification Number, where applicable, and name of material.
 2. Surface upon which material is to be applied.
 3. Specify Coat Types: Prime; body; finish; etc.
- C. Maintain space for storage, and handling of painting materials and equipment in a ventilated, neat and orderly condition to prevent spontaneous combustion from occurring or igniting adjacent items.
- D. Store materials at site at least 24 hours before using, at a temperature between 7 and 30 degrees C (45 and 85 degrees F).

1.5 QUALITY ASSURANCE

- A. Qualification of Painters: Use only qualified journeyman painters for the mixing and application of paint on exposed surfaces. Submit evidence that key personnel have successfully performed surface preparation and application of coating on a minimum of three (3) similar projects within the past three (3) years.
- B. Paint Coordination: Provide finish coats which are compatible with the prime paints used. Review other Sections of these specifications in which prime paints are to be provided to ensure compatibility of the total coatings system for the various substrates. Upon request from other subcontractors, furnish information on the characteristics of the finish materials proposed to be used, to ensure that compatible prime coats are used. Provide barrier coats over incompatible primers or remove and re-prime as required. Notify the Contracting Officer Representative (COR) in writing of any anticipated problems using the coating systems as specified with substrates primed by others.

1.6 MOCK-UP PANEL

- A. In addition to the samples specified herein to be submitted for approval, apply in the field, at their final location, each type and color of approved paint materials, applied 3.05 m (10 feet) wide, floor to ceiling of wall surfaces, before proceeding with the remainder of the work, for

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

01-01-16

approval by the COR. Paint mock-ups to include one (1) door and frame assembly.

- B. Finish and texture approved by COR will be used as a standard of quality and workmanship for remainder of work.
- C. Repaint individual areas which are not approved, as determined by the COR, until approval is received.

1.7 REGULATORY REQUIREMENTS

- A. Paint materials are to conform to the restrictions of the local Environmental and Toxic Control jurisdiction.
 - 1. Volatile Organic Compounds (VOC) Emissions Requirements: Field-applied paints and coatings that are inside the waterproofing system to not exceed limits of authorities having jurisdiction.
 - 2. Lead-Based Paint:
 - a. Comply with Section 410 of the Lead-Based Paint Poisoning Prevention Act, as amended, and with implementing regulations promulgated by Secretary of Housing and Urban Development.
 - b. Regulations concerning prohibition against use of lead-based paint in federal and federally assisted construction, or rehabilitation of residential structures are set forth in Subpart F, Title 24, Code of Federal Regulations, Department of Housing and Urban Development.
 - c. Do not use coatings having a lead content over 0.06 percent by weight of non-volatile content.
 - d. For lead-paint removal, see Section 02 83 33.13, LEAD-BASED PAINT REMOVAL AND DISPOSAL.
 - 3. Asbestos: Provide materials that do not contain asbestos.
 - 4. Chromate, Cadmium, Mercury, and Silica: Provide materials that do not contain zinc-chromate, strontium-chromate, Cadmium, mercury or mercury compounds or free crystalline silica.
 - 5. Human Carcinogens: Provide materials that do not contain any of the ACGIH-BKLT and ACGHI-DOC confirmed or suspected human carcinogens.
 - 6. Use high performance acrylic paints in place of alkyd paints.

1.8 SAFETY AND HEALTH

- A. Apply paint materials using safety methods and equipment in accordance with the following:

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

09 91 00-5

10/28/2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

01-01-16

1. Comply with applicable Federal, State, and local laws and regulations, and with the ACCIDENT PREVENTION PLAN, including the Activity Hazard Analysis (AHA) as specified in Section 01 35 26, SAFETY REQUIREMENTS. The AHA is to include analyses of the potential impact of painting operations on painting personnel and on others involved in and adjacent to the work zone.
- B. Safety Methods Used During Paint Application: Comply with the requirements of SSPC PA Guide 10.
- C. Toxic Materials: To protect personnel from overexposure to toxic materials, conform to the most stringent guidance of:
 1. The applicable manufacturer's Material Safety Data Sheets (MSDS) or local regulation.
 2. 29 CFR 1910.1000.
 3. ACHIH-BKLT and ACGHI-DOC, threshold limit values.

1.9 APPLICABLE PUBLICATIONS

- A. Publications listed below form a part of this specification to the extent referenced. Publications are referenced in the text by basic designation only.
- B. American Conference of Governmental Industrial Hygienists (ACGIH):
 - ACGIH TLV-BKLT-2012.....Threshold Limit Values (TLV) for Chemical Substances and Physical Agents and Biological Exposure Indices (BEIs)
 - ACGIH TLV-DOC-2012.....Documentation of Threshold Limit Values and Biological Exposure Indices, (Seventh Edition)
- C. ASME International (ASME):
 - A13.1-07(R2013).....Scheme for the Identification of Piping Systems
- D. Code of Federal Regulation (CFR):
 - 40 CFR 59.....Determination of Volatile Matter Content, Water Content, Density Volume Solids, and Weight Solids of Surface Coating
- E. Commercial Item Description (CID):
 - A-A-1272A.....Plaster Gypsum (Spackling Compound)
- F. Federal Specifications (Fed Spec):
 - TT-P-1411A.....Paint, Copolymer-Resin, Cementitious (For Waterproofing Concrete and Masonry Walls) (CEP)

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

01-01-16

G. Master Painters Institute (MPI):

- 1.....Aluminum Paint
- 4.....Interior/ Exterior Latex Block Filler
- 5.....Exterior Alkyd Wood Primer
- 7.....Exterior Oil Wood Primer
- 8.....Exterior Alkyd, Flat MPI Gloss Level 1
- 9.....Exterior Alkyd Enamel MPI Gloss Level 6
- 10.....Exterior Latex, Flat
- 11.....Exterior Latex, Semi-Gloss
- 18.....Organic Zinc Rich Primer
- 22.....Aluminum Paint, High Heat (up to 590% - 1100F)
- 27.....Exterior / Interior Alkyd Floor Enamel, Gloss
- 31.....Polyurethane, Moisture Cured, Clear Gloss
- 36.....Knot Sealer
- 43.....Interior Satin Latex, MPI Gloss Level 4
- 44.....Interior Low Sheen Latex, MPI Gloss Level 2
- 45.....Interior Primer Sealer
- 46.....Interior Enamel Undercoat
- 47.....Interior Alkyd, Semi-Gloss, MPI Gloss Level 5
- 48.....Interior Alkyd, Gloss, MPI Gloss Level 6
- 50.....Interior Latex Primer Sealer
- 51.....Interior Alkyd, Eggshell, MPI Gloss Level 3
- 52.....Interior Latex, MPI Gloss Level 3
- 53.....Interior Latex, Flat, MPI Gloss Level 1
- 54.....Interior Latex, Semi-Gloss, MPI Gloss Level 5
- 59.....Interior/Exterior Alkyd Porch & Floor Enamel, Low
Gloss
- 60.....Interior/Exterior Latex Porch & Floor Paint, Low
Gloss
- 66.....Interior Alkyd Fire Retardant, Clear Top-Coat (ULC
Approved)
- 67.....Interior Latex Fire Retardant, Top-Coat (ULC
Approved)
- 68.....Interior/ Exterior Latex Porch & Floor Paint,
Gloss

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

09 91 00-7

10/28/2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

01-01-16

- 71.....Polyurethane, Moisture Cured, Clear, Flat
- 77.....Epoxy Cold Cured, Gloss
- 79.....Marine Alkyd Metal Primer
- 90.....Interior Wood Stain, Semi-Transparent
- 91.....Wood Filler Paste
- 94.....Exterior Alkyd, Semi-Gloss
- 95.....Fast Drying Metal Primer
- 98.....High Build Epoxy Coating
- 101.....Epoxy Anti-Corrosive Metal Primer
- 108.....High Build Epoxy Coating, Low Gloss
- 114.....Interior Latex, Gloss
- 119.....Exterior Latex, High Gloss (acrylic)
- 134.....Galvanized Water Based Primer
- 135.....Non-Cementitious Galvanized Primer
- 138.....Interior High Performance Latex, MPI Gloss Level 2
- 139.....Interior High Performance Latex, MPI Gloss Level 3
- 140.....Interior High Performance Latex, MPI Gloss Level 4
- 141.....Interior High Performance Latex (SG) MPI Gloss
Level 5
- 163.....Exterior Water Based Semi-Gloss Light Industrial
Coating, MPI Gloss Level 5

H. Society for Protective Coatings (SSPC):

- SSPC SP 1-82(R2004).....Solvent Cleaning
- SSPC SP 2-82(R2004).....Hand Tool Cleaning
- SSPC SP 3-28(R2004).....Power Tool Cleaning
- SSPC SP 10/NACE No.2.....Near-White Blast Cleaning
- SSPC PA Guide 10.....Guide to Safety and Health Requirements

I. U.S. National Archives and Records Administration (NARA):

- 29 CFR 1910.1000.....Air Contaminants

J. Underwriter's Laboratory (UL)

PART 2 - PRODUCTS

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

01-01-16

2.1 MATERIALS

- A. Conform to the coating specifications and standards referenced in PART 3. Submit manufacturer's technical data sheets for specified coatings and solvents.

2.2 PAINT PROPERTIES

- A. Use ready-mixed (including colors), except two component epoxies, polyurethanes, polyesters, paints having metallic powders packaged separately and paints requiring specified additives.
- B. Where no requirements are given in the referenced specifications for primers, use primers with pigment and vehicle, compatible with substrate and finish coats specified.
- C. Provide undercoat paint produced by the same manufacturer as the finish coats. Use only thinners approved by the paint manufacturer, and use only to recommended limits.
- D. VOC Content: For field applications that are inside the weatherproofing system, paints and coating to comply with VOC content limits of authorities having jurisdiction and the following VOC content limits:
 - 1. Flat Paints and Coatings: 50 g/L.
 - 2. Non-flat Paints and Coatings: 150 g/L.
 - 3. Dry-Fog Coatings: 400 g/L.
 - 4. Primers, Sealers, and Undercoaters: 200 g/L.
 - 5. Anticorrosive and Antirust Paints applied to Ferrous Metals: 250 g/L.
 - 6. Zinc-Rich Industrial Maintenance Primers: 340 g/L.
 - 7. Pretreatment Wash Primers: 420 g/L.
- E. VOC test method for paints and coatings is to be in accordance with 40 CFR 59 (EPA Method 24). Part 60, Appendix A with the exempt compounds' content determined by Method 303 (Determination of Exempt Compounds) in the South Coast Air Quality Management District's (SCAQMD) "Laboratory Methods of Analysis for Enforcement Samples" manual.

2.3 PLASTIC TAPE

- A. Pigmented vinyl plastic film in colors as specified.
- B. Pressure sensitive adhesive back.
- C. Snap on coil plastic markers.
- D. Widths as shown on construction documents.

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

01-01-16

2.4 BIOBASED CONTENT

A. Paint products shall comply with following bio-based standards for biobased materials:

Material Type	Percent by Weight
Interior Paint	20 percent biobased material
Interior Paint- Oil Based and Solvent Alkyd	67 percent biobased material
Exterior Paint	20 percent biobased material
Wood & Concrete Stain	39 percent biobased content
Polyurethane Coatings	25 percent biobased content
Water Tank Coatings	59 percent biobased content
Wood & Concrete Sealer- Membrane Concrete Sealers	11 percent biobased content
Wood & Concrete Sealer- Penetrating Liquid	79 percent biobased content

B. The minimum-content standards are based on the weight (not the volume) of the material.

PART 3 - EXECUTION

3.1 JOB CONDITIONS

A. Safety: Observe required safety regulations and manufacturer's warning and instructions for storage, handling and application of painting materials.

1. Take necessary precautions to protect personnel and property from hazards due to falls, injuries, toxic fumes, fire, explosion, or other harm.
2. Deposit soiled cleaning rags and waste materials in metal containers approved for that purpose. Dispose of such items off the site at end of each day's work.

B. Atmospheric and Surface Conditions:

1. Do not apply coating when air or substrate conditions are:
 - a. Less than 3 degrees C (5 degrees F) above dew point.
 - b. Below 10 degrees C (50 degrees F) or over 35 degrees C (95 degrees F), unless specifically pre-approved by the COR and the product manufacturer. Under no circumstances are application conditions to exceed manufacturer recommendations.

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

01-01-16

- c. When the relative humidity exceeds 85 percent; or to damp or wet surfaces; unless otherwise permitted by the paint manufacturer's printed instructions.
2. Maintain interior temperatures until paint dries hard.
3. Do no exterior painting when it is windy and dusty.
4. Do not paint in direct sunlight or on surfaces that the sun will warm.
5. Apply only on clean, dry and frost-free surfaces except as follows:
 - a. Apply water thinned acrylic and cementitious paints to damp (not wet) surfaces only when allowed by manufacturer's printed instructions.
 - b. Concrete and masonry when permitted by manufacturer's recommendations, dampen surfaces to which water thinned acrylic and cementitious paints are applied with a fine mist of water on hot dry days to prevent excessive suction and to cool surface.
6. Varnishing:
 - a. Apply in clean areas and in still air.
 - b. Before varnishing vacuum and dust area.
 - c. Immediately before varnishing wipe down surfaces with a tack rag.

3.2 INSPECTION

- A. Examine the areas and conditions where painting and finishing are to be applied and correct any conditions detrimental to the proper and timely completion of the work. Do not proceed with the work until unsatisfactory conditions are corrected to permit proper installation of the work.

3.3 GENERAL WORKMANSHIP REQUIREMENTS

- A. Application may be by brush or roller.
- B. Furnish to the COR a painting schedule indicating when the respective coats of paint for the various areas and surfaces will be completed. This schedule is to be kept current as the job progresses.
- C. Protect work at all times. Protect all adjacent work and materials by suitable covering or other method during progress of work. Upon completion of the work, remove all paint and varnish spots from floors, glass and other surfaces. Remove from the premises all rubbish and accumulated materials of whatever nature not caused by others and leave work in a clean condition.

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

01-01-16

- D. Remove and protect hardware, accessories, device plates, lighting fixtures, and factory finished work, and similar items, or provide in place protection. Upon completion of each space, carefully replace all removed items by workmen skilled in the trades involved.
- E. When indicated to be painted, remove electrical panel box covers and doors before painting walls. Paint separately and re-install after all paint is dry.
- F. Materials are to be applied under adequate illumination, evenly spread and flowed on smoothly to avoid runs, sags, holidays, brush marks, air bubbles and excessive roller stipple.
- G. Apply materials with a coverage to hide substrate completely. When color, stain, dirt or undercoats show through final coat of paint, the surface is to be covered by additional coats until the paint film is of uniform finish, color, appearance and coverage, at no additional cost to the Government.
- H. All coats are to be dry to manufacturer's recommendations before applying succeeding coats.
- I. All suction spots or "hot spots" in plaster after the application of the first coat are to be touched up before applying the second coat.
- J. Do not apply paint behind frameless mirrors that use mastic for adhering to wall surface.

3.4 SURFACE PREPARATION

A. General:

- 1. The Contractor shall be held wholly responsible for the finished appearance and satisfactory completion of painting work. Properly prepare all surfaces to receive paint, which includes cleaning, sanding, and touching-up of all prime coats applied under other Sections of the work. Broom clean all spaces before painting is started. All surfaces to be painted or finished are to be completely dry, clean and smooth.
- 2. See other sections of specifications for specified surface conditions and prime coat.

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

01-01-16

3. Perform preparation and cleaning procedures in strict accordance with the paint manufacturer's instructions and as herein specified, for each particular substrate condition.
 4. Clean surfaces before applying paint or surface treatments with materials and methods compatible with substrate and specified finish. Remove any residue remaining from cleaning agents used. Do not use solvents, acid, or steam on concrete and masonry. Schedule the cleaning and painting so that dust and other contaminants from the cleaning process will not fall in wet, newly painted surfaces.
 5. Maximum Moisture Content of Substrates: When measured with an electronic moisture meter as follows:
 - a. Concrete: 12 percent.
 - b. Fiber-Cement Board: 12 percent.
 - c. Masonry (Clay and CMU's): 12 percent.
 - d. Wood: 15 percent.
 - e. Gypsum Board: 12 percent.
 - f. Plaster: 12 percent.
- B. Wood:
1. Sand to a smooth even surface and then dust off.
 2. Sand surfaces showing raised grain smooth between each coat.
 3. Wipe surface with a tack rag prior to applying finish.
 4. Surface painted with an opaque finish:
 - a. Coat knots, sap and pitch streaks with MPI 36 (Knot Sealer) before applying paint.
 - b. Apply two coats of MPI 36 (Knot Sealer) over large knots.
 5. After application of prime or first coat of stain, fill cracks, nail and screw holes, depressions and similar defects with wood filler paste. Sand the surface to make smooth and finish flush with adjacent surface.
 6. Before applying finish coat, reapply wood filler paste if required, and sand surface to remove surface blemishes. Finish flush with adjacent surfaces.
 7. Fill open grained wood such as oak, walnut, ash and mahogany with MPI 91 (Wood Filler Paste), colored to match wood color.

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

01-01-16

- a. Thin filler in accordance with manufacturer's instructions for application.
 - b. Remove excess filler, wipe as clean as possible, dry, and sand as specified.
- C. Ferrous Metals:
1. Remove oil, grease, soil, drawing and cutting compounds, flux and other detrimental foreign matter in accordance with SSPC-SP 1 (Solvent Cleaning).
 2. Remove loose mill scale, rust, and paint, by hand or power tool cleaning, as defined in SSPC-SP 2 (Hand Tool Cleaning) and SSPC-SP 3 (Power Tool Cleaning).
 3. Fill dents, holes and similar voids and depressions in flat exposed surfaces of hollow steel doors and frames, access panels, roll-up steel doors and similar items specified to have semi-gloss or gloss finish with TT-F-322D (Filler, Two-Component Type, For Dents, Small Holes and Blow-Holes). Finish flush with adjacent surfaces.
 - a. Fill flat head countersunk screws used for permanent anchors.
 - b. Do not fill screws of item intended for removal such as glazing beads.
 4. Spot prime abraded and damaged areas in shop prime coat which expose bare metal with same type of paint used for prime coat. Feather edge of spot prime to produce smooth finish coat.
 5. Spot prime abraded and damaged areas which expose bare metal of factory finished items with paint as recommended by manufacturer of item.
- D. Zinc-Coated (Galvanized) Metal, Aluminum, Copper and Copper Alloys Surfaces Specified Painted:
1. Clean surfaces to remove grease, oil and other deterrents to paint adhesion in accordance with SSPC-SP 1 (Solvent Cleaning).
 2. Spot coat abraded and damaged areas of zinc-coating which expose base metal on hot-dip zinc-coated items with MPI 18 (Organic Zinc Rich Coating). Prime or spot prime with MPI 134 (Waterborne Galvanized Primer) or MPI 135 (Non-Cementitious Galvanized Primer) depending on finish coat compatibility.
- E. Masonry, Concrete:

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

01-01-16

1. Clean and remove dust, dirt, oil, grease efflorescence, form release agents, laitance, and other deterrents to paint adhesion.
2. Use emulsion type cleaning agents to remove oil, grease, paint and similar products. Use of solvents, acid, or steam is not permitted.
3. Remove loose mortar in masonry work.
4. Replace mortar and fill open joints, holes, cracks and depressions with new mortar specified in Section 04 05 13, MASONRY MORTARING and Section 04 05 16, MASONRY GROUTING. Do not fill weep holes. Finish to match adjacent surfaces.
5. Neutralize Concrete floors to be painted by washing with a solution of 1.4 Kg (3 pounds) of zinc sulfate crystals to 3.8 L (1 gallon) of water, allow to dry three (3) days and brush thoroughly free of crystals.
6. Repair broken and spalled concrete edges with concrete patching compound to match adjacent surfaces as specified in Division 03, CONCRETE Sections. Remove projections to level of adjacent surface by grinding or similar methods.

F. Gypsum Plaster and Gypsum Board:

1. Remove efflorescence, loose and chalking plaster or finishing materials.
2. Remove dust, dirt, and other deterrents to paint adhesion.
3. Fill holes, cracks, and other depressions with CID-A-A-1272A finished flush with adjacent surface, with texture to match texture of adjacent surface. Patch holes over 25 mm (1-inch) in diameter as specified in Section for plaster or gypsum board.

3.5 PAINT PREPARATION

- A. Thoroughly mix painting materials to ensure uniformity of color, complete dispersion of pigment and uniform composition.
- B. Do not thin unless necessary for application and when finish paint is used for body and prime coats. Use materials and quantities for thinning as specified in manufacturer's printed instructions.
- C. Remove paint skins, then strain paint through commercial paint strainer to remove lumps and other particles.

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

01-01-16

- D. Mix two (2) component and two (2) part paint and those requiring additives in such a manner as to uniformly blend as specified in manufacturer's printed instructions unless specified otherwise.
- E. For tinting required to produce exact shades specified, use color pigment recommended by the paint manufacturer.

3.6 APPLICATION

- A. Start of surface preparation or painting will be construed as acceptance of the surface as satisfactory for the application of materials.
- B. Unless otherwise specified, apply paint in three (3) coats; prime, body, and finish. When two (2) coats applied to prime coat are the same, first coat applied over primer is body coat and second coat is finish coat.
- C. Apply each coat evenly and cover substrate completely.
- D. Allow not less than 48 hours between application of succeeding coats, except as allowed by manufacturer's printed instructions, and approved by COR.
- E. Apply by brush or roller.
- F. Do not paint in closed position operable items such as access doors and panels, window sashes, overhead doors, and similar items except overhead roll-up doors and shutters.

3.7 PRIME PAINTING

- A. After surface preparation, prime surfaces before application of body and finish coats, except as otherwise specified.
- B. Spot prime and apply body coat to damaged and abraded painted surfaces before applying succeeding coats.
- C. Additional field applied prime coats over shop or factory applied prime coats are not required except for exterior exposed steel apply an additional prime coat.
- D. Prime rabbets for stop and face glazing of wood, and for face glazing of steel.
- E. Metals except boilers, incinerator stacks, and engine exhaust pipes:
 - 1. Steel and iron: Use MPI 101 (Cold Curing Epoxy Primer) where MPI 77 (Epoxy Cold Cured, Gloss finish is specified).
 - 2. Zinc-coated steel and iron: MPI 134 (Waterborne Galvanized Primer).
 - 3. Aluminum scheduled to be painted: MPI 95 (Fast Drying Metal Primer).
 - 4. Terne Metal: MPI 95 (Fast Drying Metal Primer).

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

09 91 00-16

10/28/2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

01-01-16

5. Copper and copper alloys scheduled to be painted: MPI 95 (Fast Drying Metal Primer).
6. Machinery not factory finished: MPI 9 (Exterior Alkyd Enamel).
7. Asphalt coated metal: MPI 1 (Aluminum Paint).
8. Metal over 94 degrees C (201 degrees F), Boilers, Incinerator Stacks, and Engine Exhaust Pipes: MPI 22 (High Heat Resistant Coating).

F. Gypsum Board and Hardboard:

1. Surfaces scheduled to have MPI 53 (Interior Latex, Flat), MPI Gloss Level 1 :
2. Primer: MPI 50 (Interior Latex Primer Sealer) except use MPI 45 (Interior Primer Sealer) or MPI 46 (Interior Enamel Undercoat) in bathrooms.

3.8 EXTERIOR FINISHES (NOT USED)

3.8 INTERIOR FINISHES

A. Apply following finish coats over prime coats in spaces or on surfaces specified in ROOM FINISH LEGEND as a part of the drawings.

B. Metal Work:

1. Apply to exposed surfaces.
2. Omit body and finish coats on surfaces concealed after installation except electrical conduit containing conductors over 600 volts.
3. Ferrous Metal, Galvanized Metal, and Other Metals Scheduled:
 - a. Apply two (2) coats of MPI 47 (Interior Alkyd, Semi-Gloss) unless specified otherwise.
 - b. Two (2) coats of MPI 51 (Interior Alkyd, Eggshell).
 - c. One (1) coat of MPI 46 (Interior Enamel Undercoat) plus one coat of MPI 47 (Interior Alkyd, Semi-Gloss) on exposed interior surfaces of alkyd-amine enamel prime finished windows.
 - d. One (1) coat of MPI 101 primer over two (2) coats of waterborne light industrial coating MPI 163 on exposed surfaces. Steel is to be blast cleaned to SSPC 10/NACE No. 2.
 - e. Machinery: One (1) coat MPI 9 (Exterior Alkyd Enamel).
 - f. Asphalt Coated Metal: One (1) coat MPI 1 (Aluminum Paint).
 - g. Ferrous Metal over 94 degrees K (290 degrees F): Boilers, Incinerator Stacks, and Engine Exhaust Pipes: One (1) coat MPI 22 (High Heat Resistant Coating).

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

09 91 00-17

10/28/2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

01-01-16

C. Gypsum Board:

1. One (1) coat of MPI 50 or 149 (100% Acrylic Latex Primer Sealer) plus one (1) coat of MPI 53, 142, or 143 (100% Acrylic Latex, MPI Gloss level 1).

D. Wood:

1. Sanding:

- a. Use 220-grit sandpaper.
- b. Sand sealers and varnish between coats.
- c. Sand enough to scarify surface to assure good adhesion of subsequent coats, to level roughly applied sealer and varnish, and to knock off "whiskers" of any raised grain as well as dust particles.

2. Sealers:

- a. MPI 31 (gloss) or MPI 71 (flat) thinned as recommended by manufacturer at rate of one (1) part of thinner to four (4) parts of varnish.
- b. Apply sealers specified except sealer may be omitted where pigmented, penetrating, or wiping stains containing resins are used.
- c. Allow manufacturer's recommended drying time before sanding, but not less than 24 hours or 36 hours in damp or muggy weather.
- d. Sand as specified.

3. Paint Finish:

- a. One (1) coat of MPI 45 (Interior Primer Sealer) plus one (1) coat of MPI 47 (Interior Alkyd, Semi-Gloss).
- b. One (1) coat of MPI 45 Interior Primer Sealer) plus one (1) coat of MPI 48 (Interior Alkyd Gloss).
- c. Two (2) coats of MPI 51 (Interior Alkyd, Eggshell).

E. Miscellaneous:

1. Apply where specified in the ROOM FINISH LEGEND in the drawings.
2. MPI 1 (Aluminum Paint): Two (2) coats of aluminum paint.
3. Existing acoustical units scheduled to be repainted except acoustical units with a vinyl finish:
 - a. Clean units free of dust, dirt, grease, and other deterrents to paint adhesion.
 - b. Mineral fiber units: One (1) coat of MPI 53 (Interior Latex, Flat, MPI Gloss Level 1).

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

09 91 00-18

10/28/2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

01-01-16

- c. Units of organic fiber or other material not having a class A rating: One (1) coat of MPI 66 (Interior Alkyd Fire Retardant, Clear Top-Coat (UL Approved)) or MPI 67 (Interior Latex Fire Retardant, Top-Coat (UL Approved)) fire retardant paint.
- 4. Interstitial floor markings: One (1) coat MPI 27 (Exterior/ Interior Alkyd Floor Enamel, Gloss).

3.10 REFINISHING EXISTING PAINTED SURFACES

- A. Clean, patch and repair existing surfaces as specified under "Surface Preparation". No "telegraphing" of lines, ridges, flakes, etc., through new surfacing is permitted. Where this occurs, sand smooth and re-finish until surface meets with COR's approval.
- B. Remove and reinstall items as specified under "General Workmanship Requirements".
- C. Remove existing finishes or apply separation coats to prevent non compatible coatings from having contact.
- D. Patched or Replaced Areas in Surfaces and Components: Apply spot prime and body coats as specified for new work to repaired areas or replaced components.
- E. Except where scheduled for complete painting apply finish coat over plane surface to nearest break in plane, such as corner, reveal, or frame.
- F. In existing rooms and areas where alterations occur, clean existing stained and natural finished wood retouch abraded surfaces and then give entire surface one (1) coat of MPI 71 (Polyurethane, Moisture Cured, Clear Flat).
- G. Refinish areas as specified for new work to match adjoining work unless specified or scheduled otherwise.
- H. Coat knots and pitch streaks showing through old finish with MPI 36 (Knot Sealer) before refinishing.
- I. Sand or dull glossy surfaces prior to painting.
- J. Sand existing coatings to a feather edge so that transition between new and existing finish will not show in finished work.

3.11 PAINT COLOR

- A. Color and gloss of finish coats is specified in the ROOM FINISH LEGEND as part of the drawings.

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

01-01-16

- B. For additional requirements regarding color see Articles, "REFINISHING EXISTING PAINTED SURFACE" and "MECHANICAL AND ELECTRICAL FIELD PAINTING SCHEDULE".
- C. Coat Colors:
 - 1. Color of priming coat: Lighter than body coat.
 - 2. Color of body coat: Lighter than finish coat.
 - 3. Color prime and body coats to not show through the finish coat and to mask surface imperfections or contrasts.
- D. Painting, Caulking, Closures, and Fillers Adjacent to Casework:
 - 1. Paint to match color of casework where casework has a paint finish.
 - 2. Paint to match color of wall where casework is stainless steel, plastic laminate, or varnished wood.

3.12 MECHANICAL AND ELECTRICAL WORK FIELD PAINTING SCHEDULE

- A. Field painting of mechanical and electrical consists of cleaning, touching-up abraded shop prime coats, and applying prime, body and finish coats to materials and equipment if not factory finished in space scheduled to be finished.
- B. For in spaces not scheduled to be finish painted in the ROOM FINISH LEGEND paint as specified below.
- C. Paint various systems specified in Division 02 - EXISTING CONDITIONS, Division 21 - FIRE SUPPRESSION, Division 22 - PLUMBING, Division 23 - HEATING, VENTILATION AND AIR-CONDITIONING, Division 26 - ELECTRICAL, Division 27 - COMMUNICATIONS, and Division 28 - ELECTRONIC SAFETY AND SECURITY.
- D. Paint after tests have been completed.
- E. Omit prime coat from factory prime-coated items.
- F. Finish painting of mechanical and electrical equipment is not required when located in interstitial spaces, above suspended ceilings, in concealed areas such as pipe and electric closets, pipe basements, pipe tunnels, trenches, attics, roof spaces, shafts and furred spaces except on electrical conduit containing feeders 600 volts or more.
- G. Omit field painting of items specified in "BUILDING AND STRUCTURAL WORK FIELD PAINTING"; "Building and Structural Work not Painted".
- H. Color:

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

01-01-16

1. Paint items having no color specified in the ROOM FINISH LEGEND AND SCHEDULE to match surrounding surfaces.
2. Paint colors as specified in the ROOM FINISH LEGEND as a part of the drawings, except for following:
 - a. White: Exterior unfinished surfaces of enameled plumbing fixtures. Insulation coverings on breeching and uptake inside boiler house, drums and drum-heads, oil heaters, condensate tanks and condensate piping.
 - b. Gray: Heating, ventilating, air conditioning and refrigeration equipment (except as required to match surrounding surfaces), and water and sewage treatment equipment and sewage ejection equipment.
 - c. Aluminum Color: Ferrous metal on outside of boilers and in connection with boiler settings including supporting doors and door frames and fuel oil burning equipment, and steam generation system (bare piping, fittings, hangers, supports, valves, traps and miscellaneous iron work in contact with pipe).
 - d. Federal Safety Red: Exposed fire protection piping hydrants, post indicators, electrical conducts containing fire alarm control wiring, and fire alarm equipment.
 - e. Federal Safety Orange: Entire lengths of electrical conduits containing feeders 600 volts or more.
 - f. Color to match brickwork sheet metal covering on breeching outside of exterior wall of boiler house.
- I. Apply paint systems on properly prepared and primed surface as follows:
 1. Interior Locations:
 - a. Apply two (2) coats of MPI 47 (Interior Alkyd, Semi-Gloss) to following items:
 - 1) Metal under 94 degrees C (201 degrees F) of items such as bare piping, fittings, hangers and supports.
 - 2) Equipment and systems such as hinged covers and frames for control cabinets and boxes, cast-iron radiators, electric conduits and panel boards.
 - 3) Heating, ventilating, air conditioning, plumbing equipment, and machinery having shop prime coat and not factory finished.

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

01-01-16

- b. Ferrous metal exposed in hydrotherapy equipment room and chlorinator room of water and sewerage treatment plants: One (1) coat of MPI 101 (Cold Curing Epoxy Primer) and one (1) coat of MPI 77 (Epoxy Cold Cured, Gloss).
 - c. Apply two (2) coats of MPI 22 (High Heat Resistant Coating) to ferrous metal surface over 94 degrees K (290 degrees F) of following items:
 - 1) Steam line flanges, bare pipe, fittings, valves, hangers and supports over 94 degrees K (290 degrees F).
 - e. Paint electrical conduits containing cables rated 600 volts or more using two (2) coats of MPI 94 (Exterior Alkyd, Semi-gloss) in the Federal Safety Orange color in exposed and concealed spaces full length of conduit.
3. Other exposed locations:
- a. Metal surfaces, except aluminum, of cooling towers exposed to view, including connected pipes, rails, and ladders: Two (2) coats of MPI 1 (Aluminum Paint).
 - b. Cloth jackets of insulation of ducts and pipes in connection with plumbing, air conditioning, ventilating refrigeration and heating systems: One (1) coat of MPI 50 (Interior Latex Primer Sealer) and one (1) coat of MPI 119 (Exterior Latex, High Gloss (acrylic)).

3.13 BUILDING AND STRUCTURAL WORK FIELD PAINTING

- A. Painting and finishing of interior except as specified here-in-after.
 - 1. Painting and finishing of new and existing work including colors and gloss of finish selected is specified in ROOM FINISH SCHEUDLE.
 - 2. Painting of disturbed, damaged and repaired or patched surfaces when entire space is not scheduled for complete repainting or refinishing.
 - 3. Painting of ferrous metal and galvanized metal.
 - 4. Identity painting and safety painting.
- B. Building and Structural Work not Painted:
 - 1. Prefinished items:
 - a. Casework, doors, elevator entrances and cabs, metal panels, wall covering, and similar items specified factory finished under other sections.

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

01-01-16

- b. Factory finished equipment and pre-engineered metal building components such as metal roof and wall panels.
- 2. Finished surfaces:
 - a. Hardware except ferrous metal.
 - b. Anodized aluminum, stainless steel, chromium plating, copper, and brass, except as otherwise specified.
 - c. Signs, fixtures, and other similar items integrally finished.
- 3. Concealed surfaces:
 - a. Inside dumbwaiter duct shafts, interstitial spaces, pipe basements, crawl spaces, pipe tunnels, and above ceilings except as otherwise specified.
 - b. Inside walls or other spaces behind access doors or panels.
 - c. Surfaces concealed behind permanently installed casework and equipment.
- 4. Moving and operating parts:
 - a. Shafts, chains, gears, mechanical and electrical operators, linkages, and sprinkler heads, and sensing devices.
 - b. Tracks for overhead or coiling doors, shutters, and grilles.
- 5. Labels:
 - a. Code required label, such as Underwriters Laboratories Inc., Intertek Testing Service or Factory Mutual Research Corporation.
 - b. Identification plates, instruction plates, performance rating, and nomenclature.
- 6. Galvanized metal:
 - a. Except where specifically specified to be painted.
- 7. Gaskets.
- 8. Face brick.
- 9. Structural steel encased in concrete, masonry, or other enclosure.
- 10. Structural steel to receive sprayed-on fire proofing.
- 11. Ceilings, walls, columns in interstitial spaces.

3.14 IDENTITY PAINTING SCHEDULE

- A. Identify designated service in new buildings or projects with extensive remodeling in accordance with ASME A13.1, unless specified otherwise, on exposed piping, piping above removable ceilings, piping in accessible pipe

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

01-01-16

spaces, interstitial spaces, and piping behind access panels. For existing spaces where work is minor match existing.

1. Legend may be identified using snap-on coil plastic markers or by paint stencil applications.
2. Apply legends adjacent to changes in direction, on branches, where pipes pass through walls or floors, adjacent to operating accessories such as valves, regulators, strainers and cleanouts a minimum of 12.2 M (40 feet) apart on straight runs of piping. Identification next to plumbing fixtures is not required.
3. Locate Legends clearly visible from operating position.
4. Use arrow to indicate direction of flow using black stencil paint.
5. Identify pipe contents with sufficient additional details such as temperature, pressure, and contents to identify possible hazard. Insert working pressure shown on construction documents where asterisk appears for High, Medium, and Low Pressure designations as follows:
 - a. High Pressure - 414 kPa (60 psig) and above.
 - b. Medium Pressure - 104 to 413 kPa (15 to 59 psig).
 - c. Low Pressure - 103 kPa (14 psig) and below.
 - d. Add Fuel oil grade numbers.
6. Legend name in full or in abbreviated form as follows:

PIPING	COLOR OF EXPOSED PIPING	COLOR OF BACKGROUND	COLOR OF LETTERS	LEGEND ABBREVIATIONS
Blow-off		Green	White	Blow-off
Boiler Feedwater		Green	White	Blr Feed
A/C Condenser Water Supply		Green	White	A/C Cond Wtr Sup
A/C Condenser Water Return		Green	White	A/C Cond Wtr Ret
Chilled Water Supply		Green	White	Ch. Wtr Sup
Chilled Water Return		Green	White	Ch. Wtr Ret
Shop Compressed Air		Blue	White	Shop Air
Air-Instrument Controls		Green	White	Air-Inst Cont
Drain Line		Green	White	Drain
Emergency Shower		Green	White	Emg Shower

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

01-01-16

High Pressure Steam		Green	White	H.P. _____*
High Pressure Condensate				
Return		Green	White	H.P. Ret _____*
Medium Pressure Steam		Green	White	M. P. Stm _____*
Medium Pressure Condensate				
Return		Green	White	M.P. Ret _____*
Low Pressure Steam		Green	White	L.P. Stm _____*
Low Pressure Condensate				
Return		Green	White	L.P. Ret _____*
High Temperature Water				
Supply		Green	White	H. Temp Wtr Sup
High Temperature Water				
Return		Green	White	H. Temp Wtr Ret
Hot Water Heating Supply		Green	White	H. W. Htg Sup
Hot Water Heating Return		Green	White	H. W. Htg Ret
Gravity Condensate Return		Green	White	Gravity Cond Ret
Pumped Condensate Return		Green	White	Pumped Cond Ret
Vacuum Condensate Return		Green	White	Vac Cond Ret
Fuel Oil	Brown	White	Fuel Oil	
(Diesel Fuel included under Fuel Oil)				
Boiler Water Sampling		Green	White	Sample
Chemical Feed		Green	White	Chem Feed
Continuous Blow-Down		Green	White	Cont. B D
Pumped Condensate		Green	White	Pump Cond
Pump Recirculating		Green	White	Pump-Recirc.
Vent Line		Green	White	Vent
Alkali		Orange	Black	Alk
Bleach		Orange	Black	Bleach
Detergent		Yellow	Black	Det
Liquid Supply		Yellow	Black	Liq Sup
Reuse Water		Yellow	Black	Reuse Wtr
Cold Water (Domestic)	White	Green	White	C.W. Dom
Hot Water (Domestic)				
Supply	White	Yellow	Black	H.W. Dom
Return	White	Yellow	Black	H.W. Dom Ret
Tempered Water	White	Yellow	Black	Temp. Wtr
Ice Water				
Supply	White	Green	White	Ice Wtr
Return	White	Green	White	Ice Wtr Ret
Reagent Grade Water		Green	White	RG

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

01-01-16

Reverse Osmosis	Green	White	RO	
Sanitary Waste	Green	White	San Waste	
Sanitary Vent	Green	White	San Vent	
Storm Drainage	Green	White	St Drain	
Pump Drainage	Green	White	Pump Disch	
Chemical Resistant Pipe				
Waste	Orange	Black	Acid Waste	
Vent	Orange	Black	Acid Vent	
Atmospheric Vent	Green	White	ATV	
Silver Recovery	Green	White	Silver Rec	
Oral Evacuation	Green	White	Oral Evac	
Fuel Gas	Yellow	Black	Gas	
Fire Protection Water				
Sprinkler	Red	Red	White	Auto Spr
Standpipe	Red	Red	White	Stand
Sprinkler	Red	Red	White	Drain

7. Electrical Conduits containing feeders over 600 volts, paint legends using 50 mm (2 inch) high black numbers and letters, showing the voltage class rating. Provide legends where conduits pass through walls and floors and at maximum 6096 mm (20 foot) intervals in between. Use labels with yellow background with black border and words Danger High Voltage Class, 5000.

8. See Sections for methods of identification, legends, and abbreviations of the following:

a. Regular compressed air lines: Section 22 15 00, GENERAL SERVICE COMPRESSED-AIR SYSTEMS.

b. Conduits containing high voltage feeders over 600 volts:
Section 26 05 33, RACEWAY AND BOXES FOR ELECTRICAL SYSTEMS;
Section 27 05 33, RACEWAYS AND BOXES FOR COMMUNICATIONS SYSTEMS;
Section 28 05 33, RACEWAYS AND BOXES FOR ELECTRONIC SAFETY AND SECURITY.

B. Fire and Smoke Partitions:

1. Identify partitions above ceilings on both sides of partitions except within shafts in letters not less than 64 mm (2 1/2 inches) high.

2. Stenciled message: "SMOKE BARRIER" or, "FIRE BARRIER" as applicable.

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

01-01-16

3. Locate not more than 6096 mm (20 feet) on center on corridor sides of partitions, and with a least one (1) message per room, on room side of partition.
4. Use semi-gloss paint of color that contrasts with color of substrate.
- C. Identify columns in pipe basements and interstitial space:
 1. Apply stenciled number and letters to correspond with grid numbering and lettering indicated on construction documents.
 2. Paint numbers and letters 101 mm (4 inches) high, locate 45 mm (1.8 inches) below overhead structural slab.
 3. Apply on four (4) sides of interior columns and on inside face only of exterior wall columns.
 4. Color:
 - a. Use black on concrete columns.

3.15 PROTECTION CLEAN UP, AND TOUCH-UP

- A. Protect work from paint droppings and spattering by use of masking, drop cloths, removal of items or by other approved methods.
- B. Upon completion, clean paint from hardware, glass and other surfaces and items not required to be painted of paint drops or smears.
- C. Before final inspection, touch-up or refinished in a manner to produce solid even color and finish texture, free from defects in work which was damaged or discolored.

- - - E N D - - -

DIVISION 10

SPECIALTIES

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

10-01-15

SECTION 10 14 00
SIGNAGE

PART 1 - GENERAL

1.1 DESCRIPTION

- A. This section specifies interior signage for room numbers, code required signs and temporary signs.

1.2 RELATED WORK

- A. Sustainable Design Requirements: Section 01 81 13, SUSTAINABLE CONSTRUCTION REQUIREMENTS.
- B. Lighted EXIT signs for egress purposes are specified under Division 26, ELECTRICAL.

1.3 QUALITY ASSURANCE

- A. Manufacturer's Qualifications: Provide signage that is the product of one manufacturer, who has provided signage as specified for a minimum of three (3) years. Submit manufacturer's qualifications.
- B. Installer's Qualifications: Minimum three (3) years' experience in the installation of signage of the type as specified in this Section. Submit installer's qualifications.

1.4 SUBMITTALS

- A. Submit in accordance with Section 01 33 00, SHOP DRAWINGS, PRODUCT DATA AND SAMPLES.
- B. Sustainable Design Submittals, as described below:
 - 1. Volatile organic compounds per volume as specified in PART 2 - PRODUCTS.
- C. Interior Sign Samples: Sign panels and frames, with letters and symbols, for each sign type.
 - 1. Sign Panel, 203 x 254 mm (8 x 10 inches), with letters.
 - 2. Color samples of each color, 152 x 152 mm (6 x 6 inches. Show anticipated range of color and texture.
 - 3. Sample of typeface, arrow and symbols in a typical full-size layout.
- D. Manufacturer's Literature:
 - 1. Showing the methods and procedures proposed for the anchorage of the signage system to each surface type.
 - 2. Manufacturer's printed specifications and maintenance instructions.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

10 14 00-1

10/28/2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

10-01-15

- E. Sign Location Plan, showing location, type and total number of signs required.
- F. Shop Drawings: Scaled for manufacture and fabrication of sign types. Identify materials, show joints, welds, anchorage, accessory items, mounting and finishes.
- H. Full size layout patterns for dimensional letters.
- I. Manufacturer's qualifications.
- J. Installer's qualifications.

1.5 DELIVERY AND STORAGE

- A. Deliver materials to job in manufacturer's original sealed containers with brand name marked thereon. Protect materials from damage.
- B. Package to prevent damage or deterioration during shipment, handling, storage and installation. Maintain protective covering in place and in good repair until removal is necessary.
- C. Deliver signs only when the site and mounting services are ready for installation work to proceed.
- D. Store products in dry condition inside enclosed facilities.

1.6 WARRANTY

- A. Construction Warranty: Comply with FAR clause 52.246-21, "Warranty of Construction".

1.7 APPLICABLE PUBLICATIONS

- A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only.
- B. American Architectural Manufacturers Association (AAMA):
 - 611-14.....Anodized Architectural Aluminum
 - 2603-13.....Voluntary Specification, Performance Requirements and Test Procedures for Pigmented Organic Coatings on Aluminum Extrusions and Panels
- C. American National Standards Institute (ANSI):
 - A117.1-09.....Accessible and Usable Buildings and Facilities
- D. ASTM International (ASTM):
 - A36/A36M-14.....Carbon Structural Steel

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

10-01-15

- A240/A240M-15.....Chromium and Chromium-Nickel Stainless Steel
Plate, Sheet, and Strip for Pressure Vessels
and for General Applications
- A666-10.....Annealed or Cold-Worked Austenitic Stainless
Steel Sheet, Strip, Plate and Flat Bar
- A1011/A1011M-14.....Steel, Sheet and Strip, Hot-Rolled, Carbon,
Structural, High-Strength Low-Alloy, High-
Strength Low-Alloy with Improved Formability,
and Ultra-High Strength
- B36/B36M-13.....Brass Plate, Sheet, Strip, and Rolled Bar
- B152/B152M-13.....Copper Sheet, Strip, Plate, and Rolled Bar
- B209-14.....Aluminum and Aluminum-Alloy Sheet and Plate
- B209M-14.....Aluminum and Aluminum-Alloy Sheet and Plate
(Metric)
- B221-14.....Aluminum and Aluminum-Alloy Extruded Bars,
Rods, Wire, Shapes, and Tubes
- B221M-13.....Aluminum and Aluminum-Alloy Extruded Bars,
Rods, Wire, Shapes, and Tubes (Metric)
- C1036-11 (R2012).....Flat Glass
- C1048-12.....Heat-Treated Flat Glass-Kind HS, Kind FT Coated
and Uncoated Glass
- C1349-10.....Architectural Flat Glass Clad Polycarbonate
- D1003-13.....Test Method for Haze and Luminous Transmittance
of Transparent Plastics
- D4802-10.....Poly(Methyl Methacrylate) Acrylic Plastic Sheet
- D. Code of Federal Regulation (CFR):
- 40 CFR 59.....Determination of Volatile Matter Content, Water
Content, Density Volume Solids, and Weight
Solids of Surface Coating
- E. Federal Specifications (Fed Spec):
- MIL-PRF-8184F.....Plastic Sheet, Acrylic, Modified.
- MIL-P-46144C.....Plastic Sheet, Polycarbonate
- F. National Fire Protection Association (NFPA):
- 70-14.....National Electrical Code

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

10-01-15

PART 2 - PRODUCTS

2.1 SIGNAGE GENERAL

- A. Provide signs of type, size and design shown on the construction documents.
 - 1. Final sign system shall match Station standard.
- B. Provide signs complete with lettering, framing and related components for a complete installation.
- C. Provide graphics items as completed units produced by a single manufacturer, including necessary mounting accessories, fittings and fastenings.
- D. Do not scale construction documents for dimensions. Verify dimensions and coordinate with field conditions. Notify Contracting Officer Representative (COR) of discrepancies or changes needed to satisfy the requirements of the construction documents.

2.2 EXTERIOR SIGNAGE PERFORMANCE REQUIREMENTS (NOT USED)

2.3 INTERIOR SIGN MATERIALS

- A. Cast Acrylic Sheet: MIL-PRF-8184F; Type II, class 1, Water white non-glare optically clear. Matt finish water white clear acrylic shall not be acceptable.
- B. Adhesives:
 - 1. Adhesives for Field Application: Mildew-resistant, non-staining adhesive for use with specific type of panels, sheets, or assemblies; and for substrate application as recommended in writing by signage manufacturer.
 - 2. Adhesives to have VOC content of 50 g/L or less when calculated according to 40 CFR 59, (EPA Method 24).
- F. Typography: Comply with VA Signage Design Guide.
 - 1. Type Style: Helvetica Medium. Initial caps or all caps, as indicated in Sign Schedule.
 - 2. Arrow: Comply with graphic standards in construction documents.
 - 3. Letter spacing: Comply with graphic standards in construction documents.
 - 4. Letter spacing: Comply with graphic standards in construction documents.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

10 14 00-4

10/28/2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

10-01-15

5. Provide text, arrows, and symbols in size, colors, typefaces, and letter spacing shown in construction documents. Text shall be a true, clean, accurate reproduction of typeface(s). Text shown in construction documents is for layout purposes only; final text for signs is listed in Sign Schedule.

2.4 EXTERIOR SIGN MATERIALS (NOT USED)

2.5 INTERIOR SIGN TYPES

- A. Conform to the VA Signage Design Guide.
- B. Provide sliding rail frame, insert and frame, curved frame, component system where indicated.
- C. Component System Signs:
1. Provide interior sign system as follows:
 - a. Interchangeable system that allows for changes of graphic components of the installed sign, without changing sign in its entirety.
 - b. Provide sign system comprised of following primary components:
 - 1) Rail Back: Horizontal rails, spaced to allow for uniform, modular sizing of sign types.
 - 2) Rail Insert: Mount to back of Copy Panels to allow for attachment to Rail Back.
 - 3) Copy Panels: Fabricate of acrylic.
 - 4) End Caps: Interlock to Rail Back to enclose and secure changeable Copy Panels.
 - 5) Joiners and Accent Joiners: To connect separate Rail Backs together.
 - 6) Top Accent Bars: To provide decorative trim cap that encloses the top of sign.
 - c. Provide rail back, rail insert and end caps in anodized extruded aluminum.
 - d. Provide signs in system that are convertible in the field to allow for enlargement from one (1) size to another in height and width through use of joiners or accent joiners, which connect rail back panels together blindly, providing a butt joint between copy panels. Connect accent joiners to rail backs with a visible

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

10-01-15

- 3 mm (1/8") horizontal rib, flush to the adjacent copy insert surfaces.
- e. Provide sign configurations as indicated on construction documents that vary in width from 228 mm (9 inches) to 2032 mm (80 inches) and have height dimensions of 50 mm (2 inches), 76 mm (3 inches), 152 mm (6 inches), 228 mm (9 inches) and 305 mm (12 inches). Height that can be increased beyond 305 mm (12 inches), by repeating height module in full or in part.
2. Provide rail back functions as internal structural member of sign. Fabricate of 6063T5-extruded aluminum, anodized black.
 - a. Fabricate to accept an extruded aluminum or plastic insert on either side, depending upon sign type.
 - b. Provide components that are convertible in field to allow for connection to other rail back panels.
 - c. Provide mounting devices including wall mounting for screw-on applications, wall mounting with pressure sensitive tape and other mounting devices as needed.
 3. Provide rail insert functions as mounting device for copy panels on to the rail back. The rail insert mounts to the back of the copy panel with adhesive suitable for attaching particular copy insert material.
 - a. Provide copy panels that slide or snap into the horizontal rail back.
 4. Provide copy panels that accept various forms of copy and graphics and attach to the rail back with the rail insert. Provide copy panels fabricated of acrylic.
 - a. Provide copy panels that are interchangeable by sliding horizontally from either side of sign, and to other signs in system of equal or greater width or height.
 - b. Provide materials that are cleanable without use of special chemicals or cleaning solutions.
 - c. Copy Panel Materials.
 - 1) ABS Inserts: 2.3 mm (.090 inches) extruded ABS plastic core with .07 mm (.003 inches) acrylic cap bonded during extrusion/texturing process.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

10 14 00-6

10/28/2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

10-01-15

- a) Pressure bonded to extruded rail insert with adhesive.
 - b) Background Color: Integral or painted in acrylic lacquer.
 - c) Finished: Texture pattern.
- 2) Photopolymer Inserts: 3.2 mm (.125 inches) phenolic photo polymer with raised copy etched to 2.3 mm (.0937 inches), bonded to an ABS plastic or extruded aluminum insert with adhesive.
 - a) Background Color: Painted, acrylic enamel.
 - 3) Changeable Paper/ Insert Holder: Extruded insert holder with integral rail insert for connection with structural back panel in 6063T5 aluminum with a black anodized finish.
 - a) Inserts into holder are paper with a clear 0.76 mm (.030 inches) textured cover.
 - b) Background Color: Painted, acrylic lacquer.
 - 4) Acrylic - 2 mm (.080 inches) non-glare acrylic.
 - a) Pressure bonded to extruded rail insert using adhesive.
 - b) Background Color: Painted in acrylic lacquer or acrylic enamel.
 - 5) Extruded 6063T5 aluminum with a black anodized finish insert holder with integral rail insert for connection with structural back panel to hold 0.76 mm (.030 inches) textured polycarbonate insert and a sliding tile which mounts in the inset holder and slides horizontally.
5. End Caps: Extruded using 6063T5 aluminum with a black anodized finish. End caps interlock with rail back with clips to form an integral unit, enclosing and securing the changeable copy panels, without requiring tools for assembly.
 - a. Interchangeable to each end of sign and to other signs in signage system of equal height.
 - b. Provide mechanical fasteners that can be added to the end caps that will secure it to rail back to make sign tamper resistant.
 6. Joiners: Extruded using 6063T5 aluminum with a black anodized finish. Rail joiners connect rail backs together blindly, providing a butt joint between copy inserts.

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

10-01-15

7. Accent Joiners: Extruded using 6063T5 aluminum with a mirror polished finish. Connect joiner and rail backs together with a visible 3 mm (.125 inches) horizontal rib, flush to the adjacent copy panel surfaces.
8. Top Accent Rail: Extruded rail using 6063T5 aluminum with a mirror polished finish that provides a 3.2 mm (.125 inches) high decorative trim cap. Cap butts flush to adjacent copy panel and encloses top of rail back and copy panel.
9. Typography:
 - a. Vinyl First Surface Copy (non-tactile): Applied vinyl copy.
 - b. Subsurface Copy Inserts: Textured 1 mm (.030 inches) clear polycarbonate face with subsurface applied vinyl copy.
 - 1) Spray face back with paint and laminated to extruded aluminum carrier insert.
 - c. Integral Tactile Copy Inserts: Phenolic photopolymer etched with 2.3 mm (.0937 inches) raised copy.
 - d. Silk-screened First Surface Copy (non-tactile): Injection molded or extruded ABS plastic insert with first surface applied enamel silk-screened copy.

D. Tactile Sign:

1. Tactile sign made from a material that provides for letters, numbers and Braille to be integral with sign. Photopolymer etched metal, sandblasted phenolic or embossed material. Do not apply letters, numbers and Braille with adhesive.
2. Numbers, letters and Braille to be raised 0.8 mm (1/32 inches) from the background surface. The draft of the letters, numbers and Braille to be tapered, vertical and clean.
3. Braille Dots: Conform with ANSI A117.1 for Braille position and layout; (a) Dot base diameter: 1.5 mm (.059 inches) (b) Inter-dot spacing: 2.3 mm (.090 inches) (c) Horizontal separation between cells: 6.0 mm (.241 inches) (d) Vertical separation between cells: 10.0 mm (.395 inches)
4. Paint assembly specified color. After painting, apply white or other specified color to surface of the numbers and letters. Apply protective clear coat sealant to entire sign.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

10 14 00-8

10/28/2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

10-01-15

5. Finish: Eggshell, 11 to 19 degree on a 60 degree glossmeter.

E. Glass Door and Side Light Graphics:

1. Provide text and graphics as first surface applied stylus cut vinyl.
2. Provide typeface, color, and spacing, with each message or message group on a single quick release backing sheet.

F. Dimensional Letters:

1. Provide dimensional letters that are mill or laser cut acrylic in size and thickness indicated in construction documents.
2. Provide draft of letters perpendicular to letters face.
3. Fabricate letters with square corners, such as where a letter stem and bar intersect.
4. Paint letters with acrylic polyurethane.

G. Temporary Interior Signs:

1. Fabricated from 50 kg (110 pound) matte finished white paper cut to 101 mm (4 inch) wide by 305 mm (12 inch) long.
 - a. Punched 3.2 mm (.125 inch) hole with edge of hole spaced 13 mm (.5 inch) in from edge and centered on 101 mm (4 inch) side.
 - b. Reinforce hole on both sides with suitable material that prevents tie from pulling through hole.
 - c. Ties: Steel wire 0.3 mm (0.120 inch) thick attached to tag with twist leaving 152 mm (6 inch) long free ends.
2. Mark architectural room number on sign, with broad felt marker in clearly legible numbers or letters that identify room, corridor or space as shown on construction documents.
3. Install temporary signs to rooms that have a room, corridor or space number. Attach to door frame, doorknob or door pull.
 - a. Doors that do not require signs are: corridor doors in corridor with same number, folding doors or partitions, toilet partition doors, bathroom doors within and between rooms, closet doors within rooms, communicating doors in partitions between rooms with corridor entrance doors.
 - b. Replace and missing, damaged or illegible signs.

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

10-01-15

2.6 EXTERIOR SIGN TYPES (NOT USED)

2.7 FABRICATION

- A. Design interior signage components to allow for expansion and contraction for a minimum material temperature range of 38 degrees C (100 degrees F), without causing buckling, excessive opening of joints or over stressing of adhesives, welds and fasteners.
- B. Form work to required shapes and sizes, with true curve lines and angles. Provide necessary rebates, lugs and brackets for assembly of units. Provide concealed fasteners wherever possible.
- C. Shop fabricate so far as practicable. Fasten joints flush to conceal reinforcement, or weld joints, where thickness or section permits.
- D. Level and assemble contract surfaces of connected members so joints will be tight and practically unnoticeable, without applying filling compound.
- E. Signs: Fabricate with fine, even texture to be flat and sound.
 - 1. Maintain lines and miters sharp, arises unbroken, profiles accurate and ornament true to pattern.
 - 2. Plane surfaces to be smooth, flat and without oil-canning, free of rack and twist.
 - 3. Maximum variation from plane of surface plus or minus 0.3 mm (0.015 inches). Restore texture to filed or cut areas.
- F. Finish extruded members to be free from extrusion marks. Fabricate square turns, sharp corners, and true curves.
- G. Finish hollow signs with matching material on all faces, tops, bottoms and ends. Miter edge joints to give appearance of solid material.
- H. Do not manufacture signs until final sign message schedule and location review has been completed by the COR and forwarded to contractor.
- I. Drill holes for bolts and screws. Mill smooth exposed ends and edges with corners slightly rounded.
- J. Form joints exposed to weather to exclude water.
- K. Movable Parts, Including Hardware: Cleaned and adjusted to operate as designed without binding or deformation of members. Center doors and covers in opening or frame.
 - 1. Align contact surfaces fit tight and even without forcing or warping components.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

10 14 00-10

10/28/2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

10-01-15

- L. Pre-assemble items in shop to minimize field splicing and assembly. Disassemble units only as necessary for shipping and handling limitations. Clearly mark units for re-assembly and coordinated installation.
- M. Prime painted surfaces as required. Apply finish coating of paint for complete coverage with no light or thin applications allowing substrate or primer to show.
 - 1. Finish surface smooth, free of scratches, gouges, drips, bubbles, thickness variations, foreign matter and other imperfections.

PART 3 - EXECUTION

3.1 INSTALLATION

- A. Locate signs as shown on the Signage Plans.
- B. Conform to the VA Signage Design Guide for installation requirements.
- C. At each sign location there are no utility lines behind each sign location that will be affected by installation of signs.
 - 1. Correct and repair damage done to utilities during installation of signs at no additional cost to Government.
- D. Provide inserts and anchoring devices which must be set in concrete or other material for installation of signs. Submit setting drawings, templates, instructions and directions for installation of anchorage devices, which may involve other trades.
- E. Refer to Sign Message Schedule for mounting method. Mount signs in proper alignment, level and plumb according to the Sign Location Plan and the dimensions given on elevation and Sign Location Plans. When exact position, angle, height or location is not clear, contact COR for resolution.
- F. When signs are installed on glass, provide blank glass back up to be placed on opposite side of glass exactly behind sign being installed. Provide blank glass back that is the same size as sign being installed.
- G. Touch up exposed fasteners and connecting hardware to match color and finish of surrounding surface.
- H. At completion of sign installation, clean exposed sign surfaces. Clean and repair adjoining or adjacent surfaces that became soiled or damaged as a result of installation of signs.

- - - END - - -

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

10 14 00-11

10/28/2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

05-01-15

SECTION 10 21 23
CUBICLE CURTAIN TRACKS

PART 1 - GENERAL

1.1 DESCRIPTION

A. This section specifies cubicle curtain track (C.C.T.).

1.2 RELATED WORK

A. Steel shapes for suspending track assembly: Section 05 50 00, METAL FABRICATIONS.

B. Acoustical ceiling tile and suspension systems Section 09 51 00, ACOUSTICAL CEILINGS.

1.3 SUBMITTALS

A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.

B. Samples:

1. 305 mm (12 inch) long piece of cubicle curtain track with carrier access and end stop.

2. Clip anchor for fastening track to grid system of acoustical ceilings.

3. Curtain carrier for attaching curtain to track.

C. Shop Drawings: Showing layout of tracks and method of anchorage.

D. Manufacturer's Literature and Data:

1. Cubicle curtain track.

1.4 DELIVERY, STORAGE AND HANDLING

A. Deliver material in original package marked to identify the contents, brand name, and the name of the manufacturer or supplier.

B. Store in dry and protected location. Store so as to not bend or warp the tracks.

C. Do not open packages until contents are needed for installation unless verification inspection is required.

1.5 WARRANTY

A. Construction Warranty: Cubicle curtain tracks are subject to the terms of the Article "Warranty of Construction," FAR clause 52.246-21.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

10 21 23-1

10/28/2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

05-01-15

1.6 APPLICABLE PUBLICATIONS

- A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only.
- B. ASTM International (ASTM):
 - B221-14.....Aluminum and Aluminum-Alloy Extruded Bars, Rods, Wire, Shapes, and Tubes
 - B221M-13.....Aluminum and Aluminum-Alloy Extruded Bars, Rods, Wire, Shapes, and Tubes (Metric)
 - B456-11.....Electrodeposited Coatings for Copper Plus Nickel Plus Chromium and Nickel Plus Chromium
- C. Aluminum Association (AA):
 - DAF 45-09.....Designation System for Aluminum Finishes
- D. American Architectural Manufacturers Association (AAMA):
 - 2603-13.....Voluntary Specification, Performance Requirements and Test Procedures for Pigmented Organic Coatings on Aluminum Extrusions and Panels
- E. The National Association of Architectural Metal Manufacturers (NAAMM):
 - AMP 500 Series.....Metal Finishes Manual

PART 2 - PRODUCTS

2.1 CUBICLE CURTAIN TRACKS

- A. Channel Tracks (Surface Mounted Type): Extruded aluminum, ASTM B221M (B221), alloy 6063, temper T5 or T6, channel shaped, with smooth inside raceway for curtain carriers.
 - 1. Basis of Design: Match Station standard or as otherwise approved by the Contracting Officer's Representative (COR).
- B. Curtain Carriers: Nylon carriers, with nylon wheels on metal or nylon axles.
 - 1. Basis of Design: Match Station standard or as otherwise approved by the COR.
 - 2. Equip each carrier with either stainless steel, chromium plated brass or steel hooks with swivel, or nickel chromium plated brass or stainless steel bead chain

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

05-01-15

3. Hook for bead chain may be the same material and finish as the bead chain or may be chromium plated steel.
 4. Provide 2.2 carriers for every 305 mm (1 foot) of each section of each track length, plus one (1) additional carrier.
- C. End Stop Connectors, Ceiling Flanges and Other Accessories: Fabricate from the same material with the same finish as the tracks or from nylon.
- D. Hangers and Fittings: Fabricate from the same material with the same finish as the tracks. Hangers may be round or square for channel tracks and round for tubular tracks. Design fittings to be compatible with design of tracks and to safely transmit the track load to the hangers.
- E. At end of each section of track, make provision for insertion and removal of carriers. Design to prevent accidental removal of carrier. Provide operating mechanism shall be removable with common tools.

2.2. SHOWER CURTAIN TRACK (NOT USED)

2.3 INTRAVENOUS SUPPORT ASSEMBLY (NOT USED)

2.4 FASTENERS

- A. Exposed Fasteners, Screws and Bolts: Stainless steel or chromium/nickel plated brass.
- B. Concealed Fasteners, Screws and Bolts: Stainless steel.
- C. Metal Clips: Anchor curtain tracks to exposed grid of lay-in acoustical tile ceilings, with concealed metal (butterfly) type or two piece snap locking type ceiling clip of high strength spring steel.
 1. When it is not possible to install the metal ceiling clip, the cubicle curtain track may be screwed to the ceiling grid.

2.5 FINISHES

- A. Aluminum: Finish numbers for aluminum specified are in accordance with AA DAF 45. AA-C22A31 finish, chemically etched medium matte with clear anodic coating, Class II Architectural, .01 mm (0.4 mils) thick.
- B. Chrome/Nickel Plating: Satin or polished finish, ASTM B546, minimum thickness of chromium plate as follows:
 1. 0.005 mm (0.2 mil) on copper alloys.
 2. 0.01 mm (0.4 mil) on steel.
- C. Stainless Steel: No. 4 in accordance with NAAMM AMP 500.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

05-01-15

D. Baked Enamel or Powder Coat Finish: AAMA 2603.

2.6 FABRICATION

- A. Weld and grind smooth joints of fabricated components.
- B. Form tracks and bends of lengths that will produce the minimum number of joints. Make track sections up to 4877 mm (16 feet) without joints. Form corner bend on a 305 mm (12 inch) radius.
- C. Provide steel anchor plates, supports, and anchors for securing components to building construction.
- D. Form flat surface without distortion.
- E. Shop assemble components and package complete with anchors and fittings.

PART 3 - EXECUTION

3.1 INSTALLATION

- A. Install tracks after finish painting and ceiling finishing operations are complete.
- B. Install track level and hangers plumb and securely anchor to the ceiling or suspend from above to form a rigid installation.
- C. Anchor surface mounted curtain tracks directly to exposed grid of lay-in acoustical tile ceilings with suitable fasteners, spaced approximately 610 mm (24 inches) on center.
- D. Anchor surface mounted curtain tracks to concrete, plaster and gypsum board ceilings with a minimum of 3 mm (1/8-inch) diameter fastenings or concealed clips spaced not more than 914 mm (3 feet) on center.
- E. Fasten end stop caps to prevent them from being forced out by the striking weight of carriers.
- F. Remove damaged or defective components and replace with new components or repair to the original condition.
- G. Install track rigid, plumb, level and true, and securely anchored to the overhead construction.
- H. Verify that carrier units operate smoothly and easily over the full range of travel.

- - - E N D - - -

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

10-01-15

SECTION 10 26 00
WALL AND DOOR PROTECTION

PART 1 - GENERAL

1.1 DESCRIPTION

- A. This section specifies wall guards, handrail/wall guard combinations, corner guards and door/door frame protectors and high impact wall covering.

1.2 RELATED WORK

- A. Sustainable Design Requirements: Section 01 81 13, SUSTAINABLE CONSTRUCTION REQUIREMENTS.
- C. Armor plates and kick plates not specified in this section: Section 08 71 00, DOOR HARDWARE.
- D. Color and texture of aluminum and resilient material: SEE ROOM FINISH LEGEND as part of the drawings.

1.3 QUALITY ASSURANCE

- A. Manufacturer's Qualifications: Manufacturer with a minimum of three (3) years' experience in providing items of type specified.
 - 1. Obtain wall and door protection from single manufacturer.
- B. Installer's Qualifications: Installers are to have a minimum of three (3) years' experience in the installation of units required for this project.

1.4 SUBMITTALS

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Sustainable Design Submittals, as described below:
 - 1. Volatile organic compounds per volume as specified in PART 2 - PRODUCTS.
- C. Shop Drawings: Show design and installation details.
- D. Manufacturer's Literature and Data:
 - 1. Handrail/Wall Guard Combinations.
 - 2. Wall Guards.
 - 3. Corner Guards.
 - 4. Door/Door Frame Protectors.
 - 5. High Impact Wall covering.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

10 26 00-1

10/28/2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

10-01-15

- E. Test Report: Showing that resilient material complies with specified fire and safety code requirements.
- F. Manufacturer's qualifications.
- G. Installer's qualifications.
- H. Manufacturer's warranty.

1.5 DELIVERY AND STORAGE

- A. Deliver materials to the site in original sealed packages or containers marked with the name and brand, or trademark of the manufacturer.
- B. Protect from damage from handling and construction operations before, during and after installation.
- C. Store in a dry environment of approximately 21 degrees C (70 degrees F) for at least 48 hours prior to installation.

1.6 WARRANTY

- A. Construction Warranty: Comply with FAR clause 52.246-21 "Warranty of Construction".
- B. Manufacturer Warranty: Manufacturer shall warranty their wall and door protection for a minimum of five (5) years from date of installation and final acceptance by the Government. Submit manufacturer warranty.

1.7 APPLICABLE PUBLICATIONS

- A. Publications listed below form a part of this specification to extent referenced. Publications are referenced in text by basic designation only.
- B. ASTM International (ASTM):
 - A240/A240M-14.....Chromium and Chromium-Nickel Stainless Steel Plate, Sheet, and Strip for Pressure Vessels and For General Applications
 - B221-14.....Aluminum and Aluminum-Alloy Extruded Bars, Rods, Wire, Shapes, and Tubes
 - B221M-13.....Aluminum and Aluminum-Alloy Extruded Bars, Rods, Wire, Shapes, and Tubes (Metric)
 - D256-10.....Impact Resistance of Plastics
 - D635-10.....Rate of Burning and/or Extent and Time of Burning of Self-Supporting Plastics in a Horizontal Position

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

10-01-15

E84-14.....Surface Burning Characteristics of Building
Materials

C. Aluminum Association (AA):

DAF 45-09.....Designation System for Aluminum Finishes

D. American Architectural Manufacturers Association (AAMA):

611-14.....Anodized Architectural Aluminum

E. Code of Federal Regulation (CFR):

40 CFR 59.....Determination of Volatile Matter Content, Water
Content, Density Volume Solids, and Weight
Solids of Surface Coating

F. The National Association of Architectural Metal Manufacturers (NAAMM):

AMP 500-06.....Metal Finishes Manual

G. National Fire Protection Association (NFPA):

80-13.....Standard for Fire Doors and Windows

H. SAE International (SAE):

J 1545-05(R2014).....Instrumental Color Difference Measurement for
Exterior Finishes.

I. Underwriters Laboratories Inc. (UL):

Annual Issue.....Building Materials Directory

PART 2 - PRODUCTS

2.1 MATERIALS

A. Resilient Material:

1. Provide resilient material consisting of high impact resistant extruded acrylic vinyl, polyvinyl chloride, or injection molded thermal plastic conforming to the following:
 - a. Minimum impact resistance of 960.8 N-m/m (18 ft.-lbs./sq. inch) when tested in accordance with ASTM D256 (Izod impact, ft.-lbs. per inch notched).
 - b. Class 1 fire rating when tested in accordance with ASTM E84, having a maximum flame spread of 25 and a smoke developed rating of 450 or less.
 - c. Rated self-extinguishing when tested in accordance with ASTM D635.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

10 26 00-3

10/28/2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

10-01-15

- d. Provide material labeled and tested by Underwriters Laboratories or other approved independent testing laboratory.
- e. Provide resilient material for protection on fire rated doors and frames assemblies that is listed by the testing laboratory performing the tests.
- f. Provide resilient material installed on fire rated wood/steel door and frame assemblies that have been tested on similar type assemblies. Test results of material tested on any other combination of door and frame assembly are not acceptable.
- g. Provide integral color with colored components matched in accordance with SAE J 1545 to within plus or minus 1.0 on the CIE-LCH scales.

2.2 CORNER GUARDS

- A. Resilient, Shock-Absorbing Corner Guards: Surface mounted type.
 - 1. Snap-on corner guard formed from resilient material, minimum 1.98 mm (0.078-inch) thick, free floating on a continuous 1.52 mm (0.060-inch) thick extruded aluminum retainer. Provide appropriate mounting hardware, cushions and base plates as required.
 - 2. Profile: Minimum 50 mm (2 inch) long leg and 6 mm (1/4 inch) corner radius.
 - 3. Height: 1.22 m (4 feet).
 - 4. Retainer Clips: Provide manufacturer's standard impact-absorbing clips.
 - 5. Provide factory fabricated end closure caps at top and bottom of surface mounted corner guards.
 - 6. Flush mounted corner guards installed on any fire rated wall to be installed in a manner that maintains the fire rating of the wall. Provide fire test of proposed corner guard system to verify compliance.
 - a. Where insulating materials are an integral part of the corner guard system, provide insulating materials furnished by the manufacturer of the corner guard system.

2.3 WALL GUARDS AND HANDRAILS

- A. Resilient Wall Guards and Handrails:

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

10 26 00-4

10/28/2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

10-01-15

1. Handrail/Wall Guard Combination:
 - a. Snap-on covers of resilient material, minimum 2 mm (0.078-inch) thick.
 - b. Free-floating on a continuous, extruded aluminum retainer, minimum 1.82 mm (0.072-inch) thick.
 - c. Anchor to wall at maximum 762 mm (30 inches) on center.
2. Wall Guards:
 - a. Snap-on covers of resilient material, minimum 2.54 mm (0.100-inch) thick. Free-floated over a continuous extruded aluminum retainer, minimum 2.03 mm (0.080-inch) thick anchored to wall at maximum 610 mm (24 inches) on center.
3. Provide handrails and wall guards with prefabricated end closure caps, inside and outside corners, concealed splices, cushions, mounting hardware and other accessories as required. End caps and corners to be field adjustable to assure close alignment with handrails and wall guards. Screw or bolt closure caps to aluminum retainer in a concealed manner.

2.4 DOOR AND DOOR FRAME PROTECTION

- A. Fabricate door and door frame protection items from vinyl acrylic or polyvinyl chloride resilient material, minimum 1.52 mm (0.060-inch) thick, for doors and 0.89 mm (0.035-inch) thick for door frames.
- B. Provide adhesive as recommended by resilient material manufacturer.

2.5 HIGH IMPACT WALL COVERING

- A. Provide wall covering/panels consisting of high impact rigid acrylic vinyl or polyvinyl chloride resilient material.
- B. Panel sizes to be 0.61 x 1.21 m (2 x 4 ft.).
- C. Submit fire rating and extinguishing test results for resilient material.
- D. Submit statements attesting that the items comply with specified fire and safety code requirements.
- E. Rigid Vinyl Acrylic Wall Covering: Wall covering thickness to be 1.52 mm (0.060 inch).

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

10 26 00-5

10/28/2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

10-01-15

- F. Provide adhesive as recommended by the wall covering manufacturer.
Provide adhesive with VOC content of 250 g/L or less when calculated according to 40 CFR 59, (EPA Method 24).

2.6 FASTENERS AND ANCHORS

- A. Provide fasteners and anchors as required for each specific type of installation.
- B. Where type, size, spacing or method of fastening is not shown or specified in construction documents, submit shop drawings showing proposed installation details.

2.7 FINISH

- A. Resilient Material: Embossed textures and color in accordance with SAE J1545.

PART 3 - INSTALLATION

3.1 RESILIENT CORNER GUARDS

- A. Install corner guards on walls in accordance with manufacturer's instructions.

3.2 STAINLESS STEEL CORNER GUARDS (NOT USED)

3.3 RESILIENT WALL GUARDS, HANDRAILS, WALL GUARD HANDRAIL COMBINATION

- A. Secure guards to walls with brackets and fasteners in accordance with manufacturer's details and instructions.

3.4 ALUMINUM WALL GUARDS (NOT USED)

3.5 STAINLESS STEEL WALL GUARDS (NOT USED)

3.6 DOOR, DOOR FRAME PROTECTION AND HIGH IMPACT WALL COVERING

- A. Surfaces to receive protection to be clean, smooth, and free of obstructions.
- B. Install protectors after frames are in place but preceding installation of doors in accordance with approved shop drawings and manufacturer's specific instructions.
- C. Apply with adhesive in controlled environment according to manufacturer's recommendations.
- D. Protection installed on fire rated doors and frames to be installed according to NFPA 80 and installation procedures listed in UL Building Materials Directory; or equal listing by other approved independent testing laboratory establishing the procedures.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

10 26 00-6

10/28/2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

10-01-15

- - - E N D - - -

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

10 26 00-7

10/28/2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

02-01-16

SECTION 10 28 00
TOILET, BATH, AND LAUNDRY ACCESSORIES

PART 1 - GENERAL

1.1 DESCRIPTION

A. SUMMARY:

1. Section Includes: Toilet and bath accessories at toilets and other areas indicated on drawings.

1.2 RELATED REQUIREMENTS

- A. Ceramic Toilet and Bath Accessories: Section 09 30 13, CERAMIC/PORCELAIN TILING.
- B. Shower Curtain Break Away Pendant Chain Hooks: Section 10 21 23, CUBICLE CURTAIN TRACKS.

1.3 APPLICABLE PUBLICATIONS

- A. Comply with references to extent specified in this section.
- B. American Society of Mechanical Engineers (ASME):
 1. B18.6.4-98(R2005) - Thread Forming and Thread Cutting Tapping Screws and Metallic Drive Screws inch.
- C. American Welding Society (AWS):
 1. D10.4-86(2000) - Welding Austenitic Chromium-Nickle Stainless Steel Piping and Tubing.
- D. ASTM International (ASTM):
 1. A269/A269M-15 - Seamless and Welded Austenitic Stainless-Steel Tubing for General Service.
 2. A312/A312M-15b - Seamless, Welded, and Heavily Cold Worked Austenitic Stainless-Steel Pipes.
 3. A653/A653M-15 - Steel Sheet, Zinc-Coated (Galvanized) or Zinc-Iron Alloy-Coated (Galvannealed) by the Hot-Dip Process.
 4. A666-15 - Annealed or Cold-Worked Austenitic Stainless-Steel Sheet, Strip, Plate, and Flat Bar.
 5. A1011/A1011M-14 - Steel, Sheet, and Strip, Hot-Rolled, Carbon, Structural, High-Strength Low-Alloy, High-Strength Low-Alloy with Improved Formability, and Ultra-High Strength.
 6. B30-14a - Copper Alloys in Ingot Form.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

10 28 00-1

10/28/2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

02-01-16

7. B75/B75M-11 - Seamless Copper Tube.
8. B221-14 - Aluminum and Aluminum-Alloy Extruded Bars, Rods, Wire, Profiles, and Tubes.
9. B221M-13 - Aluminum and Aluminum-Alloy Extruded Bars, Rods, Wire, Profiles, and Tubes (Metric).
10. B456-11e1 - Electrodeposited Coatings of Copper Plus Nickel Plus Chromium and Nickel Plus Chromium.
11. B824-14 - General Requirements for Copper Alloy Castings.
12. C1036-11e1 - Flat Glass.
13. C1048-12e1 - Heat-Strengthened and Fully Tempered Flat Glass.
14. D635-14 - Rate of Burning and/or Extent and Time of Burning of Plastics in a Horizontal Position.
15. F446-85(2009) - Grab Bars and Accessories Installed in the Bathing Area.

E. Federal Specifications (Fed. Spec.):

1. A-A-3002 - Mirror, Glass.
2. FF-S-107C(2) - Screws, Tapping and Drive.
3. WW-P-541/8B(1) - Plumbing Fixtures (Accessories, Land Use).

F. National Architectural Metal Manufacturers (NAAMM):

1. AMP 500-06 - Metal Finishes Manual.

1.4 SUBMITTALS

A. Submittal Procedures: Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.

B. Submittal Drawings:

1. Show size, configuration, and fabrication, anchorage, and installation details.
2. Show mounting locations and heights.

C. Manufacturer's Literature and Data:

1. Description of each product.
2. Installation instructions.

D. Samples:

1. Full sized, complete assembly of each product specified.
2. Approved samples may be incorporated into project.

E. Certificates: Certify each product complies with specifications.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

10 28 00-2

10/28/2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

02-01-16

1. Soap dispensers: Certify soap dispensers are fabricated of material that will not be affected by liquid soap, aseptic detergents, and hexachlorophene solutions.

F. Qualifications: Substantiate qualifications comply with specifications.

1. Manufacturer with project experience list.

G. Operation and Maintenance Data:

1. Care instructions for each exposed finish product.

1.5 QUALITY ASSURANCE

A. Manufacturer Qualifications:

1. Regularly manufactures specified products.

1.6 DELIVERY

A. Deliver products in manufacturer's original sealed packaging.

B. Mark packaging, legibly. Indicate manufacturer's name or brand, type, color, production run number, and manufacture date.

C. Before installation, return or dispose of products within distorted, damaged, or opened packaging.

1.7 STORAGE AND HANDLING

A. Store products indoors in dry, weathertight facility.

B. Protect products from damage during handling and construction operations.

1.8 WARRANTY

A. Construction Warranty: FAR clause 52.246-21, "Warranty of Construction."

PART 2 - PRODUCTS

2.1 MATERIALS

A. Aluminum: ASTM B221M (ASTM B221), Alloy 6063-T5 and Alloy 6463-T5.

B. Stainless Steel:

1. Plate Or Sheet: ASTM A666, Type 304, 0.8 mm (0.031 inch) thick unless otherwise specified.

2. Tubing: ASTM A269/A269M, Grade TP 304, seamless or welded.

3. Pipe: ASTM A312/A312M; Grade TP 304.

C. Steel Sheet: ASTM A653/A653M, zinc-coated (galvanized) coating designation G90.

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

02-01-16

D. Chrome Plating (Service Condition Number SC 2): ASTM B456.

E. Brass Castings: ASTM B30.

F. Copper:

1. Tubing: ASTM B75/B75M.
2. Castings: ASTM B824.

G. Glass:

1. ASTM C1036, Type 1, Class 1, Quality q2, for mirrors, and for mirror doors in medicine cabinets.
2. ASTM C1036, Type 1 Class 1 Quality q3, for shelves in medicine cabinets.
3. ASTM C1048, Kind FT, Condition A, Type 1, Class 1 for glass and mirrors in Mental Health and Behavior Patient Care Units, and Security Examination Rooms.

2.2 PRODUCTS - GENERAL

A. Provide each product from one manufacturer.

2.3 PAPER TOWEL DISPENSERS (PROVIDED BY STATION, INSTALLED BY CONTRACTOR)

2.4 COMBINATION PAPER TOWEL DISPENSER AND DISPOSAL UNIT (NOT USED)

2.5 WASTE RECEPTACLES (PROVIDED BY STATION, INSTALLED BY CONTRACTOR)

2.6 TOILET TISSUE DISPENSERS

- A. Double roll surface mounted type.
- B. Mount on continuous backplate.
- C. Removable spindle ABS plastic or chrome plated plastic.
- D. Wood rollers are not acceptable.

2.7 GRAB BARS

- A. Fed. Spec. WW-P-541/8B, Type IV, bars, surface mounted, Class 2, grab bars and complying with ASTM F446.
- B. Fabricate from stainless steel or nylon coated steel, use one type throughout project:
 1. Stainless steel: Grab bars, flanges, mounting plates, supports, screws, bolts, and exposed nuts and washers.
 2. Nylon Coated Steel: Grab bars and flanges complete with mounting plates and fasteners.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

10 28 00-4

10/28/2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

02-01-16

C. Mounting:

1. Floor Mounted Grab Bars: Exposed type.
2. Swing Up Grab Bars: Exposed type.
3. Metal Toilet, Shower Partitions Mounted Grab Bars: Exposed type.
4. Other Types and Locations: Concealed type.

D. Bars:

1. Fabricate to 38 mm (1-1/2 inch) outside diameter.
 - a. Stainless steel, minimum 1.2 mm (0.05 inch) thick.
 - b. Nylon coated bars, minimum 1.5 mm (0.06 inch) thick.
2. Fabricate in one continuous piece with ends turned toward walls.
 - a. Swing up grab bars and grab bars continuous around three sides of showers may be fabricated in two sections, with concealed slip joint between.
3. Continuously weld intermediate support to grab bar.
4. Swing Up Bars: Manually operated; designed to prevent bar from falling when in raised position.

E. Flange for Concealed Mounting:

1. Minimum 2.65 mm (0.1 inch) thick, maximum 79 mm (3-1/8 inch) diameter by 13 mm (1/2 inch) deep, with minimum three set screws for securing flange to back plate.
2. Insert grab bar through center of flange and continuously weld perimeter of grab bar flush to back side of flange.
3. In lieu of providing flange for concealed mounting, and back plate as specified, grab bar may be welded to back plate covered with flange.

F. Flange for Exposed Mounting:

1. Minimum 5 mm (3/16 inch) thick, maximum 79 mm (3-1/8 inch) diameter.
2. Insert grab bar through flange and continuously weld perimeter of grab bar flush to backside of flange.
3. Where mounted on floor, provide four equally spaced holes, sized to accommodate 5 mm (3/8 inch) diameter bolts, maximum 5 mm (3/8 inch) from edge of flange.

G. Back Plates:

1. Minimum 2.65 mm (0.1046 inch) thick metal.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

10 28 00-5

10/28/2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

02-01-16

2. Fabricate in one piece, maximum 6 mm (1/4 inch) deep, with diameter sized to fit flange. Provide slotted holes to accommodate anchor bolts.
3. Provide spreaders, through bolt fasteners, and cap nuts, where grab bars are mounted on partitions.

2.8 SHOWER CURTAIN RODS (NOT USED)

2.9 CLOTHES HOOKS, ROBE OR COAT

- A. Fabricate hook units from chromium plated brass with satin finish, or stainless steel, using 6 mm (1/4 inch) minimum thick stock, with edges and corners rounded smooth to thickness of metal, or 3 mm (1/8 inch) minimum radius.
- B. Fabricate each unit as a double hook on a single shaft, integral with or permanently fastened to wall flange, provided with concealed fastenings.

2.10 TOWEL BARS (NOT USED)

2.11 METAL FRAMED MIRRORS

- A. Fed. Spec. A-A-3002 metal frame; chromium finished steel, anodized aluminum, or stainless steel.
- B. Mirror Glass:
 1. Minimum 6 mm (1/4 inch) thick.
 2. Set mirror in a protective vinyl glazing tape.
- C. Frames:
 1. Channel or angle shaped section with face of frame minimum 9 mm (3/8 inch) wide. Fabricate with square corners.
 2. Metal Thickness 0.9 mm (0.035 inch).
 3. Filler:
 - a. Where mirrors are mounted on walls having ceramic tile wainscots not flush with wall above, provide fillers contoured to conceal void between back of mirror and wall surface.
 - b. Fabricate fillers from same material and finish as mirror frame.
 4. Attached Shelf for Mirrors:
 - a. Fabricate shelf of same material and finish as mirror frame.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

10 28 00-6

10/28/2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

02-01-16

- b. Make shelf maximum 150 mm (6 inches) in depth and extend full width of mirror.
- c. Close ends and front edge of shelf to same thickness as mirror frame width.
- d. Form shelf for aluminum framed mirror as integral part of bottom frame member.
- e. Form stainless steel shelf with concealed brackets to attach to mirror frame.

D. Back Plate:

- 1. Fabricate backplate for concealed wall hanging from zinc-coated, or cadmium plated 0.9 mm (0.036 inch) thick sheet steel, die cut to fit face of mirror frame.
- 2. Provide set screw type theft resistant concealed fastening system for mounting mirrors.

E. Mounting Bracket:

- 1. Designed to support mirror tight to wall.
- 2. Designed to retain mirror with concealed set screw fastenings.

2.12 MEDICINE CABINETS (NOT USED)

2.13 FOOT OPERATED SOAP DISPENSER (NOT USED)

2.14 SOAP DISHES (NOT USED)

2.15 PAPER CUP DISPENSER (NOT USED)

2.16 MOP RACKS

A. Minimum 1016 mm (40 inches) long with five holders.

B. Clamps:

- 1. Minimum of 1.3 mm (0.05 inch) thick stainless steel bracket retaining channel with hard rubber serrated cam; pivot mounted to channel.
- 2. Clamps to hold handles from 13 mm (1/2 inch) minimum to 32 mm (1-1/4 inch) maximum diameter.

C. Support:

- 1. Minimum 1 mm (0.04 inch) thick stainless steel hat shape channel to hold clamps away from wall as indicated.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

10 28 00-7

10/28/2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

02-01-16

2. Drill wall flange for 3 mm (1/8 inch) fasteners above and below clamp locations.

D. Secure clamps to support with oval head machine screws or rivets into continuous reinforcing back of clamps.

2.17 STAINLESS STEEL SHELVES (TYPE 44)

A. Shelves:

1. Fabricate shelves of 1.2 mm (0.0478 inch) thick sheet to size and design indicated on Drawings.

2. Fabricate shelves of hollow metal type construction, forming depressions indicated, with closed fronts, backs, ends and bottoms. Reinforce shelves with 1.2 mm (0.05 inch) thick sheet steel hat channel stiffeners, full depth, welded to underside of top at bracket locations.

3. Miter cuts, where made at corners of shelves, continuously welding.

B. Form brackets of 3 mm (1/8 inch) thick steel as shown. Drill brackets for 6 mm (1/4 inch) anchor bolts.

C. Weld or Screw brackets to shelves.

2.18 STAINLESS STEEL SHELVES (TYPES 45, 45C)

A. Fabricate shelves and brackets to design shown of 1.2 mm (0.05 inch) thick stainless steel.

B. Round and finish smooth projecting corners of shelves and edge corners of brackets. Drill brackets for 6 mm (1/4 inch) anchor bolts.

C. Screw or weld brackets to shelves.

2.19 STAINLESS STEEL SHELVES AT WHEELCHAIR LAVATORY (NOT USED)

2.20 FABRICATION - GENERAL

A. Welding, AWS D10.4.

B. Grind, dress, and finish welded joints to match finish of adjacent surface.

C. Form exposed surfaces from one sheet of stock, free of joints.

D. Provide steel anchors and components required for secure installation.

E. Form flat surfaces without distortion. Keep exposed surfaces free from scratches and dents. Reinforce doors to prevent warp or twist.

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

02-01-16

- F. Isolate aluminum from dissimilar metals and from contact with building materials as required to prevent electrolysis and corrosion.
- G. Hot-dip galvanized steel or stainless steel, anchors and fastening devices.
- H. Shop assemblies accessories and package with components, anchors, fittings, fasteners and keys.
- I. Key items alike.
- J. Provide templates and rough-in measurements.
- K. Round and deburr edges of sheets to remove sharp edges.

2.21 FINISH

A. Steel Paint Finish:

- 1. Powder-Coat Finish: Manufacturer's standard two-coat finish system consisting of the following:
 - a. One coat primer.
 - b. One coat thermosetting topcoat.
 - c. Dry-film Thickness: 0.05 mm (2 mils) minimum.
 - d. Color: Refer to Section 09 06 00, SCHEDULE FOR FINISHES.

B. Nylon Coated Steel: Nylon coating powder formulated for fluidized bonding process to steel to provide hard smooth, medium gloss finish, minimum 0.3 mm (0.012 inch) thick, rated as self-extinguishing when tested according to ASTM D635.

C. Stainless Steel: NAAMM AMP 500; No. 4 polished finish.

D. Aluminum Anodized Finish: NAAMM AMP 500.

- 1. Clear Anodized Finish: AA-C22A41; Class I Architectural, 0.018 mm (0.7 mil) thick.
- 2. Color Anodized Finish: AA-C22A42 or AA-C22A44; Class I Architectural, 0.018 mm (0.7 mil) thick.

E. Chromium Plating: ASTM B456, satin or bright as specified, Service Condition No. SC2.

2.22 ACCESSORIES

A. Fasteners:

- 1. Exposed Fasteners: Stainless steel or chromium plated brass, finish to match adjacent surface.

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

02-01-16

2. Concealed Fasteners:
 - a. Shower, Bathtubs, and High Moisture Areas: Stainless steel.
 - b. Other Locations: Steel, hot-dipped galvanized.
 3. Toggle Bolts: For use in hollow masonry or frame construction.
 4. Sex bolts: For through bolting on thin panels.
 5. Expansion Shields: Lead or plastic for solid masonry and concrete substrate as recommended by accessory manufacturer to suit application.
 6. Screws:
 - a. ASME B18.6.4.
 - b. Fed. Spec. FF-S-107, Stainless steel Type A.
- B. Adhesive: As recommended by manufacturer to suit application.

PART 3 - EXECUTION

3.1 PREPARATION

- A. Examine and verify substrate suitability for product installation.
 1. Verify blocking to support accessories is installed and located correctly.
- B. Verify location of accessories with Contracting Officer's Representative.

3.2 INSTALLATION

- A. Install products according to manufacturer's instructions and approved submittal drawings.
 1. When manufacturer's instructions deviate from specifications, submit proposed resolution for Contracting Officer's Representative consideration.
- B. Install grab bars according to ASTM F446.
- C. Set work accurately, in alignment and where indicated, parallel or perpendicular as required to line and plane of surface. Install accessories plumb, level, free of rack and twist.
- D. Toggle bolt to steel anchorage plates in frame partitions and hollow masonry. Expansion bolt to concrete or solid masonry.
- E. Install accessories to function as designed. Perform maintenance service without interference with performance of other devices.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

10 28 00-10

10/28/2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

02-01-16

- F. Position and install dispensers, and other devices in countertops, clear of drawers, permitting ample clearance below countertop between devices, and ready access for maintenance.
- G. Align mirrors, dispensers and other accessories even and level, when installed in battery.
- H. Install accessories to prevent striking by other moving, items or interference with accessibility.

3.3 CLEANING

- A. After installation, clean toilet accessories according to manufacturer's instructions.

3.4 PROTECTION

- A. Protect accessories from damage until project completion.

3.5 SCHEDULE OF ACCESSORIES

- A. Refer to the Equipment Schedule as part of the construction drawings.

- - E N D - -

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

08-01-18

SECTION 10 44 13
FIRE EXTINGUISHER CABINETS

PART 1 - GENERAL

1.1 DESCRIPTION

This section covers recessed fire extinguisher cabinets.

1.2 RELATED WORK

- A. Acrylic glazing: Section 08 80 00, GLAZING.
- B. Field Painting: Section 09 91 00, PAINTING.

1.3 SUBMITTALS

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Manufacturer's Literature and Data: Fire extinguisher cabinet including installation instruction and rough opening required.

1.4 APPLICATION PUBLICATIONS

- A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only.
- B. American Society of Testing and Materials (ASTM):
D4802-15.....Poly (Methyl Methacrylate) Acrylic Plastic
Sheet

PART 2 - PRODUCTS

2.1 FIRE EXTINGUISHER CABINET

- A. Recessed type with flat trim to match Station Standard or as approved by the Contracting Officer's Representative (COR).
- B. Where necessary to fit within existing wall construction, semi-recessed type with flat trim is acceptable. Match Station Standard or as approved by the COR.

2.2 FABRICATION

- A. Form body of cabinet from 0.9 mm (0.0359 inch) thick sheet steel.
- B. Fabricate door and trim from 1.2 mm (0.0478 inch) thick sheet steel with all face joints fully welded and ground smooth.
 - 1. Glaze doors with 6 mm (1/4 inch) thick ASTM D4802, clear acrylic sheet, Category B-1, Finish 1.
 - 2. Design doors to open 180 degrees.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

08-01-18

3. Provide continuous hinge, pull handle, and adjustable roller catch.

2.3 FINISH

- A. Finish interior of cabinet body with baked-on semigloss white enamel.
- B. Finish door, frame with manufacturer's standard baked-on prime coat suitable for field painting.

PART 3 - EXECUTION

- A. Install fire extinguisher cabinets in prepared openings and secure in accordance with manufacturer's instructions.
- B. Install cabinet so that the extinguisher height within meets the requirements of NFPA 10

- - - E N D - - -

DIVISION 11

EQUIPMENT

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

01-01-17

SECTION 11 73 00
CEILING MOUNTED PATIENT LIFT SYSTEM

PART 1 - GENERAL

1.1 DESCRIPTION

Ceiling Mounted Patient Lift Systems for the transfer of physically challenged patients are specified in this section.

1.2 RELATED WORK

- A. Section 01 00 00, GENERAL REQUIREMENTS: Requirements for pre-test of equipment.
- B. Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS: General Electrical Requirements and items, which are common to sections of Division 26.

1.3 QUALITY ASSURANCE

- A. Certification for compliance is required for Ceiling Mounted Patient Lift Systems. Certifications shall be provided by the manufacturer who will conduct testing to ensure that the ceiling lift and charging system are safe and in compliance with ISO 10535 & UL 60601-1.
- B. Inspection of equipment after installation is required prior to use for patient movement. Inspection shall be in accordance with manufacturer's installation checklist and the facilities installation checklist (Patient Safety Alert AL14-07).
- C. Certification of compliance with VA requirements shall be provided by an independent third party, Inspector of Record (IOR), who will observe installation and manufacturer's testing to ensure that the ceiling structure, ceiling lift, and charging system is safe and in compliance with shop drawings, structural calculations, specifications, ISO 10535 requirements, and code requirements. IOR shall be a registered structural engineer in the state of installation.

1.4 SUBMITTALS

- A. Submit in accordance with specification Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
 - 1. Shop drawings shall show structural supports to the underside of structure. Structural calculations for the support of the track and its attachment to ceiling structure shall be submitted. Shop

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

01-01-17

drawings used in the quoting phase shall be PDFs, and either 2D CAD files or 3D BIM files showing structural support to underside of structure. Shop drawings shall also provide general room layout with bed position and all obstructions to ceiling lift.

2. Once the purchase order is accepted by the vendor, a set of stamped drawings shall be provided by the vendor. Shop drawings and structural calculations shall be signed and stamped by a registered structural engineer and shall meet all code requirements in the jurisdiction having authority. Structural engineer shall ensure ceiling minimum structure capacity shall support the loads specified in the shop and installation drawings and be in compliance with local structural and seismic codes.
 3. Shop drawings shall show obstructions such as curtains, lights and sprinklers, and coordinate their relocation.
 4. Manufacturer shall provide BIM (Building Information Model) for clash detection on the request of the Contracting Officer's Representative or General Contractor.
- B. Certificates of Compliance from Manufacturer
- C. Manufacturer's Literature and Data:
1. Lifting Capacity
 2. Lifting Speed
 3. Vertical Axis Motor
 4. Emergency Brake
 5. Emergency Lowering Device
 6. Emergency Stopping Device
 7. Electronic Soft-Start and Soft-Stop Motor Control
 8. Current Limiter for Circuit Protection
 9. Strap Length
 10. All equipment anchors and supports. Submittals shall include weights, dimensions, center of gravity of the structural support, standard connections, manufacturer's recommendations and behavior problems (e.g., vibration, thermal expansion,) associated with equipment or piping so that the proposed installation can be properly reviewed.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

01-01-17

- D. Individual Room layouts showing location of lift system installation shall be approved before proceeding with installation of lifts.
- E. Manufacturer's Checklist for after installation inspection.

1.5 APPLICABLE PUBLICATIONS

- A. The publications listed below form a part of this specification to the extent referenced. The publications are listed in the text by the basic designation only.
- B. International Organization for Standardization (ISO):
10535-06.....Hoist for the Transfer of Disabled Persons-
Requirements and Test Methods
- C. Underwriters Laboratories (UL):
60601-1(2003).....Medical Electrical Equipment: General
Requirements for Safety
94-2013.....UL Standards for Safety Test for Flammability
of Plastic Materials for Parts in Devices and
Appliances-Fifth Edition
- D. International Electromagnetic Commission (IEC):
60601-1-2(2015).....Medical electrical equipment - Part 1-2:
General requirements for basic safety and
essential performance - Collateral Standard:
Electromagnetic disturbances - Requirements and
tests.
- E. VA Patient Safety Alert AL14-07

PART 2 - PRODUCTS

2.1 CEILING TRACK SYSTEM

- A. Basis of Design Manufacturer: Guildmann, Inc. or VA approved equal.
- B. The Ceiling Track shall be made from high strength extruded aluminum or VA approved equal. Provide anchor supports at ceiling substrate.
- C. Installed rail shall be security tested for 1.5 times greater than the motor's weight capacity and maximum allowable deflection of a horizontal rail is no more than 1mm (1/16th inch) per 200mm (7.87 inch) of track length. (As per ISO 10535 standards.)

2.2 LIFT UNIT

- A. Basis of Design Manufacturer: Guildmann, Inc. or VA approved equal.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

01-01-17

- B. The Lift Unit shall be constructed of a steel frame system driven by a gear reduced high torque motor or VA approved equal.
- C. The Lift system shall have the following features.
 - 1. Lifting capacity: Minimum 750-1000 lbs (340.194- 498.952 kg) for bariatric lifts
 - 2. Electronic soft-start and soft-stop motor control
 - 3. Emergency lowering device
 - 4. Emergency stopping device
 - 5. Current limiter for circuit protection in case of overload.
 - 6. Safety device that stops the motor to lift when batteries are low.
 - 7. Horizontal axis motor:
 - 8. Emergency brake (in case of mechanical failure)
 - 9. Strap length:
 - 10. Cab: VO plastic-fire retardant, UL 94

2.3 MOTORS

- A. Vertical Movement-DC Motor

2.4 BATTERIES

- A. The life cycle (number of charging cycles) for batteries shall be in compliance with IEC 6100-1-2.
- B. Provide rechargeable batteries with up to 35 transfers with a load of 200lbs (74kg) (for repositioning) a minimum of 17 transfers with its maximum load.

2.5 CHARGER

- A. Charger

2.6 STRAPS AND SLING

- A. The straps shall meet ISO 10535 guidelines. The straps shall ensure the patient's safety by preventing the patient from falling out of the sling.
- B. The sling shall meet ISO 10535 guidelines. The sling shall cradle the body of the patient. Bariatric slings shall be rated to a minimum of 750 lbs.

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

01-01-17

PART 3 - EXECUTION

3.1 INSTALLATION

- A. Install ceiling mounted patient lift system as per manufacturer's instruction and under the supervision of manufacturer's qualified representative and as shown on drawings.
- B. If the distance in between the suspended ceiling and anchors is more than 12" consult with manufacturer to determine if lateral braces will be required.

3.2 INSTRUCTION AND PERSONNEL TRAINING

Training shall be provided for the required personnel to educate them on proper operation and maintenance for the lift system equipment.

3.3 TEST

Conduct performance test, in the presence of the Resident Engineer (RE) and/or Inspector of Record (IOR), and a manufacturer's field representative, to show that the patient lift system equipment and control devices operate properly and in accordance with design, specification, and code requirements.

3.4 INSPECTION

- 1. Inspection of installed ceiling mounted patient lift systems shall be conducted in accordance with the manufacturer's installation checklist and the VA installation checklist (Patient Safety Alert AL14-07) prior to use for patient movement.
- 2. Periodic Inspection shall be provided by the manufacturer on a yearly basis in compliance with ISO 10535.

- - - E N D - - -

DIVISION 12

FURNISHINGS

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

09-01-15

SECTION 12 32 00
MANUFACTURED WOOD CASEWORK

PART 1 - GENERAL

1.1 DESCRIPTION:

- A. This section specifies plastic laminate casework as detailed on the construction documents, including related components and accessories required to form integral units. Wood casework items shown on the construction documents, but not specified below are to be included as part of the work under this section, and applicable portions of the specification are to apply to these items.

1.2 RELATED WORK:

- A. Interior Custom Millwork: Section 06 20 00, FINISH CARPENTRY.
- B. Sealants: Section 07 92 00, JOINT SEALANTS.
- C. Color of Casework Finish: SEE ROOM FINISH LEGEND as a part of the drawings.
- D. Resilient Base: Section 09 65 13, RESILIENT BASE AND ACCESSORIES.
- E. Backing Plates for Wall Mounted Casework: Section 09 22 16, NON-STRUCTURAL METAL FRAMING.
- F. Countertop Construction and Materials and Items Installed in Countertops: Section 12 36 61.16, SOLID SURFACE COUNTERTOPS.
- G. Plumbing Requirements Related to Casework: Division 22, PLUMBING.
- H. Electrical Lighting and Power Requirements Related to Casework: Division 26, ELECTRICAL.

1.3 SUBMITTALS:

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Manufacturer's Literature and Data:
 - 1. Locks for doors and drawers.
 - 2. Adhesive cements.
 - 3. Casework hardware.
- C. Samples:
 - 1. Wood Face Veneer or Hardwood Plywood.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

12 32 00-1

10/28/2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

09-01-15

2. Plastic laminate.

D. Shop Drawings (1/2 full size):

1. Each casework type, showing details of construction, including materials, hardware and accessories.
2. Fastenings and method of installation.

E. Certification:

1. Manufacturer's qualifications specified.
2. Installer's qualifications specified.

1.4 QUALITY ASSURANCE:

A. Approval by COR is required of manufacturer and installer based upon certification of qualifications specified.

B. Manufacturer's qualifications:

1. Manufacturer is regularly engaged in design and manufacture of modular plastic laminate casework, casework components and accessories of scope and type similar to indicated requirements for a period of not less than five (5) years.
2. Manufacturer has successfully completed at least three (3) projects of scope and type similar to indicated requirements.
3. Submit manufacturer's qualifications and list of projects, including owner contact information.

C. Installer Qualifications:

1. Installer has completed at least three (3) projects in last five (5) years in which these products were installed.
2. Submit installer qualifications.

1.5 WARRANTY:

A. Construction Warranty: Comply with FAR clause 52.246-21 "Warranty of Construction".

B. Manufacturer Warranty: Manufacturer shall warranty their wood casework for a minimum of five (5) years from date of installation and final acceptance by the Government. Submit manufacturer warranty.

1.6 APPLICABLE PUBLICATIONS:

A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by basic designation only.

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

09-01-15

B. ASTM International (ASTM):

A240/A240M-14.....Chromium and Chromium-Nickel Stainless Steel
Plate, Sheet, and Strip for Pressure Vessels
and for General Applications

A1008/A1008M-13.....Steel, Sheet, Cold-Rolled, Carbon, Structural,
High Strength Low Alloy

C1036-11E1 (R2012).....Flat Glass

C. Builders Hardware Manufacturers Association (BHMA):

A156.1-13.....Butts and Hinges

A156.9-10.....Cabinet Hardware

A156.5-14.....Auxiliary Locks and Associated Products

A156.11-14.....Cabinet Locks

D. Composite Panel Association (CPA):

A208.1-09.....Particleboard

A208.2-09.....Medium Density Fiberboard (MDF) for Interior
Applications

E. U.S. Department of Commerce Product Standards (Prod. Std):

PS 1-09.....Construction and Industrial Plywood

F. Hardwood, Plywood and Veneer Association (HPVA):

HP-1-09.....Hardwood and Decorative Plywood

G. Architectural Woodwork Institute (AWI):

Architectural Woodwork Standards, Edition 2 Certification Program -
2014

H. American Society of Mechanical Engineers (ASME):

A112.18.1-12.....Plumbing Fixture Fittings

I. National Electrical Manufacturers Association (NEMA):

LD 3-05.....High Pressure Decorative Laminates

J. Underwriters Laboratories Inc. (UL):

437-08 (R2013).....Key Locks

K. Scientific Equipment and Furniture Association (SEFA):

2.3-10.....Installation of Scientific Laboratory Furniture
and Equipment

PART 2 - PRODUCTS

2.1 PLYWOOD:

A. HPVA HP-1, Premium Grade plain sliced Red Oak.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

09-01-15

2.2 PLASTIC LAMINATE:

- A. NEMA LD 3.
- B. Exposed decorative surfaces, both sides of cabinet doors, and for items having plastic laminate finish. General purpose Type HGL.
- C. Cabinet Interiors Including Shelving: Both of following options to comply with NEMA LD 3 as a minimum.
 - 1. Plastic laminate clad plywood or particleboard, MDF (excluding shelves).
- D. Backing sheet on bottom of plastic laminate covered wood tops. Backer Type BKL.
- E. Post Forming Fabrication, Decorative Surface: Post forming Type HGP.

2.3 PLYWOOD, SOFTWOOD:

- A. Prod. Std. PS1, five (5) ply construction from 13 mm to 28 mm (1/2 inch to 1-1/8 inch) thickness, and seven (7) ply for 31 mm (1 1/4 inch) thickness.

2.4 PARTICLEBOARD:

- A. CPA A208.1, Type 1, Grade M or medium density.

2.5 MEDIUM DENSITY FIBERBOARD (MDF):

- A. Fully waterproof bond conforming to CPA A208.1 and CPA A208.2.

2.6 GLASS:

- A. ASTM C1048 Kind FT Type I, Class 1, Quality q3.
- B. For Doors: 6 mm (1/4 inch) thick; except where laminated glass is shown on construction documents.
- C. For Shelves: 6 mm (1/4 inch) thick.
- D. Laminated Glass: Fabricate of two (2) sheets of 3 mm (1/8 inch) thick clear ASTM C1172 Kind LT glass, laminated together with a 1.5 mm (0.060 inch) thick vinyl interlayer, to a total overall thickness of 8 mm (5/16 inch).

2.7 HARDWARE:

- A. Cabinet Locks:
 - 1. Provide where locks are indicated on construction documents.
 - 2. Locked pair of hinged doors over 915 mm (36 inches) high:
 - a. ANSI/BHMA A156.5, key one side.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

12 32 00-4

10/28/2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

09-01-15

- b. On active leaf use three (3) point locking device, consisting of two (2) steel rods and lever-controlled cam at lock, to operate by lever having lock cylinder housed therein.
- c. On inactive leaf provide dummy lever of same design.
- d. Provide keeper holes for locking device rods and cam.
- 3. Door and Drawer: ANSI/BHMA A156.11 cam locks. Provide one (1) type for each condition as follows:
 - a. Drawer and Hinged Door up to 915 mm (36 inches) high: E07261.
 - b. Drawer and Hinged Door: Pin-tumbler, cylinder type lock with not less than four (4) pins or a UL 437 rated wafer lock with brass working parts and case.
 - c. Sliding Door: E07161.
- 4. Key locks differently for each type of casework and master key for each service, such as Nursing Units, Administrative.
 - a. Key drug locker inner door different from outer door.
 - b. Furnish two (2) keys per lock.
 - c. Furnish six (6) master keys per service or Nursing Unit.
- 5. Marking of Locks and Keys:
 - a. Name of manufacturer, or trademark which can readily be identified legibly marked on each lock and key change number marked on exposed face of lock.
 - b. Key change numbers stamped on keys.
 - c. Key change numbers to provide sufficient information for manufacturer to replace key.
- B. Hinged Doors:
 - 1. Provide doors 915 mm (36 inches) and more in height with three (3) hinges and doors less than 915 mm (36 inches) in height is to have two (2) hinges. Each door is to close against two (2) rubber bumpers.
 - 2. Hinges: Fabricate hinges with minimum 1.8 mm (0.072 inch) thick chromium plated steel leaves, and with minimum 3.5 mm (0.139 inch) diameter stainless steel pin. Hinges to be five (5) knuckle design with 63 mm (2-1/2 inch) high leaves and hospital type tips.
 - 3. Concealed Hinges: BHMA A156.9, Type B01602, 100 degrees of opening, self-closing.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

12 32 00-5

10/28/2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

09-01-15

4. Fasteners: Provide full thread wood screws to fasten hinge leaves to door and cabinet frame. Finish screws to match finish of hinges.

C. Door Catches:

1. Friction or Magnetic type, fabricated with metal housing.
2. Provide one (1) catch for cabinet doors 1220 mm (48 inches) high and under, and two (2) for doors over 1220 mm (48 inches) high.

D. Drawer and Door Pulls:

1. Doors and drawers to have flush pulls, fabricated of either chromium-plated brass, chromium plated steel, stainless steel, or anodized aluminum. Drawer and door pulls to be of a design that can be operated with a force of 22.2 N (5 pounds) or less, with one (1) hand and not require tight grasping, pinching or twisting of the wrist.

E. Drawer Slides:

1. Full extension steel slides with nylon ball-bearing rollers.
2. Slides to have positive stop.
3. Equip drawers with rubber bumpers.

F. Sliding Doors:

1. Each door to be supported by two ball bearing bronze or nylon rollers, or sheaves riding on a stainless steel track at top or bottom, and to be restrained by a nylon or stainless steel guide at the opposite end.
2. Plastic guides are not acceptable.
3. Each door to have rubber silencers set near top and bottom of each jamb.

G. Shelf Standards (Except For Fixed Shelves):

1. Bright zinc-plated steel for recessed mounting with screws, 16 mm (5/8 inch) wide by 5 mm (3/16 inch) high providing 13 mm (1/2 inch) adjustment, complete with shelf supports.

H. Castors:

1. Locking type rated for 79 kg (175 lbs.) each.

2.8 MANUFACTURED PRODUCTS:

- A. When two (2) or more units are required, use products of one (1) manufacturer.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

12 32 00-6

10/28/2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

09-01-15

- B. Manufacturer of casework assemblies is to assume complete responsibility for the final assembled unit.
- C. Provide products of a single manufacturer for parts which are alike.

2.9 FABRICATION:

- A. Casework to be of the exposed face frame design and, except as otherwise specified, be of Premium Grade construction and of component thickness in conformance with AWI Quality Standards.
- B. Fabricate casework of plastic laminated covered plywood or particleboard as follows:
 - 1. Where shown, doors, drawers, shelves, all semi-concealed surfaces to be plastic laminated.
 - 2. Glazed doors to have 6 mm (1/4 inch) thick glass, set in glazing compound.
- C. Support Members for Tops of Tables and Countertops:
 - 1. Construct as detailed on construction documents.
 - 2. Provide miscellaneous steel members and anchor as shown on construction drawings.
- D. Legs For Counters:
 - 1. Fabricate legs for counters of 1.6 mm (0.0635 inch) thick, 38 mm (1-1/2 inch) square tubular steel.
 - 2. Secure legs to counter tops and provide legs at bottom with shoes not less than 25 mm (1 inch) in height.
 - 3. Fabricate shoes of stainless steel, aluminum or chromium plated brass.

2.10 PRODUCTS OF OTHER COMPONENTS DIRECTLY RELATED TO CASEWORK:

- A. Refer to Section 07 92 00, JOINT SEALANTS for work related to sealants used in conjunction with joints of countertops, casework systems, and adjacent materials.
- B. Refer to Section 09 65 13, RESILIENT BASE AND ACCESSORIES for work related to rubber base adhered to casework systems.
- C. Refer to Section 09 22 16, NON-STRUCTURAL METAL FRAMING for backing plates used in conjunction with wall assemblies for the attachment of casework systems.
- D. Refer to Division 22, PLUMBING for the following work related to casework systems:

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

12 32 00-7

10/28/2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

09-01-15

1. Sinks, faucets and other plumbing service fixtures, venting, and piping systems.
2. Compressed air, gas, vacuum and piping systems.
- E. Refer to Division 26, ELECTRICAL for the following work related to casework systems:
 1. Connections and wiring devices.
 2. Connections and lighting fixtures except when factory installed by the manufacturer.

PART 3 - EXECUTION

3.1 COORDINATION:

- A. Begin only after work of other trades is complete, including wall and floor finish completed, ceilings installed, light fixtures and diffusers installed and connected and area free of trash and debris.
- B. Verify location and size of mechanical and electrical services as required and perform cutting of components of work installed by other trades.
- C. Verify reinforcement of walls and partitions for support and anchorage of casework.
- D. Coordinate with other Divisions and Sections of the specification for work related to installation of casework systems to avoid interference and completion of service connections.

3.2 INSTALLATION:

- A. Install casework in accordance with manufacturer's written instructions and per SEFA 2.3 recommendations.
 1. Install in available space; arranged for safe and convenient operation and maintenance.
 2. Align cabinets for flush joints except where shown otherwise.
 3. Install with bottom of wall cabinets in alignment and tops of base cabinets aligned level, plumb, true, and straight to a tolerance of 3.2 mm in 2438 mm (1/8 inch in 96 inches).
 4. Install corner cabinets with hinges on corner side with filler or spacers sufficient to allow opening of drawers.
- B. Support Rails:

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

12 32 00-8

10/28/2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

09-01-15

1. Install true to horizontal at heights shown on construction documents; maximum tolerance for uneven floors is plus or minus 13 mm (1/2 inch).
2. Shim as necessary to accommodate variations in wall surface not exceeding 5 mm (3/16 inch) at fastener.

C. Wall Strips:

1. Install true to vertical and spaced as shown on construction documents.
2. Align slots to assure that hanging units will be level.

D. Plug Buttons:

1. Install plug buttons in predrilled or prepunched perforations not used.
2. Use chromium plate plug buttons or buttons finish to match adjacent surfaces.

- E. Seal junctures of casework systems with mildew-resistant silicone sealants as specified in Section 07 92 00, JOINT SEALANTS.

3.3. CLOSURES AND FILLER PLATES:

- A. Close openings larger than 6 mm (1/4 inch) wide between cabinets and adjacent walls with flat, steel closure strips, scribed to required contours, or machined formed steel fillers with returns, and secured with sheet metal screws to tubular or channel members of units, or bolts where exposed on inside.
- B. Where ceilings interfere with installation of sloping tops, omit sloping tops and provide flat steel filler plates.
- C. Secure filler plates to casework top members, unless shown otherwise on construction documents.
- D. Secure filler plates more than 152 mm (6 inches) in width top edge to a continuous 25 x 25 mm (1 x 1 inch) 0.889 mm (1/16 inch) thick steel formed steel angle with screws.
- E. Anchor angle to ceiling with toggle bolts.
- F. Install closure strips at exposed ends of pipe space and offset opening into concealed space.
- G. Finish closure strips and fillers with same finishes as cabinets.

3.4 FASTENINGS AND ANCHORAGE:

- A. Do not anchor to wood ground strips.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

09-01-15

- B. Provide hat shape metal spacers where fasteners span gaps or spaces.
- C. Use 6 mm (1/4 inch) diameter toggle or expansion bolts, or other appropriate size and type fastening device for securing casework to walls or floor. Use expansion bolts shields having holding power beyond tensile and shear strength of bolt and breaking strength of bolt head.
- D. Use 6 mm (1/4 inch) diameter hex bolts for securing cabinets together.
- E. Use 6 mm (1/4 inch) by minimum 38 mm (1-1/2 inch) length lag bolt anchorage to wood blocking for concealed fasteners.
- F. Use not less than No. 12 or 14 wood screws with not less than 38 mm (1-1/2 inch) penetration into wood blocking.
- G. Space fastening devices 305 mm (12 inches) on center with minimum of three (3) fasteners in 915 or 1220 mm (3 or 4 foot) unit width.
- H. Anchor floor mounted cabinets with a minimum of four (4) bolts through corner gussets. Anchor bolts may be combined with or separate from leveling device.
- I. Secure cabinets in alignment with hex bolts or other internal fastener devices removable from interior of cabinets without special tools. Do not use fastener devices which require removal of tops for access.
- J. Where units abut end to end, anchor together at top and bottom of sides at front and back. Where units are back-to-back, anchor backs together at corners with hex bolts placed inconspicuously inside casework.
- K. Where type, size, or spacing of fastenings is not shown on construction documents or specified, show on shop drawings proposed fastenings and method of installation.

3.5 ADJUSTMENTS:

- A. Adjust equipment to insure proper alignment and operation.
- B. Replace or repair damaged or improperly operating materials, components or equipment.

3.6 CLEANING:

- A. Immediately following installation, clean each item, removing finger marks, soil and foreign matter.
- B. Remove from job site trash, debris and packing materials.
- C. Leave installed areas clean of dust and debris.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

12 32 00-10

10/28/2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

09-01-15

3.7 INSTRUCTIONS:

- A. Provide operational and cleaning manuals and verbal instructions in accordance with Article INSTRUCTIONS, SECTION 01 00 00, GENERAL REQUIREMENTS.
- B. Provide in service training both prior to and after facility opening. Coordinate in service activities with COR.
- C. Commencing at least seven (7) days prior to opening of facility, provide one (1) four (4) hour day of on-site orientation and technical instruction on use and cleaning procedures application to products and systems specified herein.

- - - E N D - - -

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

12-01-15

SECTION 12 36 61.16
SOLID SURFACE COUNTERTOPS

PART 1 - GENERAL

1.1 DESCRIPTION

A. This section specifies quartz and solid surface countertops.

1.2 RELATED WORK

- A. Sustainable Design Requirements: Section 01 81 13, SUSTAINABLE CONSTRUCTION REQUIREMENTS.
- B. Color and patterns of quartz and solid surface: See ROOM FINISH LEGEND as a part of the drawings.
- C. Color and patterns of quartz; surfacing, backsplashes, end splashes, apron fronts, adhesives and sealants.
- D. Color and patterns of solid surface; surfacing, backsplashes, end splashes, apron fronts, sinks, adhesives and sealants.
- E. DIVISION 26, ELECTRICAL.
- F. DIVISION 22, PLUMBING.

1.3 SUBMITTALS

- A. Submit in accordance with SECTION 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Shop Drawings
 - 1. Show dimensions of section and method of assembly.
 - 2. Show details of construction at a scale of 1/2 inch to a foot.
- C. Samples:
 - 1. 150 mm (6 inch) square samples each top.
 - 2. Front edge, back splash, end splash and core with surface material and booking.

1.4 APPLICABLE PUBLICATIONS

- A. Publications listed below form a part of this specification to the extent referenced. Publications are referenced in the text by the basic designation only.
- B. American Hardboard Association (AHA):
A135.4-95.....Basic Hardboard
- C. Composite Panel Association (CPA):
A208.1-09.....Particleboard

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

12-01-15

- D. American Society of Mechanical Engineers (ASME):
 - A112.18.1-12.....Plumbing Supply Fittings
 - A112.1.2-12.....Air Gaps in Plumbing System
- E. American Society for Testing and Materials (ASTM):
 - A167-99 (R2009).....Stainless and Heat-Resisting Chromium-Nickel Steel Plate, Sheet and Strip
 - A1008-10.....Steel, Sheet, Cold-Rolled, Carbon, Structural, High Strength, Low Alloy
 - D785-08.....Rockwell Hardness of Plastics and Electrical Insulating Materials
 - D790-10.....Flexural Properties of Unreinforced and Reinforced Plastics and Electrical Insulating Materials
 - D4690-99(2005).....Urea-Formaldehyde Resin Adhesives
- F. Federal Specifications (FS):
 - A-A-1936.....Adhesive, Contact, Neoprene Rubber
- G. U.S. Department of Commerce, Product Standards (PS):
 - PS 1-95.....Construction and Industrial Plywood
- H. ASTM C 170: Standard Test Method for Compressive Strength of Dimension Stone.
- I. SCAQMD Rule 1168: Adhesive and Sealant Application.
- J. UL 2818: GREENGUARD Certification Program for Chemical Emissions for Building Materials, Finishes, and Furnishings.
- K. ISO 9001Manufactured Certified Facility

PART 2 - PRODUCTS

2.1 MATERIALS

- A. Quartz Agglomerate: Solid sheets consisting of up to 93 percent quartz aggregate combined with polyester resin binders and proprietary pigments that are fabricated using vacuum vibrocompaction technology
Composition: Up to 93 percent quartz aggregate combined with polyester resin binders and proprietary pigments that are fabricated into slabs using vacuum vibrocompaction technology.
 - 1. Material Thickness: Product Type 062, 0.79 inch (2 cm), nominal.

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

12-01-15

2. Material Weight: 10 lb/sq.ft. (48.8 kg/sq. m) for 0.79 inch (2 cm) thick surfacing.
 3. Countertop Dimensions: As indicated on Drawings.
 4. Conformance Standards: a. NSF/ANSI Standard 51. b. UL 2818: 1) GREENGUARD, emission levels in UL 2818, Section 7.1 are applicable for furniture products. 2) GREENGUARD Gold, emission levels in UL 2818, Section 7.2 are applicable for building materials, finishes, and furnishings.
 5. Physical Characteristics:
 - a. Flexural Strength: Greater than 4,500 psi (31.0 MPa); ASTM D 790.
 - b. Flexural Strain: Less than 0.375 percent; ASTM D 790.
 - c. Flexural Modulus: Greater than 3.75 MPsi; ASTM D 790.
 - d. Stain resistance (24 Hour): No effect to moderate effect; NEMA LD-3.
 - e. Abrasion Resistance: Greater than 100 in. lbs.; ASTM C 501.
 - f. Density: Greater than 2.1 g/.cu. m per ASTM C 97
 - g. Compressive Strength (One Axis - Div.): Greater than 20,000 psi (138 MPa) per ASTM C 170.
 - h. Moisture Absorption: Less than 0.03 percent per ASTM C 97.
 - i. Surface Burning Characteristics: Class I and Class A per ASTM E 84.
 6. Quartz Finish: Polished finish with Glossometer reading greater than 45.
 7. Colors and Patterns: See ROOM FINISH LEGEND as a part of the drawings.
 8. Edge Detail: 1/4 inch (6 mm) Radius.
- B. Composition Solid-Surface Material: Homogeneous-filled plastic resin complying with ICPA SS-1.
1. Material Thickness: Product Type 062, 0.79 inch.
 2. Material Weight: 0.490 inch (12.4 mm) [0.240 inch (6.1 mm)].
 3. Panel Weight: [4.4 lb/sq. ft. (21.5 kg/sq. m)].
 4. Surface-Burning Characteristics: Comply with ASTM E 84; testing by a qualified testing agency. Identify products with appropriate markings of applicable testing agency.
 - a. Flame-Spread Index: 25 or less.
 - b. Smoke-Developed Index: 450 or less.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

12 36 61.16-3

10/28/2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

12-01-15

5. Colors and Patterns: As selected by Architect from manufacturer's full range.
- C. Composite Wood Products: Products shall be made using ultra-low-emitting formaldehyde resins as defined in the California Air Resources Board's "Airborne Toxic Control Measure to Reduce Formaldehyde Emissions from Composite Wood Products" or shall be made with no added formaldehyde.
- D. Particleboard: ANSI A208.1, Grade M-2.
- E. Plywood: Exterior softwood plywood complying with DOC PS 1, Grade C-C Plugged, touch sanded.
 1. Certified Wood: Wood products shall be certified as "FSC Pure" according to FSC STD-01-001 and FSC STD-40-004.
- F. Hardboard: ANSI/AHA A135.4, Type I, tempered, fire retardant treated, smooth surface one side.
- G. Adhesive
 1. For Field Joints:
 - a. Epoxy type, resistant to chemicals as specified for surfaces.
 - b. Fungi resistant: ASTM G-21, rating of 0.
- H. Fasteners:
 1. Metals used for welding same metal as materials joined.
 2. Use studs, bolts, spaces, threaded rods with nuts or screws suitable for materials being joined with metal splice plates, channels or other supporting shape.

2.2 ELECTRICAL RECEPTACLES

- A. Hospital grade per electrical specifications.

2.3 COUNTERTOPS

- A. Fabricate in largest sections practicable.
- B. Fabricate with joints flush on top surface.
- C. Fabricate countertops to overhang front of cabinets and end of assemblies 25 mm (one inch) except where against walls or cabinets.
- D. Provide 1 mm (0.039 inch) thick metal plate connectors or fastening devices.
- E. Join edges in a chemical resistant waterproof cement or epoxy cement, except weld metal tops.
- F. Fabricate with end splashes where against walls or cabinets.

Contract No. 36C26319D0022
Station Project No. 656-400
Bancroft-AE No. 18-116

12 36 61.16-4

10/28/2022

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR
St. Cloud VA Health Care System
St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

12-01-15

G. Splash Backs and End Splashes:

1. Not less than 19 mm (3/4 inch) thick.
2. Height 100 mm (4 inches) unless noted otherwise.
3. Where fixtures or outlets occur: Not less than 150 mm (6 inches) unless noted otherwise.
4. Fabricate Solid Surface or Quartz splash back in maximum lengths practical of the same material.

H. Drill or cutout for sinks, and penetrations.

1. Accurately cut for size of penetration.
2. Cutout for VL 81 photographic enlarger cabinet.
 - a. Finish cutout to fit flush with vertical side of cabinet, allowing adjustable shelf to fit into cutout space of cabinet at counter top level. Finish cutout surface as an exposed edge.
 - b. Provide braces under enlarger space to support not less than 45 kg (100 pounds) centered on opening side along backsplash.

I. Countertop products shall comply with following standards for biobased materials:

Material Type	Percent by Weight
Composite Panel	89 percent biobased material
Hardwood	89 percent biobased material
Particleboard	89 percent biobased material
Plywood	89 percent biobased material

The minimum-content standards are based on the weight (not the volume) of the material in the insulating core only.

PART 3 - EXECUTION

3.1 INSTALLATION

- A. Before installing countertops verify that wall surfaces have been finished as specified and that mechanical and electrical service locations are as required.
- B. Secure countertops to supporting rails of cabinets with metal fastening devices, or screws through pierced slots in rails.

CONSTRUCT PACT CLINIC - BUILDING 4 | FIRST FLOOR

St. Cloud VA Health Care System

St. Cloud, Minnesota 56303

Bancroft Architects + Engineers

12-01-15

1. Where type, size or spacing of fastenings is not shown or specified, submit shop drawings showing proposed fastenings and method of installation.
 2. Use round head bolts or screws.
 3. Use epoxy or silicone to fasten the countertops to the cabinets.
- C. Electrical Outlets:
1. Set in cutouts with manufacturers gasket sealing joint with top to prevent water leakage.
 2. Install control unit and electric outlets where shown. Seal escutcheon plate at lap if on counter or top to prevent water leakage.

3.2 PROTECTION AND CLEANING

- A. Tightly cover and protect against dirt, water, and chemical or mechanical injury.
- B. Clean at completion of work.

- - - E N D - - -